

Initial Environmental Examination

Project Number: 47229-001 May 2014
IND: Uttarakhand Emergency Assistance Project
Submitted by Uttarakhand Jal Sansthan, Government of Uttarakhand, Dehardun

This report has been submitted to ADB by the Public Works Department, Government of Uttarakhand Jal Sansthan, Dehradun and is made publicly available in accordance with ADB's public communications policy (2011). It does not necessarily reflect the views of ADB.

Asian Development Bank

Phone (Off): 0135-2676260 Fax: 0135-2676177

Email Id-adb_ujs@rediffmail.com



Uttarakhand Jal Sansthan, Jal Bhawan, B-Block, Nehru Colony, Dehradun

Letter No.

31

/ADB/ 12/2014-15

Dated

19/05/2014

To,

The Country Director, Asian Development Bank,

New Delhi.

Sub:

Loan 3055-IND: Uttarakhand Emergency Assistance Project- Regarding IEE for Kapkot, Dharchula and Bageshwar Towns.

Dear Sir,

Kindly refer ADB email dated 21 Jan, 2014 regarding clearance of Rapid Environmental assessment (REA) for Bageshwar, Dharchula & Kapkot towns & required submission of Initial Environmental Examination (IEE) of these three towns Bageshwar, Dharchula & Kapkot.

So, I am forwarding the final Initial Environmental Examination (IEE) of Bageshwar, Dharchula & Kapkot for your review & approval.

Regards

Enclosed-3 Attachments

ASIAN DEVELOPMENT BANK
INRM
2 0 MAY 2014

RECEIVED

Yours sincerely,

(P.C.Kimothi) General Manager

(Technical, Research & Material)

General Manager (Technical, Research & Material) Uttarakhand Jal Sansthan Dehradun



Initial Environmental Examination

May 2014

India: Pumping Water Supply Scheme for Kapkot under Uttarakhand Emergency Assistance Project

Prepared by State Disaster Management Authority, Government of India, for the Asian Development Bank.

This initial environmental examination is a document of the State Disaster Management Authority, Government of Uttarakhand. The views expressed herein do not necessarily represent those of ADB's Board of Directors, Management, or staff, and may be preliminary in nature.

In preparing any country program or strategy, financing any project, or by making any designation of or reference to a particular territory or geographic area in this document, the Asian Development Bank does not intend to make any judgments as to the legal or other status of any territory or area.

ABBREVIATIONS

ADB Asian Development Bank
BOD Bio Chemical Oxygen Demand

CO Carbon Mono Oxide

CFE Consent for Establishment

CH₄ Methane

CFO Consent for Operation DO Dissolve Oxygen

dB Decibel

IEE Initial Environmental Examination

EA Executing Agency

EIA Environmental Impact Assessment

EC Environmental Clearance
Gol Government of India
GoU Government of Uttrakhand

Ha Hectare

H₂S Hydrogen sulphide

HDPE High Density Poly Ehylene

HFL High Flood level
Km Kilometer
Leq Sound level
Mg Milligram

MFF Multitranche Financing Facility
MoEF Ministry of Environment & Forests

MLD Million Litter Per day

Mn Million
M Meter
mm Millimeter

mg/l Milligram per Liter
m3 Cubic meter

NAAQM National Ambient Air Quality Monitoring

NOx oxides of Nitrogen
NA Not Applicable
OUR oxygen uptake rate

O & M Operation and maintenance
PMU Project Management Unit
PVC Poly Vinyl Chloride
PWD Public works Division

PIU Project Implementation Units RCC Reinforced Cement Concrete

RoW Right of Way

RSPM Respirable suspended particulate matter

RP Rehabilitation Plan

SEIAA State Environment Impact Assessment Authority

SPCB State Pollution Control Board
SBR Sequential Batch Reactor
SPM Suspended Particulate Matter

SO₂ sulphur dioxides ST Scheduled Tribes SC Scheduled Castes

SOP Standard Operational Procedures UDD Urban Development Department

UEAP Uttarakhand Emergency Assistance Program

UEPPCB Uttaranchal Environmental Protection and Pollution

Control Board

UPJN Uttaranchal Peya Jal Nigam UJS Uttaranchal Jal Sansthan

U.P Uttar Pradesh

UPCL Uttaranchal Power Corporation Limited

(μg/m³ Micro Gram Per Cubic Meter

% Percentage

WEIGHTS AND MEASURES

Cm - centimeter

Crore - 100 lakhs = 10,000,000 Lakh = 100 thousand = 100,000

Km - Kilometer

Kph Kilometer per hour

Lpd liters per day

- Meter М

mg/l — milligrams per liter

Mm Millimeter MSL Mean sea level - 10⁻⁶ meter μ

μg/m³ – micrograms per cubic meter μS/cm = micro Siemens per centimeter

NTU - Nephalo turbidity unit Ppm parts per million

NOTE{S}
In this report, "\$" refers to US dollars.
"INR" and "₹" refer to Indian rupees

CONTENT

ABBR	EVIATIONS	Ш
EXEC	UTIVE SUMMARY	IX
I.	INTRODUCTION	11
	 A. Project Background/Rationale B. THE UTTARAKHAND EMERGECY ASSISTANCE PROJECT (UEAP) C. Purpose of the Environmental Assessment D. Extent of IEE E. IEE Content F. Methodology G. Public Consultation 	11 11 11 12 12 12 12
II.	POLICY, LEGAL AND ADMINISTRATIVE FRAMEWORK	12
III.	DESCRIPTION OF THE PROJECT	15
	A. Project LocationB. Proposed Category of the ProjectC. Backgound of the Proposed Sub-Project	15 16 16
IV.	DESCRIPTION OF THE ENVIRONMENT	20
V,	 A. Physical Environment B. Climate and Meteorology C. Ambient Air Quality D. Ambient Noise Level E. Hydrology F. Seismology G. Ecology H. Socio-Economic I. Health J. Literacy K. Energy and Electric Power Potential L. Aesthetic and Tourism M. Project Implementation Schedule ANTICIPATED ENVIRONMENTAL IMPACTS AND MITIGATION MEASURES A. Screening of Environmental Impacts	20 22 23 23 24 25 25 33 35 35 37 38 38
	 B. Impact and mitigation measure during planning and design phase C. Impacts and Mitigation Measures during Construction Phase D. Impacts during Operation Phase E. Economic Development 	40 43 52 53
VI.	INFORMATION DISCLOSURE, CONSULTATION, AND PARTICIPATION	53
	 A. Public participation during the preparation of the IEE B. Future consultation and Disclosure C. Consultation during Detailed Design D. Consultation during Construction E. Project Disclosure 	53 54 54 54 55
VII.	GRIEVANCE AND REDRESS MECHANISM	55
		vi

VIII.	ENV	IRONMENTAL MANAGEMENT PLAN	56
	A.	ENVIRONMENTAL MANAGEMENT AND MONITORING PLAN (EMMP)	56
	B.	Environmental Monitoring Plan	62
	C.	Environmental Budget	65
	D.	Environmental Monitoring and Reporting	69
	E.	Performance Indicator	95
IX.	CON	ICLUSION AND RECOMMENDATION	97

f E

LIST OF TABLES

Table II-1 Applicable Environmental National and State Requirements for UEAP	13
Table III-1: Demand and Supply Gap Parameters	
Table III-2: Details of Components of Water Supply project	18
Table III-3: Details of Proposed clear water pumping plants	19
Table III-4: Details of Proposed Rising main	20
Table IV-1District-wise Forest Cover, Uttarakhand	27
Table IV-2 Predominant Top-Canopy (Tree) Species According to Altitude	27
Table IV-3 Wildlife in Uttarakhand	
Table IV-4 National Parks in Uttarakhand	29
Table IV-5 Wildlife Sanctuaries in Uttarakhand	
Table IV-6 Wildlife in Uttarakhand	30
Table IV-7 List of Major Flora	30
Table IV-8 List of Major Fauna	31
Table IV-9 Land Utilisation in Uttarakhand	34
Table IV-10 Health Indicators of Uttarakhand	35
Table IV-11 Health Infrastructure of Uttarakhand	35
Table IV-12 Literacy Rate in Uttarakhand	36
Table VIII-1: Monitoring Plan	63
Table VIII-2: Environmental Management & Monitoring Costs	66
Table VIII-3: Standardized EMMP to guide the contractor in mitigating environmental impacts	69
Table VIII-4: Performance Indicators of EMMP	95
LIST OF APPENDIXES	
Appendix Rapid Environment Assessment Checklist	94
Appendix II Public Consultation	
Appendix III NOC for Infiltration Well	102
Appendix IV NOC for Rising Main	103
Appendix V NOC from PWD	104
Annendix VI Photographs	105

EXECUTIVE SUMMARY

- Uttarakhand lies in the northern part of India amidst the magnificent Himalayas and dense forests. The State is bordering Himachal Pradesh in the north-west and Uttar Pradesh in the South and shares international borders with Nepal and China. The State is comprised of 13 districts divided into two regions and also called administrative divisions; the Kumaon and Garhwal.
- 2. Recent disaster of unprecedented floods in June, 2013 in the state of Uttarakhand, devastated many towns and villages on the banks of rivers Bhagirathi, Pindar, Mandakini, Alaknanda and Sarju. Infrastructure facilities like roads, power supply, communication, buildings, and water supply had been affected severely. Though the state government had taken up many steps to temporarily restore the facilities, it is envisaged to take up permanent measures to restore and rehabilitate the facilities.
- 3. The disaster impacted supply of water in terms of quantity and quality. There is a gap quantity of 0.92 MLD at delivery to the users after the disaster and it has also caused increase in turbidity. This is due to the damage of the supply infrastructure including source taping point, gravity mains. The one main source Bhangarh Gadhera completely washed out, other source belan gadhera damaged and possibility to damage again in future.
- 4. To address the impact, new infiltration well (1.40 MLD) with pumping station at the bank of Saryu River near cheddi, will be constructed. Two Clear water rising main from proposed pump house to existing GLSRs to be laid.
- 5. Consistent with the Environmental Assessment and Review Framework (EARF), the proposed subporject were screened using ADB rapid environmental assessment (REA) checklist-of water supply. The environmental screening revealed that no protected or sensitive areas were traversed. All impacts are site specific; few are irreversible and can be readily mitigated supporting an environmental "Category B" classification.
- 6. Air Quality. The pristine environment and sparse population suggest that most part of the State have a very good air quality while noise level is calm except in central part of the Kapkot town. The baseline of air quality and noise level will be generated before commencement of the construction.
- 7. **Seismicity**. The State constitutes one of the most active domains of the Himalayan region. Several damaging earthquakes are recorded from this region. As such, the region is classified under high seismic zone V.
- 8. **Forest.** Uttarakhand is ranked 9th in all-India in terms of forest covered area with 24,495 km²of forestland The district of Pauri Garhwal, Uttarkashi, Nainital, and Chamoli have the largest forest cover accounting for 50% of all the state's total. The State Govt. of Uttarakhand has declared the oak tree (*Quercus* sp.) as a *Kalpvriksha* or wish fulfilling divine tree often treated as the signature plant of the Kumaon Himalayas as numerous logos and insignias with a stylized version of the deodar inscribed on them.
- 9. **Sensitive Ecosystem.** The subproject location does not fall within any sensitive ecosystem. Neither the project component have direct intervention not indirect intervention with sensitive ecosystem.

- 10. Significant Environmental Impacts and Proposed Mitigation Measures. No environmental impacts related to siting were identified in the environmental examination. All components of subproject are existing, no components of subproject is located inside or near a cultural heritage site, protected area, wetland, mangrove, estuarine, buffer zone of protected area or special area for protecting biodiversity. There are no rare, threatened, and endangered species (flora and fauna) within the subproject corridor of impact. The potential significant environmental impacts identified and assessed are related to construction time impacts.
- 11. Information Disclosure, Consultation, Participation, and Grievance and Redress Mechanism. Wide stakeholder consultation and participation was observed during the environmental examination of UEAP. Project affected communities, government institutions, and non-governmental organizations. Highlight of all consultations were documented and applicable recommended measures particularly in minimizing shifting of structures, potential conflict with migrant workers, and competing demand for local resources were incorporated in the design and the environmental management plan. This IEE report will be disclosed in the ADB website pursuant to the Bank's *Public Communication Policy* and in the SDMA website.
- 12. **Environmental Management Plan**. The Environmental Management and Monitoring Plan (EMMP), to form part of the bidding documents, adopted the procurement package scheme and facilitate subsequent compliance monitoring by the contractor.
- 13. **Conclusion.** In the present IEE certain baseline data is not available such as noise pollution and air quality. Therefore it is proposed that before the commencement of work a sampling for these parameters be conducted and IEE be revised if necessary to comply with the ADB's Safeguard Policy Statement (SPS)2009, Environmental Assessment Guidelines, 2003 and the Gol guidelines, Water (Prevention and Control of Pollution) Act-1974, the Air Act-1981 and the Environment (Protection) Act-1986.

I. Introduction

A. Project Background/Rationale

 Recent disaster of unprecedented floods in June, 2013 in the state of Uttarakhand, devastated many towns and villages on the banks of rivers Bhagirathi, Pindar, Mandakini, Alaknanda and Sarju. Infrastructure facilities like roads, power supply, communication, buildings, and water supply had been affected severely. Though the state government had taken up many steps to temporarily restore the facilities, it is envisaged to take up permanent measures to restore and rehabilitate the facilities.

B. THE UTTARAKHAND EMERGECY ASSISTANCE PROJECT (UEAP)

- 2. Uttarakhand being a tourist and pilgrimage State, attracts a large number of tourist and pilgrims. A major disaster during 15-17 June 2013 resulted in severe damages in several parts of Uttarakhand, which has a mountainous terrain and a fragile geology. Several towns have been washed away by the unprecedented flash floods and landslides, and a large number of houses, public buildings, roads, bridges, urban, rural, and tourism infrastructure, power generation and distribution facilities have been damaged. The impact on the affected population due to the loss of connectivity has been manifold.
- 3. Based on the request of India, a Rapid Joint Damage and Needs Assessment (RJDNA) was undertaken by Asian Development Bank (ADB) and the World Bank. ADB agreed to assist the Government of India (GOI) with reconstruction and rehabilitation efforts for which the Uttarakhand Emergency Assistance (Sector) Project (UEAP) has been formulated as a multi-sector emergency loan in sector loan modality. The executing agency (EA) for the UEAP will be Government of Uttarakhand (GOU) and State Disaster Management Authority (SDMA). The primary implementing agencies (IA) will be Public Works Department (PWD) for roads, bridges, urban roads, and trekking routes including eco-trails Department of Tourism (DOT) for tourism infrastructure, Uttarakhand Civil Aviation Development Authority (UCADA) for helipads; and Uttarakhand Jal Sanstahan (UJL) for urban water supply, or any successor hereto. Some other state agencies such as Forest Department, Kumaon Mandai Vikas Nigam Limited, and Garhwal Mandai Vikas Nigam Limited are likely to be entrusted with some works under UEAP under these primary IAs.

C. Purpose of the Environmental Assessment

- 4. The purpose of the study is to identify the environmental issues to be considered at project planning and design stage, assesses environmental consequences due to project intervention and suggests mitigation measures to minimise the adverse environmental impacts, if any, associated with construction and operation.
- 5. Initial environmental examination (IEE) has four basic objectives; (i) asses relevant potential impacts and risks associated with the proposed rehabilitation of Water Supply system, (ii) assess the compliance with ADB environmental safeguard requirements and applicable environmental laws, (iii) incorporate mitigation measures in the project design, (Iv) preparation of environmental management and monitoring plan.

D. Extent of IEE

6. IEE was conducted based on preliminary Detailed Design Report (DPR). The IEE covers all activities proposed under the project. The core zone of impact is taken as direct impact of the new construction or reconstruction or rehabilitation of the project component. IEE also covers the direct impact of the sub-project component. Assessment is carried out for all components of environment covering terrestrial and aquatic ecology, soil, water, noise and socio economic aspects.

E. IEE Content

- 7. The IEE has been largely structured as per SPS, 2009 ADB's Environmental Assessment Guidelines (2003) and environmental safeguards- A Good Practice Source Book (December 2012). This includes following eight chapters including this introduction Chapter.
- Chapter 1- Introduction
- Chapter 2- Policy, Legal and Administrative Framework
- Chapter 3- Description of Project
- Chapter 4- Description of Environment
- Chapter 5- Anticipated Impacts and Mitigation Measures
- Chapter 6- Information Disclosure, Consultation, and Participation
- Chapter 7- Environment Management Plan and Grievance Redress Mechanism
- Chapter 8 Conclusion and Recommendation

F. Methodology

8. The following key steps were followed in this study: review of legal requirements, reconnaissance survey for identification of key issues data requirement and preliminary consultation, primary and secondary data collection, impact assessment, consultation with stakeholders, identification of impacts and mitigation measures, and institutional review.

G. Public Consultation

9. Extensive consultations were held with all stakeholders' that includes: local residents, gov't. departments/ agencies, other water users, and NGOs with intent to collect baseline information, for better understanding of the potential impacts and appreciate the perspectives/concerns of the stakeholders. Key information gathered were integrated in project design and used in formulating mitigation measures.

II. Policy, Legal and Administrative Framework

10. The legal framework of the country consists of several acts, notifications, rules and regulations to protect environment and wildlife. In 1976, the 42nd Constitutional Amendment created Article 48A and 51A, placing an obligation on every citizen of the country to attempt to conserve the environment. Specifically for the UEAP, the following environmental laws and regulations are applicable:

Table II-1 Applicable Environmental National and State Requirements for UEAP

S.No.	Clearances	Acts/Rules/Notifications /Guidelines and Application to Water Supply Projects	Concerne d Agency	Applicable to Contract package	Respo nsibilit y	Status of Complia\n ce
	f = .	A. Pre-construction Stag				
1	Environmen tal Clearance	EIA Notification, 2006 amended till date, promulgated under Environment (Protection) Act 1986	State Environme ntal Impact Assessme nt Authority (SEIAA). If not constituted then MoEF	No	IA / PMU	Not required
2	Forest Clearance for felling of trees and acquisition of forest land for widening.	Forest Conservation Act (1980): i) If the forest land exceeds 20 hectare then prior permission of Central Government is required; ii) if the forest land is between 5 to 20 hectare, then permission form the Regional Office of Chief Conservator is required; iii) If the forest land is below or equal to 5 hectare the State Government can give permission. If the construction area is more than 40% forest, permission to undertake any work is needed from the Central Government, irrespective of the size of the area. MoEF issued soecific guidelines in July 2013 for state of Uttarakhand for expediting forest cleatrances to carry out the emergency work in forest areas (excluding works in national parks and sanctuaries) vide no 11-298/2013-FC Dated 24.07.2013	District Level Committee constituted by the State Govt.	No (No felling of trees or diversion of forest land required)	IA / PMU	Not Required
			ion Stone			
2	Dosmississ	B. Implementat		[NI=	Contac	O
3	Permission for Sand Mining from river bed	Mines and Minerals (Regulation and Development) Act, 1957 as amended in 1972	River Board Authorities/ Department of Mining	No	Contrac tor	Contractor will obtain the consents

			Govt. of Uttarakhand			from appropriate authority
4	Consents to establish & operate Water Treatment Plant	Water (Prevention and Control of Pollution) Act, 1974 and amendments	Uttarakhand Environmenta I Protection and Pollution Control Board - Dehradun	No (There is no WTP in town)	IA/PMU	To be obtained
5	Authorizatio n for Disposal of Hazardous Waste	Hazardous Wastes (Management, Handling and Transboundary movement) Rules, 2008	Uttarakhand Environmenta I Protection and Pollution Control Board – Dehradun	No	Contrac tor	
6	Consent for Disposal of Sewage from Labour camps	Water (Prevention and Control of Pollution) Act 1974	Uttarakhand Environmenta I Protection and Pollution Control Board - Dehradun	No	Contrac tor	
7	Use of Fly ash within 100 kms around Thermal Power plants	Fly Ash Notification, 1999 as amended 03.11.2009	MoEF	No	Contrac tor	
8	Pollution Under Control Certificate	Central Motor and Vehicle Act 1988	Department of Transport, Govt. of Uttarakhand	Yes	Contrac tor	
9	Installation of Generators	The Air (Prev. & Con. of Pollution) Act, 1980	Uttarakhand Environment Protection and Pollution Control Board - Dehradun	No	Contrac tor	
10	Employing Labour/ workers	The Building and Other Construction Workers (Regulation of Employment and Conditions of Service) Act, 1996, The Building and Other Construction Workers Related Laws (Amendment) Bill, by Labour and Employment on March 18, 2013.	District Labour Commissione r	Yes	Contrac tor	
11	Permission for extraction of boulder and sand from river beds	Mines & Minerals (Regulation and Development) Act, 1957 and its amended in 1972	Department of Mines and Geology. Government of Uttarakhand	Yes	Civil Work Contrac tors	

12	License for		Commissione	No	Contrac	
	Storing Diesel and other explosives	Hazardous Wastes (Management, Handling and Transboundary movement) Rules, 2008.	r of Explosives and Uttarakhand Environmenta I Protection and Pollution Control Board – Dehradun		tor	

III. DESCRIPTION OF THE PROJECT

A. Project Location

- Infiltration Well (1.4 MLD): New Infiltration well at the bank of Saryu River, cheddi near irrigation intake, below tehsil to be constructed in .
- II. Pump House: New pump house above infiltration well to be constructed in .
- **III. Rising main:** clear water rising main from proposed pump house to existing GLSRs to be laid in .



Project Location in Kapkot

B. Proposed Category of the Project

- 11. Pursuant to the requirements of the ADB Safeguard Policy Statement (2009) and operation Manual Bank Policy on Environmental Safeguard for proposed Water supply system in Kapkot were screened to identify significance of potential impacts, determine the most environmentally sensitive component, establish the needed level of assessment, and prescribe the information disclosure and consultations requirement to be complied by the Uttarakhand-Jal Sansthan. Consistent with the Environmental Assessment and Review Framework, for town was screened using the ADB rapid environmental assessment (REA) checklist-Water Supply.
- 12. The environmental screening revealed that no protected or sensitive areas were traversed. There are no rare, threatened, and endangered species (flora and fauna) within the subproject corridor of impact. All being hills town, the most significant environmental impacts are potential increase in erosion, siltation, and landslide.
- 13. Water supply in towns are existing and no additional infrastructure are proposed. All impacts are site specific, and all impacts can be readily mitigated supporting a Category B classification.

C. Backgound of the Proposed Sub-Project

14. The objective is to establish source augmentation(Construction of infiltration well¹) which were either washout or damaged during heavy rain fall on 16th & 17th June 2013 which cover more command area of entire town with 100% sustainable drinking water supply facilities. The one main source Bhangarh Gadhera completely washed out, other source belan gadhera damaged and possibility to damage again in future. As per the damage assessment report of UJS, the average per capita supply is about 31 lpcd after damages due to floods, on temporary restoration of the scheme. The current service is much lower than the desired level (135 lpcd).

S. No.	Parameter	Demand	Supply after damage	Gap/ Need for the Project
1	Water production	1.19 MLD (year 2014)	0.27 MLD (Source of water: Gadheras).	0.92 MLD gap is there
2	UFW	15 %	15 % (assumed)	More hydraulically efficient distribution system
3	Per Capita Demand	135 lpcd	31 lpcd	104 lpcd gap is there
4	Reservoir capacity	500KL	195KL	300KL gap is there

5	Convey Main	21 Km	8 Km Gravity main	13 Km gap is there
6	Coverage	100 % coverage	70%	Requirement of new system to increase supply standard

Table III-1: Demand and Supply Gap Parameters

*1: It is a system of natural filtration through the sand available on the river banks and below the river bed. The river water which infiltrates into sub surface layers of sand from the sides and bottom of the river bed is drawn through infiltration well of shallow depths varying from 6m to 10m Constructed into the sand on the banks. The water thus drawn is naturally filtered through fine sand media available in large depths on the banks and requires no further treatment except disinfection before distribution for human consumption.

The main reasons for gaps:

IMPACT DUE TO FLOODS

- Main source either washout or damaged during heavy rain fall.
- Gravity main damaged due to land sliding.

OTHER REASONS

- 15. In addition to the above, the following are the other reasons, which need attention, while taking up the proposed project.
 - 1. Water resource constraint
 - During summer, water level in the river reduces.
 - 2. Inappropriate planning
 - No initiative for augmentation of surface water abstraction.
 - 3. Poor O&M
 - High transmission loss
 - 4. Funds constraint
 - Low budget allocation for water supply rehabilitation and augmentation


DESRIPTION OF KEY FOR SOURCE AUGMENTATION ACTIVITIES

- 16. To restore the water supply to the consumers as per standard level, the existing system needs source augmentation, which are outlined below:
- 17. **Infiltration well:** New Infiltration well with Pump House at Cheddi, at the bank of River Saryu to be constructed.
- 18. Clear water Risign mains: Clear water rising main from proposed pump house to existing GLSRs to be laid.

19. Components of Water Supply-

Table III-2: Details of Components of Water Supply project

SI.	Components	Location				
1	Construction of Infiltration well (1.40 MLD)	At the bank of Saryu River, Cheddi, near Irrigation Intake well, below Tahsil building.				
2	Construction of New Pump House	Above Infiltration well.				
3	Proposed two rising main from Infiltration Well to two Existing Ground Level Service Reservoir's (GLSRs)	Along the existing roads				

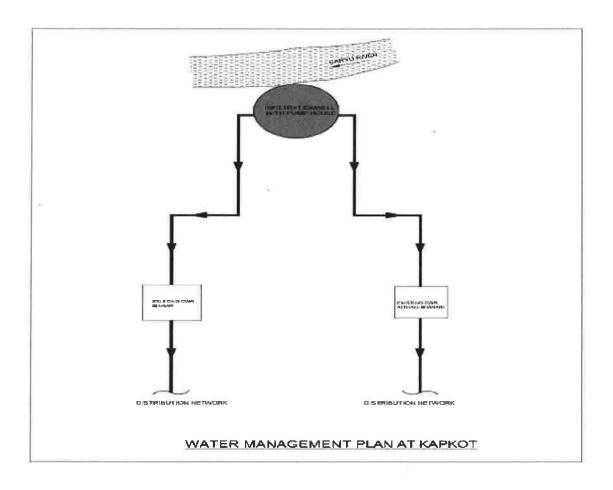

Infiltration well:

20. New Infiltration Well has been proposed with clear water capacity 1.40 MLD at the bank of Saryu River, Cheddi near Irrigation Intake well during site Inspected on 14-12-2013. Proposed location of Infiltration well should be finalised after proper trial bore at upstream and downstream of proposed location. Uttarakhand Jal sansthan can shift proposed location with suitable location after hydro geological investigation. Location of Infiltration Well is nearby the HT line which will reduce the cost of shifting of HT line or length of HT cable. Design and drawing of Infiltration well should be done after hydro geological investigation and based on infiltration rate ascertain after tests, design of infiltration well should be finalized.

Pump House:

21. Above the Infiltration Well clear water pump house is proposed. 16 hour Pumping will be consider for design purpose. Automation is require for pumping station as specified in BOQ.

Table III-3: Details of Proposed clear water pumping plants

S. No.	Description of Work Proposed	Qty. of Pumps				Discharge(Q)	Head (H)
		W	S	(MLD)	Hours	(lps)	(m)

1	For feeding GLSR at Binsar	1	1	0.70	16	12.15	223
2	For feeding OHSR at Aithan-Bharari	1	1	0.70	16	12.15	213

Note: - Above Q and H is only for estimation purpose further details of pumping plant as per describe in BOQ & technical specification of bid documents.

22. Augmentation of Power Supply and Erection of 11/0.433 kV substation

Extension of 11 KV overhead line on 11 KV poles with continuous GI earth wires including Supply and erection of overhead conductors on poles (including Supply, foundation, erection, earthing of poles), cross arms, insulators including tapping the power from the existing overhead line of the electric supply company etc and as required to complete the item. Also Supply, installation testing & commissioning of 11/0.433 KV substation equipment's (including all civil works) comprising HT Panel, Transformers,HT cable, interconnection in substation, etc. to make the item complete as required and also earthing of all equipment as per relevant IS.

Rising mains:

23. Two rising main are proposed in this report. One rising main from Infiltration well to Binsar CWR and second rinsing main from Infiltration well to Aithan-Bharari CWR. Two rising main opposite to River bank area are propose. Aithan-Bhariri Rising main Crossing River along the Hinchauri Bridge, approximate length of crossing 66m. Rising main will be with ISI Mark Plain Ended MS ERW Line pipe conforming to IS/ISO 3183:2007 of following design dia. As shown in table below

Table III-4: Details of Proposed Rising main

From		То			Internal dia. (mm)	Outer dia. (mm)	thickness (mm)	Length (m)
Infiltration Well	Existing G (75KL)	ILSR	at	Binsar	125	141.3	4.8	2111
Infiltration Well	Existing G Bharari (75k		at	Aithan-	125	141.3	4.8	5530
					Total Lengt	h = 7.641 k	(m	

Approach Bridge:

 Approach Bridge of about 20m up to Infiltration well site to be constructed for ease of O&M.

IV. DESCRIPTION OF THE ENVIRONMENT

A. Physical Environment

24. This section presents a brief description of the existing environment, including its physical, ecological resources, and socio-economic development of Sub project of Dharchula. Broad aspects on various environmental parameters such as geography, climate and meteorology, physiography, geology, seismology, ecology, socio-cultural and economic development parameters that are likely to be affected by the proposed rehabilitation of water supply system in Dharchula are presented.. Secondary information was compiled from relevant government agencies like the Forest

Department, Wildlife Department, State Environment Protection, and Pollution Control Board and Metrological Department.

Geography

25. Uttarakhand lies in the northern part of India amidst the magnificent Himalayas and dense forests. The State is bordering Himachal Pradesh in the north-west and Uttar Pradesh in the South and shares international borders with Nepal and China. The State is comprised of 13 districts, these are; Pithoragarh, Almora, Nainital, Bageshwar, Champawat, Uttarkashi, Udham Singh Nagar, Chamoli, Dehradun, Pauri, Tehri Garhwal, Rudraprayag, and Haridwar. Geographically, the state lies in the northern Himalayas between 28°53'24" to 31°27'50" North latitude and 77°34'27" to 81°02'22" East longitude. The State has an area of 53,484 sq. km. and a population of about 8.48 million as per census 2001.



Figure IV-1 Districts of Uttarakhand

26. Uttarakhand is divided into two regions and also called administrative divisions, basically following terrain: the Kumaon and Garhwal. The Kumaon division located southeast of the state and composed of Almora, Bageshwar, Champawat, Nainital, Pithoragarh, and Udham Singh Nagar. The Kumaon region is part of the vast Himalayan track and and the sub-mountains of Terai and Bhabhar. The region is drained by Gori, Dhauli, and Kali from the Tibetan mountains, and Pindari and Kaliganga which ultimately joins Alaknanda River. The Garwhal division is composed of Chamoli, Uttarkashi, Rudraprayag, Tehri Garhwal, Pauri, Dehradun, and Haridwar districts.and is entirely on rugged mountain ranges dissected by valley, and deep gorges. The Alaknanda River, the main source of the Ganges, traces its headwaters in this region.

27. The State is part of the Western Himalaya is further divided into four zones namely, the Tarai-Bhabar-Shivalik (Sub-Himalayas), Lesser-Himalayas, Greater-Himalayas, and Trans Himalaya (Tethys).

Topography, Geology and Soils

- 28. Topography is surrounded by hills and is situated in a valley, on the banks of the Saryu River at 1100m elevation. is a Tehsil in Bageshwar District of Uttarakhand State, India. e Tehsil Head Quarters is e town. It is surrounded by hills and is situated in a valley, on the banks of the Saryu River at 1022m elevation. is located approximately in between 29.90°N and 79.85°E.
- 29. The Formation is dominantly represented by rocks of the calcareous facies together with rocks of the argillaceous facies. It conformably overlies the Hatsila Formation but at a number of places the contact is tectonic; either marked by a fault or local shears. Marked dolomistisation and recystallisation is a common feature of the limestone. Magnesite occurs usually in the upper portion of this Formation. These deposits are associated with or controlled by some fault planes. Black phosphatic chert is also associated with this Formation particularly in the Pungar valley.
- 30. Litho stratigraphy of as below in Table

Formation	Chert,	pebble	beds	(impersistent)	and	subordinate
romation	slate/ca	Icareous s				

31. The baseline data on soil quality will be generated by collection of representative samples by the contractor before commencement of construction works.

The proposed locations are

- 1. Location of Infiltration well 1 Samples
- 2. Location of disposal of silt from the Infiltrationwell construction site 1 sample
- 3. Within the city limites where pipe laying will be done 6 Samples
- 4. Construction Camp/ storage yard 1 Samples
- 5. Location of labour camp 1 samples

B. Climate and Meteorology

- 32. The State of Uttarakhand, with its highly varying topographical features, has shown an equally variegating climatic condition, ranging from hot and sub-humid tropical in the southern tract of Bhabhar to temperate, cold alpine, and glacial climates in the northern part of the high mountains.
- 33. Factors such as elevation, slope, proximity of glaciers, forests, mountain peaks and ridges and direction of mountain ranges together give rise to the great variations in climatic conditions, even at the micro and local levels. These attributes determine the temperature range as well as the distribution of rainfall.
- 34. However, the overall climatic condition in the State is governed by the southwest monsoon. It has a sub-tropical to temperate climate, with three pronounced seasons; summer, winter, and monsoon. The hilly terrain of the Himalayan region has snow cover and is severely cold during winter with snowfall normally occurring during the months of

December to March. The climatic conditions of Almora, Nainital, Pithoragarh, Chamoli, Uttarkashi, Pauri and Dehradun are humid and cold.

- 35. The Garhwal region has a sub-temperate to temperate climate with maximum temperature recorded in the month of June is 45°C at Kotdwar while in the higher reaches at Dudhatoli it only rises to 25°C. Temperature descends to a minimum of 1.3°C in January, and means monthly temperature for the region ranges from 25°C to 30°C.
- 36. Summer highest day temperature in Kapkot is in between 21° C to 32°C. Average temperatures of year as shown below. It is cold in summer also.

C. Ambient Air Quality

- 37. The pristine environment and sparse population suggest that most part of the State have a very good air quality. Any point or non-point pollution sources of air pollution were not observed throughout the survey period. It was observed that the traffic on the roads is too low to cause unbearable air pollution due to vehicular exhaust. Finally, there are no industries recorded in or along the subproject area and hence any other source of atmospheric air pollution is not expected.
- 38. The air pollution level is well within the permissible limits because there are no major sources of pollution in the region. The baseline data on ambient air quality will be generated by collection of representative samples by the contractor before commencement of construction works. The selection of sampling location will be representative of residential, commercial, institutional, industrial and sensitive locations.

The proposed locations are

- 1. Location of Infiltration well 1 Samples
- 2. Within the city limites where pipe laying will be done 1 Samples
- 3. Residential Area near the location of Infiltration well 1 Samples
- 4. Near Construction Camp 1 Samples

D. Ambient Noise Level

- 39. Generally, noise pollution is not a problem in the state except in the urban areas like Dehradun.. Traffic, industrial, and festival/cultural noises, along with noise generated from construction activities, DG sets etc., are the most prominent sources of noise in the urban areas. Overall noise level in the town is calm except on the busy roads of Kapkot.
- 40. During the construction period, a temporary increase in the noise levels are expected as there will be movement of construction machineries and construction activities to be done in the proposed rehabilitation of water supply system. Suitable noise barriers in the form of vegetation and timely scheduling of construction activities will help minimize these effects better.
- 41. It was observed that ambient noise scenario in residential, commercial, and sensitive areas in the study area are quite low in general. The baseline data on ambient air quality will be generated by collection of representative samples by the contractor before commencement of construction works. The selection of sampling location will be representative of residential, commercial, institutional, industrial and sensitive locations.

The proposed locations are

1. Location of Infiltration well– 1 Samples

- 2. Within the city limites where pipe laying will be done 1 Samples
- 3. Residential Area near the location of Infiltration well 1 Samples
- 4. Near Construction Camp 1 Samples

E. Hydrology

- 42. Uttarakhand has tremendous water resources such as glaciers, lakes, rivers and other water bodies. Most of these have tourism importance like Milam, Pindari, Sunder Dhunga and Heeramani Glaciers; Seven Lakes in Nainital; and some wetlands. However these water bodies are located far from the Project area.
- 43. Generally, there has been an overall decline in water resources in the State. Hydrological studies over the last decades confirm the diminishing water resources and the worsening crises (Rawat et. al) as caused by the following factors which have resulted in the decrease in underground seepages. These have directly contributed to the reduction of water availability in and reduction of discharge in nallas as well as extensive disappearance of springs—the region's primary source of drinking water.
 - There has been a diminishing regulatory effect of glaciers of the Great Himalayan zone.
 - There is a long-term decreasing trend of stream discharges.
 - · The capacities of the lakes have dwindled.
 - Surface runoff on the hillsides has shown high increase.
 - There has been an increase in floodwater and decrease in base flow water in channels and rivers.
 - Extensive soil erosion and landslips are recurring phenomena in the region.
- 44. The Sub-project is located on the Kapkot (see Appendix 1. Rapid Environmental Assessment Checklist).

Water Drainage

- 45. The region of Uttarakhand is well drained by numerous rivers and rivulets locally known as Gad, Gadhera and Naula. The water resources of this region are of singular importance not only for the region but also for the whole Gangetic plains of north India. There are three main river systems are: (i) the Bhagirathi Alaknanda basin Ganges basin, (ii) The Yamuna Tons basin, and (iii) the Kali basin.
- 46. The Ganges system drains the major part of the region covering the whole of the Garhwal, except the western part of Uttarkashi district, and the western part of Garhwal Himalayas from an altitude of 7,138 m meet at Devprayag and flow as the Ganges thereafter. The Bhagirathi is the main stream while the Alaknanda, Saraswati, Dauli Ganga, Berahi Ganga, Nandakini, Mandakini, Madhu Ganga, Pindar, Atagad, Bhilangana, Jad Ganga, the Kaldi Gad and the Haipur are the main tributaries to the Alaknanda and/or Bhagirathi, ultimately contributing to the waters of Ganges. The Nayar, which drains more than a half area of the Garhwal district, is an important tributary of the Ganga. The Yamuna-Tons system is also located in the Garhwal region. The Yamuna river rises at Yamunotri and is joined by important tributaries such as the Giri and more importantly, the Tons, which is its biggest tributary with 2.7 times greater volume of water than the Yamuna. The River Yamuna flows out of the hill areas through the Doon

valley and the Shivaliks, into Haridwar district, being joined in the Doon valley by several streams.

Water Quality

- 47. The Kapkot City situated on the bank of Saryu River. The raw and treated water quality during construction will be monitored. Construction debris will be disposed away from the infiltration well premises on daily basis to avoid any contamination..
- 48. There is very little documentation on the pollution status of rivers except that of the holy river Ganga and some other water bodies where there were at least limited monitoring studies recently. In terms of quality, the surface water of the State is unprotected from untreated wastewater, and runoffs from chemical fertilizers and pesticides. No proper sewage treatment facilities exist in the project area. The increasing pollution of water bodies constitutes the biggest threat to public health. At present, there is limited information available on the quality of fresh water resources in the State.
- 49. Based on limited records, the water quality of Uttarakhand's rivers, rivulets, and other natural water sources is generally good and no major source of water pollution was found. The hand pumps, natural water seeping out from mountains locally called as "Naula", and natural water springs locally called as "Gadhera" represent the ground water sources in the hills. There are no major sources of water pollution in terms of point or non point sources aside from natural landslides leading to deposition of debris in streams. Proposed subproject is not expected to have any adverse impact on the surface water quality. The baseline data on water quality will be generated by collection of representative samples by the contractor before the commencement of construction activity. The proposed location of the sample collection are
 - 1. Up stream of Infiltration well and left bank of the river 1 Sample
 - 2. Down Stream left bank of infiltration well 1 sample

F. Seismology

- 50. The main tectonic elements of the region include the (i) central thrust and (ii) boundary fault. Several NE-SW lineaments are also known from the area and these traverses across different tectonic zones.
- 51. Seismically, the State constitutes one of the most active domains of the Himalayan region. Several damaging earthquakes are recorded from this region. As such, the region is classified under

high seismic zone V. The modified mercalli intensity broadly associated with the zone V is IX. The succeeding Figure shows the seismic zones of India.

Figure IV-2 Seismic Zone of India

G. Ecology

Forestry

52. The Forest Survey of India in their 2009 report reported a 4.75% increase in nation's forest cover from 1987 to 1997 translating to 3.13 million hectares but puts a caveat that

improvement in remote sensing, data interpretation and definition of forestland between the census dates renders the result "strictly not comparable." Uttarakhand is ranked 9th in all-India in terms of forest covered area with 24,495 km² where Madhya Pradesh, Arunachal Pradesh, and Chhatishgarh leads with 77,700; 67,353; 55,870 km², respectively.




Figure IV-3 Forest Cover by State, 2007 (FSI, 2009)

53. The distribution of forest cover by district is presented in the succeeding Figure and Table. The Garhwal region has more forest cover with 14,646 km compared to the Kumaon region with 9,869 km². However, they are almost equal in terms of distribution over its territory with 45% and 47% of covered with forest. The district of Pauri Garhwal, Uttarkashi, Nainital, and Chamoli have the largest forest cover accounting for 50% of all the state's total.




Figure IV-4
Uttarakhand's Forest Cover Map

Table IV-1District-wise Forest Cover, Uttarakhand

		Geographic	Forest C	est Cover		Total Forest	% of	
Region	District	Area	Very Dense	Moderate Dense	Open Forest	2007	Total 2007	
	Uttarkashi	8,016	567	1959	619	3145	39.23	
	Rudraprayag	1,984	246	581	298	1125	56.70	
	Chamoli	8,030	427	1,586	682	2695	33.56	
Garhwal	Pauri Garhwal	5,329	523	2,094	672	3289	61.72	
	Tehri Garhwal	3,642	298	1,232	617	2147	58.95	
	Dehradun	3,088	584	695	328	1,607	52.04	
	Haridwar	2,360	26	354	238	618	26.19	
Sub-Total	71	32,449	2,671	8,501	3,454	14,626	45.07	
Kumaon	Pithoragarh	7,090	567	1,115	412	2,094	29.53	
	Bageshwar	2,246	194	883	304	1,381	61.49	
	Almora	3,139	222	928	427	1,577	52.04	
8	Nainital	4,251	601	1,919	573	3,093	72.76	
	Champawat	1,766	336	571	274	1,181	66.87	
	Udham Singh Nagar	2,542	171	248	124	543	21.36	
Sub-Total		21,034	2,091	5,664	2,114	9,869	46.92	
Total		5,3483	4,762	14,165	5,568	24,495	42.80	
	Very Dense Forest - Al	l lands with tree	cover of	canopy dens	ity of 70%	and above	1	
Note	Moderately Dense Forest – Canopy density between 40%-70%							
	Open Forest - Canopy	density betwee	n 10%-40	%				

- 54. In terms of type, the state forest is classified into 9 forest types based on Champion and Seth (1968) system, the largest among which are the Himalayan Moist Temperate Forests, Sub-tropical Pine Forest Tropical Moist Decidous Forest, and Tropical Decidous Forests accounting for 37.15%, 28.81%, 19.08%, and 6.46%, respectively.
- 55. A wide variety of tree species is found in the mountains of Uttarakhand and enumerated in the succeeding Table according to altitude location. Some notable tree species are Poplar (*Populus ciliata*) and Eucalyptus (*Eucalyptus citriodora*) due to their fast growing and large market demands, and Khair (*Acacia catechu*) and Seesam (*Dalbergia sissoo*) for their ecological and economic importance. Sal (*Shorea robusta*), which is highly adapted to sandy soil are being used to stabilize river banks and islands in river beds. Oak (*Quercus* sp.) is another important species considered to be amongst the best wood in the world specially for making agriculture implements due to its very heavy hard with twisted fibers. The State Govt. of Uttarakhand has declared the oak tree (*Quercus* sp.) as a *Kalpvriksha* or wish fulfilling divine tree often treated as the signature plant of the Kumaon Himalayas as numerous logos and insignias with a stylized version of the deodar inscribed on them. Deodar grows in the temperate to alpine climate that is found between 3500 and 12000 feet in this region. Finally Chir pine (*Pinus roxburghii*) a source of resin, which is used for producing resin and terpentine.
- 56. The proposed subproject is not expected to have any adverse impact on the Forests and does not involve any tree cutting.

Table IV-2 Predominant Top-Canopy (Tree) Species According to Altitude

	Tubic II = I Toucillian	. I - p - calle p / lice, - p		.,
SI. No.	Common Name	English Name	Botanical Name	Altitude (m.)
a 1.0	Kachnar	Orchid tree	Bauhinia variegata	600-900

SI. No.	Common Name	English Name	Botanical Name	Altitude (m.)
2.	Cheed	Chir Pine	Pinus roxburghii	600-900
3,	Shal tree	Shal tree	Shorea robusta	600-750
4	Banj	Oak tree	Quercus incana	1700-2000
5	Kail	Blue pine	Pinus wallichiana	1800-2400
6.	Buransh	Rose tree	Rhododendron arboretum	200-2100
7.	Deodar	Cedar tree	Cedrus deodara	1800-2400
8.	Raga	Himalayan fir-low level	Abies pindrow	2100-2900
10.	Raga	Himalayan fir-high level	Abies spectabilis	2900-3600
11.	Spruce	Spruce	Picea smithiana	2400-2900
12.	Thuner	Himalayan Yew	Texus baccata	2400-2700
13.	Surai	Cypress	Cupressus torulosa	2300-2400
14.	Pangar	House Chestnut	Aesculus indica	1800-2100
15.		Strawberry tree	Cornus capitata	2000-2300
16.	Bhojpatra	Betula	Betula utilis	3000-3500
17,	Buransh	Rose Wood	Rhododendron arboreum	1700-2000
18.	Simaru	Rose Wood	R. campanulatum	2200-3000
19,	Moru	Oak tree	Quercus dilatata	2000-2500
20.	Kharsu/Khoru	Oak tree	Quercus semicarpifolia	2200-2400

Biodiversity

57. The State of Uttarakhand is endowed with rich bio-diversity as manifested by its approximately 64 percent forest cover. The State has established six national parks and six wildlife sanctuaries for the conservation of flora and fauna. Such areas include the Nanda Devi National Park, Valley of Flowers, Gangotri National Park, Govind Pashu Vihar National Park, Rajaji National Park, Jim Corbett National Park, Kedarnath Wildlife Sanctuary, Askot Musk Deer Sanctuary, Mussoorie Sanctuary, Binsar Wildlife Sanctuary, Sanadi Sanctuary, and Govind Wildlife Sanctuary—all of which are being looked after by the Uttarakhand government. A positive remark on the State is that it maintains rich wildlife outside their protected areas.

Table IV-3 Wildlife in Uttarakhand

SI. No.	Protected Areas	Year	Unit	Statistics
150	National Parks			
	(i) Number	2009	No.	3
	(ii) Area	2009	Sq. Km.	4083
2.	Wildlife Sanctuaries			
	(i) Number	2009	No.	5
	(ii) Area	2009	Sq. Km.	2396
3.	Important Wild Animals		i i	
	(i) Musk Deer	2001	No.	160
	(ii) Cheetal	2001	No.	35000
	(iii) Himalayan Black Bear	2001	No.	375
	(iv) Elephant	2002	No.	1582
	(v) Tiger	2003	No.	245
	(vi) Leopard	2003	No.	2090

- 58. The Himalayas represent one of the most fascinating biota (fauna and flora) all over the world, both in terms of quality and quantity. This is evident from the fact that more than 50 percent of all biota can be found only in the Himalayan region. Such fact is brought about by the region's uniqueness in terms of favorable climatic conditions, natural habitats, and soil types.
- 59. The State of Uttarakhand is represented by Biogeographic Zones 2B Western Himalaya and 7B Siwaliks ¹ in this region. About 18.7 % of the total area under the Forest Department has been clearly earmarked for biodiversity conservation by the creation and management of 12 Protected Areas (PA) and a biosphere reserve in the State.

Table IV-4 National Parks in Uttarakhand

National Park	Year of Establishmen t	Area (sq.km)	District
Corbett NP	1936	521	Garhwal
Nanda Devi NP	1982	630	Chamoli
Valley of Flower NP	1982	87	Chamoli
Rajaji NP	1983	820	Dehradun and Haridwar
Gangotri NP	1989	2390	Uttarkashi
Govind NP	1990	472	Uttarkashi
	Corbett NP Nanda Devi NP Valley of Flower NP Rajaji NP Gangotri NP	Corbett NP 1936 Nanda Devi NP 1982 Valley of Flower NP 1982 NP Rajaji NP 1983 Gangotri NP 1989	Corbett NP 1936 521 Nanda Devi NP 1982 630 Valley of Flower NP 1982 87 Rajaji NP 1983 820 Gangotri NP 1989 2390

Source: Wildlife and Protected Areas, ENVIS, 2002

Table IV-5 Wildlife Sanctuaries in Uttarakhand

SI.No.	Sanctuary	Year of Establishment	Area (sq.km.)	District
1,	Govind WLS	1955	521	Uttarkashi
2.	Kedarnath WLS	1972	957	Chamoli
3.	Askot WLS	1986	600	Pithoragarh
4.	Sonanadi WLS	1987	301	Garhwal
5.	Binsar WLS	1988	46	Almora
6.	Musoorie WLS	1993	11	Dehradun

Source: Wildlife and Protected Areas, ENVIS, 2002

- 60. Variations in the topography of high mountain ranges and deep valleys and altitudes from sea-level portions give the project districts different habitats for a variety of fauna and in turn resulted in the enriched biodiversity in the region. The common wildlife reported from the forests includes Tigers, Panthers, Civet Cats, Leopard Cats, Jungle Cats, Himalayan Silver Fox, and the Jackal. Various species of deer including the Musk Deer and the Barking Deer also roam in the districts. Sambhar and Gural as well as the Bear and the Porcupine are also found in the project area. The flying mammal Bat is also common in the area. Other animals in the region include the Chipmunk, the Rhesus Monkey and the Flying Squirrel. Discussion with local people during the survey process generated reports on the presence of Leopards, Deers, Foxes, and Wild Pigs. Some important information about wildlife of Uttarakhand is given in the Table below.
- 61. Proposed subproject is not expected to have any adverse impact on the biodiversity.

¹ Negi, A.S., Status, Distribution and Management of Mountain Ungulates in Uttaranchal, Envis Bulletine, 2002

Table IV-6 Wildlife in Uttarakhand

SI. No.	Protected Areas	Year	Unit	Statistics
1.	National Parks			
	(i) Number	2009	No.	3
	(ii) Area	2009	Sq. Km.	4083
2.	Wildlife Sanctuaries			
	(i) Number	2009	No.	5
	(ii) Area	2009	Sq. Km.	2396
3.	Important Wild Animals			
	(i) Musk Dear	2001	No.	160
	(ii) Chital	2001	No.	35000
	(iii) Himalayan Black Bear	2001	No.	375
	(iv) Elephant	2002	No.	1582
	(v) Tiger	2003	No.	245
	(vi) Leopard	2003	No.	2090

Table IV-7 List of Major Flora				
Sr No	Local Name	Scientific Name		
Trees				
1,	Buransh	Rhododendron arboretum		
2.	Deodar	Cedrus polycarpos		
3.	Chir	Pinus roxburghii		
4.	Surai	Cupressus tourulose		
5.	Padam	Prunus cornuta		
6.	Mehal	Pyrus pashia		
7.	Otis	Alnus nepalensis		
8.	Ayar	Lyonia ovalifolia		
9.	Kafal	Myrica sapida		
10.	Akhrot	Juglana regia		
11	Bhimal	Grewia optiva		
12.	Ritha	Sapijdus mukorossi		
13.	Tun	Toona ciliate		
14.	Nimla	Ficus auriculata		
15.	Timur	Zanthoxylum tamala		
16.	Kharik	Celtis eriocarpa		
17.	Chamkhirik	Carpinus viminea		
18.	Katmon	Betula alnoides		
19.	Kajal	Acer acuminatum		
20.	Katoj	Castanopsis tribuloides		
21.	Kirmola	Acer oblongum		
22.	Kandru	llese dipyrene		
23.	Banj	Quercus semicarpifolia		
Shrubs	*			
1.	Kala Hisalu	Rubus lasiocarpus		
2.	Karoz	Carissa spinarium		
3.	Kobra Plant	Arisama helleborifollium		
4.	Kandali	Urtica parviflora		
5.	Satavar	Asparagus racemosus		
6.	Dudhi	Hollerrhena antidysentricr		
7.	Bajradanti	Potentilla fulgens		
8.	Banfasa	Viola surpans		
9.	Bach	Acorus calamus		
10.	Nakol	Urticor dioica		
11	Patyura	Pteraacanthus angustifrons		

Sr No	Local Name	Scientific Name
12.	Dudhia	Taraxacum officinale
13.	Vatula	Flemingia fruticulose
14.	Belmur	Flacourtia indica
15.	Nirghesi	Delphinium denudatum
16.	Silfoda	Bergenia gossypina
17.	Jula	Gerbera grassypina
18.	Jatamasi	Nardostachys grandiflora
Grasses	~	
1.	Dub	Cynodon dactylon
2.	Kush	Sucharum spontanour
3.	Gol ringal	Chimonobambusa falcate
4.	Tachita	Apluda muticr
5.	Dev ringal	Thamnocalamus facloueri
6.	Jhugra ringal	Arundinaria jaunsarensis
7.	Thamgil	Thamnocalamus spathiflorus

Table IV-8 List of Major Fauna

S		Wild Animals
No.	Local Name	Scientific Name
1	Guldar	Panthera Pardus
2	Kala Bhalu	Selenarctos thibetanus
3	Ghural	Memorhaedus goral
4	Kakar	Muntiacus muntjak
5	Khirao	Capricornis sumatraensis
6	Jangli Suar	Sus-scrofa cristatus
7	Chitrola	Martes flarigula
8	Langoor	Presbyits entellus
9	Khargosh	Lepus nigricollis
10	Sehi	Hystrix indica
11	Gidar	Canis aureus indicus
12	Jangli Billi	Felis chaus
13	Gilehri	Eurambulus pennanti
14	Bandar	Macaques mulatta
S.		Birds
No	Local Name	Scientific Name
1	Chir Fijent	Catreus wallichii
2	Kalij Fijent	Lophura Leucomelana
3	Koklaj Fijent	Pucrassia macrolophus
4	Kala Irgal	Letinaetus makavensis
5	Karorla	Urocissa erythsorhyncha
6	Ullu	Strix aluco nivicola
7	Baaj	Flaco severaus
8	Kala Titar	Francolinus francolinus
9	Papiha	Cuculus varius
10	Tota	Psittacula humalayana
11	Chakor	Alectoris graeca chuker
12	Hariyal	Treron spenura
13	Pashchimi Tregopan	Tragopan meloccephalus
14	Bulbul	Pyconotus cafer
15	Maina	Aerioctheres tristis
16	Fakhta	Streptobelia orientalis meena
17	Gidh	Gyps himalayensis

S., No.	Wild Animals		
	Local Name	Scientific Name	
18	Kauwa	Carvus macrornynchos	
19	Saat Bahen	Teyrdoides striatus	
20	Neelkanth	Garrulus Lanaclatus	

Biosphere Reserves

- 62. The Biosphere Reserve is the top category after Wildlife Sanctuary and National Park in the Country. Out of the 14 Biosphere Reserves situated in India, the Nanda Devi Biosphere Reserve (NDBR)—established second among the 14—is situated in the State of Uttarakhand. It extends in the three districts of Chamoli (Garhwal), Pithoragarh, and Bageshwar (Kumaon). The Nanda Devi National Park (NDNP) and the Valley of Flowers are UNESCO World Heritage Site declared in 1988. The NDNP is located in the transition range between the Zanskar range and Himalayan foothills with 97 species of plants including many rare and almost extinct plants like Saussurea sudhanshui, Nardostachys grandiflora, Picrorhiza kurroa, Cypripedium elegans, C. himalaicum, Dioscorea deltoidea and Allium strachevi. There are also 83 animal species including the Bharal (Pseudois nayaur), Himalayan Musk Deer (Moschus chrysogaster), Mainland Serow (Capricornis sumatraensis), Himalayan Tahr (Hemitragus jemlahicus), Goral (Nemorhaedus goral), Snow Leopard (Panthera uncia), Common Leopard (Panthera pardus). Himalayan Black Bear (Selenarctos thibetanus), Common Langur (Presbytis entellus), and Rhesus Macaque (Macaca mullata). Also, there are about 114 avian species and 27 species of butterflies in the NDNP
- 63. The Rajaji National Park was established in 1983 protecting sections of the tropical deciduous forest area of the Shivalik Hill range on the Himalayan foothills. The Park covers 820.42 square kms, along the Haridwar, Dehradun and Pauri Garhwal. The park has a vast Sal forest, and mixed forest mostly covered with *Acacia catechu* and *Vetiveria zizanioides*. It is refuge to approximately 49 species of mammals, 315 species of birds, 49 species of reptiles, 10 species of amphibians and 49 of Piscean species. This park has the largest population of elephants in Uttarakhand and a large population of tigers and leopards. Noteable animals seen in the par are the Wild Cat, Goral, Rhesus Macaque, Himalayan Yellow Throated Marten, Monitor, Lizard, Indian Hare, Sloth, Himalayan Black Bear, King Cobra, Jackal, Barking Deer, Sambar, Wild boar, Indian Langur, Indian Porcupine and Pythons. The population of birds consists of the Great Pied Hornbill, Himalayan Pied Kingfisher, Sparrows, Fire Tailed Sunbird and the Peacock (Indian National Bird).
- 64. The Jim Corbett National Park covers 520 sq kms of Savannah-type grasslands and Sal forests. Declared as a Tiger Reserve in 1973, the Park has a rich diversity including the White Tiger, Throated Martem, Himalayan Palm Civet, Indian Grey Mongoose, Para, Kakka, Ghoral, Bar-headed Goose, Duck, Grepe, Snipe, Turtles, Python, Common Otter, Porcupine, Clack-taped Hare, Chital, Spotted Deer, Viper, Cobra, Krait, King Cobra, Tortoise, Graylag, Sandpiper, Gull, Cormorants and Egrets. There are 488 species of flora found protected in the Park including Sal, Savannah Grass, Anogeissus-Acacia catechu forests, Mallotus philippensis, Jamun and Diospyros tomentosa.
- 65. The Govind National Park covers an area of 957 sq. kms in Uttarakashi and a sanctuary for the endangered Snow Leopard and some other 15 species of mammals and 150 species of birds that includes the Himalayan Black bear, Brown bear, Musk deer, Bharal,

- Himalayan Tahr, Serow and Common leopard. The endangered birds found in this region are Monal Pheasant, Koklas Pheasant, Bearded Vulture Himalayan Snow Cock, Golden Eagle, Western Tragopan, Steppe Eagle and Black Eagle. Other varieties of birds include Owls, Pigeons, Minivets, Thrush, Warblers, Bulbul, Cuckoo and Finches.
- 66. The Valley of Flowers is a World Heritage Site located in Chamoli. There are hundreds of species mostly being Orchids, Poppies, Primula, Calendulas, Iris, Lily, Roses, Violets, Rhododendron, Angelica, Himalayan Fritillary, Daisies and Anemones and also supports a variety of mammals like the Himalayan Tahr, Snow Leopard, Musk Deer, Red Fox, Common Langur (a type of monkey), Bharal, Serow, Himalayan Black Bear, Himalayan Brown Bear, Pica (Mouse hare). A huge variety of butterflies and birds are also found in the valley including Himalayan Golden Eagle, Griffon Vulture, Snow Partridge, Himalayan Snow Cock, Himalayan Monal, Snow Pigeon, and Sparrow Hawk.

H. Socio-Economic

Social and Cultural Development

- 67. The State of Uttarakhand occupies a total land area of 53,483 sq. km. which is 1.73 percent of India's total land area. Demographically, the State has a population of 10,086,292 as per the 2011 census consisting of 51 percent males and 49 percent females. Out of these, 7,036,954 people live in rural areas spreading over 16,623 revenue villages settled in 39,967 habitations. The habitation's population is scattered between small streams and rivers and is spread over 20 to 70 degree slopes of the Himalayan and the Lesser Himalayan regions.
- 68. The State is divided into Garhwal and Kumaon divisions. Administratively, the State is divided into 13 districts, 49 tehsils and 95 blocks. Garhwal division has seven hill districts with one located in the foothills (Haridwar). Kumaon division, on the other hand, has six districts—one in the foothills (Udham Singh Nagar). There are 16,177 villages in the State and 7,227 gram panchayats. Of the total number of villages, 5,868 are not connected to all weather roads.

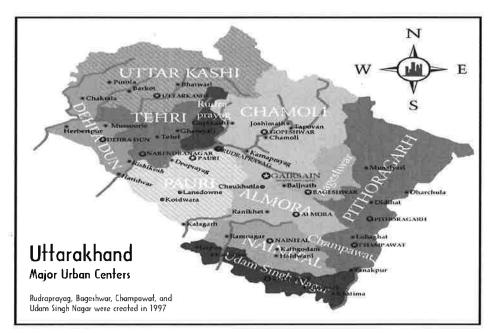


Figure IV-5 Uttarakhand Major Urban Centers

- 69. The schedule caste and schedule tribe population in the State is significant, averaging 17.9 percent and three percent respectively. The population density is 159 persons per sq.km.—considerably lower than the national average of 324 persons per sq.km. Rural population constitutes about 74% while urban population composes the remaining 26% of State's total populations. About 70% of the State population lives below the poverty line which is way above the national average of 46%. Literacy rate in the State is 71.6%.
- 70. The State recorded 19.2% decadal growth during the 1991-2001 census period which is close to the national growth rate of 21.3 %. The district of Nainital registered the highest decadal growth rate with 32%, followed by Udham Singh Nagar with 27.8%.

Land Use and Land Use Pattern

- 71. The land use pattern of Uttarakhand is strongly governed by the following: elevation, climate, mountainous terrain, lithological type, topography, surface hydrology, sunlight in the fields of forestry and agriculture, alpine meadows, sparse vegetation (scrub), grazing land, barren land, and human settlement. The human settlements are mainly located in the shallow water zones or around the localities nearer to springs.
- 72. Forest is the main land use in the State and nearly 64 % of the geographical area is under the varying forest densities (cover). Tree line is clearly demarcated above 2900 m elevation. Agriculture is confined to areas of low reliefs which are underlined by weak rock formation (i.e. schists, phyllites, weathered gneisses, and crushed quartzite). The cultivated land, approximately 11.5 % of the total geographical area, is either terraced/semi-terraced or plain. Other land use categories such as meadows, grazing lands, and scrubs do not exhibit definite relationship with lithology. It is also observed that the south-facing hill slopes are covered by lush green forests.

Table IV-9 Land Utilisation in Uttarakhand

SI. No.	Land-use	Period / Year	Unit	Statistics
1,	Total Reported Area	2006-07	Hectare	5,666,878
2.	Forest Area	2006-07	Hectare	3,465,057
3.	Culturable Waste Land	2006-07	Hectare	366,713
4,:	Fallow Land	2006-07	Hectare	108,132
	(i) Current Fallow	2006-07	Hectare	44,064
	(ii) Fallow Land other than Current Fallow	2006-07	Hectare	64,068
5.	Barren & Unculturable Land	2006-07	Hectare	311,849
6,	Land under Non-agricultural Uses	2006-07	Hectare	160,649
7 #	Permanent Pasture & Other Grazing Land	2006-07	Hectare	220,286
8,	Land under Misc., Tree Crops and Groves not included in Net Area Sown	2006-07	Hectare	269,042
9.	Net Area Sown	2006-07	Hectare	765,150

Source: Uttarakhand at a Glance 2009-10, Govt. of Directorate of Economics and Statistics

i. Health

73. The Total Fertility Rate of the State is at 3.6 while the Maternal Mortality Ratio is at 517 (SRS 2001-03). Both of which are higher than the national average. The sex ratio in the State is 962 slightly higher than the 933 All-India. Comparative figures of major health and demographic indicators are mentioned below.

Table IV-10 Health Indicators of Uttarakhand

S.No.	ltem	Uttarakhand	India
1	Total population (Census 2001) (in millions)	8.5	1,028.61
2	Decadal Growth (Census 2001) (%)	20.41	21.54
3	Crude Birth Rate (SRS 2007)	21.0	23.5
4	Crude Death Rate (SRS 2007)	6.7	7.5
5	Total Fertility Rate (SRS 2006)	3.6	2.9
6	Infant Mortality Rate (SRS 2007)	43	57
7	Maternal Mortality Ratio (SRS 2001 - 2003)	517	301
8	Sex Ratio (Census 2001)	962	933

Source: RHS Bulletin, March 2007, M/O Health & F.W., GOI

74. The health infrastructure of the State is described in succeeding Table. There are only 34 Obstetricians / Gynecologists and 18 Pediatricians in the State. Such numbers are way below the estimated State requirement of 49 each. Some of the essential requirements of the new State include basic primary health care, pre and post-natal care, and nutritional status and preventive care. Accessibility to health services with the aid of improved road conditions is essential to put progress in the health indicators of the State. Post disaster 2013 water supply facility provided to population in and around the sub-project area has been adversely affected. With better water supply system and delivery of appropriate quantity and quality of water, health scenario will also improve.

Table IV-11 Health Infrastructure of Uttarakhand

Particulars	Required	In position
Sub-centre	1,294	1,765
Primary Health Centre	214	232
Community Health Centre	53	49
Multipurpose worker (Female)/ANM at Sub Centres & PHCs	1,997	1,785
Health Worker (Male) MPW(M) at Sub Centres	1,765	656
Health Assistant (Female)/LHV at PHCs	232	159
Health Assistant (Male) at PHCs	232	147
Doctor at PHCs	232	182

Source: RHS Bulletin, March 2007, M/O Health & F.W., GOI

J. Literacy

75. In terms of the population's literacy, Uttarakhand recorded an overall literacy rate of 71.6% in 2001, marking a significant improvement from 57.7% in 1991. Meanwhile, the overall literacy rate in rural areas is 68.1%. The succeeding Table shows the literacy of Uttarakhand. The male literacy rate is 83.30% and female literacy rate is 59.60% which is comparatively high from the national average. It indicates that the rural population needs more education facilities to bridge the gap with that of the urban areas.

Table IV-12 Literacy Rate in Uttarakhand

Literacy Rate 2001	% of Total Population
Total	71.60
Males	83.30
Females	59.60
Scheduled Caste	
Total	63.40
Males	77.30
Females	48.70
Scheduled Tribes	
Total	63.20
Males	76.40
Females	49.40
School education	
Percentage of Pre- Primary/Primary schools to total institutions	69.76
Percentage of Middle schools to total institutions	19.75
Percentage of High schools/Higher Secondary to total institutions	10.48

Source: Uttarakhand at a glance 2006-07

- 76. The general enrollment and access to primary schools has seen a tremendous boost in the last decade. Such improvements are brought by the increased availability of functional primary schools and the initiation of the Education Guarantee Scheme in the State. Cultural and Archaeological Resources
- 77. The State of Uttarakhand has a great range of cultural practices. Festivals and cultural activities are being celebrated throughout the year in the State. The major fairs and festivals of the Garhwal region include the Hatkalika Fair, Tapkeshwar Fair, Surkhanda Devi Mela, Kunjapuri Fair, Lakhawar Village Fair, and Mata Murti Ka Mela. Baikunth Chaturdasi Mela is a famous fair celeberated in Dharchula. On the other hand, major fairs and festivals in the Kumaon region consist of Uttarayani Mela, Shravan Mela (Jageshwar), Kartik Poornima at Dwarahat, Kasar Devi fair, and Nanda Devi melas.
- 78. There are no heritage sites listed by Archaeological Survey of India (ASI) within the study area hence, the proposed project activities do not have any adverse impact on these sites. There are few small temples/ shrines located along the project corridors, but none of them will be affected by the subproject and the construction activity is restricted to the available land. In terms of the area's common property resources (CPR) such as public wells, water tanks, play grounds, common grassing grounds or pastures, market areas and community buildings, none will be affected by sub-project.

Economic Development : Transportation and Communication

79. Transportation system is a key factor in the socio-economic development of any State. Roads are logically the critical inputs to the growth of all the sectors. Aside from road systems, the State of Uttarakhand is connected to other states via rail and air transportation systems. Dehradun, Haridwar and Kathgodam are the major railway

stations connected to various parts of the country. Jolly Grant near Dehradun is the lone airport present in the State. As per statistical data from 2006-07, Uttarakhand has a total road network of 23,274 km of which 2,228.90 km comprises the National Highway (1,328.30 km with State PWD and 900.60 km with BRTF); 1,553.00 km comprises the State Highway; 579.85 km covers the MDR; 7,154.88 km comprises the ODR (6723.90 km with State PWD and 430.98 km with BRTF), and 7,250.53 km to the Village Road. Light vehicle roads constitute of about 2,633 km.

- 80. Density of road length per 100 sq. Km. is 45 km which is very low compared to the national average of 97 km. Only about seven percent of the roads in the State are built in two-lane standards while 50 percent are paved. About a third of the higher class paved roads are in poor condition and over 70 percent of the light-vehicle roads need to be repaired or rehabilitated. Due to the lack of road connectivity, vast areas of the State are inaccessible. Such problem influences the population to 'chunk' in far flung areas of the State remaining to be under-developed and devoid of educational and health facilities and employment opportunities.
- 81. The road density per 100 sq. km. of the total area in Garhwal region is 30 km whereas road density in Kumaon region is 37 km. In terms of population, Garhwal region has 234 km of roads per lakh and the corresponding figure in Kumaon is 266 km. Motor vehicles has increased with the annual growth rate of 11 percent accounting to 44,7000 vehicles in 2003. PWD is the principal agency responsible for the management of roads in the State.

Industrial Development

- 82. The State has very few industrial units mainly because of lack resources. In the hilly terrains, industries promoted include food processing, fruit processing, medicinal/herbal plants, and horticultural/floriculture-based industries. In the plain districts of Haridwar, Udham Singh Nagar, and other places, capital intensive and high-value addition industries are being encouraged by the government. In 2003-04, there were 178 large and medium-scale industries with total investment of Rs. 500,700 lacs providing employment to about 44,000 employees. Small scale industries, on the other hand, employ about 129,782 of the population.
- 83. In recent years, Uttarakhand has emerged as one of the attractive industrial destinations in India. In this regard, the government is encouraging private participation in all industrial activities in the State. The New Industrial Policy announced in 2003 by the State government puts in place the regulatory framework for Uttarakhand's industrialisation. The New Industrial Policy indicates that private resources may be tapped while promoting integrated Industrial States in Uttarakhand. The State government provides assistance in establishing small and medium sized agro parks, food parks, and the likes which in turn are expected to provide common infrastructure facilities for storage, processing, grading, and marketing.

K. Energy and Electric Power Potential

84. Uttarakhand has an estimated hydro power potential of approximately 20,200 MW. However, only 1,130 MW has been tapped at present. Meanwhile, 4,170 MW projects are under implementation and 3,800 MW projects are allotted to Central, State and private sectors. Thirty-nine projects with a potential of 6,374 MW have been identified for PFR under PMs Hydro Initiatives.

Although Uttarakhand is a power surplus State, a lot needs to be done to harness the untapped potential and sale the surplus power to make this a GDP driver sector for the State.

L. Aesthetic and Tourism

85. Tourism is one of the strong pillars of the State economy. The State has high growth potential for tourism, be in nature, wildlife, adventure or pilgrimage tourism. The State received 10.5 million domestic tourists in the year 2000-01, 11.6 million in the year 2001-02, and 12.9 in the year 2002-03, registering an average growth of 10.7 percent. Expenditure on schemes for tourism development and promotion in the State has progressively increased over the years. In the current five year plan, about Rs. 860 million have been spent, which is about 10 times the amount spent during 1980-85. Some of the major destinations with tourism potential include Haridwar (called 'The Gateway of God'), Rishikesh (the birth place of Yoga), Dehradun, Mussoorie, Almora, Kedarnath, Badrinath, Yamunotri, Gangotri, Jim Corbett National Park, Nainital, Ranikhet, and Pithoragarh.

M. Project Implementation Schedule

Project Activity	Start	Completion	Total duration of the project activity
Sub-Project Appraisal Report	September 2013	December 2013	4 Months
Detailed Project Report and Bidding Document	March 2014	May 2014	3 Months
Bid invitation, evaluation and award	June 2014	August 2014	3 Months
Clearances and handover of site to contractor	August 2014	September 2014	1 Month
Construction	September,2014	February, 2016	18 months

V. ANTICIPATED ENVIRONMENTAL IMPACTS AND MITIGATION MEASURES

- 86. Water supply infrastructure was screened using the ADB's rapid environmental assessment (REA) checklist for Water Supply.
- i) The individual environmental screening checklist is provided in Appendix 1 of this report.
- ii) No environmental impacts related to siting. Project area section is not located inside or near a cultural heritage site, protected area, wetland, and mangrove, estuarine, buffer zone of protected area or special area for protecting biodiversity. There are no rare, threatened, and endangered species (flora and fauna) within the subproject corridor of impact.
- iii) **Potential significant environmental impacts.** The potential significant environmental impacts are related to the excavation and disposal of earth during construction and inconvenience to local commuter during laying of pipes on the roads.
- 87. The beneficial impacts still outweighs the potential environmental impacts. The beneficial impact includes better water quality and reliability of supply.

A. Screening of Environmental Impacts

SL No.	Environmental Attributes	Pre- Construction Stage	Construction Stage	Operation Stage
1.	Physical Environment	No Impact	No Impact	No Impact
	Geography	No Impact	No Impact	No Impact
	Topography, Geology and Soils	No Impact	No Impact	No Impact
2.	Climate and Meteorology	No Impact	No Impact	No Impact
3.	Ambient Air Quality	No Impact	Reversible and Insignificant during Construction Stage	No Impact
4.	Ambient Noise Level	No Impact	Reversible and Insignificant during Construction Stage	No Impact
5.	Hydrology	No Impact	No Impact	No Impact
8	Water Drainage	No Impact	Reversible and Insignificant during Construction Stage	No Impact
	Water Quality	No Impact	No Impact	No Impact
6.	Seismology	No Impact	No Impact	No Impact
7.	Ecology	No Impact	No Impact	No Impact
	Forestry	No Impact	No Impact	No Impact
	Biodiversity	No Impact	No Impact	No Impact
	Biosphere Reserves	No Impact	No Impact	No Impact
8.	Socio-Economic	No Impact	No Impact	No Impact
	Social and Cultural Development	No Impact	No Impact	No Impact
	Land Use and Land Use Pattern	No Impact	No Impact	No Impact
	Health	No Impact	No Impact	No Impact
	Literacy	No Impact	No Impact	No Impact
	Transportation and communication	No Impact	No Impact	No Impact
	Industrial Development	No Impact	No Impact	No Impact

SL No.	Environmental Attributes	Pre- Construction Stage	Construction Stage	Operation Stage
9.	Cultural and Archaeological Resources	No Impact	No Impact	No Impact
10.	Aesthetic and Tourism	No Impact	No Impact	No Impact

B. Impact and mitigation measure during planning and design phase

- 88. There are no significant adverse environmental impacts on topography, soil and geographic significance during the planning and design phase based on the environmental screening of the sub-project in Kapkot .
- 89. Impacts on Climate. Ambient Air Qaulity, Noise Level, Seismic, Economic, Cultural and Aesthetics are insignificant in the planning and design stage.

Environmental Attributes and Project Activity and its Impacts	Mitigation
Project Establishment and pre construction activity and its social Impacts	Open liaison channels shall be established between the Site owner, operator, the contractors and interested and affected parties such that any queries, complaints or suggestions pertaining to environmental management aspects can be dealt with quickly and by the appropriate person(s).
	A communications strategy is of vital importance in terms of accommodating traffic during laying of pipes on road. In case of road closure together with the proposed detour needs to be communicated via advertising, pamphlets, radio broadcasts, road signage, etc
	Provide sign boards for pedestrians to inform nature and duration of construction works and contact numbers for concerns/complaints.
	Storage facilities, elevated tanks and other temporary structures on site shall

Environmental Attributes and Project Activity and its Impacts	Mitigation
	be located such that they have as little visual impact on local residents as possible.
Si	In areas where the visual environment is particularly important (e.g. along commercial/ tourism routes) or privacy concerns for surrounding buildings exist, the site may require screening. This could being the form of shade cloth , temporary walls, or other suitable materials prior to the beginning of construction.
	Special attention shall be given to the screening of highly reflective materials on site.
Lack of sufficient planning to assure long term sustainability of the improvements and ensure protection of the assets created and the architectural/archaeological character of the surroundings	Design will include provisions for ensuring effective maintenance and protection of the assets created so as to ensure the long term sustainability.
Layout of components and its location to avoid impacts on the aesthetics, sensitive environmental areas / attributes of the site	The project components siting will avoid impacts on the aesthetics of the site, ensure minimal impacts and in compliance with statutory and regulatory requirements. The contractor, FPIU/ IA and DSC will identify any direct or indirect intervention of primary or secondary activity before establishment of any project components on the ground.
Selection of materials and construction technologies, if not carefully chosen, will adversely impact the aesthetic appeal of the destinations	Selection of materials will be according to specification and from approved sources Material selection would be done keeping in view that no asbestos (except as allowed), and CFC is used.
	Contractors shall prepare a source statement indicating the sources of all

Environmental Attributes and Project Activity and its Impacts	Mitigation
	materials (including topsoil, sands, natural gravels, crushed stone, asphalt, clay liners etc), and submit these to the Engineer for approval prior to commencement of any work
	Where materials are borrowed (mined), proof must be provided of authorization to utilize these materials from the landowner/material rights owner and the Department of Geology and Mining
	Procurement of all material according to the material specification of the contract document and sourced from licensed and approved sources.
*0	A signed document from the supplier of natural materials shall be obtained confirming that they have been obtained in a sustainable manner and in compliance with relevant legislation
Socio cultural resources- Ground disturbance can uncover and damage archaeological and historical remains	There is not such location is anticipated on the project site. In case of chance of finding such location, Consult Archaeological Survey of India (ASI) and/or concerned dept. of Uttarakhand Govt. as applicable to obtain an expert assessment of the archaeological potential of the site; Consider alternatives if the site is found to be of medium or high risk; Develop a protocol for use by the construction contractors in conducting any excavation work, to ensure that any chance finds are recognised and measures are taken to ensure they are protected and conserved.
Integration of energy efficiency and energy conservation programs in design of sub-project components	The detailed designs for the sub-project components shall ensure that environmental sustainability principles, including energy efficiency, resource recycling, waste minimization, rainwater harvesting etc.
Site clearance activities, including	Any removal of vegetation or tree felling shall be done after taking statutory

Environmental Attributes and Project Activity and its Impacts	Mitigation
delineation of construction areas	permissions if required. All works shall be carried out such that the damage or disruption of flora other than those identified for cutting is minimum.
	Only ground cover/shrubs that impinge directly on the permanent works or necessary temporary works shall be removed with prior approval from the Environmental Expert of DSC
	All areas used for temporary construction operations will be subject to complete restoration to their former condition with appropriate rehabilitation procedures.as per the rehabilitation plan prepared by the contractor and approved by the EE of DSC.
Blockage of access in residential area, commercial area and sensitive location like school, college, hospitals and court	Contractor will identify such location in the preconstruction stage and prepare plan approved by DSC to minimize inconvenience to the people.

C. Impacts and Mitigation Measures during Construction Phase

90. Majority of the impacts will occur during the construction phase. These impacts, to be described in the succeeding sections are classified according to major components of the environment – physical, biological, air, water, and socio-economic. These impacts were mainly drawn from screening of impacts described in the introduction of this Chapter.

Impact on Physical Environment, Geography, Topography, Geology and Soil

91. The constructions of all components of the sub-project are at the existing location and not requiring additional land. So the impact on location related impact is insignificant.

Impact on Climate and Meteorology

92. The project components do not have impact on the climate and meteorology of Dharchula.

Ambient Air Quality

Environmental Attributes and Project Activity and its Impacts	Mitigation
Impacts due to operation of construction Camps and its Location, Selection, Design and Layout	Siting of the construction camps, labour camp and stockpiles shall be as per the guidelines of UEPPCB, ULB, village panchayat and any other applicable guideline to the local site. The contractor will assess the impact of the construction camp and should be acceptable to the FPIU/ IA/PMU
	Construction camps shall not be proposed within 500m from the sensitive receptors, nearest settlements to avoid conflicts and stress over the infrastructure facilities with the local community.
	Location for stockyards for construction materials shall be identified at least 300m away from watercourses.
	Construction camps will be located away from settlements and drainage from and through the camps will not endanger any domestic or public water supply. Construction camps including sanitation facilities must be adequately drained.
	Sewage management though septic tanks and solid waste management though local ULB system or other alternate measures.
Impacts due to poor supply of poor drinking water to the workers involved in construction.	Sufficient supply of potable water to be provided and maintained as per the standards, requirements, test methods and sampling procedure according to IS: 10500. If the drinking water is obtained from an intermittent public water supply then storage tanks will be provided. The cleanliness of the storage tanks will be ensured and all measures to be taken to avoid any water contamination.
Impacts on waste disposal from the construction site and construction camp.	Pre-identified disposal location (identified by Contractor in compliance to relevant regulation and approved by EE-DSC) shall be part of Comprehensive Waste Disposal Plan Solid Waste Management Plan to be prepared by the Contractor in consultation and with approval of Environmental Specialist of DSC.
×	Contractor shall ensure that waste shall not be disposed off near the water course or agricultural land, Orchards and Natural Habitats like Grasslands.

Impacts on local environmenment due to loss of natural resource of earth due to poor storage.	Stockpiling of construction materials and excavated earth or silt in case of construction of river bed filtration does not impact obstruct the drainage and Stockpiles will be covered to protect from dust and erosion.
Impacts due to construction traffic on access to Site	Contractors shall ensure that all side and mitre drains and scour check valves on access and haul roads are functioning properly and are well maintained.
	Contractors shall ensure that access roads are maintained in good condition by attending to potholes, corrugations and storm water damage as soon as these develop.
	If necessary, staff must be employed to clean surfaced roads adjacent to construction sites where materials have been spilt.
	Unnecessary compaction of soils by heavy vehicles must be avoided; construction vehicles must be restricted to demarcated access, haulage routes and turning areas.
	Cognizance of vehicle weight / dimensions must be taken when using access constructed out of certain materials. e.g. paved surfaces / cobbled
Quarry Operations	Contractor shall finalize the quarry for procurement of construction materials after assessment of the availability of sufficient quantity of materials, quality and other logistic arrangements.
	The Contractor shall obtain materials from approved quarries only after consent of the Department of Mines and Geology and District Administration.
	Adequate safety precautions will be ensured during transportation of quarry material from quarries to the construction site. Vehicles transporting the material will be covered to prevent spillage.
Impacts on increased load on water supply source due to construction work.	The contractor shall use ground/surface water as a source of water for the construction with the written consent from

the concerned Department. To avoid disruption/ disturbance to other water users, the Contractor shall extract water from fixed locations and consult DSC & line agencies before finalizing the locations. The Contractor shall provide a list of locations and type of sources from where water for construction shall be extracted. The Contractor shall need to comply with the requirements of the State Ground Water Department for the extraction and seek their approval for doing so and submit copies of the permission to DSC. Slope protection will be measures Imapets due to Soil/land Erosion undertaken as per design to control soil erosion. The Contractor shall not in any way modify nor damage the banks or bed of streams, rivers, other open water bodies and drainage lines adjacent to or within the designated area Earth, stone and rubble is to be properly disposed of so as not to obstruct natural water pathways over the site. i.e.: these materials must not be placed in storm water channels, drainage lines or rivers. There shall be a periodic checking of the site's drainage system by DSC, FPIU/IA and PMU to ensure that the water flow is unobstructed. The Contractor shall take all precautionary Water Pollution from Construction Wastes measures to prevent entering of wastewater into streams, water bodies or the irrigation system during construction. Contractor shall not wash his vehicles in river/stream water and shall not enter riverbed nearby the water resource area for that purpose. Mixing / decanting of all chemicals and hazardous substances must take place either on a tray or on an impermeable surface. Waste from these shall then be disposed of to a suitable waste site in accordance with Hazardous Wastes (Management. Handling and Transboundary movement) Rules, 2008 and amendments till date and applicable

	norms Site staff shall not be permitted to use any stream, river, other open water body or natural water source adjacent to or within the designated site for the purposes of bathing, washing of clothing or for any construction or related activities. Municipal water (or another source approved by the Engineer) shall instead be used for all activities such as washing of equipment or disposal of any type of waste, dust suppression, concrete mixing, compacting etc.
Water Pollution from Fuel and Lubricants	The Contractor shall ensure that all construction vehicle parking locations, fuel/ lubricants storage sites, vehicle, machinery and equipment maintenance and refueling sites shall be located at least 300 m away from rivers/streams and irrigation canal/ponds if any
	Contractor shall ensure that all vehicle/machinery and equipment operation, maintenance and refueling shall be carried out in such a manner that spillage of fuels and lubricants does not contaminate the ground.
	Wastewater from vehicle parking, fuel storage areas, workshops, wash down and refueling areas shall be collected and separated through an oil interceptor before discharging it on land or into other treatment system as per specified standards and UEPPCB and ULB norms if any.
Soil Pollution due to fuel and lubricants, construction waste	The fuel storage and vehicle cleaning area will be stationed such that spillage of fuels and lubricants does not contaminate the ground. All pollution parameters will be monitored as per monitoring plan. Wastewater from vehicle parking, fuel storage areas, workshops, wash down and refueling areas shall be collected and separated through an oil interceptor before discharging it on land or into other treatment system
Generation of dust	The contractor will take every precaution to reduce the levels of dust at construction site.

	Regular sprinkling of water and Stockpiles of soil will be kept covered in such a manner to minimize dust generation
Emission from Construction Vehicles Equipment and Machinery	All vehicles, equipment and machinery used for construction shall confirm to the relevant Bureau of India Standard (BIS) norms. The discharge standards promulgated under the Environment Protection Act, 1986 shall be strictly adhered to.
	The use of silent/quiet equipment compliant with India ambient noise standards and standards specified for manufacturers shall be encouraged in the sub Project.
500	The Contractor shall maintain a record of PUC for all vehicles and machinery used during the contract period which shall be produced for verification whenever required.
Noise Pollution	The Contractor shall confirm that all Construction equipment used in construction shall strictly conform to the MoEF/CPCB noise standards and all Vehicles and equipment used in construction shall be fitted with exhaust silencers.
	At the construction sites noisy construction work such as crushing, operation of DG sets, use of high noise generation equipment shall be stopped during the night time between 10.00 pm to 6.00 am.
	Noise limits for construction equipment used in this project will be in conformity to the BIS/SPCB/CPCB standards Regular monitoring of ambient noise levels to ensure compliance to Uttarakhand Environment Protection & Pollution Control Board standards.
Material Handling at Site	Workers Employed on mixing cement, lime mortars, concrete etc., will be provided with protective footwear and protective masks and goggles.
	Workers, who are engaged in welding works, will be provided with welder's protective eye-shields.

	Workers engaged in stone breaking activities will be provided with protective goggles, masks, and clothing.
	Stockpiles shall not be situated such that they obstruct natural water pathways.
	Stockpiles shall not exceed 2m in height unless otherwise permitted by the Engineer.
	If stockpiles are exposed to windy conditions or heavy rain, they shall be covered either by vegetation or cloth, depending on the duration of the project. Stockpiles may further be protected by the construction of berms or low brick walls around their bases.
	All concrete mixing must take place on a designated, impermeable surface
	The use of any toxic chemical will be strictly in accordance with the manufacturer's instructions and applicable regulations.
	The Engineer will be given at least 6 working day's notice of the proposed use of any chemical. A register of all toxic chemicals delivered to the site will be kept and maintained up to date by the contractor.
Damage, and disturbance to other infrastructure in the construction site	Confirm location of infrastructure. Finalize alignment in coordination with agencies like Uttarakhand Power Corporation Limited, Bharat Sanchar Nigam Limited, etc. Ensure prior permission of respective agency Realign pipelines, if required and subsequently revise IEE
	Provide public information in case of service disruptions
Disposal of Construction Waste / Debris / Cut Material	The Contractor shall confirm that Safe disposal of the construction waste will be ensured in the pre-identified disposal locations. In no case, any construction waste will be disposed around the project site indiscriminately.
Disruption / cessation of existing water supply systems due to construction activity	Care be taken during improvement of existing water supply systems, so that disruption in existing water supply would not occur. Tentative schedule of closure should be

	known to affected people prior to cessation of water supply.
	In case disruption of water supply exceeds the intimated schedule, arrangement for supply of potable water should be made.
Safety Measures During Construction	Personal Protective Equipment for workers on the project and adequate safety measures for workers during handling of materials at site will be taken up. The contractor has to comply with all regulations regarding safe scaffolding, ladders, working platforms, gangway, stairwells, excavations, trenches and safe means of entry and egress.
	The contractor has to comply with all regulations for the safety of workers. Precaution will be taken to prevent danger of the workers from fire, etc. First aid treatment will be made available for all injuries likely to be sustained during the course of work. Contractor shall also organize periodic visits by a qualified registered medical practitioner to the site and workers camp. Contact information of Doctor, availability & location of first aid box shall be displayed in appropriate language both at work site and workers camp.
	The Contractor will conform to all antimalaria instructions given to him by the Engineer.
	The Contractor will also ensure that the interests of the community are preferably not disturbed, and if unavoidable then disturbed to the minimum. Provide traffic management personnel, barricade, appropriate signage and safety information in and around the construction site and prevent local people entering into the construction site.
Clearing of Construction of Camps and Restoration	Contractor to prepare site restoration plans for approval by the Engineer. The plan is to be implemented by the contractor prior to demobilization.
	On completion of the works, all temporary structures will be cleared away, all rubbish

	burnt, excreta or other disposal pits or trenches filled in and effectively sealed off and the site left clean and tidy, at the Contractor's expense, to the entire satisfaction of the Engineer and facility owner.
Risk of archaeological chance finds	Strictly follow the protocol for chance finds in any excavation work; Request FPIU/DSC or any authorized person with archaeological field training to observe excavation; Stop work immediately to allow further investigation if any finds are suspected; and Inform FPIU/DSC, and take any action they require ensuring its removal or protection in situ.
Conflict with locals	Contractor shall ensure that mostly the local labourers are employed and migratory laborer shall be employed only in case of unavoidable circumstances.

93. The handling of material, excavation of earth for laying pipes, emission of air pollutants from operation construction vehicles causes air pollution. Since the scale of construction activity is not significant, so the impact is also not very significant. Periodic air quality monitoring to ensure emissions comply with standards will be conducted as per the agreed environmental monitoring plan

Ambient Noise Level

94. The operation of construction vehicles and equipments will generate noise. Since this operation will be located and limited to the construction site. The beatking of carriage way of road also generated noise. This activity will be limited to day time. So, the impact due to noise is insignificant and limited to the construction period only. Monitoring of noise levels in potential problem areas as per the monitoring plan will be carried out.

Water Drainage

- 95. The disposal of soil and excavation of road sides may impact the drainage. This impact will be insignificant since the exaction of road sides will be covered in the same day and disposal of excavated earth will be on the low laying area so that impact on drainage is minimum. Monitoring of water quality as per the monitoring plan will be carried out.
- 96. The mitigation measures of each project components are provided below.

D. Impacts during Operation Phase

Impact on Environmental Conditions due to operation of water supply system	The periodic monitoring of the ambient air quality, noise level, water (both ground, surface water) quality and soil, in the subproject area as suggested in pollution monitoring plan through an approved monitoring agency.
Increased Pollution due to the better water supply.	The subproject involves renovation and rehabilitation of existing system, augmentation of water supply is envisaged for 10 years project population and to fulfill the deficit of water supply to user as per 135 lpcd. Subproject does not envisage improvement in distribution system to end users as such very little increase is pollution load is anticipated. Sewage generated will be handled by the prevalent existing sewage management system of the town.
Algal Growth in Reservoir	Proper and regular cleaning of reservoir & provision of bleaching shall be ensured. Water sourced from River Bed Filtration (RBF) will be stored in Reservoir and chlorination will be done in the reservoir. Water sourced from WTP will be chlorinated at the WTP only and then stored in the reservoir.
Risk of contamination in water.	Chlorine should be added in sufficient quantity so that residual chlorine within permissible limit is available in pipeline.
Impacts due to Backwash water & Sludge generation in Water Treatment plan	Backwash water and clarifier sludge will be disposed in line with the guideline issued by UEPPCB.
Management of Chlorine stock	Chlorine stock shall be maintained in cool, dark and locked rooms, near the reservoir/treatment site and be handled with proper care and under safety measure.
Unhygienic condition due to poor maintenance of sanitation facilities and irregular solid waste collection	Jal Sansthan will carry out maintenance of the existing toilets, and carry out the regular collection and disposal of wastes as per norms. New facilities proposed to be created under UEAP will cater to additional load.

Chlorination in water

- 1. Chlorination through Chlorine solution
- 2. Chlorination through Chlorine Gas
- Chlorination in water will be done as per CPHEEO manual and ensure residual chlorination within permissible limit.
- Regular laboratory testing for dosing and residual chlorine
- Chlorine tank will be stored on impermeable platform with facility of collection of accidental leakage.
- Gas Chlorination the storage of Chlorine gas in HDPE drums.
- Gas Chlorination through chlorine tunnel in covered room and controlled by chlorinator,
- Provision of leak detector and alarm in the chlorination room.
- Provision of Eye bath and emergency shower facility near the gas chlorination.

E. Economic Development

97. After the disaster, there is significant economic loss mainly due to loss of life and livelihood and tourism activity. This rehabilitation of water supply scheme will bring positive impact interms of health and economic activity. The restoration of water supply will bring the supply level of pre-disaster stage and give support to the local economy.

VI. INFORMATION DISCLOSURE, CONSULTATION, AND PARTICIPATION

A. Public participation during the preparation of the IEE

- 98. The Public Consultation and Focussed Group Discussions had been held at Nagar Panchayat Office, Kapkot on 12/05/2013. The details are shown in Appendix II. The public participation process included identifying interested and affected parties (stakeholders); informing and providing the stakeholders with sufficient background and technical information regarding the proposed development; creating opportunities and mechanisms whereby they can participate and raise their viewpoints (issues, comments and concerns) with regard to the proposed development; giving the stakeholders feedback on process findings and recommendations; and ensuring compliance to process requirements with regards to the environmental and related legislation.
- 99. Stakeholder consultation and participation with various stakeholders is an integral part of the environmental and social impact assessment and also part of regulatory requirement of EIA Notification, 2006 and ADB requirements. The stake holders of the project include project affected communities (directly or indirectly affected) and institutional stake holders such as PCB, local bodies, Water Resource Department, Environmental Department, Mines and Geology Department, Forest Department, etc. Consultations at micro- and macro-level (e.g. District/State level institutional consultations) helped

planners to integrate the short term and long terms requirements of the local, regional, state and national goals in to the planning process. The regional, state and national goals are generally set by the legislations and policies by controlling or limiting the activities in order to reduce and nullify the adverse impact generated by infrastructure projects.

- 100. The following methodologies were adopted for carrying out public consultation
 - [i] Local communities, Individuals affected, traders and local shopkeepers who are directly affected were given priority while conducting public consultation.
 - [ii] Walk-through informal group consultations along the proposed subprojects area
 - [iii] One to one meetings were generally held with a few members of local communities. These consultations sometimes focused on one or more specific issues in a given section (link) of the project corridor. Focus group consultations were conducted with a sample section of the community with a good representation from the affected communities. Such meetings usually provide substantial information about the community concerns.
- 101. During consultation the following general opinions/suggestions were noted: i) Most of the people were not happy with the existing water infrastructure post June 2013 disaster and they need improvement of the water supply scheme, ii) wanted early restoration of facility iii) minimum disturbance to the local people due to construction activity in the town, iv) minimum loss to the trees v) minimum disturbance to traffic

B. Future consultation and Disclosure

102. The public consultation and disclosure program will remain a continuous process throughout the subproject implementation and shall include the following

C. Consultation during Detailed Design

- 103. Focus-group discussions with affected persons and other stakeholders to hear their views and concerns, so that these can be addressed in subproject design wherever necessary. Regular updates on the environmental component of the subproject will be kept available at the PIU/PMU of UEAP.
- 104.FPIU/PMU will conduct information dissemination sessions at major habitations and solicit the help of the local community leaders/prominent citizens to encourage the participation of the people to discuss various environmental issues.
- 105. The FPIU/PMU, with assistance of DSC will conduct information dissemination sessions in the subproject area. During EMP implementation FPIU, DSC, and PMU shall organize public meetings and will apprise the communities about the progress on the implementation of EMP in the subproject works

D. Consultation during Construction

106. Public meetings with affected communities (if any) to discuss and plan work programs and allow issues to be raised and addressed once construction has started.

107. Smaller-scale meetings to discuss and plan construction work with local communities to reduce disturbance and other impacts, and provide a mechanism through which stakeholders can participate in subproject monitoring and evaluation.

E. Project Disclosure

- 108.A communications strategy is of vital importance in terms of accommodating traffic during laying of pipes. Local communities will be continuously consulted regarding location of construction camps, access and hauling routes and other likely disturbances during construction. In case of road closure together with the proposed detours will be communicated via advertising, announcements, road signage, etc.
- 109. For the benefit of the community the IEE will be will be disclosed to the affected people and other stakeholders in a form and language(s) understandable to them at an accessible place in a timely manner and made available at: (i) PIU/PMU office; (ii) District Magistrate Office; and, (iii) DSC office. It will be ensured that the hard copies of IEE are kept at such places which are conveniently accessible to citizens as a means to disclose the document and at the same time creating wider public awareness. Electronic version of the IEE will be placed in the official website of the SDMA UEAP and the official website of ADB after approval of the IEE by ADB. The PIU will issue Notification on the locality-wise start date of implementation of the subproject. Copies of the IEE will be kept in the PMU/PIU office and will be distributed to any person willing to consult the IEE.
- 110. The IEE report will be disclosed in the English language at PMU, Jal Sansthan division office and will also be available in the website of ADB. The full reports will also be available to interested parties upon request from PMU.

VII. GRIEVANCE AND REDRESS MECHANISM

111.A joint social and environmental redress mechanism will be implemented under the project. Grievances and suggestions from local and affected people may come-up related to inappropriate implementation of the project and components of EMP. The expected range of grievances to be handled through this mechanism will encompass but not limited to the following: i) nuisance from noise, dust, and temporary blocking of access; ii) contamination of receiving water from runoff; iii) emissions from increase vehicular traffic and stationary sources like construction machineries; iv) conflict between local residents and migrant workers; v) ownership of vegetation for clearing; and vi) damage compensation. These issues will be addressed through acknowledgement, evaluation and corrective action and response approach. Grievances from public or stakeholders concerning the project and EMP implementation will be received by the concerned Executive Engineer of UEAP division. The Executive Engineer shall refer the application to Construction Supervision Consultants (DSC) who then assess the grievances/suggestions and if they are found to be genuine and acceptable, will be resolved at division level itself within 15 to 30 days from the date of receipt. In case, the issue is unable to be resolved, the matter will be forwarded to the Social and Environmental cell, UEAP (Head guarter). This mechanism is non-judicial in nature and does not preclude the affected people coursing their grievances to the courts. The corrective action will be started as per the action plan indicated to the stakeholder. The action taken and the outcome shall form a part of quarterly report to ADB.

VIII. ENVIRONMENTAL MANAGEMENT PLAN

A. ENVIRONMENTAL MANAGEMENT AND MONITORING PLAN (EMMP)

- 112. The Environmental Management and Monitoring Plan (EMMP) designed will guide the environmentally-sound construction of the subproject and ensure efficient lines of communication between the Design & Supervision Consultants (DSC) also an Engineer for the project, Contractors, Field Project Implementation Unit (FPIU), and Project Management Unit (PMU). Uttarakhand Jal Sansthan is implementing agency (IA) and will implement the Project through its field PIU's. The EMMP identifies the three phases of development as: (i) Pre Construction (ii) Construction Phase; and (iii) Post Construction/Operational Phase.
- 113. The purpose of the EMMP is to ensure that the activities are undertaken in a responsible non-detrimental manner with the objectives of: (i) providing a pro-active, feasible and practical working tool to enable the measurement and monitoring of environmental performance on site; (ii) guide and control the implementation of findings and recommendations of the environmental assessment conducted for the subproject; (iii) detail specific actions deemed necessary to assist in mitigating the environmental impact of the subproject; and (iv) ensure that safety recommendations are complied with.
- 114. A copy of the EMMP must be kept on site during the construction period at all times. The EMMP will be made binding on all contractors operating on the site and will be included within the Contractual Clauses. Non-compliance with, or any deviation from, the conditions set out in this document constitutes a failure in compliance. It shall be noted that the Supreme Court of India * mandates those responsible for environmental damage must pay the repair costs both to the environment and human health and the preventive measures to reduce or prevent further pollution and/or environmental damage. (The polluter pays principle).²
- 115. The Contractor is deemed not to have complied with the EMMP if:
 - (i) Within the boundaries of the site, and site extensions, there is evidence of contravention of clauses;
 - (ii) If environmental damage ensues due to negligence;
 - (iii) The contractor fails to comply with corrective or other instructions issued by the Engineer/PMU/FPIU within a specified time; and
 - (iv) The Contractor fails to respond adequately to complaints from the public.

Institutional Arrangements

116. The institutional arrangements specify the arrangements for the implementation of environmental provisions of the proposed subproject. The Executing Agency (EA), State Disaster Management Authority (SDMA) will work closely with the Implementing Agency (IA) Uttarakhand Jal Sansthan for effective implementation of environmental safeguards related requirements of the sub projects. The institutional arrangements and responsibilities are detailed below.

Writ petition no 657 of 1995. The Supreme Court, in its order dated Feb.4, 2005 that "The Polluter Pays Principle means that absolute liability of harm to the environment extends not only to compensate the victims of pollution, but also to the cost of restoring environmental degradation. Remediation of damaged environment is part of the process of sustainable development."

- 117. The subproject will be implemented and monitored by Uttarakhand Jal Sansthan as Implementing agency and implemented through its Field PIU's supported by DSC (also working as Engineer) and overall management support shall be provided by PMU, UEAP.
- 118. The Safeguard Staff of UEAP SDMA (EA) in PMU & IA will monitor the implementation of environmental covenants with assistance of Engineer (DSC).
- 119.UEAP SDMA (EA) shall be responsible for ensuring compliance to environmental requirements of the ADB as well as central/state governments and reporting the same to ADB. A relevant portion of EMMP will be a part of contract with the civil works contractors engaged for execution of the works. The primary responsibility of implementation of EMMP is of the IA during pre-construction and operation and maintenance phases; and of the civil works contractor during the construction phase as defined in the EMMP. The responsibility of supervision of EMMP implementation is of the DSC; and it would guide the IA and the civil works contractors in this regard., DSC with IA and EA, UEAP will act as monitoring agency as delegated in EMMP. All applicable statutory environmental clearances, consents, and/or permits (at national, state and local levels) as required for the implementation of the subproject would be obtained by the IA or by the civil works contractor in line with India's national/state/local laws and regulations, and in accordance with ADB's SPS 2009 requirements . Redressal of grievances shall be the responsibility of UEAP SDMA (EA). Apart from the mechanism for the grievances receiving and redressal at the level of EA, the provision shall be kept in the EMP of the subprojects wherein the contractor will depute one Environmental Safeguard Officer who shall be responsible for implementation of EMP, reporting and grievance redressal on day-to-day basis. The grievances/complaints received at the level of contractor shall be recorded on the Complaints Register and the same shall be forwarded to the DSC (Engineer of the Contract) within 48 hours along with the details of action taken to redress the grievance. The Team Leader of DSC shall immediately try to resolve the issues and forward the details to the FPIU / IA. If the action taken by Contractor and DSC is found to be inadequate, then necessary instructions shall be issued by the FPIU. IA for implementation of rectification measures.

UEAP, SDMA (PMU)

- Complies with all applicable legislation and is conversant with the requirements of the EMMP:
- Assesses all activities requiring special attention as specified and/or requested by the Engineer (DSC) and/or Safeguards Staff of UEAP SDMA for the duration of the Contract;
- May, on the recommendation of the EE DSC and/or Safeguards Staff of UEAP SDMA, through the DSC order the Contractor to suspend any or all works on site if the Contractor or his subcontractors/ suppliers fail to comply with the said contractual stipulations with respect to environment and EMMP.
- Act as overall monitoring agency.
- Addressing complaints and redressal of grievances.

UEAP, IA / FPIU

• Ensures along with Engineer (DSC) that EMMP and all necessary environmental stipulations are included in bidding documents and Contract documents with Contractor.

- Complies with all applicable legislations and is conversant with the requirements of the EMMP;
- Assesses all activities requiring special attention as specified and/or requested by the Engineer (DSC) and/or Safeguards Staff of UEAP PMU as Implementing agency for the duration of the Contract;
- Ensures that the Contractor conducts all activities in a manner that minimizes disturbance to directly affected residents and the public in general, as advised by the Engineer and/or Safeguards Staff of UEAP PMU & IA.
- May, on the recommendation of the EE DSC and/or Safeguards Staff of UEAPPMU &
 IA, through the DSC order the Contractor to suspend any or all works on site if the
 Contractor or his subcontractors/ suppliers fail to comply with the said contractual
 stipulations with respect to environment and EMMP.
- Act as supervising & monitoring agency as delegated in EMMP.
- Carries out public consultations, addresses complaints and responsible for redressal of grievances.

The Engineer (DSC)

- Guides EA, IA, FPIU and Contractors with respect to environmental regulations and associated requirements, and facilitates ensuring compliance with those;.
- Arranges information meetings for and consults with interested and affected parties about the impending construction activities;
- Maintains a register of complaints and queries by members of the public at the site office. This register is forwarded to the Project Manager of FPIU on weekly basis
- Enforces and monitors compliance the requirements of the EMMP on site;
- Assesses the Contractor's environmental performance in consultation with Environmental Expert
- Documents in conjunction with the Contractor, the state of the site prior to commencing construction activities.
- Documents state of implementation of EMMP and clearly delineate if any item of EMMP is pending partially or fully before issue of completion certificate of the work.

Environmental Expert of Engineer (DSC)

- Briefs the Contractor about the requirements of the Environmental Specification and/ or EMMP, as applicable;
- Facilitates statutory compliance related activities for the IA and Contractors;
- Advises the Engineer about the interpretation, implementation and enforcement of the Environmental Specification and other related environmental matters;
- Monitors and report on the performance of the contractor/project in terms of environmental compliance with the EMMP to the Engineer and UEAP, SDMA-PMU;
- Provides technical advice relating to environmental issues to the Engineer.
- Organise and ensure public consultation and information disclosure are done as per the EMMP and ADB requirements. Monitor complaints and grievances are handled as per the Grievance Redressal Mechanism and report the same as per the environmental reporting.
- Receives complaints/grievances from public, discuss Team Leader (TL) DSC, FPIU & IA
 and take steps for implementation of remedial measures in consultation with the TL
 (DSC), and reports to the Engineer (DSC) on the status in its each monthly progress
 report till satisfactory resolution.

The Contractor

- Appoints one full time suitably qualified and experienced Environmental Safeguard
 Officer for implementation of EMMP including Environment Health & Safety (EHS)
 measures, community liaisoning, reporting and grievance redressal on day to day basis.
- Complies with all applicable legislations, is conversant with the requirements of the EMMP, and briefs staff about the requirements of same;
- Ensures any sub-contractors/ suppliers who are utilized within the context of the contract comply with the environmental requirements of the EMMP. The Contractor will be held responsible for non-compliance on their behalf;
- Supplies method statements for all activities requiring special attention as specified and/or requested by the Engineer or Environmental Expert (of Engineer) during the duration of the Contract;
- Provides environmental awareness training to staff;
- Bears the costs of any damages/ compensation resulting from non-adherence to the EMMP or written site instructions:
- Conducts all activities in a manner that minimizes disturbance to directly affected residents and the public in general, and foreseeable impacts on the environment.
- Ensures that the Engineer is timely informed of any foreseeable activities that will require input from the Environmental Expert (of Engineer)
- Receives complaints/grievances from public, discuss with DSC, FPIU & IA and take steps for implementation of remedial measures in consultation with the Engineer (DSC), and reports to the Engineer (DSC) on the status in its each monthly report till satisfactory resolution.
- 120. The proposed sub-project will be implemented by the IA & FPIU, Uttarakhand Jal Sansthan. The FPIU will be responsible for supervision and monitoring of day-to-day implementation of subprojects including EMMP.
- 121. For monitoring of environmental parameters as outlined in the EMMP, appropriate monitoring agencies would be engaged by the contractor (cost has been included in each contract based on subproject specific monitoring plans) or by the IAs for the monitoring works not included in the civil works contracts (cost included in the budget given in table VIII-2).

A. Environment Management

- 122. All works undertaken towards protection of environmental resources as part of the EMMP and as part of good engineering practices while adhering to relevant specifications will be deemed to be incidental to works being carried out and no separate payment will be made unless otherwise specified explicitly. The costs towards environmental management as per EMMP unless otherwise provided as a separate head, will be deemed to be part of the bill of quantities (BOQ) of the project. The scope of works of the contractor towards the implementation of the environmental provisions shall be as follows:
- Abide by all existing Environmental regulations and requirements of the Government of Uttarakhand and Government of India, local level ULBs and Gram Sabha etc. during implementation
- Compliance with all mitigation measures and monitoring requirements set out in the EMMP.

- Submission of a method statement detailing how the subproject EMMP will be complied with. This shall include methods and schedules of monitoring.
- Monitoring of project environmental performance including performance indicators defined therein, and periodic submission of monitoring reports.
- Compliance with all measures required for construction activities in sensitive areas, in line with the regulatory requirements of these protected areas, and the guidelines set forth in the management plans for these areas.
- Compliance with all regulatory requirements associated with proximity of the sub-project to the International Borders based on assessment of Contractor in consultation with the Engineer DSC.
- Compliance of all safety rules and regulations applicable at work, and provision of adequate health and safety measures such as water, food, sanitation, personal protective equipment, workers insurance, and medical facilities besides all social and community related requirements as stipulated in EMMP.
- 123. The detailed provisions for specific environmental issues shall be as outlined in the EMMP table on impacts and mitigation measures. Key clauses are outlined in the following sections.

Quarrying

- 124. The contractor will identify and seek prior approval of the engineer for quarryingoperations. Quarrying will be carried only from locations approved by the Department of Geology & Mining and State Pollution Control Board and no new quarries will be opened for the purposes of the project. Any deviation from the provisions will be immediately notified and approval of the engineer is to be sought.
- 125. The Contractor shall maintain all stockpiles, and spoil disposal areas so as to assure the stability and safety of the works and that any adjacent feature like houses and community assets especially along hill slopes are not endangered, and to assure free and efficient natural and artificial drainage, and to prevent erosion. Stockpiling of materials (, fill material, gravel, aggregates, and other construction materials) shall not be allowed during rainy season unless covered by a suitable material. Storage on private property will be allowed if written permission is obtained from the owner or authorized lessee.
- 126. Quarries shall be sited, worked, and restored in accordance with the specifications and as per the closure plan (approved by Engineer). Spoils shall be disposed of at approved disposal sites prepared, filled, and restored in accordance with the related specification requirements.

Debris Disposal

127. Dismantling of existing structures: Debris Disposal shall be maximum utilized and disposed as per norms after consultation with DSC/FPIU/PMU Safeguard Specialist. Due care shall be taken that any material falling under hazardous waste category is

disposed in accordance with Hazardous Wastes (Management, Handling and Transboundary movement) Rules, 2008 and amendments till date & applicable norms.

Precautions for protection of Environmental Measures

- 128. The Contractor shall ensure that construction activities do not result in any contamination of land, air or water by polluting substances or cause noise generated by the activities. For cleaning activities and operation of equipment, the Contractor will utilize such practical methods and devices as are reasonably available to control, prevent and otherwise minimize air/noise pollution.
- 129. Unless otherwise provided in the specifications, the Contractor shall ensure that no trees or shrubs or other vegetation are felled or harmed except those required to be cleared for execution of the works for which all statutory permissions have been obtained. The Contractor shall protect trees and vegetation from damage to the satisfaction of the Engineer.

Air, Water, Noise Pollution and Soil Contamination

- 130. All works will be carried out without unreasonable noise and air, water and soil pollution. Subject and without prejudice to any other provision of the Contract and the law of the land and its obligation as applicable, the Contractor will take all precautions outlined in the EMMP to avoid the air, water, soil and noise pollution.
- 131. The Contractor shall monitor the environmental parameters periodically as specified in the monitoring plan and report to the Engineer.
- 132. The Contractor shall reduce the dust emission due to construction activities by regular water sprinkling in the affected areas.
- 133. All the construction equipment and vehicles shall have Pollution under Control (PUC) Certificate to ensure that no air pollution is caused due to operation of their equipment and vehicles.
- 134. All the construction equipment and vehicles should remain all time in good conditions up to satisfaction of site engineers.
- 135. The Contractor shall indemnify and keep indemnified the Employer from and against any liability for damages on account of noise or other disturbance created while carrying out the work, and from and against all claims, demands, proceedings, damages, costs, charges, and expenses, whatsoever, in regard or in relation to such liability.

Occupational & Community Health and Safety During Construction

- 136. The Contractor shall, in accordance with the safety and health provisions specified in the EMMP, provide workers with a safe and healthy working environment, in the work areas, through application of preventive and protective measures consistent with international good practices, as reflected in internationally recognized standards. The contractors, engineer, IAs and the EA will take steps to prevent accidents, injury, and disease arising from, associated with, or occurring during the course of work by-
- Providing preventive and protective measures, including modification, substitution, or

elimination of hazardous conditions or substances:

- Providing appropriate equipment to minimize risks and requiring and enforcing its use;
- Training workers and other staff; and providing them with appropriate incentives to use and comply with health and safety procedures and protective equipment;
- Documenting and reporting occupational accidents, diseases, and incidents;
- Having emergency prevention, preparedness, and response arrangements in place.
- Provide first aid facilities in all the work sites and workers camp and having qualified first
 aider to give first aid at the time of any accident. Contractor shall also organize periodic
 visits by a qualified registered medical practitioner to the site and workers camp. Contact
 information of Doctor, availability & location of first aid box shall be displayed in
 appropriate language both at work site and workers camp.
- Contractor should provide safe drinking water, clean eating and resting areas, separate
 toilets for male and female work force and sufficient amenities at work site and workers
 camps as per prevalent Labor law and EMMP. Contractor will ensure proper sanitation
 and would provide soak pits and septic tanks for disposal of waste water and sewage.
- Contractor should have prepared emergency response plan (to be approved by Engineer) with full details and methods of emergency response during any accident and shall have and display the emergency contact numbers at site.
- Contractor should follow all the applicable rules and regulations for workers health and safety.
- 137. The Contractor will also ensure that the interests of the community are disturbed to the minimum as envisaged in the EMMP. Provide barricade, signage and safety information in and around the construction site and also to prevent local people entering into the construction site.

Post Construction Clearance

- 138. On completion of work, wherever applicable, the Contractor shall clear away and remove from the sites all constructional plant, surplus materials, rubbish, scaffoldings, and temporary works of every kind and leave the whole of the sites and works in a clean condition as per agreed redevelopment plan to the satisfaction of the Engineer.
- 139. Construction camp sites and any other sites temporarily occupied during construction shall be cleared as specified in the contract and handed over to the Owner. It will be ensured by the contractor that the site handed over is in line with the conditions of temporary acquisition signed by both parties. Contractor would obtain and furnish (to FPIU) a certificate to this effect from the owner.

B. Environmental Monitoring Plan

140. To ensure the effective implementation of mitigation measures and Environmental Management Plan during construction and operation phase of the sub-project, it is essential that an effective Environmental Monitoring Plan be followed as given in Table below.

- 141. Monitoring is an essential component for sustainability of any developmental project. It is an integral part of any environmental assessment process. The monitoring program consists of performance indicators, reporting formats and necessary budgetary provision. The contractors monitoring methods and parameters should be in accordance with the norms prescribed by the Uttarakhand Environment Protection and Pollution Control Board (UEPPCB) & CPCB which ever has stringent standards for air, water, soil and noise. Indicators and Targets for Environmental Performance are provided in the table VIII-4 in Section E of this EMMP. The frequency of sampling and selection of sampling sites are sub-project specific.
- 142. The monitoring will be carried out by the contractor through approved agency accredited by National Accreditation Board for Testing and Calibration Laboratories and will be supervised by the Environmental Expert of the Design & Supervision Consultant. The monitoring plan is outlined in Table VIII-1 below.

Table VIII-1: Monitoring Plan

	Table VIII-1: Monitoring Plan						
Indicators	Parameters to be Monitored	Frequency	Responsibility				
Pre- Construction S	Stage						
Legislation, permits and Agreements	·		Contractor, DSC, IA & EA.				
Environmental Baseline Data Generation	Ambient Air Quality, Noise level, Water Quality & Soil characteristics as per parameters outlined in EMMP.	Once in Pre- Construction Stage	Contractor				
Debris disposal	Safe disposal of construction wastes including bituminous wastes	Random checks	Contractor				
Construction Stage							
Legislation, permits and Agreements	Permissions,/ NoCs/Consents other statutory requirement	Continuous	Contractor, DSC, IA & EA.				
Dust suppression	No. of tankers for water sprinkling, Timing of sprinkling, Location of sprinkling (log books to be maintained)	iming of sprinkling, checks sprinkling (log					
Ambient air quality	RPM, SPM, SO ₂ , NO _x , CO	Once in a Quarter where work is in progress and near sensitive receptors; and at the construction camp sites (except monsoon) for the entire construction period	Contractor, to be monitored through approved Monitoring Agency				

Indicators	Parameters to be Monitored	Frequency	Responsibility
Ambient noise	Equivalent Day & Night Time Noise Levels	Once in a quarter where work is in progress and near sensitive receptors during construction stage	Contractor, to be monitored through approved Monitoring Agency
Water Quality	TDS, TSS, pH, Hardness, BOD, Faecal Coli form	Once in a quarter where work is in progress and near sensitive receptors during construction stage	Contractor, to be monitored through approved Monitoring Agency
Soil	Available Nitrogen, Phosphorus, Carbon, heavy metals (including Lead) and Pesticides	Once in a quarter where work is in progress and near sensitive receptors during construction stage	Contractor, to be monitored through approved Monitoring Agency
Heritage Protection, if needed	Visual Inspection of works, compliance with ASI regulations and norms	Continuous	DSC/ASI/FPIU
Occupation Health and Safety	Usage of PPE on site, adequacy of equipment. Testing of drinking water for compliance to standards specified in IS: 10500.	water	Contractor
Establishing Medical facilities	Access to health facilities for the construction workers	Continuous	Contractor
Accident record	No. of fatal accidents at work site, No. of injuries, No. of disabilities	Continuous	Contractor
Post construction clearance of site	Physical field verification and Satisfaction certificate from owner: Whether temporary locations for workers camp, site office, batching plant and other construction locations are restored to pre-project conditions as per approved	Post construction	Contractor

Indicators	Parameters to be Monitored	Frequency	Responsibility	
	closure plan			
Operation & Maint	enance Stage			
Water quality	All parameters as per UEPPCB & CPCB standards	Once in year during operation stage	PMU, SDMA	
Disposal of Solid Waste	Proper disposal of Solid Waste (domestic) generated shall be ensured in accordance with the prevalent norms	25		

Budget covered in subsequent cost Table, however, would be finalized based on subproject specific requirements at IEE stage. Contractor will obtain a copy of approved IEE and keep available at construction site and site office(s) for proper implementation of IEE & EMMP.

C. Environmental Budget

- 143. As part of good engineering practices in the project, there have been several measures as erosion prevention, rehabilitation of borrow areas, safety, signage, provision of temporary drains, etc., the costs for which will be included in the design costs (site development cost) of specific subprojects. Therefore, these items of costs have not been included in the IEE budget. Only those items not covered under budgets for construction are included in the IEE budget.
- 144. The Contractor's cost for site establishment, preliminary, construction, and defect liability activities will be incorporated into the contract agreements, which will be binding on him for implementation and Uttarakhand Jal Sansthan as Implementing Agency and DSC to ensure the compliance. The air, soil, water quality, and noise level monitoring during construction and defect liability phases will be conducted by the contractor for which provision has been kept in Environmental budget of EMMP.
- 145. These are small construction projects, therefore, it is not expected to cause much significant air, water, soil and noise pollution. The main EMMP cost will arise from monitoring of environmental parameters (air, soil, water and noise).
- 146. The costs of water sprinkling for dust suppression and providing personal protective equipment to construction workers shall be borne by contractor as part of conditions of contract. In addition the sources of funds for Mitigation measures during construction stage including monitoring during construction stage are also to be borne by the contractor. These are deemed to be included as part of the contract price amount quoted by the contractor for the works. The costs for generation of baseline data and monitoring shall be borne by the contractor. The locations for baseline data generation & monitoring shall be identified during IEE preparation. The baseline data will be generated prior to commencing with civil works. The costs of components for monitoring during operation and maintenance stage and the capacity building costs are to be funded by the PMU. The EMMP cost is given in the Table VIII-2 below.
- 147. Most of the mitigation measures require the contractors to adopt good site practice, which should be part of their normal procedures already, so there are unlikely to be

major costs associated with this compliance. Only those items not covered under budget for construction are included in the IEE budget. The IEE costs include mitigation, monitoring and capacity building costs. The summary budget for the environmental management costs for the subproject based on construction period stipulated in the bidding document is presented in Table below:

Table VIII-2: Environmental Management & Monitoring Costs

SI. No.	Particulars	Stages	Unit	Total No.	Rate (INR)	Cost (INR) *	Source of fund
A.	Legislation, permits and Agreements	Consent to Establish and Consent to Operate for plants and machinery of the contractor					The cost for clearances, permits and consents required by IA & Contractor s shall be borne by them respectivel y.
В.	Public consultations and information disclosure	Pre Constructio n phase Constructio n phases		Lump sum	5,00,000	5,00,000	p:
	nvironmental l					di-	
1,	Ambient Air Quality monitoring	Pre- Constructio n	Per Sample	4	15000	60000	
2.	Noise Quality monitoring			4	5000	20000	
3.	Water Quality monitoring	7		2	9200	18400	Contractor s cost

SI. No.	Particulars	Stages	Unit	To			ate NR)	Cost (INR) *	Source of fund
4.	Soil			10			000	80000	i i i i i i i i i i i i i i i i i i i
D.		onmental Monitoring					000	00000	
1	Air quality	Constructio n	Per sample		(4 No of Location X 3 season in year	on ns	15000	180000	.=.
2	Mater quality		Day samp	la.	X 1 sample per location	n)	0200	55200	-
2	Water quality		Per samp		(2 No of Location X 3 season in year 1 sample per location	ns ns n)	9200	55200	
3	Noise Levels		Per location	on	(4 No of Location X 3 season in year X 1 sample per location	on ns	5000	60000	
4	Soil				(10 No of Location X 3 season in year X 1 sample per location	on ns	8000	240000	
5.	Dust Suppression	constructio n and	lump sum				lump sum	500000	

SI. No.	Particulars	Stages	Unit				ate	Cost	Source of
NO.	-1	1.6.1		NO		(117	IR)	(INR) *	fund
	at subproject	defect							
	sites	liability							
		phases							
6	Ambient Air		Per Samp	ole	(4 No o	- 1	15000	540000	
	Quality				Location	n			
		Operation/			X 3			1	Implementi
		Defect			seasons	s			ng
		Liability			in year				Agencies
		Period			X 3				cost/
					sample				Contractor
					per				s cost
					location	1)			
7	Water quality	1	Per year		(2 No of	f	9200	55200	1
					Location	- 1		-	
					X 3				
					seasons	s			
					in year				
					1	-11		-	
					sample				
					рег				
					location	n l			
8	Ambient		Per Samp	ole	(5 No of		5000	180000	1
-	Noise Quality		5. 56		Location			.00000	
					X 3				
					seasons	۰			
					in year	٦			
					X 3				1
					sample				
					per				_
					location	<u>') </u>			

E. Capacity Building (Includes cost estimates for entire sub project area not included in the package costs)

1	Capacity	EMP		15,000	1,00,000	PMU/DSC
	Building	Training at				
	expenses	Site				
	2 sessions	Implementa	6	50,000		
		tion of				

SI. No.	Particulars	Stages	Unit	Total No.	Rate (INR)	Cost (INR) *	Source of fund
		EMMP for					
		field PIUs					
		and					
		Engineer					
	Total INR						1

D. Environmental Monitoring and Reporting

- 148. The PMU will monitor and measure the progress of EMMP implementation. Safeguards Staffs of IA / FPIU will undertake site inspections and document review to verify compliance with the EMMP and progress toward the final outcome. Environment and Safety Officer of the Contractor will submit the monitoring of EMMP to the DSC/Engineer on day to day basis. DSC / Engineer will submit monthly EMMP monitoring and implementation reports to FPIU, who will take follow-up actions, if necessary. FPIU/IA will submit quarterly monitoring and implementation reports to PMU. The PMU will submit semi-annual monitoring reports to ADB based on reporting of FPIU/ IA and its safeguards staff assessment of the implementation performance and its verification by the PMU safeguards specialist. PMU will also take corrective actions as required.
- 149. Monitoring reports will be posted in a location accessible to the public.
- 150.ADB will review project performance against the EA's commitments as agreed in the legal documents. The extent of ADB's monitoring and supervision activities will be commensurate with the Project's risks and impacts. Implementation of social and environmental safeguards related requirements will be integrated into the project performance management system. ADB will monitor projects on an ongoing basis until a project completion report is issued.

Table VIII-3: Standardized EMMP to guide the contractor in mitigating environmental impacts

	Activity	Management/ Mitigation	Implementation Responsibility	Supervision Responsibility	Fund Source	
1.	Site Establishment and Preliminary Activities Impacts					
1.1	Legislation, Permits and Agreements	In all instances, EA, IA contractors and consultants must remain in compliance with relevant environmental legislation of India at the national, state and local levels.	Permissions,/ NoCs/Consent requirement— IA/PMU Permissions / NoCs/Consents requirement for equipment/machin eries and material sourced from licensed/ approved	PMU	IA, Contractor	

	Activity	Management/ Mitigation	Implementation Responsibility	Supervision Responsibility	Fund Source
			quarries etc – Contractor		
		Proof of compliance to statutory requirements must be forwarded by the facility owner and/or contractor to PMU/FPIU in relation to hot mixing, stone crushers, diesel generators etc	ESO-Contractor, Engineer, & Environmental Expert of DSC (EE)	PMU	
		A copy of the EMP must be kept on site during the construction period	ESO-Contractor, Engineer & EE	FPIU, IA & PMU	
1.2	Education of site staff on general and Environmental Conduct ³	Ensure that all site personnel have a basic level of environmental awareness training	ESO-Contractor and EE EE to deliver	IA & PMU	Contractor, IA,
5		Staff operating equipment (such as excavators, loaders, etc.) shall be adequately trained and sensitized to any potential hazards associated with their task	Safety and environment officer of Contractor and EE	FPIU, IA & PMU	
		No operator shall be permitted to operate critical items of mechanical equipment without having been trained by the Contractor	Contractor and EE	FPIU, IA & PMU	
		All employees must undergo safety training and wear the necessary protective clothing /equipment.	Contractor and EE	IA & PMU	
		A general regard for the social and ecological well-being of the site and adjacent areas is	Contractor and EE	IA & PMU	ii ii

These points need to be made clear to all staff on site before the work commences.

Activity	Management/ Mitigation	Implementation Responsibility	Supervision Responsibility	Fund Source
	expected of the site staff. Workers need to be made aware of the following general rules: No alcohol / drugs to be present on site; Measures for abatement of noise due to construction related activities and conduct of			
	 work force. Construction staff are to make use of the facilities provided 			
e	for them, as opposed to ad-hoc alternatives (e.g. use of firewood for cooking, the use of surroundings as a toilet facility are forbidden) Trespassing on private / commercial properties adjoining			
	the site is forbidden Other than pre approved security staff, no workers shall be permitted to live on the construction site. No worker may be forced to do work that is potentially dangerous or for			· ·

	Activity	Management/ Mitigation	Implementation Responsibility	Supervision Responsibility	Fund Source
		not trained to do.			
1.3	Social Impacts ⁴	Open liaison channels shall be established between the Site owner, operator, the contractors and interested and affected parties such that any queries, complaints or suggestions pertaining to environmental management aspects can be dealt with quickly and by the appropriate person(s).	Environment and Safety officer of Contractor with the Engineer, EE & FPIU	IA & PMU	Contractor
		A communications strategy is of vital importance in terms of accommodating traffic during laying of pipes. The road closure together with the proposed detour needs to be communicated via advertising, pamphlets, radio broadcasts, road signage, etc	Contractor with the Engineer, EE & FPIU	IA & PMU	
		Provide sign boards for pedestrians to inform nature and duration of construction works and contact numbers for concerns/complaints.	Contractor with the Engineer, EE & FPIU	IA & PMU	
		Storage facilities, elevated tanks and other temporary structures on site shall be located such that they have as little visual impact on local residents as possible.	Engineer and EE	IA & PMU	si .

⁴ It is important to take notice of the needs and wishes of those living or working adjacent to the site. Failure to do so can cause disruption to work.

	Activity	Management/ Mitigation	Implementation Responsibility	Supervision Responsibility	Fund Source
		In areas where the visual environment is particularly important (e.g. along commercial/ tourism routes) or privacy concerns for surrounding buildings exist, the site may require screening. This could being the form of shade cloth, temporary walls, or other suitable materials prior to the beginning of construction.	Engineer and EE	IA & PMU	
		Special attention shall be given to the screening of highly reflective materials on site.	EE	IA & PMU	
1.4	Lack of sufficient planning to assure long term sustainability of the improvements and ensure protection of the assets created and the architectural/archaeological character of the surroundings	Design will include provisions for ensuring effective maintenance and protection of the assets created so as to ensure the long term sustainability.	Engineer, EE and	IA/ PMU	
2.	Design Impacts and Pre-co	nstruction Impacts			
2.1	Layout of components and its location to avoid impacts on the aesthetics, sensitive environmental areas / attributes of the site	The project components siting will avoid impacts on the aesthetics of the site, ensure minimal impacts and in compliance with statutory and regulatory requirements. The contractor, FPIU/ IA and DSC will identify any direct or indirect intervention of primary or secondary activity		IA & PMU	

	Activity	Management/ Mitigation	Implementation Responsibility	Supervision Responsibility	Fund Source
		before establishment of any project components on the ground.			
2.2	Selection of materials and construction technologies, if not carefully chosen, will adversely impact the aesthetic appeal of the destinations	Selection of materials will be according to specification and from approved sources Material selection would be done keeping in view that no asbestos (except as allowed), and CFC is used. Contractors shall prepare a source statement indicating the sources of all materials (including topsoil, sands, natural gravels, crushed stone, asphalt, clay liners etc), and submit these to the Engineer for approval prior to commencement of any work Where materials are borrowed (mined), proof must be provided of authorization to utilize these materials from the	,	IA & PMU	
		landowner/material rights owner and the Department of Geology and Mining			
		Procurement of all material according to the material specification of the contract document and sourced from licensed and approved sources.			

	Activity	Management/ Mitigation	Implementation Responsibility	Supervision Responsibility	Fund Source
		A signed document from the supplier of natural materials shall be obtained confirming that they have been obtained in a sustainable manner and in compliance with relevant legislation			
2.3	Socio cultural resources-Ground disturbance can uncover and damage archaeological and historical remains`	There is not such location is anticipated on the project site. In case of chance of finding such location, Consult Archaeological Survey of India (ASI) and/or concerned dept. of Uttarakhand Govt. as applicable to obtain an expert assessment of the archaeological potential of the site; Consider alternatives if the site is found to be of medium or high risk; Develop a protocol for use by the construction contractors in conducting any excavation work, to ensure that any chance finds are recognised and measures are taken to ensure they are protected and conserved.	Engineer, EE and FPIU	Contractor, IA & PMU	
2.4	Integration of energy efficiency and energy conservation programs in design of sub-project components	The detailed designs for the sub-project components shall ensure that environmental sustainability principles, including energy efficiency, resource recycling,	_	IA & PMU	

	Activity	Management/ Mitigation	Implementation Responsibility	Supervision Responsibility	Fund Source
		waste minimization, rainwater harvesting etc.			
2.5	Site clearance activities, including delineation of construction areas	Any removal of vegetation or tree felling shall be done after taking statutory permissions if required. All works shall be carried out such that the damage or disruption of flora other than those identified for cutting is minimum.	Contractor,	Engineer, EE and FPIU	Contractor
	22	Only ground cover/shrubs that impinge directly on the permanent works or necessary temporary works shall be removed with prior approval from the Environmental Expert of DSC			
		All areas used for temporary construction operations will be subject to complete restoration to their former condition with appropriate rehabilitation procedures as per the rehabilitation plan prepared by the contractor and approved by the EE of DSC.			
2.6	Blockage of access in residential area, commercial area and sensitive location like school, college, hospitals and court	Contractor will identify such location in the preconstruction stage and prepare plan approved by DSC to minimize inconvenience to the	Contractor	Engineer, EE and FPIU	Contractor

	Activity	Management/ Mitigation	Implementation Responsibility	Supervision Responsibility	Fund Source
		people.	NO a		
2.7	Slop protection near reservoir and intake well	Retaining wall will constructed near reservoir and intake well	Contractor	Engineer, EE and FPIU	The cost and specification is part the bill of quantity of the contract.
3	Construction Impacts				
3.1	Construction Camps - Location, Selection, Design and Layout	Siting of the construction camps, labour camp, and stockpiles shall be as per the guidelines of UEPPCB, ULB, village panchayat and any other applicable guideline to the local site. The contractor will assess the impact of the construction camp and should be acceptable to the FPIU/ IA/PMU. Below and details of layout to be approved by DSC. Construction camps shall not be proposed within 500m from the sensitive receptors, nearest settlements to avoid conflicts and stress over the infrastructure facilities with the local community. Location for stockyards for construction materials shall be identified at least 300m away from	Contractor with the Engineer and EE	FPIU, IA & PMU	
	,	watercourses. Construction camps will be located away			

	Activity	Management/ Mitigation	Implementation Responsibility	Supervision Responsibility	Fund Source
		from settlements and drainage from and through the camps will not endanger any domestic or public water supply. Construction camps including sanitation facilities must be adequately drained.			
		Sewage management though septic tanks and solid waste management though local ULB system or other alternate measures.		×	
3.2	Drinking water availability	Sufficient supply of potable water to be provided and maintained as per the standards, requirements, test methods and sampling procedure according to IS: 10500. If the drinking water is obtained from an intermittent public water supply then storage tanks will be provided. The cleanliness of the storage tanks will be ensured and all measures to be taken	Contractor	Engineer and EE	
	N	to avoid any water contamination.	t _a		
3.3	Waste disposal	Pre-identified disposal location (identified by Contractor in compliance to relevant regulation and approved by EE-DSC) shall be part of Comprehensive Waste	Contractor with Engineer	FPIU, IA & PMU	

	Activity	Management/ Mitigation	Implementation Responsibility	Supervision Responsibility	Fund Source
		Disposal Plan Solid Waste Management Plan to be prepared by the Contractor in consultation and with approval of Environmental Specialist of DSC.			
		The Environmental Specialist of DSC shall approve these disposal sites after conducting a joint inspection on the site with the Contractor. Wherever, possible Solid waste management shall be through local ULB system or other alternate measures.			
		Contractor shall ensure that waste shall not be disposed off near the water course or agricultural land, Orchards and Natural Habitats like Grasslands.			Sa .
3.4	Stockpiling of construction materials	Stockpiling of construction materials and excavated earth or silt in case of construction of river bed filtration does not impact obstruct the drainage and Stockpiles will be covered to protect from dust and erosion.	Contractor with Engineer	FPIU, IA & PMU	
3.5	Access to Site	Contractors shall ensure that all side and mitre drains and scour check walls on access and haul roads are functioning properly and are well	Contractor with Engineer	FPIU, IA & PMU	

	Activity	Management/ Mitigation	Implementation Responsibility	Supervision Responsibility	Fund Source
		maintained. Contractors shall ensure that access roads are maintained in good condition by attending to potholes, corrugations and storm water damage as soon as these develop.		,	
5		If necessary, staff must be employed to clean surfaced roads adjacent to construction sites where materials have been spilt.			ñ
		Unnecessary compaction of soils by heavy vehicles must be avoided; construction vehicles must be restricted to demarcated access, haulage routes and turning areas.			e
	19	Cognizance of vehicle weight / dimensions must be taken when using access constructed out of certain materials. e.g. paved surfaces / cobbled entranceways.			
3.6	Quarry Operations	Contractor shall finalize the quarry for procurement of construction materials after assessment of the availability of sufficient quantity of materials, quality and other logistic arrangements.	Contractor with Engineer	FPIU, IA & PMU	
		The Contractor shall obtain materials from			

	Activity	Management/ Mitigation	Implementation Responsibility	Supervision Responsibility	Fund Source
		approved quarries only after consent of the Department of Mines and Geology and District Administration.		*1	
		Adequate safety precautions will be ensured during transportation of quarry material from quarries to the construction site. Vehicles transporting the material will be covered to prevent spillage.			
3.7	Arrangement for Construction Water	The contractor shall use ground/surface water as a source of water for the construction with the written consent from the concerned Department.	Contractor with Engineer	FPIU, IA & PMU	
		To avoid disruption/ disturbance to other water users, the Contractor shall extract water from fixed locations and consult DSC & line agencies before finalizing the locations.		F	
		The Contractor shall provide a list of locations and type of sources from where water for construction shall be extracted.			
		The Contractor shall need to comply with the requirements of the State Ground Water Department for the extraction and seek their approval for			

	Activity	Management/ Mitigation	Implementation Responsibility	Supervision Responsibility	Fund Source
		doing so and submit copies of the permission to DSC.			
3.8	Soil/land Erosion	Slope protection measures will be undertaken as per design to control soil erosion. The Contractor shall not in any way modify nor damage the banks or bed of streams, rivers, other open water bodies and drainage lines adjacent to or within the designated area Earth, stone and rubble is to be properly disposed of so as not to obstruct natural water pathways over the site. i.e.: these materials must not be placed in storm water channels, drainage lines or rivers. There shall be a periodic checking of the site's drainage system by DSC, FPIU/IA and PMU to ensure that the water flow is unobstructed.	Contractor with Engineer	FPIU, IA & PMU	
3.9	Water Pollution fro	The Contractor shall take all precautionary measures to prevent entering of wastewater into streams, water bodies or the irrigation system during construction. Contractor shall not wash his vehicles in river/stream water and shall not enter riverbed nearby the water	Contractor with Engineer	Engineer, FPIU & PMU	

	Activity	Management/	Implementation	Supervision	Fund
		Mitigation	Responsibility	Responsibility	Source
		resource area for that			
		purpose.			
		Mixing / decanting of		i i	
		all chemicals and			
		hazardous substances			
		must take place either			
		on a tray or on an			
		impermeable surface.			
		Waste from these shall			
		then be disposed of to			
		a suitable waste site in			
		accordance with			
		Hazardous Wastes			
		(Management,			
		Handling and			
		Transboundary			
		movement) Rules,			
		2008 and amendments			
		till date and applicable			
		norms			
		Site staff shall not be			
		permitted to use any			
		stream, river, other			
		open water body or			
		natural water source			
		adjacent to or within			
		the designated site for			
		the purposes of	_		
		bathing, washing of			
		clothing or for any			
	9	construction or related			
		activities. Municipal			
		water (or another	20.0		
		source approved by			
		the Engineer) shall			
		instead be used for all			
		activities such as			
		washing of equipment			
		or disposal of any type			
		of waste, dust			
		suppression, concrete			
		mixing, compacting			
		etc.			
3.10	Water Pollution from Fuel	The Contractor shall	Contractor	EE of DSC,	
3.10	and Lubricants	ensure that all		Engineer,	
	and Edundants	construction vehicle		FPIU & PMU	
		parking locations, fuel/	ia .		
Ļ		lubricants storage			

	Activity	Management/ Mitigation	Implementation Responsibility	Supervision Responsibility	Fund Source
		sites, vehicle, machinery and equipment maintenance and refueling sites shall be located at least 300 m away from rivers/streams and irrigation canal/ponds if any			
	ES	Contractor shall ensure that all vehicle/machinery and equipment operation, maintenance and refueling shall be carried out in such a manner that spillage of fuels and lubricants does not contaminate the ground.			
		Wastewater from vehicle parking, fuel storage areas, workshops, wash down and refueling areas shall be collected and separated through an oil interceptor before discharging it on land or into other treatment system as per specified standards and UEPPCB and ULB norms if any.			
3.11	Soil Pollution due to fuel and lubricants, construction waste	The fuel storage and vehicle cleaning area will be stationed such that spillage of fuels and lubricants does not contaminate the ground. All pollution parameters will be monitored as per monitoring plan. Wastewater from	Contractor	Engineer, FPIU & PMU	

	Activity	Management/ Mitigation	Implementation Responsibility	Supervision Responsibility	Fund Source
		vehicle parking, fuel storage areas, workshops, wash down and refueling areas shall be collected and separated through an oil interceptor before discharging it on land or into other treatment system			
3.12	Generation of dust	The contractor will take every precaution to reduce the levels of dust at construction site.	Contractor	Engineer, FPIU & PMU	
		Regular sprinkling of water and Stockpiles of soil will be kept covered in such a manner to minimize dust generation			
3.13	Emission from Construction Vehicles, Equipment and Machinery	All vehicles, equipment and machinery used for construction shall confirm to the relevant Bureau of India Standard (BIS) norms. The discharge standards promulgated under the Environment Protection Act, 1986 shall be strictly adhered to.	Contractor	Engineer, FPIU & PMU	
		The use of silent/quiet equipment compliant with India ambient noise standards and standards specified for manufacturers shall be encouraged in the sub Project.			
	-	The Contractor shall maintain a record of PUC for all vehicles and machinery used			

	Activity	Management/ Mitigation	Implementation Responsibility	Supervision Responsibility	Fund Source
		during the contract period which shall be produced for verification whenever required.			
3.14	Noise Pollution	The Contractor shall confirm that all Construction equipment used in construction shall strictly conform to the MoEF/CPCB noise standards and all Vehicles and equipment used in construction shall be fitted with exhaust silencers. At the construction sites noisy construction work such as crushing, operation of DG sets, use of high noise generation equipment shall be stopped during the night time between 10.00 pm to 6.00 am.	Contractor with Engineer	EE, FPIU & PMU	
		Noise limits for construction equipment used in this project will be in conformity to the BIS/SPCB/CPCB standards Regular monitoring of ambient noise levels to ensure compliance to Uttarakhand Environment Protection & Pollution Control Board standards.			
3.15	Material Handling at Site	Workers Employed on mixing cement, lime	Contractor	Engineer, FPIU & PMU	

Activity	Management/ Mitigation	Implementation Responsibility	Supervision Responsibility	Fund Source
	mortars, concrete etc., will be provided with protective footwear and protective masks and goggles.			
	Workers, who are engaged in welding works, will be provided with welder's protective eye-shields.			
8	Workers engaged in stone breaking activities will be provided with protective goggles, masks, and clothing.			
	Stockpiles shall not be situated such that they obstruct natural water pathways.			
	Stockpiles shall not exceed 2m in height unless otherwise permitted by the Engineer.			
	If stockpiles are exposed to windy conditions or heavy rain, they shall be covered either by vegetation or cloth, depending on the duration of the project. Stockpiles may further be protected by the construction of berms or low brick walls around their bases.	e va		
	All concrete mixing must take place on a designated, impermeable surface			
	The use of any toxic chemical will be strictly in accordance with the			

	Activity	Management/ Mitigation	Implementation Responsibility	Supervision Responsibility	Fund Source
		manufacturer's instructions and applicable regulations.			ж
		The Engineer will be given at least 6 working day's notice of the proposed use of any chemical. A register of all toxic chemicals delivered to the site will be kept and maintained up to date by the contractor.			
3.16	Damage, and disturbance to other infrastructure in the construction site	Confirm location of infrastructure. Finalize alignment in coordination with agencies like Uttarakhand Power Corporation Limited, Bharat Sanchar Nigam Limited, etc. Ensure prior permission of respective agency Realign pipelines, if required and subsequently revise IEE Provide public information in case of service disruptions	Contractor	Engineer, FPIU & PMU	
3.17	Disposal of Construction Waste / Debris / Cut Material	The Contractor shall confirm that Safe disposal of the construction waste will be ensured in the pre-identified disposal locations. In no case, any construction waste will be disposed around the project site indiscriminately.	Contractor	Engineer, FPIU & PMU	
3.18	Disruption / cessation of existing water supply systems due to	Care be taken during improvement of existing water supply	Contractor with Engineer and FPIU	EE, IA and PMU	

	Activity	Management/ Mitigation	Implementation Responsibility	Supervision Responsibility	Fund Source
	construction activity	systems, so that disruption in existing water supply would not occur. Tentative schedule of closure should be known to affected people prior to cessation of water supply. In case disruption of water supply exceeds the intimated schedule, arrangement for supply of potable water should be made.			38
3.19	Safety Measures During Construction	Personal Protective Equipment for workers on the project and adequate safety measures for workers during handling of materials at site will be taken up. The contractor has to comply with all regulations regarding safe scaffolding, ladders, working platforms, gangway, stairwells, excavations, trenches and safe means of entry and egress.	Contractor	Engineer, FPIU & PMU	
		The contractor has to comply with all regulations for the safety of workers. Precaution will be taken to prevent danger of the workers from fire, etc. First aid treatment will be made available for all injuries likely to be sustained during the course of work. Contractor shall also organize periodic			

	Activity	Management/ Mitigation	Implementation Responsibility	Supervision Responsibility	Fund Source
		visits by a qualified registered medical practitioner to the site and workers camp. Contact information of Doctor, availability & location of first aid box shall be displayed in appropriate language both at work site and workers camp.			
		The Contractor will conform to all antimalaria instructions given to him by the Engineer. The Contractor will also ensure that the interests of the community are preferably not disturbed, and if unavoidable then disturbed to the minimum. Provide traffic management personnel, barricade, appropriate signage and safety information in and around the construction site and prevent local people entering into the construction site.			
3.20	Clearing of Construction of Camps and Restoration	Contractor to prepare site restoration plans for approval by the Engineer. The plan is to be implemented by the contractor prior to demobilization.	Contractor	Engineer, FPIU & PMU	
		On completion of the works, all temporary structures will be cleared away, all rubbish burnt, excreta or other disposal pits			=

	Activity	Management/ Mitigation	Implementation Responsibility	Supervision Responsibility	Fund Source
		or trenches filled in and effectively sealed off and the site left clean and tidy, at the Contractor's expense, to the entire satisfaction of the Engineer and facility owner.			
3.21	Risk of archaeological chance finds	Strictly follow the protocol for chance finds in any excavation work; Request FPIU/DSC or any authorized person with archaeological field training to observe excavation; Stop work immediately to allow further investigation if any finds are suspected; and Inform FPIU/DSC, and take any action they require ensuring its removal or protection in situ.	Contractor	Engineer, FPIU & PMU	
3.22	Conflict with locals	Contractor shall ensure that mostly the local labourers are employed and migratory laborer shall be employed only in case of unavoidable circumstances.	Contractor	Engineer, FPIU & PMU	
3.23	Environment Safeguard Officer	Contractor shall appoint one full-time suitably qualified and experienced Environment and Safety Officer who shall be responsible for assisting contractor in implementation of EMP, community liaisoning, consultations with interested/affected	Contractor	Engineer, FPIU & PMU	

	Activity	Management/	Implementation	Supervision	Fund
		Mitigation	Responsibility	Responsibility	Source
		parties, reporting and			
		grievance redressal on			
		day-to-day basis. This			
		environment and			
		safety officer will be at		55	
		site till all works			
		related to the project	-		
		including			
		demobilization are			
		completed.			
4	Operation and Maintenanc	e impacts			
	Environmental Conditions	The periodic	Dollution Monitoring	CDMA DMI	
4.1	Environmental Conditions		Pollution Monitoring	SDMA, PMU	
		monitoring of the	Agency appointed by		
		ambient air quality,	IA		
		noise level, water			
		(both ground, surface			
		water) quality and soil,			
		in the subproject area			
		as suggested in			
		pollution monitoring			
		plan through an			
		approved monitoring		0.	
		agency.			
4.2	Increased Pollution due to	The subproject	IA, EA and Jai	SDMA PMU	
	the better water supply.	involves renovation	Sansthan	& GoUK	
		and rehabilitation of			
		existing system,			
		augmentation of water			
		supply is envisaged for			
		10 years project			
		population and to fulfill			
	-	the deficit of water			
		supply to user as per			
		135 lpcd. Subproject			
		does not envisage			
	=	improvement in			
		distribution system to			
		end users as such			
		very little increase is			
		pollution load is			
		anticipated. Sewage			
		generated will be			
		handled by the			
		prevalent existing			
		sewage management			
		system of the town.			
4.3	Algal Growth in Reservoir	Proper and regular	Uttarakhand Jal	SDMA PMU	
		cleaning of reservoir &		CDIVITY I IVIO	

	Activity	Management/ Mitigation	Implementation Responsibility	Supervision Responsibility	Fund Source
	2	provision of bleaching shall be ensured. Water sourced from River Bed Filtration (RBF) will be stored in Reservoir and chlorination will be done in the reservoir. Water sourced from WTP will be chlorinated at the WTP only and then stored in the reservoir.	Sansthan / IA	& GoUK	
4.4	Water Quality	Chlorine should be added in sufficient quantity so that residual chlorine within permissible limit is available in pipeline.	Uttarakhand Jal Sansthan / IA	SDMA PMU & GoUK	
4.5	Backwash water & Sludge collection	IA shall obtain Consent to Operate for WTPs from UEPPCB as per Water (Prevention and Control of Pollution) Act 1974. Backwash water and clarifier sludge will be disposed in line with the guideline issued by UEPPCB.	Uttarakhand Jal Sansthan / IA	SDMA PMU & GoUK	
4.6	Disposal of Sludge form WTPs	IA shall obtain Consent to Operate for WTPs from UEPPCB as per Water (Prevention and Control of Pollution) Act 1974. Backwash water and clarifier sludge will be disposed in line with the guideline issued by UEPPCB.	Uttarakhand Jal Sansthan / IA	SDMA PMU & GoUK	
4.7	Management of Chlorine stock	Chlorine stock shall be maintained in cool, dark and locked rooms, near the reservoir/treatment site and be handled with	Uttarakhand Jal Sansthan / IA	SDMA PMU & GoUK	

	Activity	Management/ Mitigation	Implementation Responsibility	Supervision Responsibility	Fund Source
		proper care and under safety measure. Jal Sansthan will carry			
4.8	Unhygienic condition due to poor maintenance of sanitation facilities and irregular solid waste collection	out maintenance of the existing toilets, and carry out the regular collection and disposal of wastes as per norms. New facilities proposed to be created under UEAP will cater to additional load.	IA, Jal Sansthan.	IA/ Jal Sansthan, GoUK.	
4.9	Chlorination in water 3. Chlorination through Chlorine solution 4. Chlorination through Chlorine Gas	 Chlorination in water will be done as per CPHEEO manual and ensure residual chlorination within permissible limit. Regular laboratory testing for dosing and residual chlorine Chlorine tank will be stored on impermeable platform with facility of collection of accidental leakage. Gas Chlorination – the storage of Chlorine gas in HDPE drums. 	IA	PMU	

Activity	Management/ Mitigation	Implementation Responsibility	Supervision Responsibility	Fund Source
	 Gas Chlorination through chlorine tunnel in covered room and controlled by chlorinator, Provision of leak detector and alarm in the chlorination room. Provision of Eye bath and emergency shower facility near the gas chlorination. 			

EE= Environmental Expert of Engineer (DSC), DSC= Design & Supervision Consultants, IA= Implementing Agency, EA= Executing Agency, FPIU= Field Project Implementation Unit.

E. Performance Indicator

151. The performance indicators of implementation of environmental management and monitoring plan has been provided in below table.

Table VIII-4: Performance Indicators of EMMP

	Performance Indicators	Target	Achievement in Semi- annually and annually
1	Budget	Environmental Budget (EMMP Budget)	Expenditure till date
	Performance Ir	dicators of Monitoring Plan	1.
2,	Ambient Air Quality	Total Number of samples as per Environmental Monitoring Plan	Total Number of samples collected
3.	Noise Level	Total Number of samples as per Environmental Monitoring Plan	Total Number of samples collected
4.	Water Quality	Total Number of samples as per Environmental Monitoring Plan	Total Number of samples collected
5.	Soil	Total Number of samples as per	Total Number of samples

		Environmental Monitoring Plan	collected
	Safety of Workers	List of PPE as per the number labours	List of PPEs actually provided in the project
erform	ance Indicators of E	nvironmental Management Plan	
6.	Permissions,/ NoCs/Consents requirement	Target timeline to obtain the permit/NoC/ consents and its validity	List of Permission and NoCs / consents obtained till date and status of its validity.
7.	Public Consultation	Total Number of planned Public Consultation with timeline and coverage of people.	Number of public consultation conducted till date and actual coverage of the people.
8.	Grievance redressal	Total number of complaints received, its timeline to response and resolution	Actual number of complaints resolved in percentage, response time.
9.	Issues raised in publiconsultation	Target to attend the issues raised in the Public Consultation	Status of compliance to the issues of Public consultation
10.	Information disclosu	List of information and locations where information to be disclosed	Actual locations where information has been disclosed.
11.	Education of site sta on Environmental training	ff Total Number of staffs to be trained	No of staff actually
12.	Capacity Building	Total number of sessions to be covered ,Total Number of contractors, PIUs and DSCs to be covered	Number of Sessions completed and Number of contractors, PIUs and DSCs
13.	Implementation of El mitigation Measures	MP All items of Environmental Management Plan with timeline and its respective regulatory standards like for Amebient air Qaulity – NAAQS, 2009 standards, Drinking water – IS:10500 etc, Residual Chlorine – UEPPCB standards and CPHEEO manual for handling.	Implementation status of EMP items till date
14.	Reporting	List and number of Report	List and number of reports

to be submitted	submitted	
	1	

IX. CONCLUSION AND RECOMMENDATION

- 152. The initial environmental examination describes the environmental impact of all components of subproject of Kapkot. This includes rabbilitation of Water Treatment Plan, Pumping and pumping station, River Bed Filtration, Reservoires and laying of pipes.
- 153. The locations of all project componets are within the Kapkot Town. There is no ecologically sensitive area having intervention with the porect components neither directly nor indirectly. No felling of trees envisaged in the project and not having any intervention of cultural or archaeological site.
- 154. The construction activity will have impact on ambient air and noise environmental due operation of construction vehicles, equipments, excavation and disposal of earth. The laying of pipes in the residential area may cause inconvenience to the local people due obstruction on road and interrupted supply of water. Mitigation measures have been developed to reduce all negative impacts to acceptable levels. The implementation of mitigation measures are suggested in the environmental management and monitoring plan
- 155. The proposed subproject has been categorized as Category 'B' as per ADB SPS 2009 based on environmental screening and assessment of Kapkot Water Supply Scheme. The initial environmental examination (IEE) ascertains that it is unlikely to cause any significant environmental impacts. Few impacts were identified attributable to the proposed sub-project, all of which are localized and temporary in nature and easy to mitigate.
- 156. The initial environmental examination ascertains that the subject is unlikely to cause anysignificant environmental impacts. No additional studies or need of undertaking detailed EIA is envisaged at this stage. The Executing Agency shall ensure that EMP and EMoP is included in Bill of Quantity (BOQ) and forms part of bid document and civil works contract. The same shall be revised if necessary during project implementation or if there is any change in the project design and with approval of ADB.

APPENDIXES

Appendix I Rapid Environmental Assessment Checklist

Kapkot Water Supply Subproject

A. Screening Questions for Impact Categorization

Screening Question	Current Assessment	Additional Information for Substantiating Assessment
A. Project Siting		
bensely populated? Densely populated?	⊠Yes □No	The project is proposed within the town limit of Kapkot, which is having average population density of 1842 Persons / Sq. Km. Kapkot comes under high population density categorization (national average of high population density of more than 340 Persons/ Sq. Km.
 Heavy with development activities? 	□Yes ⊠No	There are no major development activities in the town
 Adjacent to or within any environmentally sensitive areas? 	□Yes ⊠No	No
Cultural heritage site	□Yes ⊠No	No
Protected Area	□Yes ⊠No	No
Wetland	□Yes ⊠No	No
Mangrove	☐Yes ⊠No	No
Estuarine	☐Yes ⊠No	No
Buffer zone of protected are		No
 Special area for protecting biodiversity 	☐Yes ⊠No	No
• Bay	☐Yes ⊠No	No
Potential Environmental Impact Will the Project cause		
 Pollution of raw water suppl from upstream wastewater discharge from communities industries, agriculture, and serosion runoff? 	⊠No s,	There is no pollution Sources from existing systems
 Impairment of historical/cultural monuments/areas and loss/damage to these sites? 		There are no historical / cultural monuments in the project area.
 Hazard of land subsidence caused by excessive ground water pumping? 	□Yes ☑No	Sub surface water pumping within the limit so no ground water will be abstracted.
 Social conflicts arising from displacement of communitie 		The project will not lead to displacement of communities.
 Conflicts in abstraction of ra water for water supply with other beneficial water uses 	ıw	There are no conflicts are anticipated.

	Screening Question	Current Assessment	Additional Information for Substantiating Assessment
	surface and ground waters?	Assessment	Oubstantiating Assessment
•	Unsatisfactory raw water supply (e.g. excessive pathogens or mineral constituents)?	□Yes ⊠No	Source of water is ground water for this sub- project. Liquid chlorination system is proposed
•	Delivery of unsafe water to distribution system?	□Yes ⊠No	Liquid chlorination system is proposed at new Infiltration well.
•	Inadequate protection of intake works or wells, leading to pollution of water supply?	∐Yes ⊠No	Infiltration well will be protected against flooding by constructing protecting works.
•	Over pumping of ground water, leading to salinization and ground subsidence?	∐Yes ⊠No	Ground water extraction will not be over pumped.
•	Excessive algal growth in storage reservoir?	□Yes ⊠No	Regular cleaning of storage reservoir shall be ensured to avoid algal growth in the reservoir.
•	Increase in production of sewage beyond capabilities of community facilities?	□Yes ☑No	There is no existing sewerage system in the sub-project area.
•	Inadequate disposal of sludge from water treatment plants?	∐Yes ⊠No	Water Treatment Plant is not the scope of sub- project.
•	Inadequate buffer zone around pumping and treatment plants to alleviate noise and other possible nuisances and protect facilities?	∐Yes ⊠No	Adequate buffer and protection will be assured.
•	Impairments associated with transmission lines and access roads?	⊠Yes ⊡No	Temporary Impairments with diversion / access road is anticipated during construction. Restoration of damaged roads will be ensured as soon as the work is completed.
•	Health hazards arising from inadequate design of facilities for receiving, storing, and handling of chlorine and other hazardous chemicals.	∐Yes ⊠No	Liquid chlorine has been proposed to be used for disinfection of water. Proper facility for storing and handling of chlorine shall be maintained all around to avoid such hazards.
•	Health and safety hazards to workers from the management of chlorine used for disinfection and other contaminants?	∐Yes ⊠No	Only trained and skilled operator will operate the chlorination system. Proper precautionary measures will be taken during handling of chlorine.
•	dislocation or involuntary resettlement of people	∐Yes ⊠No	No displacement of people is anticipated.
•	Social conflicts between construction workers from other areas and community workers?	Yes ⊠No	No such impact anticipated; local communities in the vicinity of the project would be employed as much as possible.
•	Noise and dust from construction activities?	∐Yes ⊠No	All Constructions are proposed manually and away from populated area. Hence noise & dust will not affect due to construction activities.
•	Continuing soil erosion/silt runoff from construction operations?	∏Yes ⊠No	Construction work during monsoon shall be carried out with due care so that silt run off due to construction operation is prevented. No construction will be allowed during rains.
•	Increased road traffic due to interference of construction activities?	⊠Yes □No	Chances of little traffic-disturbance are anticipated, that will be managed through diversion routes.

	Screening Question	Current	Additional Information for
		Assessment	Substantiating Assessment
	Delivery of unsafe water due to poor O&M treatment processes (especially mud accumulations in filters) and inadequate chlorination due to lack of adequate monitoring of chlorine residuals in distribution systems?	∐Yes ⊠No	Infiltration well is proposed in this sub-project. However skilled staff will be deputed for O&M.
•	Delivery of water to distribution system, which is corrosive due to inadequate attention to feeding of corrective chemicals?	□Yes ⊠No	GI pipes will be used for distribution system and are non-corrosive in nature.
•	Accidental leakage of chlorine gas?	∐Yes ⊠No	Only liquid chlorine will be used.
•	Excessive abstraction of water affecting downstream water users?	□Yes ⊠No	Only Ground water will be used.
•	Competing uses of water?	□Yes ⊠No	No conflicts envisaged,
•	Risks to community health and safety due to the transport, storage, and use and/or disposal of materials such as explosives, fuel and other chemicals during operation and construction?	∐Yes ⊠No	Not applicable. Construction will not involve use of explosives and chemicals.
•	Community safety risks due to both accidental and natural hazards, especially where the structural elements or components of the project are accessible to members of the affected community or where their failure could result in injury to the community throughout project construction, operation and commissioning?	∐Yes ⊠No	Operational area will be clearly demarcated and access will be controlled. Only worker and project concerned members will be allowed to visit the operational sites.

As per Uttarakhand Emergency Assistance Project (RRP IND 47229), Environmental Assessment and Framework, C Anticipated Environmental Impacts, Categorized B On the basis of point 33 Environmental Classification, After Screening by the respective IA and or the EA, duly endorsed REA checklist will be submitted to ADB for review and for ADB's confirmation of the environmental classification of each subproject.

B. ASSESSMENT CHECKLIST ON THE CATEGORIZATION AND PLANNING REQUIREMENT FOR THIS SUBPROJECT?

Category A. A proposed project is classified as category A if it is likely to have
significant adverse environmental impacts that are irreversible, diverse or unprecedented
These impacts may affect an area larger than the sites or facilities subject to physical works
An environmental impact assessment is required.
Category B. A proposed project is classified as category B if its potential adverse
environmental impacts are less adverse than those of category A projects. These impacts are
site-specific, few if any of them are irreversible and in most cases mitigation measures can be
designed more readily than for category A projects. An initial environmental examination is
required.

☐ Category C. A proposed project is classified as category C if it is likely to have minimal or no adverse environmental impacts. No environmental assessment is required although environmental implications need to be reviewed.

☐ Category FI. A proposed project is classified as category FI if it involves investment of ADB funds to or through FI.

Appendix II Public Consultaion

Public Consultation & Focused Group Discussions (Socio-Economic and Environmental)

Name of the Sub-Project: Uttarakhand Emergency Assistance Project: Water Supply

Sector

Name of the Block: Kapkot Name of the District: Bageshwar

Distance from the District Head Quarter: 23 Km

Date & time of Consultation :-12.05.2014, 2.00-4:00 PM

Location : - 1. At Nagar Panchayat Office, Kapkot

Table: Issues of the Public Consultation- Design Phase

Sr. No.	Key issues/Demands	Perception of community	Action to be Taken
1.	Awareness of the project – including Project Coverage area	Most of the people are aware of the project. They appreciated the efforts of the Government in development of such infrastructures in the town and feel that the project will bring overall socioeconomic status of the Fort area.	Awareness programme and disclosure of Information is a part of sub-project. An NGO is appointed for his program.
2.	In what way they may associate with the project	Sufficient numbers of labours are available in and around the Kapkot town who can be engaged for different construction works. Tractors or dumpers can also be hired locally. Local residents should also be involved in Construction work.	Engagement of Local labours may be encouraged during construction. Possibilities of engaging the local population in laying of pipeline may be explored in the sub-project
3.	Presence of any forest, wild life or any sensitive/ unique environmental components nearby the project	No forest land comes in the vicinity of our project area.	Adequate preventive measures required to be incorporated in the project to avoid all sensitive components.
4	Presence of historical/cultural/ religious sites nearby	No Historical / cultural/ religious sites comes in the proposed rising main.	Adequate preventive measures required to be incorporated in the project to avoid all sensitive components.
5	Un favorable climatic condition	The temperature during summer is 30-33 °C and in Winter at around 4-5 °C.	Proper rest shed, water supply and first aid box to be provided at work site. Scheduling of works should be adjusted according to the climatic condition
6	Occurrence of flood	A heavy rain is observed in month of June – August and it becomes very difficult to work during this season. Flood was occurred in the year 2013.	All preventive measures should be taken in monsoon season and working schedule should be maintained as per seasonal conditions.
7	Drainage and sewerage problem facing	Presently there is problem of drainage and sewerage in this area.	Sewerage problem will be solved after commencing new sewerage project.

Sr. No.	Key issues/Demands	Perception of community	Action to be Taken
8	Present drinking water problem- quantity and quality	Presently source is surface water of gadheras and natural springs using	In this Sub-Project infiltration well is proposed with proper chlorination.
9	Present solid waste collection and disposal problem	At present there is no designated site for solid waste disposal. There is a major problem of collection & disposal of solid waste. The solid waste is disposed to open land and that waste creates odour and mosquitoes generation.	There is a need of Solid Waste Management Proposal.
10	Availability of Labour during construction time	Sufficient labours are available in this town.	
11	Access road to project site	The proposed project is along the road. There will be no congestion over this road.	
12	Perception of villagers on tree felling and a forestation	Villagers are against tree falling	There is no such issue in this sub project. 3 Plants will be planted at the cost of cutting of one plant if any
13	Dust and noise pollution and disturbances during construction work	Dust and Noise pollution should be controlled during construction activity.	Contractor should provide all preventive measures to control the Dust and Noise during construction work.
14	Setting up worker camp site within the village/ project locality	The people of nearby village want that workers should be engaged from nearby villages for different construction activities. However they agreed to cooperate with the project authority for setting up worker camp near the work site.	Proper attention will be taken
15	Safety of residents during construction phase and applying of vehicle for construction activities	Locals feel that all safety measures would be taken for public safety during construction phase.	Contractor should appoint a safety officer to encounter the Public as well as workers safety during construction phase.
16	Requirement of other facilities	Near infiltration well there is no light at night	Provision of Proper flood light arrangement is already in DPR
17	Whether local people agreed to sacrifice their lands (cultivable of not) for beneficial project after getting proper compensation	Local people agreed to give their own land if there is need for the project. People want to donate the land for this subproject if need.	Nazula land available for this sub project components. Although agricultural land of 6 farmers will be temporarilly affected in laying of rising main. However they will be compensated as the entitlement matrixof Rehabilitation Framework of UEAP and a separate Resettlement plan has been prepared for them.

List of Participants - Public Consultation & Focused Group Discussions

Public Consultation & Focused Group Discussions (Socio-Economic and Environmental)
Uttarakhand Emergency Assistance Project: Water Supply Scheme: Kapkot

SI. No	Name of the Participant	Occupation	Signature (If agreed by the participants)
1	- ८१३वा देव	COI EZIB - FICHE	97561816
2	heer newari	RE, DSC-D	New
3	Buyadavshan Singh Rawa	AE (VJS)	fdzhan-
4	Keilast chardra jost	J-E (UTS)	1
5	Drimoheurs.	वार्ड मेरबट	- Af
6	Grown Chandsetter	In. Metaber N. P. Kolpicofe	G 941011377
7	Men Sims Simsh	MILRI	Net 941059809
8	Laspman Ram	Drowen	18th 941188799
9	Om Dithaui	Buseurs	Juithi 09690811119
10	Kedas Dati	-211119	केन्त्र २ न
11	Wand ? R	चिह्न ग्रीमेला	. (Noor
12	ट्रांची-इं मी	= 11120	40
13	भाषान गार		- Car
14	भरदारी लाउ	ביירות ביירות	1
15	जीवनीस द एक	20129101	Sp
16	ना-द सिंह नहारी	un they	- an
17	xixitie.	22/2/101	200
18	F-121-01-5	HINO SIMPITY	-100mm = 412094628
19	जागदेखा र १२१	र्गाकी है।	ol
20	497 IGE	प्रविधापार्ने प्रविधि	MN9410303137
21	विज्ञानासिंह हार	only neustano	+ Kin
22 -	प्रकाश्चीह जाह	आया काप करण	Shop 9411306892
23	जागानिह पत्वाव	पूर्व पदान	जिल्लाकि



Photographs of Public Consultation

Appendix III NOC for Infiltration Well

מנש פונט- חנמים PPV, PO, ODDEDZZZZZZZ 20 Jan. 2019 05:63 P 1 पंजीकत प्रेषचन, िएला अधिकारी बागेश्वर । सेवा में, वमुख शिवद राजस्य अनुभाग-2, जलाराक्षण्ड शारान, देहरादून। दिनाक-13 /07 /2014 राज्या-1339 / भारह-13 / एस०ए०सी / 2013-14, विषय:--यू0ई0ए0पी0 के अन्तर्भंश प्रस्कावित कपकोट नगरीय पेयजल योजना के अन्तर्गत इन्फिल्ट्रेशन वैल निर्माण हेतु मूमि हस्तान्तरण के संबंध पहीदय उपयंक्त विश्वयक पर अधिशाली अभियन्ता उत्तरस्याण्ड जल संस्थान वागेश्वर के द्वीश अपने पत्र राख्या 43/एवडीव्यीव/03 दिनाक 39 जनवरी, 2014 से अध्यत कराया गया है कि कपकोट नगरीय पैयजल योजना की मरम्मत /जीर्णाद्धार का कार्य यूग्डं०ए०पी० (ए०डी०वी०) योजना के तहत किया जाना प्रस्तापित है। जिसके लिए टेंक निर्माण हेतु भूमि की आवश्यकता है। प्रयुक्त निरीक्षण के पश्चात ग्राम कपकोट के स्थान होटी लोक के अन्तर्गत मैक्फाoविक्खकाल संख्या 128 के छेश नं१ ब184 जो माल अभिलेखों में अभी 10 (4) बजार नाकाविण आवाद (अक्टुबक बंजर भूमि) वर्ज है, को भयमित कर 0.025 हैं0 मूमि आवंटन प्रश्ताद प्राप्त है। प्रस्तावित भूमि की अन्य स्थितियाँ निग्नवत है-प्रस्तातित मुभि पर फिल्मी प्रकार का कोई वश नहीं है। प्रस्तावित भूभि धर मंदिर, मंकितद, गिरुणाधीर, मरधट एवं कविस्तान सोना नहीं पाटा गया 2-在上 प्रस्ताबित भूगि का आवंट्यु उत्त्युर्ख्युष्ड जल संस्थात शाखा भागेश्वर के कपकोट नगरीय पेयजस योजना की गरामत / जीर्जीद्धार का कार्य दूवई०९०पी० के अन्तर्गत पेयजस्य द्वन्छिल्ट्रेशन नेल (टेंक) निर्माण हेतु किया जाना है। परवाधित भूमें का आवंदन हो जाने की दशा में सदि संबंधित विभाग को आवंदित भूमि की सामध्यकता म रह जाये तो ऐसी वशा ने विभाग को निर्माण सहित बिना प्रतिकट भूगतान के पूल विभाग को प्रत्यावर्तित किया जाना आवश्यक होगा। प्रस्तापित भूने का आवंदन विभाग के पक्ष में नि.शुल्क किया दश्या है। प्रस्तायित भूमि पर किसी भी प्रकार का कोई वृधाँ न डोने से बन संस्थल अधिनिधम 1980 के प्राविधान प्रभावी नहीं सोते है। प्रस्ताचित गृष्टि का वद्धरण क्सरा, क्योंनी व नवशा एंत्सरन कर प्रेषित किये जा रहे हैं। सासन से अनुरोध है कि जनमद वामेश्वर के तहसील कपकोट में नगरीय मेथलल कंकना की मरम्मत / जीमौद्धार का कार्य गुठ्डंpएoपीo के अन्तर्गत पेटाअल इन्धिल्ट्रेशन बैल (टैक) निर्माण हेस् जनपद बागेत्रवर को गहसील कपकोट ग्राम कपकोट के अंतर्गत 0.025 है। सूमि का आयंटन उत्तरसंख्याच्य जल संस्थान शास्त्रा बागेएबर के गड़ा में भरने कर कर करें। शंलग्न - यथ्वित । अवदीय. (बीटएस०मगरात) जिलाभिकारी, बागेश्वर । संख्या एवं दिनांक उक्तानुसार। प्रतिलिपि- जिल्लाकित को पूचनार्थ एवं आवस्थक कार्यवाठी हेत् प्रवित।

) अभिशासी अधिकास, राज्याखण्ड जल जरखान शाखा कर्मश्यर। १ सम्प्रक अधिकता /कमिश्ट अभिक्ता, जलसंस्टण्ड जल संख्यान कप्रकोट ३ उपजिलाधिकारी, कंपजोट।

(गीव) एस० मनराल) जिल्लाधिकारी, बागश्यर। W 10 KI

Appendix IV NOC for Rising Main

-: अनापत्ति-पत्र :-

कपकोट नगरीब पेराजल योजना हेत् बहुसील कपकोट के िकट केली नामक स्थल से परिपंग करते हुये विजयर एवं ऐठान-शराड़ी जलाश्रय तक पांईप लाईन बिछाने का कार्य उत्तराखण्ड जल संस्थान विभाग द्वारा प्रस्तापित है। उत्तत पाईप लाईन के सरेखण में हम सभी निजी भूमि वालों को पाईप ्लाईन बिछाये जाले पर एवं बाद में आवश्यकता पड़के पर मरम्मत कार्थी हेतु कोई आपित नही होगी तथा विछायी गयी पाईप लाईन वाली भूमि के ऊपर हमारे द्वारा किसी प्रकार का निर्माण कार्य नहीं कराया जायेगा। उत्तराखण्ड जल संस्थान विभाग द्वारा उत्तत स्थल पर पाईप लाईन इतनी गहराई तक बिछायी जायेगी, जिससे भविष्य में उवत स्थल पर कृषि कार्य किया जा सके।

ाम पिता का माम खुशाल सिंह भगवत सिंह महिपाल सिंह खुशाल सिंह मुन्ना सिंह दाल सिंह राजेन्द्र सिंह राम सिंह नैन सिंह चन्द्र सिंह दीवान सिंह किटर सिंह

हस्ताक्षार/अंगुठा का निशान

Chares Tere

दिनॉक:- 04/04/2014

Appendix V NOC from PWD



कार्यालय अधिशासी अभियन्ता, उत्तराखण्ड जल संस्थान, शाखा बागेश्वर।

सेवा में

अधिशासी अभियन्ता निर्माण खण्ड, लोक निर्माण विभाग, कंपकोट (बागंश्यर)।

पत्रांक 29

A.D.B 1 02

देनांक 🕰 . /01 / 2014

विषय: पाइप लाइन बिछाने की अनुमति के सम्बन्ध में।

गहोदय

उपरोक्त विषयक अग्रमत कराना है कि UEAP(ADB) के अन्तर्गत कपकोट नगरीय पेयजल योजना की मरमात / जीणींद्वार का कार्य किया जाना है। उक्त कार्य के लिये कपकोट घूनी मोटर मार्ग पर कपकोट से 3 किमीठ दूरी के अन्तर्गत. कपकोट पुरा, के उपर एवं कपकोट भराडी मोटर मार्ग पर कपकोट थाना से बमसंस पुलिया के मध्य विभिन्न रंथलों पर पाइप लाइन बिछाने का कार्य किया जाना सम्मावित है जिस हेतु व्यक्तिपूर्ति का गुगतान आपके विभाग को वास्तविक आधार पर कर दिया जाएगा। अलः अनुरोध है कि उक्तानसार पाइप लाइन बिछाने के कार्य हेत् सैद्वान्तिक अनुमति देने का कष्ट करें।

भवदीय (संजीय निश्र) अधिशासो अभियन्ता

पृ०संख्या एंव दिनांक - तदैव।

प्रतिलिपि :-- १. अधीक्षण अमियन्ता उत्तररखण्ड जल संस्थान अल्मोडा, वृद अल्मोडा को सूचनार्थ प्रेषित।

2. सहायक अभियन्ता / कॉनेष्ट अभियन्ता, उत्तराखण्ड जल संस्थान, कपकोट को इस निर्देश के साथ प्रेषित कि व्यक्तिगत रूप से सम्पर्क करते हुए आवश्यक कार्यवाही किया जाना सनिश्चित करें।

अधिशासी अभियना

Appendix VI Photographs



Plate -1- Existing Source Belan Gadhera had been Damaged



Plate -2- Land Sliding at Source



Plate -3- Temporary Arrangement by PPR




Plate -4-Existing Source Bhangarh Gadhera Completely washout