

Initial Environmental Examination

Project Number: 47229-001 May 2014

IND: Uttarakhand Emergency Assistance Project

Submitted by Uttarakhand Jal Sansthan, Government of Uttarakhand, Dehardun

This report has been submitted to ADB by the Public Works Department, Government of Uttarakhand Jal Sansthan, Dehradun and is made publicly available in accordance with ADB's public communications policy (2011). It does not necessarily reflect the views of ADB.

Asian Development Bank

GM

Phone (Off): 0135-2676260 Fax: 0135-2676177 Email Id-adb_ujs@rediffmail.com



Uttarakhand Jal Sansthan, Jal Bhawan,

B-Block, Nehru Colony, Dehradun

Letter No. 31 /ADB/

/ADB/ 12/2014-15

Dated 19/05/2014

To,

The Country Director, Asian Development Bank, New Delhi.

Sub: Loan 3055-IND: Uttarakhand Emergency Assistance Project- Regarding IEE for Kapkot, Dharchula and Bageshwar Towns. Dear Sir,

Kindly refer ADB email dated 21 Jan, 2014 regarding clearance of Rapid Environmental assessment (REA) for Bageshwar, Dharchula & Kapkot towns & required submission of Initial Environmental Examination (IEE) of these three towns Bageshwar, Dharchula & Kapkot.

So, I am forwarding the final Initial Environmental Examination (IEE) of Bageshwar, Dharchula & Kapkot for your review & approval.

Regards

Enclosed-3 Attachments





Yours sincerely,

2014 (P.C.Kimothi)

General Manager

(Technical, Research & Material)

General Manager (Technical, Research & Material) Uttarakhand Jal Sansthan Dehradun

E:\ADB Project- ADB Letter-33

May 2014

2

r

India: Rehabilitation of Water Supply System of Bageshwar under Uttarakhand Emergency Assistance Project

Prepared by State Disaster Management Authority, Government of India, for the Asian Development Bank.

This initial environmental examination is a document of the State Disaster Management Authority, Government of Uttarakhand. The views expressed herein do not necessarily represent those of ADB's Board of Directors, Management, or staff, and may be preliminary in nature.

In preparing any country program or strategy, financing any project, or by making any designation of or reference to a particular territory or geographic area in this document, the Asian Development Bank does not intend to make any judgments as to the legal or other status of any territory or area.

ŝ

ABBREVIATIONS

1 30

ADB BOD CO CFE CH ₄ CFO DO dB IEE EA EIA EC Gol GoU Ha H $_2$ S HDPE HFL Km Leq Mg MFF MoEF MLD Mn M M M M M M M M M M M M M M M M M M	Asian Development Bank Bio Chemical Oxygen Demand Carbon Mono Oxide Consent for Establishment Methane Consent for Operation Dissolve Oxygen Decibel Initial Environmental Examination Executing Agency Environmental Impact Assessment Environmental Clearance Government of India Government of India Government of Uttrakhand Hectare Hydrogen sulphide High Density Poly Ehylene High Flood level Kilometer Sound level Milligram Multitranche Financing Facility Ministry of Environment & Forests Million Meter Million Meter Millimeter Milligram per Liter Cubic meter National Ambient Air Quality Monitoring oxides of Nitrogen Not Applicable oxygen uptake rate Operation and maintenance Project Management Unit Poly Vinyl Chloride Public works Division
PVC	Poly Vinyl Chloride
PIU	Project Implementation Units
RCC	Reinforced Cement Concrete
RoW RSPM	Right of Way Respirable suspended particulate matter
RP	Rehabilitation Plan
SEIAA	State Environment Impact Assessment Authority
SPCB	State Pollution Control Board
UEPPCB	Uttaranchal Environmental Protection and Pollution
UEAP	Control Board Uttarakhand Emaregncy Assistance Program
UJS	Uttarakhand Jal Sanasthan

SS	Suspended Solids
SBR	Sequential Batch Reactor
SPM	Suspended Particulate Matter
SO ₂	sulphur dioxides
ST	Scheduled Tribes
SC	Scheduled Castes
SOP	Standard Operational Procedures
UDD	Urban Development Department
UPJN	Uttaranchal Peya Jal Nigam
UJS	Uttaranchal Jal Sansthan
U.P	Uttar Pradesh
UPCL	Uttaranchal Power Corporation Limited
(μg/m ³	Micro Gram Per Cubic Meter
%	Percentage

WEIGHTS AND MEASURES

Cm	 centimeter
U 111	001101000

1

a,

- 100 lakhs = 10,000,000 Crore

Lakh - 100 thousand = 100,000

- Kilometer Km

 Kilometer per hour Kph

- liters per day Lpd

- Meter M

μ

- milligrams per liter mg/l

Mm - Millimeter

 Mean sea level MSL

- 10⁻⁶ meter

µg/m³ - micrograms per cubic meter

µS/cm - micro Siemens per centimeter

NTU Nephalo turbidity unit

Ppm - parts per million

NOTE{S} In this report, "\$" refers to US dollars. "INR" and "₹" refer to Indian rupees

CONTENT

ABBR	EVIATIONS	Ш
EXEC	UTIVE SUMMARY	IX
I.	INTRODUCTION	12
	 A. Project Background/Rationale B. THE UTTARAKHAND EMERGECY ASSISTANCE PROJECT (UEAP) C. Purpose of the Environmental Assessment D. Extent of IEE E. IEE Content F. Methodology G. Public Consultation 	12 12 13 13 13 13
il.	POLICY, LEGAL AND ADMINISTRATIVE FRAMEWORK	13
III.	DESCRIPTION OF THE PROJECT	17
	 A. Project Location B. Proposed Category of the Project C. Background of the Proposed Sub-project 	17 18 18
IV.	DESCRIPTION OF THE ENVIRONMENT	24
	 A. Physical Environment B. Climate and Meteorology C. Ambient Air Quality D. Ambient Noise Level E. Hydrology F. Seismology G. Ecology H. Socio-Economic I. Health J. Literacy K. Energy and Electric Power Potential L. Aesthetic and Tourism M. Project Implementation Schedule 	24 26 27 28 29 30 37 39 40 42 42 42
ν.	ANTICIPATED ENVIRONMENTAL IMPACTS AND MITIGATION MEASURES	43
	 A. Screening of Environmental Impacts B. Impact and mitigation measure during planning and design phase C. Impacts and Mitigation Measures during Construction Phase D. Impacts during Operation Phase E. Economic Development 	43 44 47 56 57
Vie	INFORMATION DISCLOSURE, CONSULTATION, AND PARTICIPATION	57
	 A. Public participation during the preparation of the IEE B. Future consultation and Disclosure C. Consultation during Detailed Design D. Consultation during Construction E. Project Disclosure 	57 58 59 59 59

vi

VII.	GRI	EVANCE AND REDRESS MECHANISM	60
VIII.	ENV	IRONMENTAL MANAGEMENT PLAN	61
	Α.	ENVIRONMENTAL MANAGEMENT AND MONITORING PLAN (EMMP)	61
	В.	Environmental Monitoring Plan	67
	C.	Environmental Budget	69
	D.	Environmental Monitoring and Reporting	73
	Ε.	Performance Indicator	97
IX.	CON	ICLUSION AND RECOMMENDATION	99

х

LIST OF TABLES

Table II-1: Environmental laws and Regulations	14
Table III-1: Demand and Supply Gap Parameters	19
Table III-2: Proposed Scheme	20
Table III-3: Clear water pumps proposed for Infiltration well	22
Table III-4: Raw Water Pumping Machinery at Kathyatbada Dry intake well	23
Table III-5: Clear Water Pumping Machinery at Kathyatbada WTP	24
Table IV-1:District-wise Forest Cover, Uttarakhand	31
Table IV-2: Predominant Top-Canopy (Tree) Species According to Altitude	32
Table IV-3: Wildlife in Uttarakhand	33
Table IV-4: National Parks in Uttarakhand	33
Table IV-5: Wildlife Sanctuaries in Uttarakhand	33
Table IV-6: Wildlife in Uttarakhand	34
Table IV-7: List of Major Flora	34
Table IV-8: List of Major Fauna	35
Table IV-9: Land Utilisation in Uttarakhand	
Table IV-10: Health Indicators of Uttarakhand	39
Table IV-11: Health Infrastructure of Uttarakhand	39
Table IV-12: Literacy Rate in Uttarakhand	40
Table VIII-1: Monitoring Plan	68
Table VIII-2: Environmental Management & Monitoring Costs	70
Table VIII-3: Standardized EMMP to guide the contractor in mitigating environmental impacts	
Table VIII-4: Performance Indicators of EMMP	97

LIST OF APPENDIXES

Appendix I Rapid Environmental Assessment (REA) Checklist	
Appendix II – Public Consultaion	
Appendix III Project Photographs	

I

EXECUTIVE SUMMARY

- 1. Uttarakhand lies in the northern part of India amidst the magnificent Himalayas and dense forests. The State is bordering Himachal Pradesh in the north-west and Uttar Pradesh in the South and shares international borders with Nepal and China. The State is comprised of 13 districts divided into two regions and also called administrative divisions; the Kumaon and Garhwal.
- 2. Recent disaster of unprecedented floods in June, 2013 in the state of Uttarakhand, devastated many towns and villages on the banks of rivers Bhagirathi, Pindar, Mandakini, Alaknanda and Sarju. Infrastructure facilities like roads, power supply, communication, buildings, and water supply had been affected severely. Though the state government had taken up many steps to temporarily restore the facilities, it is envisaged to take up permanent measures to restore and rehabilitate the facilities.
- 3. The disaster impacted supply of water in terms of quantity and quality. There is a gap quantity of 1 MLD at delivery to the users after the disaster and it has also caused increase in turbidity. This is due to the damage of the supply infrastructure including Intake wells, pumps and water treatment plants.
- 4. To address the impact, the following works need to be undertaken on priority basis.
 - Construction Works at Jalkal Water Works
 - a Demolition of existing damaged Intake well and Construction of new Infiltration well having pumping capacity of 1.35 Mld
 - b Installation of submersible pumps of 65Hp, Q=1400lpm, H=110, 2nos, 1 w +1s along with all related electrical, mechanical, automation and piping works.
 - Repair of Dry Intake well in Kathyatbada
 - a Replacement of existing raw water pumps with 25Hp, Q=1250lpm, H=40, 2nos, 1w +1s and replacements of valves and base plates. All including related electrical, mechanical, automation and piping works.
 - Rehabilitation of WTP at Thakurdwara
 - a Repair and Disilting of Hopper bottom Settling Tank; Disilting of Inlet channel
 - b Replacement of filter media in 2 nos. of pressure filter of size 1.5 m Φ X 1.5 m height
 - c Reconstruction of alum godown within the WTP premises; G+1 having plan area of4mX 4m and G+1
 - Replacement of existing clear water pumps at Thakurdwara WTP with 145Hp, Q=1250lpm, H=275, 2nos, 1w +1s along with replacement of valves, base plates. All including related electrical, mechanical, automation and piping works.
 - Replacement of 0.5 km, 80 mm, GI rising main from Jalkal water works to WTP at Thakurdwara with150 mm Φ MS pipe (new pipe will follow old pipe's alignment)
 - Demolition of old structures to accommodate new structures (Infiltration well near JalkalPump house and old Structures/Mechanical items at Thakurdwara WTP)

- a. Demolition of old intake structure at Jalkal water works
- b. Demolition of damaged alum godownapprox.4.6mX 6.6mX 3min dimension
- 5. Consistent with the Environmental Assessment and Review Framework (EARF), the proposed subporject were screened using ADB rapid environmental assessment (REA) checklist-of water supply. The environmental screening revealed that no protected or sensitive areas were traversed. All impacts are site specific; few are irreversible and can be readily mitigated supporting an environmental "Category B" classification.
- 6. **Air Quality**. The pristine environment and sparse population suggest that most part of the State have a very good air quality while noise level is calm except in central part of the Bageshwar town. The baseline of air quality and noise level will be generated before commencement of the construction.
- 7. **Seismicity**. The State constitutes one of the most active domains of the Himalayan region. Several damaging earthquakes are recorded from this region. As such, the region is classified under high seismic zone V.
- 8. **Forest.** Uttarakhand is ranked 9th in all-India in terms of forest covered area with 24,495 km²of forestland The district of Pauri Garhwal, Uttarkashi, Nainital, and Chamoli have the largest forest cover accounting for 50% of all the state's total. The State Govt. of Uttarakhand has declared the oak tree (*Quercus* sp.) as a *Kalpvriksha* or wish fulfilling divine tree often treated as the signature plant of the Kumaon Himalayas as numerous logos and insignias with a stylized version of the deodar inscribed on them.
- 9. **Sensitive Ecosystem.** The subproject location does not fall within any sensitive ecosystem. Neither the project component have direct intervention not indirect intervention with sensitive ecosystem.
- 10. Significant Environmental Impacts and Proposed Mitigation Measures. No environmental impacts related to siting were identified in the environmental examination. All components of subproject are existing, no components of subproject is located inside or near a cultural heritage site, protected area, wetland, mangrove, estuarine, buffer zone of protected area or special area for protecting biodiversity. There are no rare, threatened, and endangered species (flora and fauna) within the subproject corridor of impact. The potential significant environmental impacts identified and assessed are related to construction time impacts.
- 11. Information Disclosure, Consultation, Participation, and Grievance and Redress Mechanism. Wide stakeholder consultation and participation was observed during the environmental examination of UEAP. Project affected communities, government institutions, and non-governmental organizations. Highlight of all consultations were documented and applicable recommended measures particularly in minimizing shifting of structures, potential conflict with migrant workers, and competing demand for local resources were incorporated in the design and the environmental management plan. This IEE report will be disclosed in the ADB website pursuant to the Bank's *Public Communication Policy* and in the SDMA website.

12. **Environmental Management Plan**. The Environmental Management and Monitoring Plan (EMMP), to form part of the bidding documents, adopted the procurement package scheme and facilitate subsequent compliance monitoring by the contractor.

1

13. Conclusion. In the present IEE certain baseline data is not available such as noise pollution and air quality. Therefore it is proposed that before the commencement of work a sampling for these parameters be conducted and IEE be revised if necessary to comply with the Environmental Assessment and Review Framework (EARF) which is in consistent with the ADB's Safeguard Policy Statement (SPS) 2009. However, to satisfy the Gol guidelines, the operation of Water Treatment Plant requires to Obtain Consent for operation (CFO) from the UEPPCB under Water (Prevention and Control of Pollution) Act, 1974. It will be responsibility of the PMU /IA to ensure that CFE and CFO is obtained before start of operation. No study will be required for obtaining consent but required to comply with the procedures as laid out by the UEPPCB.

I. Introduction

A. Project Background/Rationale

 Recent disaster of unprecedented floods in June, 2013 in the state of Uttarakhand, devastated many towns and villages on the banks of rivers Bhagirathi, Pindar, Mandakini, Alaknanda and Sarju. Infrastructure facilities like roads, power supply, communication, buildings, and water supply had been affected severely. Though the state government had taken up many steps to temporarily restore the facilities, it is envisaged to take up permanent measures to restore and rehabilitate the facilities.

B. THE UTTARAKHAND EMERGECY ASSISTANCE PROJECT (UEAP)

- 2. Uttarakhand being a tourist and pilgrimage State, attracts a large number of tourist and pilgrims. A major disaster during 15-17 June 2013 resulted in severe damages in several parts of Uttarakhand, which has a mountainous terrain and a fragile geology. Several towns have been washed away by the unprecedented flash floods and landslides, and a large number of houses, public buildings, roads, bridges, urban, rural, and tourism infrastructure, power generation and distribution facilities have been damaged. The impact on the affected population due to the loss of connectivity has been manifold.
- Based on the request of India, a Rapid Joint Damage and Needs Assessment 3. (RJDNA) was undertaken by Asian Development Bank (ADB) and the World Bank. ADB agreed to assist the Government of India (GOI) with reconstruction and rehabilitation efforts for which the Uttarakhand Emergency Assistance Project (UEAP) has been formulated as a multi-sector emergency loan in sector loan modality. The executing agency (EA) for the UEASP will be Government of Uttarakhand (GOU) and State Disaster Management Authority (SDMA). The primary implementing agencies (IA) will be Public Works Department (PWD) for roads, bridges, urban roads, and trekking Department of Tourism (DOT) for tourism infrastructure, routes including eco-trails Uttarakhand Civil Aviation Development Authority (UCADA) for helipads; and Uttarakhand Ja! Sanstahan (UJL) for urban water supply, or any successor hereto. Some other state agencies such as Forest Department, Kumaon Mandai Vikas Nigam Limited, and Garhwal Mandai Vikas Nigam Limited are likely to be entrusted with some works under UEAP under these primary IAs.

C. Purpose of the Environmental Assessment

- 4. The purpose of the study is to identify the environmental issues to be considered at project planning and design stage, assesses environmental consequences due to project intervention and suggests mitigation measures to minimise the adverse environmental impacts, if any, associated with construction and operation.
- 5. Initial environmental examination (IEE) has four basic objectives; (i) asses relevant potential impacts and risks associated with the proposed rehabilitation of Water Supply system, (ii) assess the compliance with ADB environmental safeguard requirements and applicable environmental laws, (iii) incorporate mitigation measures in the project design, (Iv) preparation of environmental management and monitoring plan.

D. Extent of IEE

£.

Ť.

6. IEE was conducted based on preliminary Detailed Design Report (DPR). The IEE covers all activities proposed under the project. The core zone of impact is taken as direct impact of the new construction or reconstruction or rehabilitation of the project component. IEE also covers the direct impact of the sub-project component. Assessment is carried out for all components of environment covering terrestrial and aquatic ecology, soil, water, noise and socio economic aspects.

E. IEE Content

- 7. The IEE has been largely structured as per SPS, 2009 ADB's Environmental Assessment Guidelines (2003) and environmental safeguards- A Good Practice Source Book (December 2012). This includes following eight chapters including this introduction Chapter.
- Chapter 1- Introduction
- Chapter 2- Policy, Legal and Administrative Framework
- Chapter 3- Description of Project
- Chapter 4- Description of Environment
- Chapter 5- Anticipated Impacts and Mitigation Measures
- Chapter 6- Information Disclosure, Consultation, and Participation
- Chapter 7- Environment Management Plan and Grievance Redress Mechanism
- Chapter 8 Conclusion and Recommendation

F. Methodology

8. The following key steps were followed in this study: review of legal requirements, reconnaissance survey for identification of key issues data requirement and preliminary consultation, primary and secondary data collection, impact assessment, consultation with stakeholders, identification of impacts and mitigation measures, and institutional review.

G. Public Consultation

9. Extensive consultations were held with all stakeholders' that includes: local residents, gov't. departments/ agencies, other water users, and NGOs with intent to collect baseline information, for better understanding of the potential impacts and appreciate the perspectives/concerns of the stakeholders. Key information gathered were integrated in project design and used in formulating mitigation measures.

II. POLICY, LEGAL AND ADMINISTRATIVE FRAMEWORK

10. The legal framework of the country consists of several acts, notifications, rules and regulations to protect environment and wildlife. In 1976, the 42nd Constitutional Amendment created Article 48A and 51A, placing an obligation on every citizen of the country to attempt to conserve the environment. Specifically for the UEAP, the following environmental laws and regulations are applicable:

S. No,	Clearance s	Acts/Rules/Notifications/Guide lines and Application to Water Supply Projects	Concerned AgencyApplicable to Contract packageRespons ibility			Status of Compli a\nce	
		A. Pre-construction Stage					
1	Environme ntal Clearance	EIA Notification, 2006 amended till date, promulgated under Environment (Protection) Act 1986	State Environment al Impact Assessment Authority (SEIAA). If not constituted then MoEF	No	IA / PMU	Not required	
2	2 Forest Clearance for felling of trees and clearance for selling of trees and clearance for felling of for felling of fo		Level Committee constituted by the State Govt.	<u>No (No</u> <u>felling of</u> <u>trees or</u> <u>diversion of</u> <u>forest land</u> <u>required</u>)	IA / PMU	Not Require d	
		B. Implementati	ion Stage				
3	Permission for Sand Mining from river bed	Mines and Minerals (Regulation and Development) Act, 1957 as amended in 1972	No River Board Authorities/ Department of Mining Govt. of Uttarakhand		Contract or	Contract or will obtain the consent s from appropri ate authority	
4	Consents to establish a	Water (Prevention and Control of Pollution) Act, 1974 and	Uttarakhand Environmenta	Yes	IA/PMU	Consent to	

Table II-1: Environmental laws and Regulations

	operate Water Treatment Plant	amendments	Protection and Pollution Control Board - Dehradun			operate WTP located at Thakurd wara shall be obtained from UEPPC B
5	Authorization for Disposal of Hazardous Waste	Hazardous Wastes (Management, Handling and Transboundary movement) Rules, 2008	Uttarakhand Environmental Protection and Pollution Control Board – Dehradun	No	Contract or	
6	Consent for Disposal of Sewage from Labour camps	Water (Prevention and Control of Pollution) Act 1974	Uttarakhand Environmental Protection and Pollution Control Board - Dehradun	No	Contract or	
7	Use of Fly ash within 100 kms around Thermal Power plants	Fly Ash Notification, 1999 as amended 03.11.2009	MoEF	No	Contract or	
8	Pollution Under Control Certificate	Central Motor and Vehicle Act 1988	Department of Transport, Govt. of Uttarakhand	Yes	Contract or	
9	Installation of Generators	The Air (Prev. & Con. of Pollution) Act, 1980	Uttarakhand Environment Protection and Pollution Control Board - Dehradun	No	Contract or	
10	Employing Labour/ workers	The Building and Other Construction Workers (Regulation of Employment and Conditions of Service) Act, 1996 & The Building and Other Construction Workers Related Laws (Amendment) Bill, 2013	District Labour Commissioner	Yes	Contract or	
11	Permission for extraction of boulder and sand from river beds	Mines & Minerals (Regulation and Development) Act, 1957 and its amended in 1972	Department of Mines and Geology. Government of Uttarakhand	Yes	Civil Work Contract ors	
12	License for Storing Diesel and	Petroleum Rules, 2011. Hazardous Wastes (Management, Handling and	Commissioner of Explosives and	No	Contract or	

other	Transboundary movement)	Uttarakhand	
explosives	Rules, 2008.	Environmental	
		Protection and	
		Pollution Control Board –	
		Dehradun	


Applicable Environmental National and State Requirements for UEAP

DESCRIPTION OF THE PROJECT

III.

t.

1

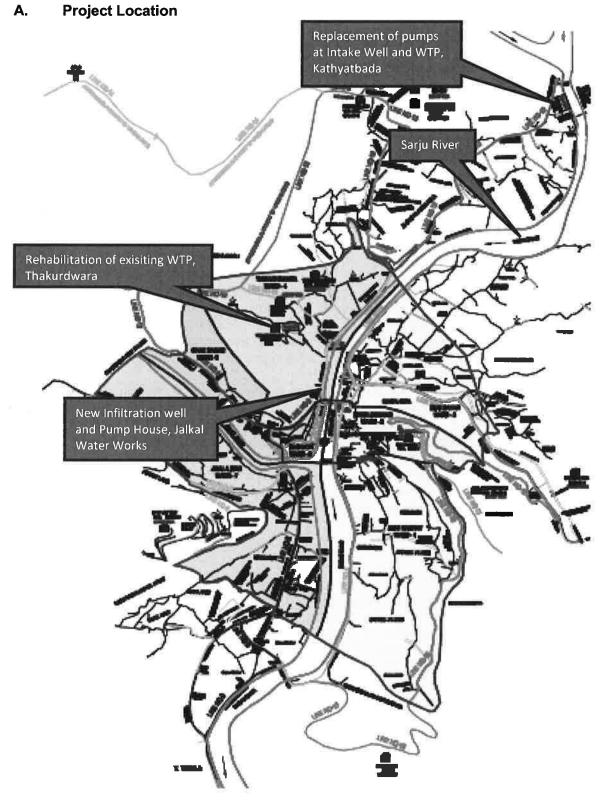

Project Location in Bageshwar

- **I.** Infiltration well works: Construction of new Infiltration well; Location: Jalkal water works.
- II. WTP Rehabilitaion: Rehabilatation of WTP; Location: Thakurdwara
- **III. Raw water transmission mains**: Replacement of raw water transmission main from proposed Infiltration well at Jalkal water works to Water treatment plant at Thakurdwara.
- IV. Pumps and Pumping Equipments installation or replacement works in Bageshwar:
 - a. Installation of clear water pumps at proposed Infiltration well; Location: Jalkal water works.
 - b. Replacement of raw water pumps at dry Intake well; Location: Kathatbada
 - c. Replacement of clear water pumps at 1.2 Mld WTP; Location: Kathyatbada

B. Proposed Category of the Project

- 11. Pursuant to the requirements of the ADB Safeguard Policy Statement (2009) proposed rehabilitation of water supply system in Bageshwar was screened to identify significance of potential impacts, determine the environmentally sensitive component, establish the needed level of assessment, and prescribe the information disclosure and consultations requirement to be complied by the Uttarakhand-Jal Sansthan. Consistent with the Environmental Assessment and Review Framework, the subproject was screened using the ADB rapid environmental assessment (REA) checklist-Water supply.
- 12. The environmental screening revealed that no protected or sensitive areas were traversed. There are no rare, threatened, and endangered species (flora and fauna) within the subproject corridor of impact. All being hill town, the most significant environmental impacts are potential increase in erosion, siltation, and landslide.
- 13. Existing water supply system in Bageshwar is proposed to be rehabilitated and reconstructed post disasted and no additional infrastructure is proposed. All impacts are site specific, and all impacts can be readily mitigated supporting a Category B classification.

C. Background of the Proposed Sub-project

14. Due to 16 -17th June, 2013 onwards floods few of the water supply components located along the river side have got damaged, Existing Wet Intake well and its pumping machinery located along the Saryu River have got damaged and is not operating. Pumping machinery of Dry type of intake well located along Saryu River has also got damaged and is not functioning. At present all the raw water pumping is through temporary pumping arrangements directly from Saryu River. Due to floods some of the units of WTP located at Thakurdwara got filled up with silt, Quality of treated water from this WTP has got degraded and is not delivering quality water as per desirable drinking water standards, due to the above reasons presently there is inadequate water supply in the Bageshwar town. After detailed assessment it concludes that the present water production is less than 0.96 MLD which is insufficient not only for present population, but insufficient for the Base Year (2014) and onward. For Bageshwar city the above stated issues need to be addressed immediately in order to bring the water supply service levels to the service levels of national standards. As per assessment report of UJS, the average per capita supply is about 52 lpcd after damages due to floods, on temporary

restoration of the scheme. The current service is much lower than the desired level (135 lpcd).

S. No.	Parameter	Demand	Existing System Capacity before flood damage	Supply from Existing system after flood damage	Gap/ Need for the Project
1	Water production	2.001mld (year 2014)	2.2 mld	0.96 mld	Gap of 1.041mld(year 2014)
2	Per Capita Demand	135 lpcd	135 lpcd	52lpcd	Gap of 83lpcd(year 2014)
3	UFW	15%	30%	30%	Hydraulically efficient system required
4	Intake Source	2.001 mld (year 2014)	2.2 mld	1.2 mld	1 Mld Intake well @ Jalkal pump house is damaged and completely inoperative; it needs reconstruction with improved design
5	Raw water Pumping Machinery	2.001 mld (year 2014)	2.2 mld	0.96 mld Through temporary arrangements	Replacement of raw water pumps needed
6	Water Production as per GOI standards	2.001 mld (year 2014)	2.2 mld	1.2 mld	Rehabilitation of 1 Mld WTP at Thakurdwara
7	Clear water Pumping Machinery	1.2mld (year 2014)	1.2 mld	0.348 mld Through temporary arrangements	Replacement of 1.2 mld Pumps

Table III-1: Demand and Supply Gap Parameters

The main reasons for gaps:

IMPACT DUE TO FLOODS

- Wet Intake well on river bank got damaged and is inoperable.
- During floods, submergence of raw water pumps.
- Presently raw water pumping is being done directly through Saryu River with the help of some temporary pumps and suction line arrangements. Temporary arrangements are not reliable and may not withstand any similar flooding in future.
- Pressure Filters got chocked up due to which WTP is unable to catter clean water

19

OTHER REASONS

- 15. In addition to the above, the following are the other reasons, which need attention, while taking up the proposed project.
 - 1. Water resource constraint
 - During summer, water level in the river reduces and the existing centrifugal pump sets are inefficiently operated due to higher suction lift resulting in reduced discharge.
 - 2. Deterioration of Existing facilities
 - The current WTPs design capacity is 2.2 mld but running at 0.96 mld due to deterioration of the plants and pump machineries.
 - Due to corrosion rising main capacities have reduced significantly
 - The existing distribution system is very old primarily laid in bits and pieces during in between 1975-1982, leading to leakages and transmission losses.
 - 3. Inappropriate planning
 - No initiative for augmentation of surface water abstraction.
 - The distribution network is deficient in effective hydraulics.
 - 4. Poor O&M
 - High transmission loss
 - The efficiencies of pumping machinery and transformers are deteriorated
 - 5. Funds constraint
 - Low budget allocation for water supply rehabilitation and augmentation

DESCRIPTION OF KEY REHABILITATION AND RECONSTRUCTION ACTIVITIES

16. To restore the water supply to the consumers as per standard level, the existing system needs rehabilitation, reconstruction and augmentation, which is tabulated as below:

S. No.	Parameter	Demand	Supply /capacity before flood damage	Supply/capacity after flood damage	Proposed Scheme to fill the Gap
1	Water production	2.001 mld (year 2014) 2.541 mld (year 2024)	2.2 mld 2.2 mld 2.2 mld	0.96 mld 0.96 mld 0.96 mld	Replacement/Reconstruction of non-functioning components and additional augmentation of 0.341 Mld to meet midterm demand (2024yr)
2	Per Capita Demand	135 lpcd	135 lpcd	77 lpcd	Gap of 58 lpcd to be filled by Replacement/Reconstruction of non-functioning

Table III-2: Proposed Scheme

S. No.	Parameter	Demand	Supply /capacity before flood damage	Supply/capacity after flood damage	Proposed Scheme to fill the Gap
			-		components and additional augmentation of 0.341 Mld
3	UFW	15%	30%	30%	With new scheme losses will come down; Approx. value not known since distribution network evaluation is not in scope of this project
4	Intake Source	2.001 mld (year 2014) 2.541 mld (year 2024)	2.2 mld	1.2 mld	Demolition of 1 mld damaged Wet Intake well and construction of new intake with 1.341 Mld capacity @Jalkal Water works
5	Raw water Pumping Machinery	2.001 mld (year 2014) 2.541 mld (year 2024)	2.2 mld	0.96 mld	Replacement of 1.2 mld pumps @ Kathyatbada and installation of 1.341 mld pumps at new Intake Well
6	WTP : Water Production as per GOI standards	2.001 mld (year 2014) 2.541 mld(year 2024)	2.2 mld	1.2 mld	Rehabilitation of 1 Mld WTP at Thakurdwara (0.341 mld augmentation works can be taken up in tranche-3 works)
7	Clear water Pumping Machinery	1.2mld (year 2014) 1.2mld (year 2024)	1.2 mld	0.348 mld	Replacement of 1.2 mld Pumps is proposed
8	Clear water Reservoir/Distribution lines/Transmission Lines	545 KI /50 km /53.8 km	545 KI /not known/not known	545 KI /not known/not known	Augmentation/rehabilitation works required can be taken up in Tranche-3 since scope is only limited to damage works

Following topics cover the detailed description of each individual water supply component which is proposed in this Sub-project in order to fill the demand supply gap as stated in table above:-

- Proposed Reconstruction of Source Intake Structure & Installation of New Pumping Machinery at Jalkal Water Works
 - i. Construction of 1.341 mld capacity Infiltration Well in place of existing 1 mld Wet Intake Well
- 17. Existing 1 mld Wet intake well is not functioning due to the damage caused by June, 2013 floods, after the inspection it was concluded to demolish this structure and construct a new Infiltration well of 1.341 Mld pumping capacity;

ii. Proposed Clear Water Pumping Machinery

ţ.

ñ

18. Following table gives the details of clear water pumps proposed for Infiltration well

Sr.No	Description	Location	НР	Capacity of pumps (LPM)	Head (m)	Quantity (Nos.)	Working	Working hrs
1	Installation of submersible pumps for newly proposed Infiltration Well along with all Electrical, Mechanical, and Automation and related, piping works.	Jalkal Water works	65	1400	110	2	1W+1S	16

Table III-3: Clear water pumps proposed for Infiltration well

• Proposed Replacement of Raw Water Rising main from Jalkal water works to WTP at Thakurdwara

19. Existing rising main of 80 mm Φ GI, 0.5 km in length from Jalkal pump house to WTP at Thakurdwara is inadequate to carry 1.341Mld(for design year) in 16 hours of pumping, Also it is not even adequate to carry 1 Mld (for base year) in 16 hrs of pumping Hence it is decided to replace this pipe with higher diameter pipe. Optimum pipe size to carry 1.341MLD flow worked out to be around 200 mm but since there is marginal difference in total cost of 150 mm and 200 mm hence 150 mm dia pipe is chosen for the proposed rising main as comparatively it will occupy less space along the alignment of existing 80 mm Φ GI

• Proposed Rehabilitation of WTP at Thakurdwara

20. At Thakurdwara WTP there is one inlet channel, one hopper bottom settling tank, two pressure filters and one autowash filter. The central vertical pipe of settling tank which exits coagulated water at the bottom of tank has got chocked up completely due to which currently there is a short circuit i.e. raw water from inlet channel is directly overflowing into the collection chamber of settling tank without undergoing any flocculation or clarification process. Since filters are also not functioning raw water is directly entering into the CWR then to distribution network without undergoing filtration processes; as informed previously several attempts were made by Jal Sansthan employees to get filters repaired but were unsuccessful. The existing settling tank can be put back into use after disilting and replacements of central vertical pipe and sludge value;

Following rehabilitation works are proposed at existing Thakurdwara WTP

- a Repair and Disilting of Hopper bottom Settling Tank; Disilting of Inlet channel
- b Replacement of filter media in 2 nos. of pressure filter of size 2 m Φ X 1.5 m height; 4 layer of media as follows:
 - Coarse Gravel media 6.7mm to 13.2mm
 - Fine Gravel media 2.36 mm to 4.75mm
 - Coarse Sand effective size 1mm to 2mm
 - Fine Sand of effective size 0.5 mm and uniformity coefficient Uc = 1.3 to 1.5
- c Reconstruction of alum godown (along with additional provision of Chlorination room) within the WTP premises; G+1 having plan area of 4mX 4m

d Bypass Arrangement from Inflow pipe near inlet chamber to CWR: ERW pipe 150mm Dia 5mm

• Proposed Replacement of Raw Water Pumping Machinery at Kathyatbada Dry intake well

21. Raw water pumps inside the existing Intake well are of 35 HP, Q=1000LPM, H=40, 2 nos are not functioning efficiently due to damage caused by the floods. As of now water is being directly pumped from Saryu River with the help of some temporary pumps and suction line arrangements; these temporary arrangements are not reliable and may get washed away in flash floods or rainy season. At existing dry intake well location river water level has gone down, this possibly may be due to shifting of river course. NPSHa is evaluated to check if there is any problem of negative suction. NPSHa of existing setup of pumps worked out to be around 10.0 m which can be considered to be on safer side on a condition that the new pumps which will be replacing the old have NPSHr at least1m less than the NPSHa. Also it should be ensured that while giving an order for new pumps NPSHa calculations is furnished to the pump manufacturer. Following table gives the details of raw water pumps proposed at kathyatbada dry intake well.

Sr.No	Description	Location	НР	Capacity of pumps (LPM)	Head (m)	Quantity (Nos.)	Working	Working hrs
1	Replacement of Raw Water pumps at Kathyatbada Dry Intake well including replacement of 4 sluice valves, 2 check valves and baseplates (Existing pumps are Centrifugal pumps)	Kathyatbada	25HP	1250	40	2	1W+1S	16

Table III-4: Raw Water Pumping Machinery at Kathyatbada D

• Proposed Replacement of Clear Water Pumping Machinery at Kathyatbada WTP

22. There is a clear water pump house within the premises of Kathyatbada WTP. Presently clear water pumps are of 100 HP, Q=1000LPM, H=275, 2 nos, 1W+1S. Being old the efficiency of pumps have gone down and are now delivering discharge of 800 lpm only against rated discharge of 1000lpm. In order to avoid water loss due to overflowing WTP units clear water pumps replacement is proposed. Following table gives the details of pumps proposed at clear water pump house in kathyatbada WTP

Sr.No	Description	Location	HP	Capacity of pumps (LPM)	Head (m)	Quantity (Nos.)	Working	Working hrs
1	Replacement of Pumps in Clear Water Pumphouse of Kathyatwada Water treatment Plant, Replacement of starters (Existing pumps are Centrifugal Multistage pumps)	Kathyatwada(WTP premises)	145 HP	1250	275	2	1W+1S	16

Table III-5: Clear Water Pumping Machinery at Kathyatbada WTP

23. While selecting the pumps the following aspects will be considered.

- Sufficient NPSH to avoid cavitation in the pumps.
- Since the raw water has high turbidity (having silt content), the pumps shall be provided with suitable screening arrangements to screen out the silt content at the pump suction.
- As the turbidity is more, pumps with lower speed shall be considered to avoid more wear over a period.
- Pumps, which can pump highly turbid water (about 2000 NTU) shall be proposed.
- Option of providing submersible pumps with railing arrangement to lift and lower the pumps will also be explored.

IV. DESCRIPTION OF THE ENVIRONMENT

A. Physical Environment

24. This section presents a brief description of the existing environment, including its physical, ecological resources, and socio-economic development of Sub project of Bageshwar. Broad aspects on various environmental parameters such as geography, climate and meteorology, physiography, geology, seismology, ecology, socio-cultural and economic development parameters that are likely to be affected by the proposed rehabilitation and reconstruction of water supply system in Bageshwar are presented.. Secondary information was compiled from relevant government agencies like the Forest

Department, Wildlife Department, State Environment Protection, and Pollution Control Board and Metrological Department. Payee

Geography

25. Uttarakhand lies in the northern part of India amidst the magnificent Himalayas and dense forests. The State is bordering Himachal Pradesh in the north-west and Uttar Pradesh in the South and shares international borders with Nepal and China. The State is comprised of 13 districts, these are; Pithoragarh, Almora, Nainital, Bageshwar, Champawat, Uttarkashi, Udham Singh Nagar, Chamoli, Dehradun, Pauri, Tehri Garhwal, Rudraprayag, and Haridwar. Geographically, the state lies in the northern Himalayas between 28°53'24" to 31°27'50" North latitude and 77°34'27" to 81°02'22" East longitude. The State has an area of 53,484 sq. km. and a population of about 8.48 million as per census 2001.



- **Districts of Uttarakhand**
- 26. Uttarakhand is divided into two regions and also called administrative divisions, basically following terrain: the Kumaon and Garhwal. The Kumaon division located southeast of the state and composed of Almora, Bageshwar, Champawat, Nainital, Pithoragarh, and Udham Singh Nagar. The Kumaon region is part of the vast Himalayan track and and the sub-mountains of Terai and Bhabhar. The region is drained by Gori, Dhauli, and Kali from the Tibetan mountains, and Pindari and Kaliganga which ultimately joins Alaknanda River. The Garwhal division is composed of Chamoli, Uttarkashi, Rudraprayag, Tehri Garhwal, Pauri, Dehradun, and Haridwar districts.and is entirely on rugged mountain ranges dissected by valley, and deep gorges. The Alaknanda River, the main source of the Ganges, traces its headwaters in this region.
- 27. The State is part of the Western Himalaya is further divided into four zones namely, the Tarai-Bhabar-Shivalik (Sub-Himalayas), Lesser-Himalayas, Greater-Himalayas, and Trans Himalaya (Tethys).

Topography, Geology and Soils

- 28. Bageshwar town is in the mountainous area and has an average elevation of 1,004 m. The project boundary is surrounded by mountains all sloping towards Gomati and Saryu rivers
- 29. The rock units exposed in various parts of Bageshwar district comprise current-bedded quartzite with associated volcanics, mica-talc schist, limestone, conglomerate, slate, quartzite, granodiorite, augen gneiss, migmatite and granite gneiss. Reference: "District Ground Water Brochure of Bageshwar District, Uttarakhand"
- 30. Soil in this region is of two types; Soils of lesser Himalaya and Soils of Greater or Central Himalaya. Majority of the area is covered by the first type. The soils in this area are exposed in massive mountainous tracts and tangled mass of series of ridges divided from each other by deep, narrow valleys. The soils of Lesser Himalaya are further subdivided into a) Soils of Summits and Ridge tops, b) Soils of Side Slopes, c) Soils of Glacio-Fluvial Valleys, d) Soils of Fluvial Valleys and e) Soils of Cliffs. The soils of Greater Himalaya have been broadly classified under a) Soils of Summits, Ridge Tops and Mountain Glaciers, b) Soils of Side Slopes, c) Soils of Upper Glacio-Fluvial Valleys and d) Soils of Cliffs. Reference: "District Ground Water Brochure of Bageshwar District, Uttarakhand"
- 31. The baseline data on soil quality will be generated by collection of representative samples by the contractor before commencement of construction works.

The proposed locations are

- 1. Location of proposed Infiltration well 1 Samples
- 2. Location of disposal of silt from the Infiltration well construction site 1 sample
- 3. Within the city limites where pipe laying will be done 1 Samples
- 4. Construction Camp/ storage yard/Location of labour camp 1 Samples

B. Climate and Meteorology

- 32. The State of Uttarakhand, with its highly varying topographical features, has shown an equally variegating climatic condition, ranging from hot and sub-humid tropical in the southern tract of Bhabhar to temperate, cold alpine, and glacial climates in the northern part of the high mountains.
- 33. Factors such as elevation, slope, proximity of glaciers, forests, mountain peaks and ridges and direction of mountain ranges together give rise to the great variations in climatic conditions, even at the micro and local levels. These attributes determine the temperature range as well as the distribution of rainfall.
- 34. However, the overall climatic condition in the State is governed by the southwest monsoon. It has a sub-tropical to temperate climate, with three pronounced seasons; summer, winter, and monsoon. The hilly terrain of the Himalayan region has snow cover and is severely cold during winter with snowfall normally occurring during the months of December to March. The climatic conditions of Almora, Nainital, Pithoragarh, Chamoli, Uttarkashi, Pauri and Dehradun are humid and cold.
- 35. The Garhwal region has a sub-temperate to temperate climate with maximum temperature recorded in the month of June is 45°C at Kotdwar while in the higher

reaches at Dudhatoli it only rises to 25°C. Temperature descends to a minimum of 1.3°C in January, and means monthly temperature for the region ranges from 25°C to 30°C.

36. The climate of Bageshwar town is temperate to sub-humid. Severe winter is the chief climatic feature in the district; In general town experiences a tropical to sub-tropical and sub-humid climate. January is the coldest month with mean maximum temperature of 10°C, the mean minimum temperature being about 2°C. June is the warmest month with the mean maximum and the mean minimum temperatures of 25°C and 15°C respectively. Most of the rainfall, about 75% of the annual value, occurs during monsoon months of June to September. July is the rainiest month followed by August.

C. Ambient Air Quality

- 37. The pristine environment and sparse population suggest that most part of the State have a very good air quality. Any point or non-point pollution sources of air pollution were not observed throughout the survey period. It was observed that the traffic on the roads is too low to cause unbearable air pollution due to vehicular exhaust. Finally, there are no industries recorded in or along the subproject area and hence any other source of atmospheric air pollution is not expected.
- 38. The air pollution level is well within the permissible limits because there are no major sources of pollution in the region. The baseline data on ambient air quality will be generated by collection of representative samples by the contractor before commencement of construction works. The selection of sampling location will be representative of residential, commercial, institutional, industrial and sensitive locations.

The proposed locations are

- 1. Location of proposed Infiltration well 1 Samples
- 2. Within the city limites where pipe laying will be done 1 Samples

D. Ambient Noise Level

- 39. Generally, noise pollution is not a problem in the state except in the urban areas like Dehradun.. Traffic, industrial, and festival/cultural noises, along with noise generated from construction activities, DG sets etc., are the most prominent sources of noise in the urban areas. Overall noise level in the town is calm except on the busy roads of Bageshwar.
- 40. During the construction period, a temporary increase in the noise levels are expected as there will be movement of construction machineries and construction activities to be done in the proposed rehabilitation of water supply system. Suitable noise barriers in the form of vegetation and timely scheduling of construction activities will help minimize these effects better.
- 41. It was observed that ambient noise scenario in residential, commercial, and sensitive areas in the study area are quite low in general. The baseline data on ambient air quality will be generated by collection of representative samples by the contractor before commencement of construction works. The selection of sampling location will be representative of residential, commercial, institutional, industrial and sensitive locations.
 - The proposed locations are

- 1. Location of proposed Infiltration well 1 Samples
- 2. Within the city limites where pipe laying will be done 1 Samples
- 3. Location where Raw water pumps will be replaced 1 Samples
- 4. Location where Clear water pumps will be replaced 1 Samples

E. Hydrology

- 42. Uttarakhand has tremendous water resources such as glaciers, lakes, rivers and other water bodies. Most of these have tourism importance like Milam, Pindari, Sunder Dhunga and Heeramani Glaciers; Seven Lakes in Nainital; and some wetlands. However these water bodies are located far from the Project area.
- 43. Generally, there has been an overall decline in water resources in the State. Hydrological studies over the last decades confirm the diminishing water resources and the worsening crises (Rawat et. al) as caused by the following factors which have resulted in the decrease in underground seepages. These have directly contributed to the reduction of water availability in and reduction of discharge in nallas as well as extensive disappearance of springs—the region's primary source of drinking water.
 - There has been a diminishing regulatory effect of glaciers of the Great Himalayan zone.
 - There is a long-term decreasing trend of stream discharges.
 - The capacities of the lakes have dwindled.
 - Surface runoff on the hillsides has shown high increase.
 - There has been an increase in floodwater and decrease in base flow water in channels and rivers.
 - Extensive soil erosion and landslips are recurring phenomena in the region.
- 44. The Sub-project is located on the bank of Sarju and Gomti River is Bageshwar (see Appendix 1. Rapid Environmental Assessment Checklist).

Water Drainage

- 45. The region of Uttarakhand is well drained by numerous rivers and rivulets locally known as Gad, Gadhera and Naula. The water resources of this region are of singular importance not only for the region but also for the whole Gangetic plains of north India. There are three main river systems are: (i) the Bhagirathi – Alaknanda basin – Ganges basin, (ii) The Yamuna – Tons basin, and (iii) the Kali basin.
- 46. The Ganges system drains the major part of the region covering the whole of the Garhwal, except the western part of Uttarkashi district, and the western part of Garhwal Himalayas from an altitude of 7,138 m meet at Devprayag and flow as the Ganges thereafter. The Bhagirathi is the main stream while the Alaknanda, Saraswati, Dauli Ganga, Berahi Ganga, Nandakini, Mandakini, Madhu Ganga, Pindar, Atagad, Bhilangana, Jad Ganga, the Kaldi Gad and the Haipur are the main tributaries to the Alaknanda and/or Bhagirathi, ultimately contributing to the waters of Ganges. The Nayar, which drains more than a half area of the Garhwal district, is an important tributary of the Ganga. The Yamuna-Tons system is also located in the Garhwal region. The Yamuna river rises at Yamunotri and is joined by important tributaries such as the Giri and more importantly, the Tons, which is its biggest tributary with 2.7 times greater volume of water than the Yamuna. The River Yamuna flows out of the hill areas through the Doon


valley and the Shivaliks, into Haridwar district, being joined in the Doon valley by several streams.

Water Quality

- 47. The Bageshwar City is situated on the bank of Sarju and Gomiti River. The raw and treated water quality during construction will be monitored. Construction debris will be disposed away from the source premises on daily basis to avoid any contamination..
- 48. There is very little documentation on the pollution status of rivers in Uttarakhand except that of the holy river Ganga and some other water bodies where there were at least limited monitoring studies recently. In terms of quality, the surface water of the State is unprotected from untreated wastewater, and runoffs from chemical fertilizers and pesticides. No proper sewage treatment facilities exist in the project area. The increasing pollution of water bodies constitutes the biggest threat to public health. At present, there is limited information available on the quality of fresh water resources in the State.
- 49. Based on limited records, the water quality of Uttarakhand's rivers, rivulets, and other natural water sources is generally good and no major source of water pollution was found. The hand pumps, natural water seeping out from mountains locally called as "Naula", and natural water springs locally called as "Gadhera" represent the ground water sources in the hills. There are no major sources of water pollution in terms of point or non point sources aside from natural landslides leading to deposition of debris in streams. Proposed subproject is not expected to have any adverse impact on the surface water quality. The baseline data on water quality will be generated by collection of representative samples by the contractor before the commencement of construction activity. The proposed location of the sample collection are
 - 1. Up stream of linfiltration well location 1 Samples
 - 2. Down Stream of Infiltration well location- 1 smaple

F. Seismology

- 50. The main tectonic elements of the region include the (i) central thrust and (ii) boundary fault. Several NE-SW lineaments are also known from the area and these traverses across different tectonic zones.
- 51. Seismically, the State constitutes one of the most active domains of the Himalayan region. Several damaging earthquakes are recorded from this region. As such, the region is classified under high seismic zone V. The modified mercalli intensity broadly



1. Figure IV-2 Seismic Zone of India

associated with the zone V is IX. The succeeding Figure shows the seismic zones of India.

G. Ecology

Forestry

52. The Forest Survey of India in their 2009 report reported a 4.75% increase in nation's forest cover from 1987 to 1997 translating to 3.13 million hectares but puts a caveat that improvement in remote sensing, data interpretation and definition of forestland between the census dates renders the result "strictly not comparable." Uttarakhand is ranked 9th in all-India in terms of forest covered area with 24,495 km² where Madhya Pradesh, Arunachal Pradesh, and Chhatishgarh leads with 77,700; 67,353; 55,870 km2, respectively.




Figure IV-3 Forest Cover by State, 2007 (FSI, 2009)

53. The distribution of forest cover by district is presented in the succeeding Figure and Table. The Garhwal region has more forest cover with 14,646 km compared to the Kumaon region with 9,869 km². However, they are almost equal in terms of distribution over its territory with 45% and 47% of covered with forest. The district of Pauri Garhwal, Uttarkashi, Nainital, and Chamoli have the largest forest cover accounting for 50% of all the state's total.

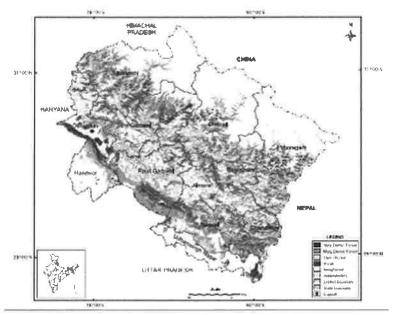


Figure IV-4 Uttarakhand's Forest Cover Map Table IV-1:District-wise Forest Cover, Uttarakhand

	District	Geographic Area	Forest C	over	Total Forest	% of	
Region			Very Dense	Moderate Dense	Open Forest	2007	Total 2007
	Uttarkashi	8,016	567	1959	619	3145	39.23
	Rudraprayag	1,984	246	581	298	1125	56.70
	Chamoli	8,030	427	1,586	682	2695	33.56
Garhwal	Pauri Garhwal	5,329	523	2,094	672	3289	61.72
	Tehri Garhwal	3,642	298	1,232	617	2147	58.95
	Dehradun	3,088	584	695	328	1,607	52.04
	Haridwar	2,360	26	354	238	618	26.19
Sub-Total		32,449	2,671	8,501	3,454	14,626	45.07
Kumaon	Pithoragarh	7,090	567	1,115	412	2,094	29.53
	Bageshwar	2,246	194	883	304	1,381	61.49
	Almora	3,139	222	928	427	1,577	52.04
	Nainital	4,251	601	1,919	573	3,093	72.76
	Champawat	1,766	336	571	274	1,181	66.87
	Udham Singh Nagar	2,542	171	248	124	543	21.36
Sub-Total		21,034	2,091	5,664	2,114	9,869	46.92
Total	-	5,3483	4,762	14,165	5,568	24,495	42.80
Note	Very Dense Forest – All lands with tree cover of canopy density of 70% and above Moderately Dense Forest – Canopy density between 40%-70% Open Forest – Canopy density between 10%-40%						

54. In terms of type, the state forest is classified into 9 forest types based on Champion and Seth (1968) system, the largest among which are the Himalayan Moist Temperate Forests, Sub-tropical Pine Forest Tropical Moist Decidous Forest, and Tropical Decidous Forests accounting for 37.15%, 28.81%, 19.08%, and 6.46%, respectively.

- 55. A wide variety of tree species is found in the mountains of Uttarakhand and enumerated in the succeeding Table according to altitude location. Some notable tree species are Poplar (*Populus ciliata*) and Eucalyptus (*Eucalyptus citriodora*) due to their fast growing and large market demands, and Khair (*Acacia catechu*) and Seesam (*Dalbergia sissoo*) for their ecological and economic importance. Sal (*Shorea robusta*), which is highly adapted to sandy soil are being used to stabilize river banks and islands in river beds. Oak (*Quercus* sp.) is another important species considered to be amongst the best wood in the world specially for making agriculture implements due to its very heavy hard with twisted fibers. The State Govt. of Uttarakhand has declared the oak tree (*Quercus* sp.) as a *Kalpvriksha* or wish fulfilling divine tree often treated as the signature plant of the Kumaon Himalayas as numerous logos and insignias with a stylized version of the deodar inscribed on them. Deodar grows in the temperate to alpine climate that is found between 3500 and 12000 feet in this region. Finally Chir pine (*Pinus roxburghii*) a source of resin, which is used for producing resin and terpentine.
- 56. The proposed subproject is not expected to have any adverse impact on the Forests and does not involve any tree cutting.

SI. No.	Common Name	English Name	Botanical Name	Altitude (m.)
1.	Kachnar	Orchid tree	Bauhinia variegata	600-900
2.	Cheed	Chir Pine	Pinus roxburghii	600-900
3.	Shal tree	Shal tree	Shorea robusta	600-750
4.	Banj	Oak tree	Quercus incana	1700-2000
5.	Kail	Blue pine	Pinus wallichiana	1800-2400
6.	Buransh	Rose tree	Rhododendron arboretum	200-2100
7.	Deodar	Cedar tree	Cedrus deodara	1800-2400
8.	Raga	Himalayan fir-low level	Abies pindrow	2100-2900
10.	Raga	Himalayan fir-high level	Abies spectabilis	2900-3600
11.	Spruce	Spruce	Picea smithiana	2400-2900
12.	Thuner	Himalayan Yew	Texus baccata	2400-2700
13.	Surai	Cypress	Cupressus torulosa	2300-2400
14.	Pangar	House Chestnut	Aesculus indica	1800-2100
15.		Strawberry tree	Cornus capitata	2000-2300
16.	Bhojpatra	Betula	Betula utilis	3000-3500
17.	Buransh	Rose Wood	Rhododendron arboreum	1700-2000
18.	Simaru	Rose Wood	R. campanulatum	2200-3000
19.	Moru	Oak tree	Quercus dilatata	2000-2500
20.	Kharsu/Khoru	Oak tree	Quercus semicarpifolia	2200-2400

Table IV-2: Predominant Top-Canopy (Tree) Species According to Altitude

Biodiversity

57. The State of Uttarakhand is endowed with rich bio-diversity as manifested by its approximately 64 percent forest cover. The State has established six national parks and six wildlife sanctuaries for the conservation of flora and fauna. Such areas include the Nanda Devi National Park, Valley of Flowers, Gangotri National Park, Govind Pashu Vihar National Park, Rajaji National Park, Jim Corbett National Park, Kedarnath Wildlife Sanctuary, Askot Musk Deer Sanctuary, Mussoorie Sanctuary, Binsar Wildlife Sanctuary, Sanadi Sanctuary, and Govind Wildlife Sanctuary—all of which are being

looked after by the Uttarakhand government. A positive remark on the State is that it maintains rich wildlife outside their protected areas.

SI. No.	Protected Areas	Year	Unit	Statistics
1.	National Parks			
	(i) Number	2009	No.	3
	(ii) Area	2009	Sq. Km.	4083
2.	Wildlife Sanctuaries			
	(i) Number	2009	No.	5
	(ii) Area	2009	Sq. Km.	2396
3.	Important Wild Animals			
	(i) Musk Deer	2001	No.	160
	(ii) Cheetal	2001	No.	35000
	(iii) Himalayan Black Bear	2001	No.	375
	(iv) Elephant	2002	No.	1582
	(v) Tiger	2003	No.	245
	(vi) Leopard	2003	No.	2090

Table I	V-3·	Wildlife	in	Uttarakhand
ι αρίς ι	¥-J.	TAIICING		Vilaraknanu

- 58. The Himalayas represent one of the most fascinating biota (fauna and flora) all over the world, both in terms of quality and quantity. This is evident from the fact that more than 50 percent of all biota can be found only in the Himalayan region. Such fact is brought about by the region's uniqueness in terms of favorable climatic conditions, natural habitats, and soil types.
- 59. The State of Uttarakhand is represented by Biogeographic Zones 2B Western Himalaya and 7B Siwaliks ¹ in this region. About 18.7 % of the total area under the Forest Department has been clearly earmarked for biodiversity conservation by the creation and management of 12 Protected Areas (PA) and a biosphere reserve in the State.

SI. No.	National Park	Year of	Area	District
		Establishment	(sq.km)	
1	Corbett NP	1936	521	Garhwal
2.	Nanda Devi NP	1982	630	Chamoli
3.	Valley of Flower NP	1982	87	Chamoli
4.	Rajaji NP	1983	820	Dehradun and Haridwar
5.	Gangotri NP	1989	2390	Uttarkashi
6.	Govind NP	1990	472	Uttarkashi

Table IV-4	1 National	l Parke in	Uttarakhand
	$\mathbf{T}_{\mathbf{i}}$ is a constant		ollaraniana

Source: Wildlife and Protected Areas, ENVIS, 2002

Table IV-5:	Wildlife	Sanctuaries	in	Uttarakhand

SI.No.	Sanctuary	Ýear of Establishment	Area (sq.km.)	District
1.2	Govind WLS	1955	521	Uttarkashi
2.	Kedarnath WLS	1972	957	Chamoli
3.	Askot WLS	1986	600	Pithoragarh
4.	Sonanadi WLS	1987	301	Garhwal
5.	Binsar WLS	1988	46	Almora
6.	Musoorie WLS	1993	11	Dehradun

Source: Wildlife and Protected Areas, ENVIS, 2002

¹ Negi, A.S., Status, Distribution and Management of Mountain Ungulates in Uttaranchal, Envis Bulletine, 2002

- 60. Variations in the topography of high mountain ranges and deep valleys and altitudes from sea-level portions give the project districts different habitats for a variety of fauna and in turn resulted in the enriched biodiversity in the region. The common wildlife reported from the forests includes Tigers, Panthers, Civet Cats, Leopard Cats, Jungle Cats, Himalayan Silver Fox, and the Jackal. Various species of deer including the Musk Deer and the Barking Deer also roam in the districts. Sambhar and Gural as well as the Bear and the Porcupine are also found in the project area. The flying mammal Bat is also common in the area. Other animals in the region include the Chipmunk, the Rhesus Monkey and the Flying Squirrel. Discussion with local people during the survey process generated reports on the presence of Leopards, Deers, Foxes, and Wild Pigs. Some important information about wildlife of Uttarakhand is given in the Table below.
- 61. Proposed subproject is not expected to have any adverse impact on the biodiversity.

SI. No.	Protected Areas	Year	Unit	Statistics
1.	National Parks			
	(i) Number	2009	No.	3
	(ii) Area	2009	Sq. Km.	4083
2,	Wildlife Sanctuaries			
	(i) Number	2009	No.	5
	(ii) Area	2009	Sq. Km.	2396
3.	Important Wild Animals			
	(i) Musk Dear	2001	No.	160
	(ii) Chital	2001	No.	35000
	(iii) Himalayan Black Bear	2001	No.	375
	(iv) Elephant	2002	No.	1582
	(v) Tiger	2003	No.	245
	(vi) Leopard	2003	No.	2090

Table IV-6: Wildlife in Uttarakhand

I	able	IV-	7:	List	of I	Mai	or	Flora

Sr No	Local Name	Scientific Name			
Trees					
1,	Buransh	Rhododendron arboretum			
2,	Deodar	Cedrus polycarpos			
3.	Chir	Pinus roxburghii			
4.	Surai	Cupressus tourulose			
5.	Padam	Prunus cornuta			
6.	Mehal	Pyrus pashia			
7.	Otis	Alnus nepalensis			
8.	Ayar	Lyonia ovalifolia			
9.	Kafal	Myrica sapida			
10.	Akhrot	Juglana regia			
11.	Bhimal	Grewia optiva			
12.	Ritha	Sapijdus mukorossi			
13.	Tun	Toona ciliate			
14.	Nimla	Ficus auriculata			
15.	Timur	Zanthoxylum tamala			
16.	Kharik	Celtis eriocarpa			
17.	Chamkhirik	Carpinus viminea			
18.	Katmon	Betula alnoides			
19.	Kajal	Acer acuminatum			
20.	Katoj	Castanopsis tribuloides			
21.	Kirmola	Acer oblongum			

Sr No			
22.	Kandru	llese dipyrene	
23.	Banj	Quercus semicarpifolia	
Shrubs			
1.,	Kala Hisalu	Rubus lasiocarpus	
2.	Karoz	Carissa spinarium	
3.	Kobra Plant	Arisama helleborifollium	
4.	Kandali	Urtica parviflora	
5.	Satavar	Asparagus racemosus	
6.	Dudhi	Hollerrhena antidysentricr	
7.	Bajradanti	Potentilla fulgens	
8.	Banfasa	Viola surpans	
9.	Bach	Acorus calamus	
10.	Nakol	Urticor dioica	
11.	Patyura	Pteraacanthus angustifrons	
12.	Dudhia	Taraxacum officinale	
13.	Vatula	Flemingia fruticulose	
14.	Belmur	Flacourtia indica	
15.	Nirghesi	Delphinium denudatum	
16.	Silfoda	Bergenia gossypina	
17.	Jula	Gerbera grassypina	
18.	Jatamasi	Nardostachys grandiflora	
Grasses			
1	Dub	Cynodon dactylon	
2.	Kush	Sucharum spontanour	
3.	Gol ringal	Chimonobambusa falcate	
4.	Tachita	Apluda muticr	
5.	Dev ringal	Thamnocalamus facloueri	
6.	Jhugra ringal	Arundinaria jaunsarensis	
7.	Thamgil	Thamnocalamus spathiflorus	

ł.

1

Table IV-8: List of Major FaunaList of Major Fauna

S	. Wild Animals		
No.	Local Name	Name Scientific Name	
1	Guldar	Panthera Pardus	
2	Kala Bhalu	Selenarctos thibetanus	
3	Ghural	Memorhaedus goral	
4	Kakar	Muntiacus muntjak	
5	Khirao	Capricornis sumatraensis	
6	Jangli Suar	Sus-scrofa cristatus	
7	Chitrola	Martes flarigula	
8	Langoor	Presbyits entellus	
9	Khargosh	Lepus nigricollis	
10	Sehi	Hystrix indica	
11	Gidar	Canis aureus indicus	
12	Jangli Billi	Felis chaus	
13	Gilehri	Eurambulus pennanti	
14	Bandar	Macaques mulatta	
S.	Birds		
No	Local Name	Scientific Name	
1	Chir Fijent	Catreus wallichii	

S	S 6	Wild Animals		
No.	Local Name	Scientific Name		
2	Kalij Fijent	Lophura Leucomelana		
3	Koklaj Fijent	Pucrassia macrolophus		
4	Kala Irgal	Letinaetus makavensis		
5	Karorla	Urocissa erythsorhyncha		
6	Ullu	Strix aluco nivicola		
7	Baaj	Flaco severaus		
8	Kala Titar	Francolinus francolinus		
9	Papiha	Cuculus varius		
10	Tota	Psittacula humalayana		
11	Chakor	Alectoris graeca chuker		
12	Hariyal	Treron spenura		
13	Pashchimi Tregopan	Tragopan meloccephalus		
14	Bulbul	Pyconotus cafer		
15	Maina	Aerioctheres tristis		
16	Fakhta	Streptobelia orientalis meena		
17	Gidh	Gyps himalayensis		
18	Kauwa	Carvus macrornynchos		
19	Saat Bahen	Teyrdoides striatus		
20	Neelkanth	Garrulus Lanaclatus		

Biosphere Reserves

- 62. The Biosphere Reserve is the top category after Wildlife Sanctuary and National Park in the Country. Out of the 14 Biosphere Reserves situated in India, the Nanda Devi Biosphere Reserve (NDBR)—established second among the 14—is situated in the State of Uttarakhand. It extends in the three districts of Chamoli (Garhwal), Pithoragarh, and Bageshwar (Kumaon). The Nanda Devi National Park (NDNP) and the Valley of Flowers are UNESCO World Heritage Site declared in 1988. The NDNP is located in the transition range between the Zanskar range and Himalayan foothills with 97 species of plants including many rare and almost extinct plants like Saussurea sudhanshui, Nardostachys grandiflora, Picrorhiza kurroa, Cypripedium elegans, C. himalaicum, Dioscorea deltoidea and Allium stracheyi. There are also 83 animal species including the Bharal (Pseudois nayaur), Himalayan Musk Deer (Moschus chrysogaster), Mainland Serow (Capricornis sumatraensis), Himalayan Tahr (Hemitragus jemlahicus), Goral (Nemorhaedus goral), Snow Leopard (Panthera uncia), Common Leopard (Panthera pardus), Himalayan Black Bear (Selenarctos thibetanus), Common Langur (Presbytis entellus), and Rhesus Macaque (Macaca mullata). Also, there are about 114 avian species and 27 species of butterflies in the NDNP
- 63. The Rajaji National Park was established in 1983 protecting sections of the tropical deciduous forest area of the Shivalik Hill range on the Himalayan foothills. The Park covers 820.42 square kms, along the Haridwar, Dehradun and Pauri Garhwal. The park has a vast Sal forest, and mixed forest mostly covered with *Acacia catechu* and *Vetiveria zizanioides*. It is refuge to approximately 49 species of mammals, 315 species of birds, 49 species of reptiles, 10 species of amphibians and 49 of Piscean species. This park has the largest population of elephants in Uttarakhand and a large population of tigers and leopards. Noteable animals seen in the par are the Wild Cat, Goral, Rhesus Macaque, Himalayan Yellow Throated Marten, Monitor, Lizard, Indian Hare, Sloth, Himalayan Black Bear, King Cobra, Jackal, Barking Deer, Sambar, Wild boar, Indian Langur, Indian Porcupine and Pythons. The population of birds consists of the Great


Pied Hornbill, Himalayan Pied Kingfisher, Sparrows, Fire Tailed Sunbird and the Peacock (Indian National Bird).

- 64. The Jim Corbett National Park covers 520 sq kms of Savannah-type grasslands and Sal forests. Declared as a Tiger Reserve in 1973, the Park has a rich diversity including the White Tiger, Throated Martem, Himalayan Palm Civet, Indian Grey Mongoose, Para, Kakka, Ghoral, Bar-headed Goose, Duck, Grepe, Snipe, Turtles, Python, Common Otter, Porcupine, Clack-taped Hare, Chital, Spotted Deer, Viper, Cobra, Krait, King Cobra, Tortoise, Graylag, Sandpiper, Gull, Cormorants and Egrets. There are 488 species of flora found protected in the Park including Sal, Savannah Grass, Anogeissus-*Acacia catechu* forests, *Mallotus philippensis*, Jamun and *Diospyros tomentosa*.
- 65. The Govind National Park covers an area of 957 sq. kms in Uttarakashi and a sanctuary for the endangered Snow Leopard and some other 15 species of mammals and 150 species of birds that includes the Himalayan Black bear, Brown bear, Musk deer, Bharal, Himalayan Tahr, Serow and Common leopard. The endangered birds found in this region are Monal Pheasant, Koklas Pheasant, Bearded Vulture Himalayan Snow Cock, Golden Eagle, Western Tragopan, Steppe Eagle and Black Eagle. Other varieties of birds include Owls, Pigeons, Minivets, Thrush, Warblers, Bulbul, Cuckoo and Finches.
- 66. The Valley of Flowers is a World Heritage Site located in Chamoli. There are hundreds of species mostly being Orchids, Poppies, Primula, Calendulas, Iris, Lily, Roses, Violets, Rhododendron, Angelica, Himalayan Fritillary, Daisies and Anemones and also supports a variety of mammals like the Himalayan Tahr, Snow Leopard, Musk Deer, Red Fox, Common Langur (a type of monkey), Bharal, Serow, Himalayan Black Bear, Himalayan Brown Bear, Pica (Mouse hare). A huge variety of butterflies and birds are also found in the valley including Himalayan Golden Eagle, Griffon Vulture, Snow Partridge, Himalayan Snow Cock, Himalayan Monal, Snow Pigeon, and Sparrow Hawk.

H. Socio-Economic

Social and Cultural

- 67. The State of Uttarakhand occupies a total land area of 53,483 sq. km. which is 1.73 percent of India's total land area. Demographically, the State has a population of 10,116,752 as per the 2011 census consisting of 51 percent males and 49 percent females. Out of these, 7,026,084 people live in rural areas spreading over 16,623 revenue villages settled in 39,967 habitations. The habitation's population is scattered between small streams and rivers and is spread over 20 to 70 degree slopes of the Himalayan and the Lesser Himalayan regions.
- 68. The State is divided into Garhwal and Kumaon divisions. Administratively, the State is divided into 13 districts, 49 tehsils and 95 blocks. Garhwal division has seven hill districts with one located in the foothills (Haridwar). Kumaon division, on the other hand, has six districts—one in the foothills (Udham Singh Nagar). There are 16,177 villages in the State and 7,227 gram panchayats. Of the total number of villages, 5,868 are not connected to all weather roads.

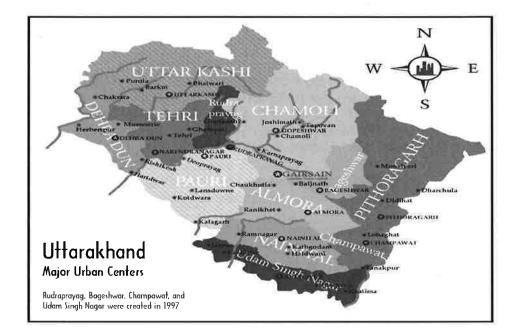

- 69. The schedule caste and schedule tribe population in the State is significant, averaging 17.9 percent and three percent respectively. The population density is 159 persons per sq.km.—considerably lower than the national average of 324 persons per sq.km. Rural population constitutes about 74% while urban population composes the remaining 26% of State's total populations. About 70% of the State population lives below the poverty line which is way above the national average of 46%. Literacy rate in the State is 71.6%.
- 70. The State recorded 19.2% decadal growth during the 1991-2001 census period which is close to the national growth rate of 21.3 %. The district of Nainital registered the highest decadal growth rate with 32%, followed by Udham Singh Nagar with 27.8%.

Land Use and Land Use Pattern

- 71. The land use pattern of Uttarakhand is strongly governed by the following: elevation, climate, mountainous terrain, lithological type, topography, surface hydrology, sunlight in the fields of forestry and agriculture, alpine meadows, sparse vegetation (scrub), grazing land, barren land, and human settlement. The human settlements are mainly located in the shallow water zones or around the localities nearer to springs.
- 72. Forest is the main land use in the State and nearly 64 % of the geographical area is under the varying forest densities (cover). Tree line is clearly demarcated above 2900 m elevation. Agriculture is confined to areas of low reliefs which are underlined by weak rock formation (i.e. schists, phyllites, weathered gneisses, and crushed quartzite). The cultivated land, approximately 11.5 % of the total geographical area, is either terraced/semi-terraced or plain. Other land use categories such as meadows, grazing lands, and scrubs do not exhibit definite relationship with lithology. It is also observed that the south-facing hill slopes are covered by lush green forests.

Table 19-9. Land Othisation In Ottarakitanu					
SI. No.	Land-use	Period / Year	Unit	Statistics	
1	Total Reported Area	2006-07	Hectare	5,666,878	

Table IV-9: Land Utilisation in Uttarakhand

SI. No.	Land-use	Period / Year	Unit	Statistics
2.	Forest Area	2006-07	Hectare	3,465,057
3.	Culturable Waste Land	2006-07	Hectare	366,713
4.	Fallow Land	2006-07	Hectare	108,132
	(i) Current Fallow	2006-07	Hectare	44,064
	(ii) Fallow Land other than Current Fallow	2006-07	Hectare	64,068
5.	Barren & Unculturable Land	2006-07	Hectare	311,849
6,	Land under Non-agricultural Uses	2006-07	Hectare	160,649
7.	Permanent Pasture & Other Grazing Land	2006-07	Hectare	220,286
8.	Land under Misc., Tree Crops and Groves	2006-07	Hectare	269,042
	not included in Net Area Sown			
9.	Net Area Sown	2006-07	Hectare	765,150

Source: Uttarakhand at a Glance 2009-10, Govt. of Directorate of Economics and Statistics

Health

I.

73. The Total Fertility Rate of the State is at 3.6 while the Maternal Mortality Ratio is at 517 (SRS 2001-03). Both of which are higher than the national average. The sex ratio in the State is 962 slightly higher than the 933 All-India. Comparative figures of major health and demographic indicators are mentioned below.

S.No.	ltem	Uttarakhand	India	
1	Total population (Census 2001) (in millions)	8.5	1,028.61	
2	Decadal Growth (Census 2001) (%)	20.41	21.54	
3	Crude Birth Rate (SRS 2007)	21.0	23.5	
4	Crude Death Rate (SRS 2007)	6.7	7.5	
5	Total Fertility Rate (SRS 2006)	3.6	2.9	
6	Infant Mortality Rate (SRS 2007)	43	57	
7	Maternal Mortality Ratio (SRS 2001 - 2003)	517	301	
8	Sex Ratio (Census 2001)	962	933	

Table IV-10: Health Indicators of Uttarakhand

Source: RHS Bulletin, March 2007, M/O Health & F.W., GOI

74. The health infrastructure of the State is described in succeeding Table. There are only 34 Obstetricians / Gynecologists and 18 Pediatricians in the State. Such numbers are way below the estimated State requirement of 49 each. Some of the essential requirements of the new State include basic primary health care, pre and post-natal care, and nutritional status and preventive care. Accessibility to health services with the aid of improved road conditions is essential to put progress in the health indicators of the State. Post disaster 2013 water supply facility provided to population in and around the sub-project area has been adversely affected. With better water supply system and delivery of appropriate quantity and quality of water, health scenario will also improve.

Particulars	Required	In position
Sub-centre	1,294	1,765
Primary Health Centre	214	232
Community Health Centre	53	49
Multipurpose worker (Female)/ANM at Sub	1,997	1,785

Table IV-11: Health Infrastructure of Uttarakhand

Centres & PHCs		
Health Worker (Male) MPW(M) at Sub Centres	1,765	656
Health Assistant (Female)/LHV at PHCs	232	159
Health Assistant (Male) at PHCs	232	147
Doctor at PHCs	232	182

Source: RHS Bulletin, March 2007, M/O Health & F.W., GOI

J. Literacy

75. In terms of the population's literacy, Uttarakhand recorded an overall literacy rate of 71.6% in 2001, marking a significant improvement from 57.7% in 1991. Meanwhile, the overall literacy rate in rural areas is 68.1%. The succeeding Table shows the literacy of Uttarakhand. The male literacy rate is 83.30% and female literacy rate is 59.60% which is comparatively high from the national average. It indicates that the rural population needs more education facilities to bridge the gap with that of the urban areas.

Literacy Rate 2001	% of Total Population	
Total	71.60	
Males	83.30	
Females	59.60	
Scheduled Caste		
Total	63.40	
Males	77.30	
Females	48.70	
Scheduled Tribes		
Total	63.20	
Males	76.40	
Females	49.40	
School education		
Percentage of Pre- Primary/Primary schools to total institutions	69.76	
Percentage of Middle schools to total institutions	19.75	
Percentage of High schools/Higher Secondary to total institutions	10.48	

Table IV-12: Literacy Rate in Uttarakhand

Source: Uttarakhand at a glance 2006-07

- 76. The general enrollment and access to primary schools has seen a tremendous boost in the last decade. Such improvements are brought by the increased availability of functional primary schools and the initiation of the Education Guarantee Scheme in the State. Cultural and Archaeological Resources
- 77. The State of Uttarakhand has a great range of cultural practices. Festivals and cultural activities are being celebrated throughout the year in the State. The major fairs and festivals of the Garhwal region include the Hatkalika Fair, Tapkeshwar Fair, Surkhanda Devi Mela, Kunjapuri Fair, Lakhawar Village Fair, and Mata Murti Ka Mela. On the other hand, major fairs and festivals in the Kumaon region consist of Uttarayani Mela, Shravan Mela (Jageshwar), Kartik Poornima at Dwarahat, Kasar Devi fair, and Nanda Devi

melas. Baheshwar being situated at the confluence of the rivers Saryu and Gomti is considered to be 'Kashi' of the north. Bageshwar is famous for its Bagnath Temple, which is dedicated to lord Siva. This sacred Shrine was constructed during the reign of the Chand dynasty. A huge fair is held at this location every year on the festival of Shivratri. Pilgrims from all over the country come to this shrine on temple tours, especially during the festival of Shivratri. The fair is organized every year, at the time of 'MakarSankranti' in Bageshwar around the Bagnath temple complex.

78. There are no heritage sites listed by Archaeological Survey of India (ASI) within the study area hence, the proposed project activities do not have any adverse impact on these sites. There are few small temples/ shrines located along the project corridors, but none of them will be affected by the subproject and the construction activity is restricted to the available land. In terms of the area's common property resources (CPR) such as public wells, water tanks, play grounds, common grassing grounds or pastures, market areas and community buildings, none will be affected by sub-project.

79. Economic Development

Transportation and Communication

- 80. Transportation system is a key factor in the socio-economic development of any State. Roads are logically the critical inputs to the growth of all the sectors. Aside from road systems, the State of Uttarakhand is connected to other states via rail and air transportation systems. Dehradun, Haridwar and Kathgodam are the major railway stations connected to various parts of the country. Jolly Grant near Dehradun is the lone airport present in the State. As per statistical data from 2006-07, Uttarakhand has a total road network of 23,274 km of which 2,228.90 km comprises the National Highway (1,328.30 km with State PWD and 900.60 km with BRTF); 1,553.00 km comprises the State Highway; 579.85 km covers the MDR; 7,154.88 km comprises the ODR (6723.90 km with State PWD and 430.98 km with BRTF), and 7,250.53 km to the Village Road. Light vehicle roads constitute of about 2,633 km.
- 81. Density of road length per 100 sq. Km. is 45 km which is very low compared to the national average of 97 km. Only about seven percent of the roads in the State are built in two-lane standards while 50 percent are paved. About a third of the higher class paved roads are in poor condition and over 70 percent of the light-vehicle roads need to be repaired or rehabilitated. Due to the lack of road connectivity, vast areas of the State are inaccessible. Such problem influences the population to 'chunk' in far flung areas of the State remaining to be under-developed and devoid of educational and health facilities and employment opportunities.
- 82. The road density per 100 sq. km. of the total area in Garhwal region is 30 km whereas road density in Kumaon region is 37 km. In terms of population, Garhwal region has 234 km of roads per lakh and the corresponding figure in Kumaon is 266 km. Motor vehicles has increased with the annual growth rate of 11 percent accounting to 44,7000 vehicles in 2003. PWD is the principal agency responsible for the management of roads in the State.

Industrial Development

83. The State has very few industrial units mainly because of lack resources. In the hilly terrains, industries promoted include food processing, fruit processing, medicinal/herbal

plants, and horticultural/floriculture-based industries. In the plain districts of Haridwar, Udham Singh Nagar, and other places, capital intensive and high-value addition industries are being encouraged by the government. In 2003-04, there were 178 large and medium-scale industries with total investment of Rs. 500,700 lacs providing employment to about 44,000 employees. Small scale industries, on the other hand, employ about 129,782 of the population.

84. In recent years, Uttarakhand has emerged as one of the attractive industrial destinations in India. In this regard, the government is encouraging private participation in all industrial activities in the State. The New Industrial Policy announced in 2003 by the State government puts in place the regulatory framework for Uttarakhand's industrialisation. The New Industrial Policy indicates that private resources may be tapped while promoting integrated Industrial States in Uttarakhand. The State government provides assistance in establishing small and medium sized agro parks, food parks, and the likes which in turn are expected to provide common infrastructure facilities for storage, processing, grading, and marketing.

K. Energy and Electric Power Potential

85. Uttarakhand has an estimated hydro power potential of approximately 20,200 MW. However, only 1,130 MW has been tapped at present. Meanwhile, 4,170 MW projects are under implementation and 3,800 MW projects are allotted to Central, State and private sectors. Thirty-nine projects with a potential of 6,374 MW have been identified for PFR under PMs Hydro Initiatives.

Although Uttarakhand is a power surplus State, a lot needs to be done to harness the untapped potential and sale the surplus power to make this a GDP driver sector for the State.

L. Aesthetic and Tourism

86. Tourism is one of the strong pillars of the State economy. The State has high growth potential for tourism, be in nature, wildlife, adventure or pilgrimage tourism. The State received 10.5 million domestic tourists in the year 2000-01, 11.6 million in the year 2001-02, and 12.9 in the year 2002-03, registering an average growth of 10.7 percent. Expenditure on schemes for tourism development and promotion in the State has progressively increased over the years. In the current five year plan, about Rs. 860 million have been spent, which is about 10 times the amount spent during 1980-85. Some of the major destinations with tourism potential include Haridwar (called 'The Gateway of God'), Rishikesh (the birth place of Yoga), Dehradun, Mussoorie, Almora, Kedarnath, Badrinath, Yamunotri, Gangotri, Jim Corbett National Park, Nainital, Ranikhet, and Pithoragarh.

Project Activity	Start	Completion	Total duration of the project activity
Sub-Project Appraisal Report	September 2013	December 2013	4 Months
Detailed Project Report and Bidding Document	March 2014	May 2014	3 Months

M. Project Implementation Schedule

Bid invitation, evaluation and award	June 2014	August 2014	3 Months
Clearances and handover of site to contractor	August 2014	September 2014	1 Month
Construction	September,2014	February, 2016	18 months

V. ANTICIPATED ENVIRONMENTAL IMPACTS AND MITIGATION MEASURES

- 87. Water supply infrastructure was screened using the ADB's rapid environmental assessment (REA) checklist for Water Supply.
- i) The individual environmental screening checklist is provided in Appendix 1 of this report.
- ii) No environmental impacts related to siting. Project area section is not located inside or near a cultural heritage site, protected area, wetland, and mangrove, estuarine, buffer zone of protected area or special area for protecting biodiversity. <u>There are no rare,</u> <u>threatened, and endangered species (flora and fauna) within the subproject corridor of impact.</u>
- iii) **Potential significant environmental impacts.** The potential significant environmental impacts are related to the excavation and disposal of earth during construction and inconvenience to local commuter during laying of pipes crossing roads.
- 88. The beneficial impacts still outweighs the potential environmental impacts. The beneficial impact includes better water quality and reliability of supply.

SL No.	Environmental Attributes	Pre- Construction Stage	Construction Stage	Operation Stage
1.	Physical Environment	No Impact	No Impact	No Impact
	Geography	No Impact	No Impact	No Impact
	Topography, Geology and Soils	No Impact	No Impact	No Impact
2.	Climate and Meteorology	No Impact	No Impact	No Impact
3.	Ambient Air Quality	No Impact	Reversible and Insignificant during Construction Stage	No Impact
4.	Ambient Noise Level	No Impact	Reversible and Insignificant	No Impact

A. Screening of Environmental Impacts

			during Construction Stage	
5.	Hydrology	No Impact	No Impact	No Impact
	Water Drainage	No Impact	Reversible and Insignificant during Construction Stage	No Impact
	Water Quality	No Impact	No Impact	No Impact
6.	Seismology	No Impact	No Impact	No Impact
7.	Ecology	No Impact	No Impact	No Impact
	Forestry	No Impact	No Impact	No Impact
	Biodiversity	No Impact	No Impact	No Impact
	Biosphere Reserves	No Impact	No Impact	No Impact
8.	Socio-Economic	No Impact	No Impact	No Impact
	Social and Cultural Development	No Impact	No Impact	No Impact
	Land Use and Land Use Pattern	No Impact	No Impact	No Impact
	Health	No Impact	No Impact	No Impact
	Literacy	No Impact	No Impact	No Impact
	Transportation and communication	No Impact	No Impact	No Impact
	Industrial Development	No Impact	No Impact	No Impact
9.	Cultural and Archaeological Resources	No Impact	No Impact	No Impact
10.	Aesthetic and Tourism	No Impact	No Impact	No Impact

B. Impact and mitigation measure during planning and design phase

- 89. There are no significant adverse environmental impacts on topography, soil and geographic significance during the planning and design phase based on the environmental screening of the sub-project in Bageshwar.
- 90. Impacts on Climate. Ambient Air Qaulity, Noise Level, Seismic, Economic, Cultural and Aesthetics are insignificant in the planning and design stage.

-

Environmental Attributes and Project Activity and its Impacts	t Mitigation
--	--------------

	,
Project Establishment and pre construction activity and its social Impacts	Open liaison channels shall be established between the Site owner, operator, the contractors and interested and affected parties such that any queries, complaints or suggestions pertaining to environmental management aspects can be dealt with quickly and by the appropriate person(s).
5	A communications strategy is of vital importance in terms of accommodating traffic during laying of pipes on road. In case of road closure together with the proposed detour needs to be communicated via advertising, pamphlets, radio broadcasts, road signage, etc
v	Provide sign boards for pedestrians to inform nature and duration of construction works and contact numbers for concerns/complaints.
	In areas where the visual environment is particularly important (e.g. along commercial/ tourism routes) or privacy concerns for surrounding buildings exist, the site may require screening. This could being the form of shade cloth , temporary walls, or other suitable materials prior to the beginning of construction.
*	Special attention shall be given to the screening of highly reflective materials on site.
Lack of sufficient planning to assure long term sustainability of the improvements and ensure protection of the assets created and the architectural/archaeological character of the surroundings	Design will include provisions for ensuring effective maintenance and protection of the assets created so as to ensure the long term sustainability.
Layout of components and its location to avoid impacts on the aesthetics, sensitive environmental areas / attributes of the site	The project components siting will avoid impacts on the aesthetics of the site, ensure minimal impacts and in compliance with statutory and regulatory requirements. The contractor, FPIU/ IA and DSC will identify any direct or indirect intervention of

	primary or secondary activity before establishment of any project components on the ground.
Selection of materials and construction technologies, if not carefully chosen, will adversely impact the aesthetic appeal of the destinations	Selection of materials will be according to specification and from approved sources
	Material selection would be done keeping in view that no asbestos (except as allowed), and CFC is used.
2	Contractors shall prepare a source statement indicating the sources of all materials (including topsoil, sands, natural gravels, crushed stone, asphalt, clay liners etc), and submit these to the Engineer for approval prior to commencement of any work
	Where materials are borrowed (mined), proof must be provided of authorization to utilize these materials from the landowner/material rights owner and the Department of Geology and Mining
	Procurement of all material according to the material specification of the contract document and sourced from licensed and approved sources.
	A signed document from the supplier of natural materials shall be obtained confirming that they have been obtained in a sustainable manner and in compliance with relevant legislation
Socio cultural resources- Ground disturbance can uncover and damage archaeological and historical remains	There is not such location is anticipated on the project site. In case of chance of finding such location, Consult Archaeological Survey of India (ASI) and/or concerned dept. of Uttarakhand Govt. as applicable to obtain an expert assessment of the archaeological potential of the site; Consider alternatives if the site is found to be of medium or high risk; Develop a protocol for use by the construction contractors in conducting any excavation work, to ensure that any chance finds are recognised and measures are taken to ensure they are protected and conserved.
Integration of energy efficiency and	The detailed designs for the sub-project

energy conservation programs in design of sub-project components	components shall ensure that environmental sustainability principles, including energy efficiency, resource recycling, waste minimization, rainwater harvesting etc.
Site clearance activities, including delineation of construction areas	Any removal of vegetation or tree felling shall be done after taking statutory permissions if required. All works shall be carried out such that the damage or disruption of flora other than those identified for cutting is minimum.
	Only ground cover/shrubs that impinge directly on the permanent works or necessary temporary works shall be removed with prior approval from the Environmental Expert of DSC
	All areas used for temporary construction operations will be subject to complete restoration to their former condition with appropriate rehabilitation procedures.as per the rehabilitation plan prepared by the contractor and approved by the EE of DSC.
Blockage of access in residential area, commercial area and sensitive location like school, college, hospitals and court	Contractor will identify such location in the preconstruction stage and prepare plan approved by DSC to minimize inconvenience to the people.
Slop protection near Infiltration well site	Retaining wall will constructed near Infiltration well site

C. Impacts and Mitigation Measures during Construction Phase

91. Majority of the impacts will occur during the construction phase. These impacts, to be described in the succeeding sections are classified according to major components of the environment – physical, biological, air, water, and socio-economic. These impacts were mainly drawn from screening of impacts described in the introduction of this Chapter.

Impact on Physical Environment, Geography, Topography, Geology and Soil

92. The constructions of all components of the sub-project are at the existing location and not requiring additional land. So the impact on location related impact is insignificant.

Impact on Climate and Meteorology

93. The project components do not have impact on the climate and meteorology of Bageshwar.

Ambient Air Quality

94. The handling of material, excavation of earth for laying pipes or construction of infiltration well, emission of air pollutants from operation of construction vehicles causes air pollution. Since the scale of construction activity is not significant, so the impact is also not very significant. Periodic air quality monitoring to ensure emissions comply with standards will be conducted as per the agreed environmental monitoring plan

Ambient Noise Level

95. The operation of construction vehicles and equipments will generate noise. Since this operation will be located and limited to the construction site. The breaking of carriage way of road will also generate. This activity will be limited to day time. So, the impact due to noise is insignificant and limited to the construction period only. Monitoring of noise levels in potential problem areas as per the monitoring plan will be carried out.

Water Drainage

- 96. The disposal of soil and excavation of road sides may impact the drainage. This impact will be insignificant since the excavation of road sides will be covered in the same day and disposal of excavated earth will be on the low laying area so that impact on drainage is minimum. Monitoring of water quality as per the monitoring plan will be carried out.
- 97. The mitigation measures of each project components are provided below.

Environmental Attributes and Project Activity and its Impacts	Mitigation
Impacts due to operation of construction Camps and its Location, Selection, Design and Layout	Siting of the construction camps, labour camp and stockpiles shall be as per the guidelines of UEPPCB, ULB, village panchayat and any other applicable guideline to the local site. The contractor will assess the impact of the construction camp and should be acceptable to the FPIU/ IA/PMU
	Construction camps shall not be proposed within 500m from the sensitive receptors, nearest settlements to avoid conflicts and stress over the infrastructure facilities with the local community.
	Location for stockyards for construction materials shall be identified at least 300m

F	away from watercaurage
	away from watercourses.
	Construction camps will be located away from settlements and drainage from and through the camps will not endanger any domestic or public water supply. Construction camps including sanitation facilities must be adequately drained.
	Sewage management though septic tanks and solid waste management though local ULB system or other alternate measures.
Impacts due to poor supply of poor drinking water to the workers involved in construction.	Sufficient supply of potable water to be provided and maintained as per the standards, requirements, test methods and sampling procedure according to IS: 10500. If the drinking water is obtained from an intermittent public water supply then storage tanks will be provided. The cleanliness of the storage tanks will be ensured and all measures to be taken to avoid any water contamination.
Impacts on waste disposal from the construction site and construction camp.	Pre-identified disposal location (identified by Contractor in compliance to relevant regulation and approved by EE-DSC) shall be part of Comprehensive Waste Disposal Plan Solid Waste Management Plan to be prepared by the Contractor in consultation and with approval of Environmental Specialist of DSC.
	Contractor shall ensure that waste shall not be disposed off near the water course or agricultural land, Orchards and Natural Habitats like Grasslands.
Impacts on local environmenment due to loss of natural resource of earth due to poor storage.	Stockpiling of construction materials and excavated earth or silt in case of construction of Infiltration well does not impact obstruct the drainage and Stockpiles will be covered to protect from dust and erosion.
Impacts due to construction traffic on access to Site	Contractors shall ensure that all side and mitre drains and scour check valves on access and haul roads are functioning properly and are well maintained.
	Contractors shall ensure that access roads are maintained in good condition by

	attending to potholes, corrugations and storm water damage as soon as these develop.
	If necessary, staff must be employed to clean surfaced roads adjacent to construction sites where materials have been spilt.
	Unnecessary compaction of soils by heavy vehicles must be avoided; construction vehicles must be restricted to demarcated access, haulage routes and turning areas.
12	Cognizance of vehicle weight / dimensions must be taken when using access constructed out of certain materials. e.g. paved surfaces / cobbled
Quarry Operations	Contractor shall finalize the quarry for procurement of construction materials after assessment of the availability of sufficient quantity of materials, quality and other logistic arrangements.
	The Contractor shall obtain materials from approved quarries only after consent of the Department of Mines and Geology and District Administration.
	Adequate safety precautions will be ensured during transportation of quarry material from quarries to the construction site. Vehicles transporting the material will be covered to prevent spillage.
Impacts on increased load on water supply source due to construction work.	The contractor shall use ground/surface water as a source of water for the construction with the written consent from the concerned Department.
	To avoid disruption/ disturbance to other water users, the Contractor shall extract water from fixed locations and consult DSC & line agencies before finalizing the locations.
	The Contractor shall provide a list of locations and type of sources from where water for construction shall be extracted.
	The Contractor shall need to comply with the requirements of the State Ground Water Department for the extraction and seek their approval for doing so and submit

	copies of the permission to DSC.
Imapcts due to Soil/land Erosion	Slope protection measures will be undertaken as per design to control soil erosion. The Contractor shall not in any way modify nor damage the banks or bed of streams, rivers, other open water bodies and drainage lines adjacent to or within the designated area Earth, stone and rubble is to be properly disposed of so as not to obstruct natural water pathways over the site. i.e.: these materials must not be placed in storm water channels, drainage lines or rivers. There shall be a periodic checking of the site's drainage system by DSC, FPIU/IA and PMU to ensure that the water flow is unobstructed.
Water Pollution from Construction Wastes	The Contractor shall take all precautionary measures to prevent entering of wastewater into streams, water bodies or the irrigation system during construction. Contractor shall not wash his vehicles in river/stream water and shall not enter riverbed nearby the water resource area for that purpose. Mixing / decanting of all chemicals and hazardous substances must take place either on a tray or on an impermeable surface. Waste from these shall then be disposed of to a suitable waste site in accordance with Hazardous Wastes (Management, Handling and Transboundary movement) Rules, 2008 and amendments till date and applicable norms Site staff shall not be permitted to use any stream, river, other open water body or natural water source adjacent to or within the designated site for the purposes of bathing, washing of clothing or for any construction or related activities. Municipal water (or another source approved by the Engineer) shall instead be used for all activities such as washing of equipment or disposal of any type of waste, dust suppression, concrete mixing, compacting etc.

	1
Water Pollution from Fuel and Lubricants	The Contractor shall ensure that all construction vehicle parking locations, fuel/ lubricants storage sites, vehicle, machinery and equipment maintenance and refueling sites shall be located at least 300 m away from rivers/streams and irrigation canal/ponds if any
	Contractor shall ensure that all vehicle/machinery and equipment operation, maintenance and refueling shall be carried out in such a manner that spillage of fuels and lubricants does not contaminate the ground.
	Wastewater from vehicle parking, fuel storage areas, workshops, wash down and refueling areas shall be collected and separated through an oil interceptor before discharging it on land or into other treatment system as per specified standards and UEPPCB and ULB norms if any.
Soil Pollution due to fuel and lubricants, construction waste	The fuel storage and vehicle cleaning area will be stationed such that spillage of fuels and lubricants does not contaminate the ground. All pollution parameters will be monitored as per monitoring plan. Wastewater from vehicle parking, fuel storage areas, workshops, wash down and refueling areas shall be collected and separated through an oil interceptor before discharging it on land or into other treatment system
Generation of dust	The contractor will take every precaution to reduce the levels of dust at construction site.
	Regular sprinkling of water and Stockpiles of soil will be kept covered in such a manner to minimize dust generation
Emission from Construction Vehicles, Equipment and Machinery	All vehicles, equipment and machinery used for construction shall confirm to the relevant Bureau of India Standard (BIS) norms. The discharge standards promulgated under the Environment Protection Act, 1986 shall be strictly adhered to.
	The use of silent/quiet equipment compliant with India ambient noise standards and

A	
	standards specified for manufacturers shall be encouraged in the sub Project.
	The Contractor shall maintain a record of PUC for all vehicles and machinery used during the contract period which shall be produced for verification whenever required.
Noise Pollution	The Contractor shall confirm that all Construction equipment used in construction shall strictly conform to the MoEF/CPCB noise standards and all Vehicles and equipment used in construction shall be fitted with exhaust silencers.
	At the construction sites noisy construction work such as crushing, operation of DG sets, use of high noise generation equipment shall be stopped during the night time between 10.00 pm to 6.00 am.
	Noise limits for construction equipment used in this project will be in conformity to the BIS/SPCB/CPCB standards Regular monitoring of ambient noise levels to ensure compliance to Uttarakhand Environment Protection & Pollution Control Board standards.
Material Handling at Site	Workers Employed on mixing cement, lime mortars, concrete etc., will be provided with protective footwear and protective masks and goggles.
	Workers, who are engaged in welding works, will be provided with welder's protective eye-shields.
	Workers engaged in stone breaking activities will be provided with protective goggles, masks, and clothing.
	Stockpiles shall not be situated such that they obstruct natural water pathways.
	Stockpiles shall not exceed 2m in height unless otherwise permitted by the Engineer.
	If stockpiles are exposed to windy conditions or heavy rain, they shall be covered either by vegetation or cloth, depending on the duration of the project. Stockpiles may further be protected by the

	construction of berms or low brick walls around their bases.
	All concrete mixing must take place on a designated, impermeable surface
	The use of any toxic chemical will be strictly in accordance with the manufacturer's instructions and applicable regulations.
	The Engineer will be given at least 6 working days notice of the proposed use of any chemical. A register of all toxic chemicals delivered to the site will be kept and maintained up to date by the contractor.
Damage, and disturbance to other infrastructure in the construction site	Confirm location of infrastructure. Finalize alignment in coordination with agencies like Uttarakhand Power Corporation Limited, Bharat Sanchar Nigam Limited, etc. Ensure prior permission of respective agency Realign pipelines, if required and subsequently revise IEE
	Provide public information in case of service disruptions
Disposal of Construction Waste / Debris / Cut Material	The Contractor shall confirm that Safe disposal of the construction waste will be ensured in the pre-identified disposal locations. In no case, any construction waste will be disposed around the project site indiscriminately.
Disruption / cessation of existing water supply systems due to construction activity	
÷.	In case disruption of water supply exceeds the intimated schedule, arrangement for supply of potable water should be made.
Safety Measures During Construction	Personal Protective Equipment for workers on the project and adequate safety measures for workers during handling of materials at site will be taken up. The contractor has to comply with all regulations regarding safe scaffolding, ladders, working platforms, gangway, stairwells,

	averations transhes and safe means of
	excavations, trenches and safe means of entry and egress.
	The contractor has to comply with all regulations for the safety of workers. Precaution will be taken to prevent danger of the workers from fire, etc. First aid treatment will be made available for all injuries likely to be sustained during the course of work. Contractor shall also organize periodic visits by a qualified registered medical practitioner to the site and workers camp. Contact information of Doctor, availability & location of first aid box shall be displayed in appropriate language both at work site and workers camp.
	The Contractor will conform to all anti- malaria instructions given to him by the Engineer.
	The Contractor will also ensure that the interests of the community are preferably not disturbed, and if unavoidable then disturbed to the minimum. Provide traffic management personnel, barricade, appropriate signage and safety information in and around the construction site and prevent local people entering into the construction site.
Clearing of Construction of Camps and Restoration	Contractor to prepare site restoration plans for approval by the Engineer. The plan is to be implemented by the contractor prior to demobilization.
	On completion of the works, all temporary structures will be cleared away, all rubbish burnt, excreta or other disposal pits or trenches filled in and effectively sealed off and the site left clean and tidy, at the Contractor's expense, to the entire satisfaction of the Engineer and facility owner.
Risk of archaeological chance finds	Strictly follow the protocol for chance finds in any excavation work; Request FPIU/DSC or any authorized person with archaeological field training to observe excavation; Stop work immediately to allow further investigation if any finds are suspected; and

	Inform FPIU/DSC, and take any action they require ensuring its removal or protection in situ.
Conflict with locals	Contractor shall ensure that mostly the local labourers are employed and migratory laborer shall be employed only in case of unavoidable circumstances.

D. Impacts during Operation Phase

Impact on Environmental Conditions due to operation of water supply system	The periodic monitoring of the ambient air quality, noise level, water (both ground, surface water) quality and soil, in the subproject area as suggested in pollution monitoring plan through an approved monitoring agency.		
Increased Pollution due to the better water supply.	The subproject involves renovation, reconstruction and rehabilitation of existing system, augmentation of water supply is envisaged for 10 years project population and to fulfill the deficit of water supply to user as per 135 lpcd. Subproject does not envisage improvement in distribution system to end users as such very little increase is pollution load is anticipated. Sewage generated will be handled by the prevalent existing sewage management system of the town.		
Algal Growth in Reservoir	Proper and regular cleaning of reservoir & provision of bleaching shall be ensured. Water sourced from Infiltration well will be stored in Reservoir and chlorination will be done in the reservoir. Water sourced from WTP will be chlorinated at the WTP only and then stored in the reservoir.		
Risk of contamination in water.	Chlorine should be added in sufficient quantity so that residual chlorine within permissible limit is available in pipeline.		
Impacts due to Backwash water & Sludge generation in Water Treatment plan			
Management of Chlorine stock	Chlorine stock shall be maintained in cool, dark and locked rooms, near the reservoir/treatment site and be handled with proper care and under safety measure.		
Unhygienic condition due to poor	lal Sansthan will carry out maintenance of		

maintenance of sanitation facilities and irregular solid waste collection	collection and disposal of wastes as per norms. New facilities proposed to be created under UEAP will cater to additional load.				
Chlorination in water	Chlorination in water will be done as per CPHEEO manual and ensure				
1. Chlorination through Chlorine solution	residual chlorination within permissible limit.				
2. Chlorination through Chlorine Gas	 Regular laboratory testing for dosing and residual chlorine Chlorine tank will be stored on impermeable platform with facility of collection of accidental leakage. Gas Chlorination – the storage of Chlorine gas in HDPE drums. Gas Chlorination through chlorine tunnel in covered room and controlled by chlorinator, Provision of leak detector and alarm in the chlorination room. Provision of Eye bath and emergency shower facility near the gas chlorination. 				

E. Economic Development

98. After the disaster, there is significant economic loss mainly due to loss of life and livelihood and tourism activity. This rehabilitation of water supply scheme will bring positive impact interms of health and economic activity. The restoration of water supply will bring the supply level of pre-disaster stage and give support to the local economy.

VI. INFORMATION DISCLOSURE, CONSULTATION, AND PARTICIPATION

A. Public participation during the preparation of the IEE

- 99. The public participation process included identifying interested and affected parties (stakeholders); informing and providing the stakeholders with sufficient background and technical information regarding the proposed development; creating opportunities and mechanisms whereby they can participate and raise their viewpoints (issues, comments and concerns) with regard to the proposed development; giving the stakeholders feedback on process findings and recommendations; and ensuring compliance to process requirements with regards to the environmental and related legislation.
- 100. Stakeholder consultation and participation with various stakeholders is an integral part of the environmental and social impact assessment and also part of regulatory requirement of EIA Notification, 2006 and ADB requirements. The stake holders of the project include project affected communities (directly or indirectly affected) and institutional stake holders such as PCB, local bodies, Water Resource Department, Environmental Department, Mines and Geology Department, Forest Department, etc. Consultations at micro- and macro-level (e.g. District/State level institutional consultations) helped planners to integrate the short term and long terms requirements of the local, regional,

state and national goals in to the planning process. The regional, state and national goals are generally set by the legislations and policies by controlling or limiting the activities in order to reduce and nullify the adverse impact generated by infrastructure projects.

101. The following methodologies were adopted for carrying out public consultation

[i] Local communities, Individuals affected, traders and local shopkeepers who are directly affected were given priority while conducting public consultation.

[ii] Walk-through informal group consultations along the proposed subprojects area

[iii] One to one meetings were generally held with a few members of local communities. These consultations sometimes focused on one or more specific issues in a given section (link) of the project corridor. Focus group consultations were conducted with a sample section of the community with a good representation from the affected communities. Such meetings usually provide substantial information about the community concerns.

- 102. For Bageshwar Sub-Project public consultation and information disclosure is been carried out as an integral part of the UEAP (water sector) since the begining. Informal consultation at Sub-Project site involving the community were conducted in Oct-2014 & Dec-2013, while key consultations held with stakeholders in Dec-2013 and May-2014 to understand the needs and preferences for basic infrastrucutre facilities and discuss social and environmental issues in order to minimize the impact on local community. Public consultation meeting held on 13-May-2014 at Nagar Palika office, Bageshwar was attended by chairman Nagar Palika, ward members, Engineers of UJS, Local community people, Media persons etc. Intotal 24 people attented the meeting. During consultations it was found that people were aware about the proposed investments and welcomed the project as it was benefiting to them. However one of the major concern raised was "Construction activities should be scheduled properly so as not to disturb residents/Local peoples for a longer duration; also water supply during construction period should be uninterrupted." It was assured to them that prior information on schedule of construction activities will be announced by the concerned and schedulling of construction activities during early morning or less rush hour will be given priority to minimize the impacts. It was also assured to the local community that during construction period water supply will be continued via alternate mediums.
- 103. During consultation the following general opinions/suggestions were noted: i) Most of the people were not happy with the existing water infrastructure post June 2013 disaster and they need improvement of the water supply scheme, ii) wanted early restoration of facility iii) minimum disturbance to the local people due to construction activity in the town, iv) minimum interruption in water supply during construction period, v) minimum loss to the trees vi) minimum disturbance to traffic

B. Future consultation and Disclosure

104. The public consultation and disclosure program will remain a continuous process throughout the subproject implementation and shall include the following

C. Consultation during Detailed Design

- 105. Focus-group discussions with affected persons and other stakeholders to hear their views and concerns, so that these can be addressed in subproject design wherever necessary. Regular updates on the environmental component of the subproject will be kept available at the PIU/PMU of UEAP.
- 106.FPIU/PMU will conduct information dissemination sessions at major habitations and solicit the help of the local community leaders/prominent citizens to encourage the participation of the people to discuss various environmental issues.
- 107. The FPIU/PMU, with assistance of DSC will conduct information dissemination sessions in the subproject area. During EMP implementation FPIU, DSC, and PMU shall organize public meetings and will apprise the communities about the progress on the implementation of EMP in the subproject works

D. Consultation during Construction

- 108. Public meetings with affected communities (if any) to discuss and plan work programs and allow issues to be raised and addressed once construction has started.
- 109. Smaller-scale meetings to discuss and plan construction work with local communities to reduce disturbance and other impacts, and provide a mechanism through which stakeholders can participate in subproject monitoring and evaluation.

E. Project Disclosure

- 110.A communications strategy is of vital importance in terms of accommodating traffic during laying of pipes. Local communities will be continuously consulted regarding location of construction camps, access and hauling routes and other likely disturbances during construction. In case of road closure together with the proposed detours will be communicated via advertising, announcements, road signage, etc.
- 111. For the benefit of the community the IEE will be will be disclosed to the affected people and other stakeholders in a form and language(s) understandable to them at an accessible place in a timely manner and made available at: (i) PIU/PMU office; (ii) District Magistrate Office; and, (iii) DSC office. It will be ensured that the hard copies of IEE are kept at such places which are conveniently accessible to citizens as a means to disclose the document and at the same time creating wider public awareness. Electronic version of the IEE will be placed in the official website of the SDMA UEAP and the official website of ADB after approval of the IEE by ADB. The PIU will issue Notification on the locality-wise start date of implementation of the subproject. Copies of the IEE will be kept in the PMU/PIU office and will be distributed to any person willing to consult the IEE.



Figure VI-1 6.1 Photographs of Typical Roadside Consultations

Public Disclosure

112. The IEE report will be disclosed in the English language at PMU, Jal Sansthan division office and will also be available in the website of ADB. The full reports will also be available to interested parties upon request from PMU.

VII. GRIEVANCE AND REDRESS MECHANISM

113. A joint social and environmental redress mechanism will be implemented under the project. Grievances and suggestions from local and affected people may come-up related to inappropriate implementation of the project and components of EMP. The expected range of grievances to be handled through this mechanism will encompass but not limited to the following: i) nuisance from noise, dust, and temporary blocking of access; ii) contamination of receiving water from runoff; iii) emissions from increase vehicular traffic and stationary sources like construction machineries; iv) conflict between local residents and migrant workers; v) ownership of vegetation for clearing; and vi) damage compensation. These issues will be addressed through acknowledgement, evaluation and corrective action and response approach. Grievances from public or stakeholders concerning the project and EMP implementation will be received by the concerned Executive Engineer of UEAP division. The Executive Engineer shall refer the application to Construction Supervision Consultants (DSC) who then assess the grievances/suggestions and if they are found to be genuine and acceptable, will be resolved at division level itself within 15 to 30 days from the date of receipt. In case, the issue is unable to be resolved, the matter will be forwarded to the Social and Environmental cell, UEAP (Head quarter). This mechanism is non-judicial in nature and does not preclude the affected people coursing their grievances to the courts. The corrective action will be started as per the action plan indicated to the stakeholder. The action taken and the outcome shall form a part of quarterly report to ADB.

VIII. ENVIRONMENTAL MANAGEMENT PLAN

A. ENVIRONMENTAL MANAGEMENT AND MONITORING PLAN (EMMP)

- 114. The Environmental Management and Monitoring Plan (EMMP) designed will guide the environmentally-sound construction of the subproject and ensure efficient lines of communication between the Design & Supervision Consultants (DSC) also an Engineer for the project, Contractors, Field Project Implementation Unit (FPIU), and Project Management Unit (PMU). Uttarakhand Jal Sansthan is implementing agency (IA) and will implement the Project through its field PIU's. The EMMP identifies the three phases of development as: (i) Pre Construction (ii) Construction Phase; and (iii) Post Construction/Operational Phase.
- 115. The purpose of the EMMP is to ensure that the activities are undertaken in a responsible non-detrimental manner with the objectives of: (i) providing a pro-active, feasible and practical working tool to enable the measurement and monitoring of environmental performance on site; (ii) guide and control the implementation of findings and recommendations of the environmental assessment conducted for the subproject; (iii) detail specific actions deemed necessary to assist in mitigating the environmental impact of the subproject; and (iv) ensure that safety recommendations are complied with.
- 116.A copy of the EMMP must be kept on site during the construction period at all times. The EMMP will be made binding on all contractors operating on the site and will be included within the Contractual Clauses. Non-compliance with, or any deviation from, the conditions set out in this document constitutes a failure in compliance. It shall be noted that the Supreme Court of India * mandates those responsible for environmental damage must pay the repair costs both to the environment and human health and the preventive measures to reduce or prevent further pollution and/or environmental damage. (The polluter pays principle).²
- 117. The Contractor is deemed not to have complied with the EMMP if:

(i) Within the boundaries of the site, and site extensions, there is evidence of contravention of clauses;

(ii) If environmental damage ensues due to negligence;

(iii) The contractor fails to comply with corrective or other instructions issued by the Engineer/PMU/FPIU within a specified time; and

(iv) The Contractor fails to respond adequately to complaints from the public.

Institutional Arrangements

118. The institutional arrangements specify the arrangements for the implementation of environmental provisions of the proposed subproject. The Executing Agency (EA), State Disaster Management Authority (SDMA) will work closely with the Implementing Agency (IA) Uttarakhand Jal Sansthan for effective implementation of environmental safeguards related requirements of the sub projects. The institutional arrangements and responsibilities are detailed below.

² Writ petition no 657 of 1995. The Supreme Court, in its order dated Feb.4, 2005 that "The Polluter Pays Principle means that absolute liability of harm to the environment extends not only to compensate the victims of pollution, but also to the cost of restoring environmental degradation. Remediation of damaged environment is part of the process of sustainable development."

- 119. The subproject will be implemented and monitored by Uttarakhand Jal Sansthan as Implementing agency and implemented through its Field PIU's supported by DSC (also working as Engineer) and overall management support shall be provided by PMU, UEAP.
- 120. The Safeguard Staff of UEAP SDMA (EA) in PMU & IA will monitor the implementation of environmental covenants with assistance of Engineer (DSC).
- 121. UEAP SDMA (EA) shall be responsible for ensuring compliance to environmental requirements of the ADB as well as central/state governments and reporting the same to ADB. A relevant portion of EMMP will be a part of contract with the civil works contractors engaged for execution of the works. The primary responsibility of implementation of EMMP is of the IA during pre-construction and operation and maintenance phases; and of the civil works contractor during the construction phase as defined in the EMMP. The responsibility of supervision of EMMP implementation is of the DSC; and it would guide the IA and the civil works contractors in this regard. , DSC with IA and EA, UEAP will act as monitoring agency as delegated in EMMP. All applicable statutory environmental clearances, consents, and/or permits (at national, state and local levels) as required for the implementation of the subproject would be obtained by the IA or by the civil works contractor in line with India's national/state/local laws and regulations, and in accordance with ADB's SPS 2009 requirements . Redressal of grievances shall be the responsibility of UEAP SDMA (EA). Apart from the mechanism for the grievances receiving and redressal at the level of EA, the provision shall be kept in the EMP of the subprojects wherein the contractor will depute one Environmental Safeguard Officer who shall be responsible for implementation of EMP, reporting and grievance redressal on day-to-day basis. The grievances/complaints received at the level of contractor shall be recorded on the Complaints Register and the same shall be forwarded to the DSC (Engineer of the Contract) within 48 hours along with the details of action taken to redress the grievance. The Team Leader of DSC shall immediately try to resolve the issues and forward the details to the FPIU / IA. If the action taken by Contractor and DSC is found to be inadequate, then necessary instructions shall be issued by the FPIU. IA for implementation of rectification measures.

UEAP, SDMA (PMU)

- Complies with all applicable legislation and is conversant with the requirements of the EMMP;
- Assesses all activities requiring special attention as specified and/or requested by the Engineer (DSC) and/or Safeguards Staff of UEAP SDMA for the duration of the Contract;
- May, on the recommendation of the EE DSC and/or Safeguards Staff of UEAP SDMA, through the DSC order the Contractor to suspend any or all works on site if the Contractor or his subcontractors/ suppliers fail to comply with the said contractual stipulations with respect to environment and EMMP.
- Act as overall monitoring agency.
- Addressing complaints and redressal of grievances.

UEAP, IA / FPIU

• Ensures along with Engineer (DSC) that EMMP and all necessary environmental stipulations are included in bidding documents and Contract documents with Contractor.

- Complies with all applicable legislations and is conversant with the requirements of the EMMP;
- Assesses all activities requiring special attention as specified and/or requested by the Engineer (DSC) and/or Safeguards Staff of UEAP PMU as Implementing agency for the duration of the Contract;
- Ensures that the Contractor conducts all activities in a manner that minimizes disturbance to directly affected residents and the public in general, as advised by the Engineer and/or Safeguards Staff of UEAP PMU & IA.
- May, on the recommendation of the EE DSC and/or Safeguards Staff of UEAPPMU & IA, through the DSC order the Contractor to suspend any or all works on site if the Contractor or his subcontractors/ suppliers fail to comply with the said contractual stipulations with respect to environment and EMMP.
- Act as supervising & monitoring agency as delegated in EMMP.
- Carries out public consultations, addresses complaints and responsible for redressal of grievances.

The Engineer (DSC)

- Guides EA, IA, FPIU and Contractors with respect to environmental regulations and associated requirements, and facilitates ensuring compliance with those;
- Arranges information meetings for and consults with interested and affected parties about the impending construction activities;
- Maintains a register of complaints and queries by members of the public at the site office. This register is forwarded to the Project Manager of FPIU on weekly basis
- Enforces and monitors compliance the requirements of the EMMP on site;
- Assesses the Contractor's environmental performance in consultation with Environmental Expert
- Documents in conjunction with the Contractor, the state of the site prior to commencing construction activities.
- Documents state of implementation of EMMP and clearly delineate if any item of EMMP is pending partially or fully before issue of completion certificate of the work.

Environmental Expert of Engineer (DSC)

- Briefs the Contractor about the requirements of the Environmental Specification and/ or EMMP, as applicable;
- Facilitates statutory compliance related activities for the IA and Contractors;
- Advises the Engineer about the interpretation, implementation and enforcement of the Environmental Specification and other related environmental matters;
- Monitors and report on the performance of the contractor/project in terms of environmental compliance with the EMMP to the Engineer and UEAP, SDMA-PMU;
- Provides technical advice relating to environmental issues to the Engineer.
- Organise and ensure public consultation and information disclosure are done as per the EMMP and ADB requirements. Monitor complaints and grievances are handled as per the Grievance Redressal Mechanism and report the same as per the environmental reporting.
- Receives complaints/grievances from public, discuss Team Leader (TL) DSC, FPIU & IA and take steps for implementation of remedial measures in consultation with the TL (DSC), and reports to the Engineer (DSC) on the status in its each monthly progress report till satisfactory resolution.

The Contractor

- Appoints one full time suitably qualified and experienced Environmental Safeguard Officer for implementation of EMMP including Environment Health & Safety (EHS) measures, community liaisoning, reporting and grievance redressal on day to day basis.
- Complies with all applicable legislations, is conversant with the requirements of the EMMP, and briefs staff about the requirements of same;
- Ensures any sub-contractors/ suppliers who are utilized within the context of the contract comply with the environmental requirements of the EMMP. The Contractor will be held responsible for non-compliance on their behalf;
- Supplies method statements for all activities requiring special attention as specified and/or requested by the Engineer or Environmental Expert (of Engineer) during the duration of the Contract;
- Provides environmental awareness training to staff;
- Bears the costs of any damages/ compensation resulting from non-adherence to the EMMP or written site instructions;
- Conducts all activities in a manner that minimizes disturbance to directly affected residents and the public in general, and foreseeable impacts on the environment.
- Ensures that the Engineer is timely informed of any foreseeable activities that will require input from the Environmental Expert (of Engineer)
- Receives complaints/grievances from public, discuss with DSC, FPIU & IA and take steps for implementation of remedial measures in consultation with the Engineer (DSC), and reports to the Engineer (DSC) on the status in its each monthly report till satisfactory resolution.
- 122. The proposed sub-project will be implemented by the IA & FPIU, Uttarakhand Jal Sansthan. The FPIU will be responsible for supervision and monitoring of day-to-day implementation of subprojects including EMMP.
- 123. For monitoring of environmental parameters as outlined in the EMMP, appropriate monitoring agencies would be engaged by the contractor (cost has been included in each contract based on subproject specific monitoring plans) or by the IAs for the monitoring works not included in the civil works contracts (cost included in the budget given in table VIII-2).

A. Environment Management

- 124. All works undertaken towards protection of environmental resources as part of the EMMP and as part of good engineering practices while adhering to relevant specifications will be deemed to be incidental to works being carried out and no separate payment will be made unless otherwise specified explicitly. The costs towards environmental management as per EMMP unless otherwise provided as a separate head, will be deemed to be part of the bill of quantities (BOQ) of the project. The scope of works of the contractor towards the implementation of the environmental provisions shall be as follows:
- Abide by all existing Environmental regulations and requirements of the Government of Uttarakhand and Government of India, local level ULBs and Gram Sabha etc. during implementation
- Compliance with all mitigation measures and monitoring requirements set out in the EMMP.

- Submission of a method statement detailing how the subproject EMMP will be complied with. This shall include methods and schedules of monitoring.
- Monitoring of project environmental performance including performance indicators defined therein, and periodic submission of monitoring reports.
- Compliance with all measures required for construction activities in sensitive areas, in line with the regulatory requirements of these protected areas, and the guidelines set forth in the management plans for these areas.
- Compliance with all regulatory requirements associated with proximity of the sub-project to the International Borders based on assessment of Contractor in consultation with the Engineer DSC.
- Compliance of all safety rules and regulations applicable at work, and provision of adequate health and safety measures such as water, food, sanitation, personal protective equipment, workers insurance, and medical facilities besides all social and community related requirements as stipulated in EMMP.
- 125. The detailed provisions for specific environmental issues shall be as outlined in the EMMP table on impacts and mitigation measures. Key clauses are outlined in the following sections.

Quarrying

- 126. The contractor will identify and seek prior approval of the engineer for quarryingoperations. Quarrying will be carried only from locations approved by the Department of Geology & Mining and State Pollution Control Board and no new quarries will be opened for the purposes of the project. Any deviation from the provisions will be immediately notified and approval of the engineer is to be sought.
- 127. The Contractor shall maintain all stockpiles, and spoil disposal areas so as to assure the stability and safety of the works and that any adjacent feature like houses and community assets especially along hill slopes are not endangered, and to assure free and efficient natural and artificial drainage, and to prevent erosion. Stockpiling of materials (, fill material, gravel, aggregates, and other construction materials) shall not be allowed during rainy season unless covered by a suitable material. Storage on private property will be allowed if written permission is obtained from the owner or authorized lessee.
- 128. Quarries shall be sited, worked, and restored in accordance with the specifications and as per the closure plan (approved by Engineer). Spoils shall be disposed of at approved disposal sites prepared, filled, and restored in accordance with the related specification requirements.

Debris Disposal

129. Dismantling of existing structures: Debris Disposal shall be maximum utilized and disposed as per norms after consultation with DSC/FPIU/PMU Safeguard Specialist. Due care shall be taken that any material falling under hazardous waste category is

disposed in accordance with Hazardous Wastes (Management, Handling and Transboundary movement) Rules, 2008 and amendments till date & applicable norms.

Precautions for protection of Environmental Measures

- 130. The Contractor shall ensure that construction activities do not result in any contamination of land, air or water by polluting substances or cause noise generated by the activities. For cleaning activities and operation of equipment, the Contractor will utilize such practical methods and devices as are reasonably available to control, prevent and otherwise minimize air/noise pollution.
- 131. Unless otherwise provided in the specifications, the Contractor shall ensure that no trees or shrubs or other vegetation are felled or harmed except those required to be cleared for execution of the works for which all statutory permissions have been obtained. The Contractor shall protect trees and vegetation from damage to the satisfaction of the Engineer.

Air, Water, Noise Pollution and Soil Contamination

- 132. All works will be carried out without unreasonable noise and air, water and soil pollution. Subject and without prejudice to any other provision of the Contract and the law of the land and its obligation as applicable, the Contractor will take all precautions outlined in the EMMP to avoid the air, water, soil and noise pollution.
- 133. The Contractor shall monitor the environmental parameters periodically as specified in the monitoring plan and report to the Engineer.
- 134. The Contractor shall reduce the dust emission due to construction activities by regular water sprinkling in the affected areas.
- 135. All the construction equipment and vehicles shall have Pollution under Control (PUC) Certificate to ensure that no air pollution is caused due to operation of their equipment and vehicles.
- 136.All the construction equipment and vehicles should remain all time in good conditions up to satisfaction of site engineers.
- 137. The Contractor shall indemnify and keep indemnified the Employer from and against any liability for damages on account of noise or other disturbance created while carrying out the work, and from and against all claims, demands, proceedings, damages, costs, charges, and expenses, whatsoever, in regard or in relation to such liability.

Occupational & Community Health and Safety During Construction

- 138. The Contractor shall, in accordance with the safety and health provisions specified in the EMMP, provide workers with a safe and healthy working environment, in the work areas, through application of preventive and protective measures consistent with international good practices, as reflected in internationally recognized standards. The contractors, engineer, IAs and the EA will take steps to prevent accidents, injury, and disease arising from, associated with, or occurring during the course of work by-
- Providing preventive and protective measures, including modification, substitution, or

elimination of hazardous conditions or substances;

- Providing appropriate equipment to minimize risks and requiring and enforcing its use;
- Training workers and other staff; and providing them with appropriate incentives to use and comply with health and safety procedures and protective equipment;
- Documenting and reporting occupational accidents, diseases, and incidents;
- Having emergency prevention, preparedness, and response arrangements in place.
- Provide first aid facilities in all the work sites and workers camp and having qualified first aider to give first aid at the time of any accident. Contractor shall also organize periodic visits by a qualified registered medical practitioner to the site and workers camp. Contact information of Doctor, availability & location of first aid box shall be displayed in appropriate language both at work site and workers camp.
- Contractor should provide safe drinking water, clean eating and resting areas, separate toilets for male and female work force and sufficient amenities at work site and workers camps as per prevalent Labor law and EMMP. Contractor will ensure proper sanitation and would provide soak pits and septic tanks for disposal of waste water and sewage.
- Contractor should have prepared emergency response plan (to be approved by Engineer) with full details and methods of emergency response during any accident and shall have and display the emergency contact numbers at site.
- Contractor should follow all the applicable rules and regulations for workers health and safety.
- 139. The Contractor will also ensure that the interests of the community are disturbed to the minimum as envisaged in the EMMP. Provide barricade, signage and safety information in and around the construction site and also to prevent local people entering into the construction site.

Post Construction Clearance

- 140. On completion of work, wherever applicable, the Contractor shall clear away and remove from the sites all constructional plant, surplus materials, rubbish, scaffoldings, and temporary works of every kind and leave the whole of the sites and works in a clean condition as per agreed redevelopment plan to the satisfaction of the Engineer.
- 141. Construction camp sites and any other sites temporarily occupied during construction shall be cleared as specified in the contract and handed over to the Owner. It will be ensured by the contractor that the site handed over is in line with the conditions of temporary acquisition signed by both parties. Contractor would obtain and furnish (to FPIU) a certificate to this effect from the owner.

B. Environmental Monitoring Plan

142. To ensure the effective implementation of mitigation measures and Environmental Management Plan during construction and operation phase of the sub-project, it is essential that an effective Environmental Monitoring Plan be followed as given in Table below.

- 143. Monitoring is an essential component for sustainability of any developmental project. It is an integral part of any environmental assessment process. The monitoring program consists of performance indicators, reporting formats and necessary budgetary provision. The contractors monitoring methods and parameters should be in accordance with the norms prescribed by the Uttarakhand Environment Protection and Pollution Control Board (UEPPCB) & CPCB which ever has stringent standards for air, water, soil and noise. Indicators and Targets for Environmental Performance are provided in the table VIII-4 in Section E of this EMMP. The frequency of sampling and selection of sampling sites are sub-project specific.
- 144. The monitoring will be carried out by the contractor through approved agency accredited by National Accreditation Board for Testing and Calibration Laboratories and will be supervised by the Environmental Expert of the Design & Supervision Consultant. The monitoring plan is outlined in Table VIII-1 below.

	Table VIII-1: Monitoring Plan						
Indicators	Parameters to be Monitored	Frequency	Responsibility				
Pre- Construction Stage							
Legislation,	Permissions,/ NoCs/Consents other	Once in Pre-	Contractor,				
permits and	statutory requirement	Construction Stage	DSC, IA & EA.				
Agreements							
Environmental	Ambient Air Quality, Noise level, Water	Once in Pre-	Contractor				
Baseline Data	Quality & Soil characteristics as per	Construction Stage					
Generation	parameters outlined in EMMP.						
Debris	Safe disposal of construction wastes	Random checks	Contractor				
disposal	including bituminous wastes						
Construction S							
Legislation,	Permissions,/ NoCs/Consents other	Continuous	Contractor,				
permits and	statutory requirement		DSC, IA & EA				
Agreements							
Dust	No. of tankers for water sprinkling,	Random checks	Contractor				
suppression	Timing of sprinkling, Location of						
	sprinkling (log books to be maintained)						
Ambient air	RPM, SPM, SO ₂ , NO _x , CO	Once in a Quarter	Contractor, to be				
quality		where work is in	monitored				
		progress and near	through				
		sensitive	approved				
		receptors; and at	Monitoring				
		the construction	Agency				
		camp sites (except monsoon) for the					
		entire construction					
		period					
Ambient noise	Equivalent Day & Night Time Noise	Once in a quarter	Contractor, to be				
	Levels	where work is in	monitored				
		progress and near	through				
		sensitive receptors	approved				
		during construction	Monitoring				
		stage	Agency				
Water Quality	TDS, TSS, pH, Hardness, BOD, Faecal	Once in a quarter	Contractor, to be				

Table VIII-1: Monitoring Plan

Indicators	Parameters to be Monitored	Frequency	Responsibility	
	Coli form	where work is in progress and near sensitive receptors during construction stage	monitored through approved Monitoring Agency	
Soil	Available Nitrogen, Phosphorus, Carbon, heavy metals (including Lead) and Pesticides	Once in a quarter where work is in progress and near sensitive receptors during construction stage	Contractor, to be monitored through approved Monitoring Agency	
Heritage Protection, if needed	Visual Inspection of works, compliance with ASI regulations and norms	Continuous	DSC/ASI/FPIU	
Occupation Health and Safety	Usage of PPE on site, adequacy of equipment. Testing of drinking water for compliance to standards specified in IS: 10500.	Continuous and quarterly for drinking water	Contractor	
Establishing Medical facilities	Access to health facilities for the construction workers	Continuous	Contractor	
Accident record	No. of fatal accidents at work site, No. of injuries, No. of disabilities	Continuous	Contractor	
Post construction clearance of site	Physical field verification and Satisfaction certificate from owner: Whether temporary locations for workers camp, site office, batching plant and other construction locations are restored to pre-project conditions as per approved closure plan	Post construction	Contractor	
Operation & Ma	aintenance Stage			
Water quality	All parameters as per UEPPCB & CPCB standards	Once in year during operation stage	PMU, SDMA	
Disposal of Solid Waste	Proper disposal of Solid Waste (domestic) generated shall be ensured in accordance with the prevalent norms		× /	

Budget covered in subsequent cost Table, however, would be finalized based on subproject specific requirements at IEE stage. Contractor will obtain a copy of approved IEE and keep available at construction site and site office(s) for proper implementation of IEE & EMMP.

C. Environmental Budget

145. As part of good engineering practices in the project, there have been several measures as erosion prevention, rehabilitation of borrow areas, safety, signage, provision of temporary drains, etc., the costs for which will be included in the design costs (site development cost) of specific subprojects. Therefore, these items of costs have not been included in the IEE budget. Only those items not covered under budgets for construction are included in the IEE budget.

- 146. The Contractor's cost for site establishment, preliminary, construction, and defect liability activities will be incorporated into the contract agreements, which will be binding on him for implementation and Uttarakhand Jal Sansthan as Implementing Agency and DSC to ensure the compliance. The air, soil, water quality, and noise level monitoring during construction and defect liability phases will be conducted by the contractor for which provision has been kept in Environmental budget of EMMP.
- 147. These are small construction projects, therefore, it is not expected to cause much significant air, water, soil and noise pollution. The main EMMP cost will arise from monitoring of environmental parameters (air, soil, water and noise).
- 148. The costs of water sprinkling for dust suppression and providing personal protective equipment to construction workers shall be borne by contractor as part of conditions of contract. In addition the sources of funds for Mitigation measures during construction stage including monitoring during construction stage are also to be borne by the contractor. These are deemed to be included as part of the contract price amount quoted by the contractor for the works. The costs for generation of baseline data and monitoring shall be borne by the contractor. The locations for baseline data generation & monitoring shall be identified during IEE preparation. The baseline data 'will be generated prior to commencing with civil works. The costs of components for monitoring during operation and maintenance stage and the capacity building costs are to be funded by the PMU. The EMMP cost is given in the Table VIII-2 below.
- 149. Most of the mitigation measures require the contractors to adopt good site practice, which should be part of their normal procedures already, so there are unlikely to be major costs associated with this compliance. Only those items not covered under budget for construction are included in the IEE budget. The IEE costs include mitigation, monitoring and capacity building costs. The summary budget for the environmental management costs for the subproject based on construction period stipulated in the bidding document is presented in Table below:

SI. No.	Particulars	Stages	Unit	Total No.	Rate (INR)	Cost (INR) *	Source of fund
Α.	Legislation, permits and Agreements	Consent to Establish and Consent to Operate for plants and machinery of the contractor			0		The cost for clearances, permits and consents required by IA & Contractors shall be borne by them respectively.

Table VIII-2: Environmental Management & Monitoring Costs

SI. No.	Particulars	Stages	Unit	Total No.	Rate (INR)	Cost (INR) *	Source of fund
В.	Public	Pre		NO.			
υ.	consultations	Construction		Lump	5,00,000	5,00,000	
	and	phase		sum	0,00,000	0,00,000	
	information	Construction		Sum			
	disclosure	phases					
C. E	invironmental Ba	· · · · · · · · · · · · · · · · · · ·	neration				
1.	Ambient Air	Pre-	Per Sample	2	15000	30,000	
	Quality	Construction					
	monitoring						
2.	Noise Quality			4	5,000	20,000	1
	monitoring						
3.	Water Quality	-		2	9,200	18,400	
	monitoring				,		Contractors
4.	Soil			4	8000	32,000	cost
D.	Environmental	Monitoring					
1	Air quality		Per sample	(2 No of	15,000	60,000	
		Construction		Location			
				X 3			
				seasons			
				in year X			
			8	1 sample			
				per			
				location)			
2	Water quality		Per sample	(1 No of	9200	55,200	1
				Location			
				X 3			
				seasons			
				in year 1			
				sample			
				per			1
				location)			
3	Noise Levels		Per location	(4 No of	5000	30,000	
		8 5		Location			
		-		X 3			
				seasons			
	.45			in year X			
				1 sample			
				per			
		_		location)			6
4	Soil			(4 No of	8000	80,000	
				Location			
				X 3			1

SI. No.	Particulars	Stages	Unit	Total No.	Rate (INR)	Cost (INR) *	Source of fund
NO.				seasons			Tunu
				in year X			
				1 sample			
				per location)			
5.	Dust	construction	lump sum		lump sum	500000	
0	Suppression at	and defect				300000	
	subproject	liability					
	sites	phases					
6	Ambient Air	Princes	Per Sample	(2 No of	15000	90,000	
	Quality			Location			
		Operation/		X 3			Implementing
		Defect		seasons			Agencies cost/
		Liability		in year X			Contractors
		Period		3 sample			cost
	1			per			
				location)			
7	Water quality		Per year	(1 No of	9200	55,200	-
				Location			
				X 3			
				seasons			
				in year 1			
				sample			6
				per			
				location)			_
8	Ambient Noise		Per Sample	(5 No of	5000	1,35,000	Ex.
	Quality			Location			
				X 3			
				seasons			
				in year X			
				3 sample			
				per location)			
Е.	Capacity Buildir	a (Includes co	st astimatos fa		project area	a not includ	od in the
L .	package costs)	'y (moluues co	5. 65timat63 10	n entile Sub	איטפטנ מופנ		
1	Capacity	EMP		1	15,000	1,00,000	PMU/DSC
-	Building	Training at				.,,	
	expenses	Site					
	2 sessions	Implementati			50,000		
		on of EMMP					
		for field PIUs					

SI. No.	Particulars	Stages	Unit	Total No.	Rate (INR)	Cost (INR) *	Source of fund
	and Engineer						
					Total INR	17,05,800	

D. Environmental Monitoring and Reporting

- 150. The PMU will monitor and measure the progress of EMMP implementation. Safeguards Staffs of IA / FPIU will undertake site inspections and document review to verify compliance with the EMMP and progress toward the final outcome. Environment and Safety Officer of the Contractor will submit the monitoring of EMMP to the DSC/Engineer on day to day basis. DSC / Engineer will submit monthly EMMP monitoring and implementation reports to FPIU, who will take follow-up actions, if necessary. FPIU/IA will submit quarterly monitoring and implementation reports to PMU. The PMU will submit semi-annual monitoring reports to ADB based on reporting of FPIU/ IA and its safeguards staff assessment of the implementation performance and its verification by the PMU safeguards specialist. PMU will also take corrective actions as required.
- 151. Monitoring reports will be posted in a location accessible to the public.
- 152. ADB will review project performance against the EA's commitments as agreed in the legal documents. The extent of ADB's monitoring and supervision activities will be commensurate with the Project's risks and impacts. Implementation of social and environmental safeguards related requirements will be integrated into the project performance management system. ADB will monitor projects on an ongoing basis until a project completion report is issued.

	Activity	Management/ Mitigation	Implementation Responsibility	Supervision Responsibility	Fund Source
	Site Establishment and P	reliminary Activities Impac	ts		
l	Legislation, Permits and Agreements	In all instances, EA, IA contractors and consultants must remain in compliance with relevant environmental legislation of India at the national, state and local levels.	 Permissions,/ NoCs/Consent requirement- IA/PMU Permissions / NoCs/Consents requirement for equipment/machin eries and material sourced from licensed/ approved quarries etc – Contractor 	PMU	IA, Contracto

Table VIII-3: Standardized EMMP to guide the contractor in mitigating environmental impacts

	Activity	Management/	Implementation	Supervision	Fund
		Mitigation	Responsibility	Responsibility	Source
		Proof of compliance to	ESO-Contractor,	PMU	
		statutory requirements	Engineer, &		
		must be forwarded by	Environmental Expert		
		the facility owner and/or	of DSC (EE)		
		contractor to PMU/FPIU			
		in relation to hot mixing,			
		stone crushers, diesel			
-		generators etc			
		A copy of the EMP must	ESO-Contractor,	FPIU, IA &	
		be kept on site during	Engineer & EE	PMU	
		the construction period	0		
2	Education of site staff on	Ensure that all site	ESO-Contractor and	IA & PMU	Contractor
	general and Environmental	personnel have a basic	EE		IA,
	Conduct ³	level of environmental			
		awareness training	EE to deliver		
-		Staff operating	Safety and	FPIU, IA &	
		equipment (such as	environment officer of	PMU	
		excavators, loaders,	Contractor and EE		
		etc.) shall be adequately			
		trained and sensitized to			
		any potential hazards			
		associated with their			
		task			
		No operator shall be	Contractor and EE	FPIU, IA &	
		permitted to operate		PMU	
		critical items of			
		mechanical equipment			
		without having been			
		trained by the Contractor			
		All employees must	Contractor and EE	IA & PMU	
		undergo safety training			
		and wear the necessary			
		protective clothing			
		/equipment.			
		A general regard for the	Contractor and EE	IA & PMU	
		social and ecological			
		well-being of the site and			
		adjacent areas is			
		expected of the site staff.			
		Workers need to be			
		made aware of the			
		following general rules:			
		No alcohol / drugs to			
		be present on site;			
		Measures for			

 $^{^{3}}$ These points need to be made clear to all staff on site before the work commences.

	Activity	Management/	Implementation	Supervision	Fund
		Mitigation	Responsibility	Responsibility	Source
		 abatement of noise due to construction related activities and conduct of work force. Construction staff are to make use of the facilities provided for them, as opposed to ad-hoc alternatives (e.g. use of firewood for cooking, the use of surroundings as a toilet facility are 	Responsibility		Source
	×	forbidden) Trespassing on private / commercial properties adjoining the site is forbidden 		2	
	10	Other than pre approved security staff, no workers shall be permitted to live on the construction site. No worker may be forced to do work that is potentially dangerous or for what he / she is not trained to do.			
.3	Social Impacts ⁴	Open liaison channels shall be established between the Site owner, operator, the contractors and interested and affected parties such that any queries, complaints or suggestions pertaining	Environment and Safety officer of Contractor with the Engineer, EE & FPIU	IA & PMU	Contractor

×

3

⁴ It is important to take notice of the needs and wishes of those living or working adjacent to the site. Failure to do so can cause disruption to work.

Activity	Management/ Mitigation	Implementation Responsibility	Supervision Responsibility	Fund Source
	to environmental			3
	management aspects			
	can be dealt with quickly			
	and by the appropriate			
	person(s).			
	A communications	Contractor with the	IA & PMU	
	strategy is of vital	Engineer, EE & FPIU		
	importance in terms of			
	accommodating traffic			
	during laying of pipes.			
	The road closure			
	together with the			
	proposed detour needs			
	to be communicated via			
	advertising, pamphlets,			
	radio broadcasts, road			
	signage, etc			
	Provide sign boards for	Contractor with the	IA & PMU	
	pedestrians to inform	Engineer, EE & FPIU		
	nature and duration of			
	construction works and			
	contact numbers for			
	concerns/complaints.			
	Storage facilities,	Engineer and EE	IA & PMU	
	elevated tanks and other			
	temporary structures on			
	site shall be located			
	such that they have as			
	little visual impact on			
	local residents as			
	possible.			
	In areas where the visual	Engineer and EE	IA & PMU	
	environment is			
	particularly important			
	(e.g. along commercial/			
·	tourism routes) or			
	privacy concerns for			
	surrounding buildings			
	exist, the site may			
	require screening. This			
	could being the form of			
	shade cloth, temporary			
	walls, or other suitable			
	materials prior to the			
	beginning of			
	construction.			
	Special attention shall	EE	IA & PMU	
	be given to the			

-	screening of highly			
	reflective materials on site.			
Lack of sufficient planning to assure long term sustainability of the improvements and ensure protection of the assets created and the architectural/archaeological character of the surroundings	Design will include provisions for ensuring effective maintenance and protection of the assets created so as to ensure the long term sustainability.	Contractor, Engineer, EE and FPIU	IA/ PMU	
Design Impacts and Pre-co	Instruction Impacts			
Layout of components and its location to avoid impacts on the aesthetics, sensitive environmental areas / attributes of the site	The project components siting will avoid impacts on the aesthetics of the site, ensure minimal impacts and in compliance with statutory and regulatory requirements. The contractor, FPIU/ IA and DSC will identify any direct or indirect intervention of primary or secondary activity before establishment of any project components on the ground.	Engineer, EE and FPIU	IA & PMU	
	to assure long term sustainability of the improvements and ensure protection of the assets created and the architectural/archaeological character of the surroundings Design Impacts and Pre-co Layout of components and its location to avoid impacts on the aesthetics, sensitive environmental	to assure long term sustainability of the improvements and ensure protection of the assets created and the architectural/archaeological character of the surroundings Design Impacts and Pre-construction Impacts Layout of components and its location to avoid impacts on the aesthetics, sensitive environmental areas / attributes of the site New Your State Stat	to assure long term sustainability of the improvements and ensure protection of the assets created and the architectural/archaeological character of the surroundings Design Impacts and Pre-construction Impacts Layout of components and its location to avoid impacts on the aesthetics, sensitive environmental areas / attributes of the site The project components the asstetics of thesite, ensure minimalimpacts and incompliance withstatutory and regulatoryrequirements. Thecontractor, FPIU/ IA andDSC will identify anydirect or indirectintervention of primary orsecondary activity beforeestablishment of anyproject components on	to assure long term sustainability of the improvements and ensure protection of the assets created and the architectural/archaeological character of the surroundings Design Impacts and Pre-construction Impacts Layout of components and its location to avoid impacts on the aesthetics, sensitive environmental areas / attributes of the site Nature of the site improvements. The contractor, FPIU/ IA and DSC will identify any direct or indirect intervention of primary or secondary activity before establishment of any project components on

Activity	Management/ Mitigation	Implementation Responsibility		Supervision Responsibility	Fund Source
Selection of materials and construction technologies, if not carefully chosen, will adversely impact the aesthetic appeal of the destinations	specification and from	Engineer, EE FPIU	and	IA & PMU	

	Activity	Management/ Mitigation	Implementation Responsibility		Supervision Responsibility	Fund Source
.3	Socio cultural resources- Ground disturbance can uncover and damage archaeological and historical remains`	There is not such location is anticipated on the project site. In case of chance of finding such location, Consult Archaeological Survey of India (ASI) and/or concerned dept. of Uttarakhand Govt. as applicable to obtain an expert assessment of the archaeological potential of the site; Consider alternatives if the site is found to be of medium or high risk; Develop a protocol for use by the construction contractors in conducting any excavation work, to ensure that any chance finds are recognised and measures are taken to ensure they are protected and conserved.	Engineer, EE a FPIU	and	Contractor, IA & PMU	
.4	Integration of energy efficiency and energy conservation programs in design of sub-project components	The detailed designs for the sub-project components shall ensure that environmental sustainability principles, including energy efficiency, resource recycling, waste minimization, rainwater harvesting etc.	•	and	IA & PMU	
.5	Site clearance activities, including delineation of construction areas	Any removal of vegetation or tree felling shall be done after taking statutory permissions if required. All works shall be carried out such that the damage or disruption of flora other than those identified for cutting is minimum.	Contractor,		Engineer, EE and FPIU	Contractor

	Activity	Management/ Mitigation	Implementation Responsibility	Supervision Responsibility	Fund Source
		Onlygroundcover/shrubsthatimpinge directly on thepermanentworks ornecessarytemporaryworks shall be removedwith prior approval fromtheEnvironmentalExpert of DSCAll areasused fortemporaryconstructionoperationswillbesubjecttocompleterestorationtotheirformerformerconditionwithappropriaterehabilitationplan			
		prepared by the contractor and approved by the EE of DSC.			
.6	Blockage of access in residential area, commercial area and sensitive location like school, college, hospitals and court	such location in the preconstruction stage	Contractor	Engineer, EE and FPIU	Contractor
.7	Slop protection near reservoir and intake well	Retaining wall will constructed near reservoir and intake well	Contractor	Engineer, EE and FPIU	The con and specificatio is part th bill c quantity c the contrac
	Construction Impacts				
≞ 1	Construction Camps - Location, Selection, Design and Layout	Siting of the construction camps, labour camp, stockpiles shall be as per the guidelines of UEPPCB, ULB, village panchayat and any other applicable guideline to the local site. The	Contractor with the Engineer and EE	FPIU, IA & PMU	

80

ñ

Activity	Management/ Mitigation	Implementation Responsibility	Supervision Responsibility	Fund Source
	contractor will assess the impact of the construction camp and should be acceptable to the FPIU/ IA/PMU. below and details of layout to be approved by DSC.			
	Construction camps shall not be proposed within 500m from the sensitive receptors, nearest settlements to avoid conflicts and stress over the infrastructure facilities with the local community.			
	Location for stockyards for construction materials shall be identified at least 300m away from watercourses.			
8	Construction camps will be located away from settlements and drainage from and through the camps will not endanger any domestic or public water supply. Construction camps including sanitation facilities must be adequately drained.	¥		3
	Sewage management though septic tanks and solid waste management though local ULB system or other alternate measures.			
Drinking water availability	Sufficient supply of potable water to be provided and maintained as per the standards, requirements, test methods and sampling procedure according to	Contractor	Engineer and EE	

	Activity	Management/ Mitigation	Implementation Responsibility	Supervision Responsibility	Fund Source
		IS:10500. If the drinking water is obtained from an intermittent public water supply then storage tanks will be provided. The cleanliness of the storage tanks will be ensured and all measures to be taken to avoid any water contamination.			
3	Waste disposal	Pre-identified disposal location (identified by Contractor in compliance to relevant regulation and approved by EE- DSC) shall be part of Comprehensive Waste Disposal Plan Solid Waste Management Plan to be prepared by the Contractor in consultation and with approval of Environmental Specialist of DSC.	Contractor with Engineer	FPIU, IA & PMU	
	2011 2011	The Environmental Specialist of DSC shall approve these disposal sites after conducting a joint inspection on the site with the Contractor. Wherever, possible Solid waste management shall be through local ULB system or other alternate measures.			
		Contractor shall ensure that waste shall not be disposed off near the water course or agricultural land, Orchards and Natural Habitats like Grasslands.			
Ļ	Stockpiling of construction	Stockpiling of construction materials	Contractor with Engineer	FPIU, IA & PMU	

Activity	Management/ Mitigation	Implementation Responsibility	Supervision Responsibility	Fund Source
materials	and excavated earth or silt in case of construction of river bed filtration does not impact obstruct the drainage and Stockpiles will be covered to protect from dust and erosion.			*(
Access to Site	Contractors shall ensure that all side and mitre drains and scour check walls on access and haul roads are functioning properly and are well maintained.	Contractor with Engineer	FPIU, IA & PMU	
	Contractors shall ensure that access roads are maintained in good condition by attending to potholes, corrugations and storm water damage as soon as these develop.	ж		
ĸ	If necessary, staff must be employed to clean surfaced roads adjacent to construction sites where materials have been spilt.			
	Unnecessary compaction of soils by heavy vehicles must be avoided; construction vehicles must be restricted to demarcated access, haulage routes and turning areas.		¢	
	Cognizance of vehicle weight / dimensions must be taken when using access constructed out of certain materials. e.g. paved surfaces / cobbled entranceways.			

× × .

-	Activity	Management/ Mitigation	Implementation Responsibility	Supervision Responsibility	Fund Source
.6	Quarry Operations	Contractor shall finalize the quarry for procurement of construction materials after assessment of the availability of sufficient quantity of materials, quality and other logistic arrangements.	Contractor with Engineer	FPIÙ, IA & PMU	
	-	The Contractor shall obtain materials from approved quarries only after consent of the Department of Mines and Geology and District Administration.			-9
	2	Adequate safety precautions will be ensured during transportation of quarry material from quarries to , the construction site. Vehicles transporting the material will be covered to prevent spillage.			
7	Arrangement f Construction Water	or The contractor shall use ground/surface water as a source of water for the construction with the written consent from the concerned Department.	Contractor with Engineer	FPIU, IA & PMU	
		To avoid disruption/ disturbance to other water users, the Contractor shall extract water from fixed locations and consult DSC & line agencies before finalizing the locations.			
		The Contractor shall provide a list of locations and type of sources from where water for construction shall be		1	

	Activity	Management/	Implementation	Supervision	Fund Source
		Mitigation extracted.	Responsibility	Responsibility	Source
		The Contractor shall need to comply with the requirements of the State Ground Water Department for the extraction and seek their approval for doing so and submit copies of the permission to DSC.	c		
3	Soil/land Erosion	Slope protection measures will be undertaken as per design to control soil erosion. The Contractor shall not in any way modify nor damage the banks or bed of streams, rivers, other open water bodies and drainage lines adjacent to or within the designated area Earth, stone and rubble is to be properly disposed of so as not to obstruct natural water pathways over the site. i.e.: these materials must not be placed in storm water channels, drainage lines or rivers. There shall be a periodic checking of the site's drainage system by DSC, FPIU/IA and PMU to ensure that the water flow is unobstructed.	Contractor with Engineer	FPIU, IA & PMU	
9	Water Pollution Construction Wastes	from The Contractor shall take all precautionary measures to prevent entering of wastewater into streams, water bodies or the irrigation system during construction. Contractor	Contractor with Engineer	Engineer, FPIU & PMU	

	/ity	Management/ Mitigation	Implementation Responsibility	Supervision Responsibility	Fund Source
		shall not wash his		licopolicionity	
		vehicles in river/stream			
		water and shall not enter			
		riverbed nearby the			
		water resource area for			
		that purpose.			
		Mixing / decanting of all			
		chemicals and			
		hazardous substances			
		must take place either			
		on a tray or on an			
		impermeable surface.			
		Waste from these shall			
		then be disposed of to a			
		suitable waste site in			
		accordance with			
		Hazardous Wastes			
		(Management, Handling			
		and Transboundary			
		movement) Rules, 2008			
		and amendments till			
		date and applicable			
		norms			
		Site staff shall not be			
		permitted to use any			
		stream, river, other open			
		water body or natural			
		water source adjacent to			
		or within the designated			
		site for the purposes of			
		bathing, washing of			
		clothing or for any			
		construction or related			
		activities. Municipal			
		water (or another source			
		approved by the			
		Engineer) shall instead			
		be used for all activities			
		such as washing of			
		equipment or disposal of			
		any type of waste, dust			
		suppression, concrete			
		mixing, compacting etc.			
14/	- Dellution from E		Contractor	EE of DSC,	
1	er Pollution from Fu			Engineer,	
and	Lubricants	ensure that all		FPIU & PMU	
1		construction vehicle			
1		parking locations, fuel/			

	Activity	Management/	Implementation	Supervision	Fund
	Activity	Management/ Mitigation vehicle, machinery and equipment maintenance and refueling sites shall be located at least 300 m away from rivers/streams and irrigation canal/ponds if any Contractor shall ensure that all vehicle/machinery and equipment operation, maintenance and refueling shall be carried out in such a manner that spillage of fuels and lubricants does not contaminate the ground. Wastewater from vehicle parking, fuel storage areas, workshops, wash down and refueling areas shall be collected and separated through an oil interceptor before discharging it on land or into other treatment system as per specified	Implementation Responsibility	Supervision Responsibility	Fund Source
1	Soil Pollution due to fuel and lubricants, construction waste	standards and UEPPCB and ULB norms if any. The fuel storage and vehicle cleaning area will be stationed such that spillage of fuels and lubricants does not contaminate the ground. All pollution parameters will be monitored as per monitoring plan. Wastewater from vehicle parking, fuel storage areas, workshops, wash down and refueling areas shall be collected and separated through an oil interceptor before discharging it on land or	Contractor	Engineer, FPIU & PMU	

	Activity	Management/ Mitigation	Implementation Responsibility	Supervision Responsibility	Fund Source
		into other treatment system	,	, , , , , , , , , , , , , , , , , , , ,	
.12	Generation of dust	The contractor will take every precaution to reduce the levels of dust at construction site.	Contractor	Engineer, FPIU & PMU	
		Regular sprinkling of water and Stockpiles of soil will be kept covered in such a manner to minimize dust generation			
.13	Emission from Construction Vehicles, Equipment and Machinery	All vehicles, equipment and machinery used for construction shall confirm to the relevant Bureau of India Standard (BIS) norms. The discharge standards promulgated under the Environment Protection Act, 1986 shall be strictly adhered to.		Engineer, FPIU & PMU	
		The use of silent/quiet equipment compliant with India ambient noise standards and standards specified for manufacturers shall be encouraged in the sub Project.	а Т		
		The Contractor shall maintain a record of PUC for all vehicles and machinery used during the contract period which shall be produced for verification whenever required.			
.14	Noise Pollution	The Contractor shall confirm that all Construction equipment used in construction shall strictly conform to the MoEF/CPCB noise standards and all	Contractor with Engineer	EE, FPIU & PMU	

 $\hat{\boldsymbol{r}}_{i}$

	Activity	Management/ Mitigation	Implementation Responsibility	Supervision Responsibility	Fund Source
-	×	Vehicles and equipment used in construction shall be fitted with exhaust silencers.	Responsibility	Reopensional	
	- P	At the construction sites noisy construction work such as crushing, operation of DG sets, use of high noise generation equipment shall be stopped during the night time between 10.00 pm to 6.00 am.			
		Noise limits for construction equipment used in this project will be in conformity to the BIS/SPCB/CPCB standards Regular monitoring of ambient noise levels to ensure compliance to Uttarakhand Environment Protection & Pollution Control Board standards.	2	a	
.15	Material Handling at Site	Workers Employed on mixing cement, lime mortars, concrete etc., will be provided with protective footwear and protective masks and goggles.	Contractor	Engineer, FPIU & PMU	
		Workers, who are engaged in welding works, will be provided with welder's protective eye-shields.			
		Workers engaged in stone breaking activities will be provided with protective goggles, masks, and clothing.			
		Stockpiles shall not be situated such that they	1		

89

.

.8

Activity	Management/ Mitigation	Implementation Responsibility	Supervision Responsibility	Fund Source
<i>N</i> .	obstruct natural water pathways.			
	Stockpiles shall not exceed 2m in height unless otherwise permitted by the Engineer.			
9	If stockpiles are exposed to windy conditions or heavy rain, they shall be covered either by vegetation or cloth, depending on the duration of the project. Stockpiles may further be protected by the construction of berms or low brick walls around their bases.			
	All concrete mixing must take place on a designated, impermeable surface			
	The use of any toxic chemical will be strictly in accordance with the manufacturer's instructions and applicable regulations.			
	The Engineer will be given at least 6 working days notice of the proposed use of any chemical. A register of all toxic chemicals delivered to the site will be kept and maintained up to date by the contractor.			
Damage, and disturbance to other infrastructure in the construction site	Confirm location of infrastructure. Finalize alignment in coordination with agencies like Uttarakhand Power Corporation Limited,	Contractor	Engineer, FPIU & PMU	

	Activity	Management/ Mitigation	Implementation Responsibility	Supervision Responsibility	Fund Source
	-	Bharat Sanchar Nigam Limited, etc.			
		Ensure prior permission of			
		respective agency Realign pipelines, if			
		required and subsequently revise			
		IEE			
		Provide public information in case of service disruptions			
17	Disposal of Construction Waste / Debris / Cut Material	The Contractor shall confirm that Safe disposal of the construction waste will	Contractor	Engineer, FPIU & PMU	
		be ensured in the pre- identified disposal locations. In no case,			
		any construction waste will be disposed around the project site			
		indiscriminately.			
18	Disruption / cessation of existing water supply systems due to construction activity	Care be taken during improvement of existing water supply systems, so that disruption in existing water supply would not occur.	Contractor with Engineer and FPIU	EE, IA and PMU	
		Tentative schedule of closure should be known			
		to affected people prior to cessation of water supply.		~	C4
		In case disruption of water supply exceeds the intimated schedule, arrangement for supply of potable water should be made.			
19	Safety Measures During Construction	Personal Protective Equipment for workers on the project and adequate safety measures for workers during handling of materials at site will be	Contractor	Engineer, FPIU & PMU	

Activity	Management/ Mitigation	Implementation Responsibility	Supervision Responsibility	Fund Source
	has to comply with all regulations regarding safe scaffolding, ladders, working platforms, gangway, stairwells, excavations, trenches and safe means of entry and egress.	G.		
	The contractor has to comply with all regulations for the safety of workers. Precaution will be taken to prevent danger of the workers from fire, etc. First aid treatment will be made available for all injuries likely to be sustained during the course of work. Contractor shall also organize periodic visits by a qualified registered medical practitioner to the site and workers camp. Contact information of Doctor, availability & location of first aid box shall be displayed in appropriate language both at work site and workers camp.			
	The Contractor will conform to all anti- malaria instructions given to him by the Engineer. The Contractor will also ensure that the interests of the community are preferably not disturbed, and if unavoidable then disturbed to the minimum. Provide traffic management personnel, barricade, appropriate signage and safety information in and			

	Activity	Management/ Mitigation	Implementation Responsibility	Supervision Responsibility	Fund Source
		around the construction site and prevent local people entering into the construction site.			
.20	Clearing of Construction of Camps and Restoration	Contractor to prepare site restoration plans for approval by the Engineer. The plan is to be implemented by the contractor prior to demobilization.	Contractor	Engineer, FPIU & PMU	
		On completion of the works, all temporary structures will be cleared away, all rubbish burnt, excreta or other disposal pits or trenches filled in and effectively sealed off and the site left clean and tidy, at the Contractor's expense, to the entire satisfaction of the Engineer and facility owner.		2	
21	Risk of archaeological chance finds	Strictly follow the protocol for chance finds in any excavation work; Request FPIU/DSC or any authorized person with archaeological field training to observe excavation; Stop work immediately to allow further investigation if any finds are suspected; and Inform FPIU/DSC, and take any action they require ensuring its removal or protection in situ.	Contractor	Engineer, FPIU & PMU	
.22	Conflict with locals	Contractor shall ensure that mostly the local labourers are employed and migratory laborer shall be employed only in case of unavoidable circumstances.	Contractor	Engineer, FPIU & PMU	

	Activity	Management/ Mitigation	Implementation Responsibility	Supervision Responsibility	Fund Source
23	Environment Safeguard Officer	Contractor shall appoint one full-time suitably qualified and experienced Environment and Safety Officer who shall be responsible for assisting contractor in implementation of EMP, community liaisoning, consultations with interested/affected parties, reporting and grievance redressal on day-to-day basis. This environment and safety officer will be at site till all works related to the project including demobilization are completed.	Contractor	Engineer, FPIU & PMU	
1	Environmental Conditions	The periodic monitoring of the ambient air quality, noise level, water (both ground, surface water) quality and soil, in the subproject area as suggested in pollution monitoring plan through an approved monitoring agency.	Pollution Monitoring Agency appointed by IA	SDMA, PMU	
2	Increased Pollution due to the better water supply.	The subproject involves renovation and rehabilitation of existing system, augmentation of water supply is envisaged for 10 years project population and to fulfill the deficit of water supply to user as per 135 lpcd. Subproject does not envisage improvement in distribution system to end users as such very	IA, EA and Jal Sansthan	SDMA PMU & GoUK	

	Activity	Management/ Mitigation	Implementation Responsibility	Supervision Responsibility	Fund Source
		little increase is pollution load is anticipated. Sewage generated will be handled by the prevalent existing	Responsibility		
		sewage management system of the town.			v
3	Algal Growth in Reservoir	Proper and regular cleaning of reservoir & provision of bleaching shall be ensured. Water	Uttarakhand Jal Sansthan / IA	SDMA PMU & GoUK	
		sourced from River Bed Filtration (RBF) will be stored in Reservoir and chlorination will be done in the reservoir. Water sourced from WTP will be chlorinated at the WTP only and then stored in the reservoir.			
ŀ	Water Quality	Chlorine should be added in sufficient quantity so that residual chlorine within permissible limit is available in pipeline.	Uttarakhand Jal Sansthan / IA	SDMA PMU & GoUK	
	Backwash water & Sludge collection	IA shall obtain Consent to Operate for WTPs from UEPPCB as per Water (Prevention and Control of Pollution) Act 1974. Backwash water and clarifier sludge will be disposed in line with the guideline issued by UEPPCB.	Uttarakhand Jal Sansthan / IA	SDMA PMU & GoUK	
	Disposal of Sludge form WTPs	IA shall obtain Consent to Operate for WTPs from UEPPCB as per Water (Prevention and Control of Pollution) Act 1974. Backwash water and clarifier sludge will be disposed in line with the guideline issued by UEPPCB.	Uttarakhand Jal Sansthan / IA	SDMA PMU & GoUK	
,	Management of Chlorine stock	Chlorine stock shall be maintained in cool, dark	Uttarakhand Jal	SDMA PMU &	

8. j. 8

	Activity	Management/ Mitigation	Implementation Responsibility	Supervision Responsibility	Fund Source
		and locked rooms, near the reservoir/treatment site and be handled with proper care and under safety measure.	Sansthan / IA	GoUK	
8	Unhygienic condition due to poor maintenance of sanitation facilities and irregular solid waste collection	Jal Sansthan will carry out maintenance of the existing toilets, and carry out the regular collection and disposal of wastes as per norms. New facilities proposed to be created under UEAP will cater to additional load.	IA, Jal Sansthan.	IA/ Jal Sansthan, GoUK.	
)	 Chlorination in water 3. Chlorination through Chlorine solution 4. Chlorination through Chlorine Gas 	 Chlorination in water will be done as per CPHEEO manual and ensure residual chlorination within permissible limit. Regular laboratory testing for dosing and residual chlorine Chlorine tank will be stored on impermeable platform with facility of collection of accidental leakage. Gas Chlorination – the storage of Chlorine gas in HDPE drums. Gas Chlorination through chlorine tunnel in covered room and 	IA	PMU	

×.

Activity	Management/ Mitigation	Implementation Responsibility	Supervision Responsibility	Fund Source
	controlled by chlorinator,			
	 Provision of leak detector and alarm in the chlorination room. 			
	Provision of Eye bath and emergency shower facility near the gas chlorination.			

EE= Environmental Expert of Engineer (DSC), DSC= Design & Supervision Consultants, IA= Implementing Agency, EA= Executing Agency, FPIU= Field Project Implementation Unit.

E. Performance Indicator

153. The performance indicators of implementation of environmental management and monitoring plan has been provided in below table.

Table VIII-4:	Performance	Indicators of I	EMMP

	Performance Indicators	Target	Achievement in Semi- annually and annually
1,,	Budget	Environmental Budget (EMMP Budget)	Expenditure till date
	Performance Indica	tors of Monitoring Plan	
2.	Ambient Air Quality	Total Number of samples as per Environmental Monitoring Plan	Total Number of samples collected
3.	Noise Level	Total Number of samples as per Environmental Monitoring Plan	Total Number of samples collected
4.	Water Quality	Total Number of samples as per Environmental Monitoring Plan	Total Number of samples collected
5.	Soil	Total Number of samples as per Environmental Monitoring Plan	Total Number of samples collected
	Safety of Workers	List of PPE as per the number labours	List of PPEs actually provided in the project

6.	Permissions,/ NoCs/Consents requirement	Target timeline to obtain the permit/NoC/ consents and its validity	List of Permission and NoCa / consents obtained till date and status of its validity.
7.	Public Consultation	Total Number of planned Public Consultation with timeline and coverage of people.	Number of public consultation conducted till date and actual coverage of the people.
8.	Grievance redressal	Total number of complaints received, its timeline to response and resolution	Actual number of complaint resolved in percentage, response time.
9.	Issues raised in public consultation	Target to attend the issues raised in the Public Consultation	Status of compliance to the issues of Public consultation
10.	Information disclosure	List of information and locations where information to be disclosed	Actual locations where information has been disclosed.
11.	Education of site staff on Environmental training	Total Number of staffs to be trained	No of staff actually
12.	Capacity Building	Total number of sessions to be covered Total Number of contractors, PIUs and DSCs to be covered	Number of Sessions completed and Number of contractors, PIUs and DSC
13.	Implementation of EMP mitigation Measures	All items of Environmental Management Plan with timeline and its respective regulatory standards like for Amebient air Qaulity – NAAQS, 2009 standards, Drinking water – IS:10500 etc, Residual Chlorine – UEPPCB standards and CPHEEO manual for handling.	Implementation status of EMP items till date
14.	Reporting	List and number of Report to be submitted	List and number of reports submitted

IX. CONCLUSION AND RECOMMENDATION

- 154. The initial environmental examination describes the environmental impact of all components of subproject of Bageshwar. This includes Rehabilation of Water Treatment Plan, Pumping and pumping station, Construction of Infiltration well and laying of pipes.
- 155. The locations of all project componets are within the Bageshwar Town on the bank of Sarju River. There is no ecologically sensitive area having intervention with the porect components neither directly nor indirectly. No felling of trees envishaged in the project and not having any intervention of cultural or archaeological site.
- 156. The construction activity will have impact on ambient air and noise environmental due operation of construction vehicles, equipments, excavation and disposal of earth. The laying of pipes in the residential area may cause inconvenience to the local people due obstruction on road and interrupted supply of water. Mitigation measures have been developed to reduce all negative impacts to acceptable levels. The implementation of mitigation measures are suggested in the environmental management and monitoring plan
- 157. The proposed subproject has been categorized as Category 'B' as per ADB SPS 2009 based on environmental screening and assessment of likely impacts of rehabilitation of water supply system of Bageshwar. The initial environmental examination (IEE) ascertains that it is unlikely to cause any significant environmental impacts. Few impacts were identified attributable to the proposed sub-project, all of which are localized and temporary in nature and easy to mitigate.
- 158. The initial environmental examination ascertains that the subject is unlikely to cause anysignificant environmental impacts. No additional studies or need of undertaking detailed EIA is envisaged at this stage. The Executing Agency shall ensure that EMP and EMoP is included in Bill of Quantity (BOQ) and forms part of bid document and civil works contract. The same shall be revised if necessary during project implementation or if there is any change in the project design and with approval of ADB

APPENDICES

Appendix I Rapid Environmental Assessment (REA) Checklist

Country/Project Title		India/ Uttarakhand Emergency Assistance Project
Sector/Division		Water Supply – Bageshwar
Probable Involuntary Resettlement Effects	Current Assessment	Additional Information for Substantiating Assessment
A. Project Sitting		
Is the project area Densely populated?	⊡Yes ⊠No	The project is proposed within the town limit of Bageshwar, which is having average population density of 2000 Persons / Sq. Km.
Heavy with development activities?	□Yes ⊠No	There are no major development activities in the town
Adjacent to or within any	Yes	
environmentally sensitive areas? Cultural heritage site	⊠No □Yes ⊠No	There are no cultural heritage site in the project
Protected area	∐Yes ⊠No	area No
Wetland	☐Yes ⊠No	No
Mangrove	☐Yes ⊠No	No
Estuarine	☐Yes ⊠No	No
Buffer zone of protected area	☐Yes ⊠No	No
Special area for protecting biodiversity	⊡Yes ⊠No	No
Вау	□Yes ⊠No	No
Potential Environmental Impacts Will the Project cause		
Pollution of raw water supply from upstream wastewater discharge from communities, industries, agriculture, and soil erosion runoff?	∐Yes ⊠No	There is no domestic or industrial/agriculture wastewater discharge in the upstream of the raw water source. There are no industries in the vicinity of the project area
Impairment of historical / cultural monuments / areas and loss / damage to these sites?	∐Yes ⊠No	There are no historical / cultural monuments in the project area.
Hazard of land subsidence caused by excessive ground water pumping?	⊡Yes ⊠No	Only river water (surface) has been proposed as raw water source
Social conflicts arising from displacement of communities?	∐Yes ⊠No	The project will not lead to displacement of communities.
Conflicts in abstraction of raw water for water supply with other beneficial water uses for surface and ground waters?	□Yes ⊠No	Raw water withdrawal from Saryu river have been obtained, no conflicts are anticipated.
Unsatisfactory raw water supply (e.g. excessive pathogens or	∐Yes ⊠No	Raw water is fit for drinking after conventional treatment/disinfection.

5. e 1⁰

mineral constituents)?		
Delivery of unsafe water to distribution system?	∐Yes ⊠No	Water will be treated in existing WTPs before distribution.
Inadequate protection of intake works or wells, leading to pollution of water supply?	∐Yes ⊠No	Intake works will be protected against flooding by constructing protecting works
Over pumping of ground water, leading to salinization and ground subsidence?	⊡Yes ⊠No	No ground water is proposed to be abstracted
Excessive algal growth in storage reservoir?	∐Yes ⊠No	Regular cleaning of storage reservoir shall be ensured to avoid algal growth in the reservoir.
Increase in production of sewage beyond capabilities of community facilities?	∐Yes ⊠No	No sewerage facilities as of now and wastewater getting discharged into Saryu river untreated; some of the houses have soak pits.
Inadequate disposal of sludge from water treatment plants?	∐Yes ⊠No	Only nominal quantity of sludge is anticipated from WTP. There will be provision of proper sludge disposal from water treatment plant.
Inadequate buffer zone around pumping and treatment plants to alleviate noise and other possible nuisances and protect facilities?	∐Yes ⊠No	Adequate buffer and protection will be assured
Impairments associated with transmission lines and access roads?	⊡Yes ⊠No	No new transmission lines are proposed.
Health hazards arising from inadequate design of facilities for receiving, storing, and handling of chlorine and other hazardous chemicals.	∐Yes ⊠No	Liquid chlorine has been proposed to be used for disinfection of water. Proper facility for storing and handling of chlorine shall be maintained all around to avoid such hazards.
Health and safety hazards to workers from the management of chlorine used for disinfection and other contaminants?	∐Yes ⊠No	Only Trained operator will operate the chlorination system. Proper precautionary measures will be taken during handling of chlorine
Dislocation or involuntary resettlement of people	⊡Yes ⊠No	No displacement of people is anticipated
Social conflicts between construction workers from other areas and community workers?	⊡Yes ⊠No	No such impact anticipated; local communities in the vicinity of the project would be employed as much as possible.
Noise and dust from construction activities?	∐Yes ⊠No	All constructions sites are away from populated areas, Hence noise and dust generated due to any construction activity will not affect common public, However construction activities will be done using manual techniques.
Continuing soil erosion / silt runoff from construction operations?	∐Yes ⊠No	Construction work during monsoon shall be carried out with due care so that silt run off due to construction operation is prevented. No construction will be allowed during rains. Immediate back filling followed by compaction shall be ensured at the site.
Increased road traffic due to interference of construction activities?	∐Yes ⊠No	Nothing is proposed to be laid on road. Hence there won't be any interference to traffic
Delivery of unsafe water due to poor O&M treatment processes (especially mud accumulations in filters) and inadequate chlorination due to lack of adequate monitoring of chlorine residuals in distribution systems?	∐Yes ⊠No	Trained and skilled staff will be deployed for O&M. Water quality will be regularly monitored through water sample testing.

×., 3

1.

		4
Delivery of water to distribution system, which is corrosive due to inadequate attention to feeding of corrective chemicals?	⊡Yes ⊠No	Dosing of chemicals such as chlorine and alum will be as per the raw water analysis and GI pipes will be used which are non-corrosive in nature
Accidental leakage of chlorine gas?	I ∐Yes I ⊠No	All standard safety equipment will be provided and procedure will be followed.
Excessive abstraction of water affecting downstream water users?	∐Yes ⊠No	Abstraction will remain increase by about 0.341 Mld but will not affect downstream users.
Competing uses of water?	□Yes ⊠No	No
Increased sewage flow due to increased water supply	☐Yes ⊠No	There is no augmentation of source works but only renovation.
Increased volume of sullage (wastewater from cooking and washing) and sludge from wastewater treatment plant	□Yes ⊠No	As above
Large population influx during project construction and operation that causes increased burden on social infrastructure and services (such as water supply and sanitation systems)?	∐Yes ⊠No	No such impact anticipated; local communities in the vicinity of the project would be employed as much as possible.
Risks to community health and safety due to the transport, storage, and use and/or disposal of materials such as explosives, fuel and other chemicals during operation and construction?	∐Yes ⊠No	Not applicable. Construction will not involve use of explosives and chemicals.
Community safety risks due to both accidental and natural hazards, especially where the structural elements or components of the project are accessible to members of the affected community or where their failure could result in injury to the community throughout project construction, operation and decommissioning?	∐Yes ⊠No	Operational area will be clearly demarcated and access will be controlled. Only worker and project concerned members will be allowed to visit the operational sites.

Climate Change and Disaster Risk Questions	Yes	No	Remarks
The following questions are not for environmental categorization. They are included in this checklist to help identify potential climate and disaster risks.			
 Is the Project area subject to hazards such as earthquakes, floods, landslides, tropical cyclone winds, storm surges, tsunami or volcanic eruptions and climate changes? 	V		The project area falls in the seismic zone V as per Indian Seismic Zone map as per IS: 1893 (Part-1) 2002.

K., . K

Could changes in temperature, precipitation, or extreme events patterns over the Project lifespan affect technical or financial sustainability (e.g., changes in rainfall patterns disrupt reliability of water supply; sea level rise creates salinity intrusion into proposed water supply source)?	V		Will be assessed and suitable mitigation measures will be proposed.
• Are there any demographic or socio-economic aspects of the Project area that are already vulnerable (e.g. High incidence of marginalized populations, rural-urban migrants, illegal settlements, ethnic minorities, women or children)?		\checkmark	Proposed project will not impact any marginalized population, rural-urban migrants, illegal settlement etc.
• Could the Project potentially increase the climate or disaster vulnerability of the surrounding area (e.g., by using water from a vulnerable source that is relied upon by many user groups, or encouraging settlement in earthquake zones)?		\checkmark	No such possibility of vulnerability increase of the surrounding area.

° . , *

B. The Assessment checklist on the Categorization and Planning Requirement for this subproject?

Category A.	A proposed project is classified as category A if it is likely to have significant adverse environmental impacts that are irreversible, diverse, or unprecedented. These impacts may affect an area larger than the sites or facilities subject to physical works. An environmental impact assessment is required.
Category B.	A proposed project is classified as category B if its potential adverse environmental impacts are less adverse than those of category A projects. These impacts are site-specific, few if any of them are irreversible and in most cases mitigation measures can be designed more readily than for category A projects. An initial environmental examination is required.
Category C.	A proposed project is classified as category C if it is likely to have minimal or no adverse environmental impacts. No environmental assessment is required although environmental implications need to be reviewed.
Category FI.	A proposed project is classified as category FI if it involves investment of ADB funds to or through a FI .

103

٩

Appendix II – Public Consultaion

Public Consultation & Focused Group Discussions (Socio-Economic and Environmental)

Name of the Sub-Project: Uttarakhand Emergency Assistance Project: Water Supply Sector Number of Participants: 24 Name of the Village/ Ward: Nagar Palika office, Bheeleshwar Ward (Ward no.2) Name of the Block: Bageshwar Name of the District: Bageshwar Distance from the District Head Quarter: 0.5 Km Date: 13.05.2014

Issues	Participant's Opinion, Comments and Suggestions		
General perception about the Investment Program UEAP (WATER SECTOR)). Awareness about the Investment Program especially the Water Supply renovation & reconstruction components. Support of the people for the Investment Program.	Local people are aware of the water supply investment programme. There is immense support of local people for the Investment Program.		
Support of local people for the proposed Rehabilitation & Reconstruction of Water Supply Components of the project.	All people gathered for consultations raised one voice for the renovation/reconstruction of water supply system in Bageshwar City.		
Any critical issue or concern by the local people regarding this project?	They seemed worried about the disruption in water supply during the implementation of the project components. Engineer (DSC) assured that old water supply rising main will be in place till the commissioning of the new rising main. They were made aware of the temporary raw water pumping arrangements which are already in place.		
Any criteria you would like to see considered during project design, construction and operation stage?	During construction time the Executing Agency should conduct the work without affecting the common people. No suggestion for operation stage.		
Number of Households in this area and Population of the village/ area	Number of Households in this area is around 1916 and Population of the area is around 9827		
Any Ethnic minorities/ tribal population living in this area (Note the name of Tribe/ indigenous community, if any). Any Vulnerable groups are in the village/ Ward (women headed, BPL, ST, PH etc.).	No ethnic minorities/ tribal population living in this area Some BPL families are living in this area.		
Do the village/ ward people face any problems of water supply to their houses?	Due to flood damage water supply has reduced. Some part of the town is recieveing turbid water during rainy days.		
If there is any problem related to these services, do you think that any up-gradation is necessary?	One of the old WTP which got damaged during floods is unable to catter clean water especially during rains. Rehabilation of WTP was requested.		
Do you have any ideas on what is to be involved in the process of up-gradation?	No idea about the process required for up-gradation. Whatever scheme concerned authority decides for water supply up-gradation works should be sustainable atleast.		
For this up-gradation, the road/ street/ path may be affected - What is your opinion on this? Is it acceptable?	Yes, it is acceptable to the local people but not for a prolonged period. The timing and period of work should be fixed and notified to the local people before the start of civil works.		
Who else is to be affected due to this up-gradation process?	Local residents will also be affected for commuting to their destinations.		

ť –

Issues	Participant's Opinion, Comments and Suggestions		
How intense could be the effect?	The effect is minor. (They were made aware of one new		
	rising main to be laid which will be occupying a very		
	small stretch of road)		
Do you think the effect will be of a permanent	The effect may likely be of temporary in nature.		
nature?			
If it is not, how intense will be the temporary	The intensity of effect may be temporary in nature and		
effect?	minimum to the local residents.		
The work will be executed in this part of the road/footpath. You may require shifting to other side of the road. Please give your comments and suggestions.	Not Applicable		
During the time of execution of work will you shift to other side of road or any other place in the town?	Not Applicable		
In what way Executive Agency of GOU can assist	They have no direct comment on this issue. But said		
you so that your daily business is not affected?	that Government should think about their genuine		
What extra support you want from the Executing	problem and whatever possible way GoU can help		
Agency of GOU?	them, it is welcome.		
What are your perceived benefits from the Investment Program?	Only benefit may be un-interrupted purified water supply with good pressure. They may get good and hygienic water to drink.		
Do you think that local labour force would like to	Obviously, local unemployed labour force would like to		
participate in construction work?	participate in the construction work.		
Do you think that the local people would like to get	Yes, the local people would like to get regular		
regular information regarding this Investment Program?	information regarding this project and Investment Program.		
Number of Shops/ Commercial establishments in the village/ town/ area	Around 200 shops/ commercial area in this locality.		
Numbers of Industrial Units in the village/ town and surrounding area	No industrial unit available in this and surrounding area.		
General socio-economic standing: What are the economic activities? Land use, cropping pattern (Seasonal), types of crops, value of the crops, Average land holding size etc.	General socio-economic standing is middle class, lower middle class or poor family background. Mainly involved in agricultural activities, selling vegetables, fruits, and variety of items for their livelihood and support to family. Major Landuse pattern is Residential, Agricultural and commercial. Rice, wheat, mandua, barley, maize and sawan are the principal crops grown in the pheripheral areas.		
s the land Irrigated and what are the sources of rrigation?	source of water used for irrigation is surface as well as subsurface water		
Current rates for the agricultural land	Not Applicable		
Government as well as market rates).			
Source of drinking water in this area.	UJS water pipe line house connections and hand pump		
	is the source of drinking water in this area.		
oss of residential/ commercial structures, if any	No loss to residential / commercial structures due to		
Juaa vi rearvennon, commencial structures. Il dilv 📗	the project.		
	No loss to community activities or market places.		

9 -- 9

Issues	Participant's Opinion, Comments and Suggestions		
irrigation, and other downstream uses? How	the WTP got damaged due to which people are not		
extensive are they?	getting clean water especially during rains.		
Any conflicts on water use rights and its social	No conflict yet on water use rights,		
impacts?			
Protected areas (national park, protected forest,	No protected areas (national park, protected forest,		
religiously sensitive sites, historical or	religiously sensitive sites, historical or archaeological		
archaeological sites near the project area around	sites near to the sub-project area.		
3km), if any			
Health status, Availability of Hospitals, Is there any	Health status is normal to this area. Hospital is available		
chronic disease prevalent in this area. Over all	in Bageshwar. Most of the people are aware of		
environmental condition of the area.	HIV/AIDS and STD.		
Are you aware about HIV/AIDS and STD?			
Poverty Level: Is the village/ ward is poor or very	Poor/Middle class		
poor or well off?			
Education Status in this Village/ward: Literate,	Mostly literate.		
illiterate etc.			
Type of compensation expected (Cash or Kind)	N.A		
Perceived benefits from the project	Regular water supply system will be established for		
	better facilities to the urban population.		
Perceived losses from the project	No such loss is percieved.		
What other organizations of a social nature	Local people do not know about these organisations.		
(NGOs/CBOs/ Civil Society) active in this			
village/ward? Name of these organizations.			
Organization of the village/ ward and its structure.	There is ward committee and the councilor is the head		
Do you have a village/ ward committee? What is	of the ward. Ward Committee decides issues of ward		
the decision-making system in your village/ward?	and finalize it with the presence of councilor. The		
Who are the decision makers on community	committee and councilor are all elected members by		
related issues in your village/ward? Are they	majority vote.		
elected or selected? If elected: By consensus or By			
majority vote.			
Any Other Issues you may feel to share: (Demand	All issues depend on GoU. If Government is sympathetic		
of any support form Authority and whether they	to the local community then, they are also ready to		
welcome the project, will there be cooperation	cooperate and welcome the project during the		
from the local community during the	implementation and security measures.		
implementation, security measures, etc).			
Is this consultation useful? Comments	Yes, it is useful		
Will there be likely involvement of local people in	It depends on the individual local community to decide.		
the implementation of this Water Supply Project?			
Source: FGD – Public consultation, May 2014, for IEE			

•

ن _{ي 20} ک

List of Participants - Public Consultation & Focused Group Discussions

> Public Consultation & Focused Group Discussions (Socio-Economic and Environmental) Uttarakhand Emergency Assistance Project: Water Supply Scheme : Bageshwar Date: 12/05/14-

SI. No	Name of the Participant	Occupation	Signature (If agreed by the participants)	
1	Sont Geeton Rawal	Adhyouth Nogar Palika	genter,	
2	Neeroj Tewari	RE. DSC-II	Neron:	
3	Ishow Singh Raward	Chicentre officer N.P.P.Ban		15 44 81)
4	1. K Pande.	H.C. NPP. BAS		
5	D. Dayael	J-2 0.7.1	STE	12-1
6	Vyany Kumaz printa	J.H. V.J.C.BR	8 Jobel	
7	50	,	T = 1 = 2	
8	की तरी नामरवारी जोगी	अनाती व स आहम	- 11- 15d Star V	9760624314
9	का गराज्यका धम	212	प्रदेश व्यक्तान्ता व	Lary/
10	eni-1 ur-953614472	सन्भासद्भाई	ster Choniger	घट क्याड वहि
11	SINA. 371-34100		SHIT BUIERINE	X
12	A-nat-2-513m		-27-31-3416114	
13		प्रतिन्दी)	Seat. (9412	313718)
14	311-94-9	an an ily and i	They C94	10050580)
15	(31) 21341Emm (000. (90	12930376)
16	र्द्व यत् पाण्डे भ C स् अध्य	1 349 m min 4 1	Jandung C 986	(1114999)
17	नवीन रावल (रमद्	n dis sup sta		0305534)
18	Allage Etar	212445 N.S.U.	F) A= (899	3899977)
19	संसप्साहम्गारी	ed (14/-4 2)	reman Genone	9412363920
20	310011105	Jakenia ansher	- mazacais	9410586494
21	मिरेश लाल	CULLI DEINOT	AT BA	941132477
22	र्मेप सान्ड जायी .	सभासद बेगीन	TUTAD Dest	9760095134
23	Anar 1-4 MILEIC	Uniting abin	101 ais 1-4 yiller	9458713399
24	एकछा-ठन्डलोशी	सभा सर ज्वालावा	ais An	9458442352
25	19			
26				
27				

1.

Public Consultaion Photographs



ć.



Appendix III Project Photographs



Plate-1 Jalkal Intake Well -Construction Year 1975: Will be demolished and Infiltration well will be constructed in its place



ر بر الا مرد

Plate-2 Garbage and silt deposition at Jalkal Intake Well



Plate-3 Cracks in Jalkal Intake well



Plate-4 Damaged Cantilever slab in Jalkal Intake Well



Intake Well



Plate-6 Temporary pumping arrangements at Jalkal Water Works



Plate-7 Dry Intake Well at Kathyatbada



Plate-8 Dry Intake Well at Kathyatbada- Site where raw water pumps replacement is proposed



Plate-9 Clear water Pump house inside Kathyatwada WTP



Plate-10 Clear water Pump house inside Kathyatwada WTP - Site where clear water pumps replacement is proposed



Plate-11 Old WTP at Thakurdwara – Site where rehabilitation of settlers will be carried out




Plate-12 Old WTP at Thakurdwara – Site where filter media of pressure filters will be replaced