

# Initial Environmental Examination

---

March 2015

## IND: Madhya Pradesh District Connectivity Sector Project

Katra-Mauganj Road

Prepared by Madhya Pradesh Road Development Corporation for the Asian Development Bank.

## CURRENCY EQUIVALENTS

(as of 31 March 2015)

|               |   |                        |
|---------------|---|------------------------|
| Currency unit | – | Indian rupees (INR/Rs) |
| Rs1.00        | = | \$ 0.016               |
| \$1.00        | = | Rs 62.5096             |

## ABBREVIATIONS

|                           |   |  |
|---------------------------|---|--|
| AAQ                       | – | ambient air quality  |
| AAQM                      | – | ambient air quality monitoring   |
| ADB                       | – | Asian Development Bank   |
| APHA                      | – | American Public Health Association   |
| BGL                       | – | below ground level   |
| BOD                       | – | biological oxygen demand   |
| BOQ                       | – | bill of quantity   |
| CO                        | – | carbon monoxide  |
| COD                       | – | chemical oxygen demand   |
| CPCB                      | – | Central Pollution Control Board  |
| CSC                       | – | construction supervision consultant  |
| MPRDC                     | – | Madhya Pradesh Road Development Corporation  |
| DG                        | – | diesel generating set  |
| DO                        | – | dissolved oxygen   |
| DPR                       | – | detailed project report  |
| E&S                       | – | environment and social   |
| EA                        | – | executing agency   |
| EAC                       | – | Expert Appraisal Committee   |
| EIA                       | – | environmental impact assessment  |
| EMP                       | – | environmental management plan  |
| EMOP                      | – | environmental monitoring plan  |
| GHG                       | – | greenhouse gas   |
| GIS                       | – | geographical information system  |
| GOM                       | – | Government of Madhya Pradesh   |
| GRC                       | – | grievance redress committee  |
| GRM                       | – | grievance redress mechanism  |
| HFL                       | – | highest flood level  |
| IEE                       | – | initial environmental examination  |
| IMD                       | – | Indian Meteorological Department   |
| IRC                       | – | Indian Road Congress   |
| LHS                       | – | left hand side   |
| LPG                       | – | liquefied petroleum gas  |
| Max                       | – | Maximum  |
| Min                       | – | Minimum  |
| MJB                       | – | major bridge   |
| MNB                       | – | minor bridge   |
| MORT&H                    | – | Ministry of Road Transport and Highways  |
| MOEF                      | – | Ministry of Environment and Forests  |
| MPRSD                     | – | Master Plan Road Sector Development  |
| N, S, E, W,<br>NE, SW, NW | – | Wind Directions ( North, South, East, West or<br>combination of two directions like South West,<br>North West) |
| KM                        | – | Katra-Mauganj Road   |

|      |   |  |
|------|---|--|
| NGO  | – | nongovernmental organization             |
| NH   | – | national highway                         |
| NIC  | – | National Information Centre              |
| NOC  | – | No Objection Certificate                 |
| NOx  | – | oxides of nitrogen                       |
| OBC  | – | other backward classes                   |
| PCC  | – | Portland Cement Concrete                 |
| PCU  | – | Passenger Car Units                      |
| PD   | – | Project Director                         |
| PFR  | – | project feasibility report               |
| PIU  | – | project implementation unit              |
| PPE  | – | personal protective equipment            |
| PPT  | – | parts per trillion                       |
| PWD  | – | Public Works Department                  |
| RCC  | – | reinforced cement concrete               |
| REA  | – | rapid environmental assessment           |
| RHS  | – | right hand side                          |
| ROW  | – | right of way                             |
| RSPM | – | respiratory suspended particulate matter |
| SH   | – | state highway                            |
| SOI  | – | Survey of India                          |
| SO2  | – | Sulphur Dioxide                          |
| SPCB | – | State Pollution Control Board            |
| SPL  | – | sound pressure level                     |
| SPM  | – | suspended particulate matter             |
| SPS  | – | ADB Safeguard Policy Statement, 2009     |
| TA   | – | technical assistance                     |
| UT   | – | Union Territories                        |
| WHC  | – | Water holding capacity                   |

## **WEIGHTS AND MEASURES**

|                 |   |  |
|-----------------|---|--|
| dB (A)          | – | A-weighted decibel                                 |
| ha              | – | Hectare  |
| km              | – | Kilometer  |
| km <sup>2</sup> | – | square kilometer                                   |
| KWA             | – | kilowatt ampere                                    |
| Leq             | – | equivalent continuous noise level                  |
| µg              | – | Microgram  |
| m               | – | Meter  |
| MW              | – | Megawatt   |
| PM 2.5 or 10    | – | Particulate Matter of 2.5 micron or 10 micron size |

## **NOTE**

In this report, "\$" refers to US dollars.

This initial environmental examination is a document of the borrower. The views expressed herein do not necessarily represent those of ADB's Board of Directors, Management, or staff, and may be preliminary in nature. Your attention is directed to the "terms of use" section of this website.

In preparing any country program or strategy, financing any project, or by making any designation of or reference to a particular territory or geographic area in this document, the Asian Development Bank does not intend to make any judgments as to the legal or other status of any territory or area.

## TABLE OF CONTENTS

|  |    |
|--|----|
| EXECUTIVE SUMMARY .....  | i  |
| I. INTRODUCTION.....   | 1  |
| A. Project Background .....  | 1  |
| B. Nature, Size and Location of the Project.....                               | 1  |
| C. Purpose and Scope of the Study .....  | 2  |
| D. Methodology .....   | 3  |
| E. Organizational Setting of Implementing Agency.....                          | 4  |
| II. POLICY AND LEGAL FRAMEWORK.....  | 6  |
| A. Country's Legal Framework and Regulatory Requirements for the Project ..... | 6  |
| B. International Agreements.....   | 8  |
| C. Asian Development Bank Safeguard Policies .....                             | 9  |
| D. Category of the Project as per SPS .....                                    | 9  |
| III. PROJECT DESCRIPTION .....   | 10 |
| A. Rational and Project Settings.....  | 10 |
| B. Characteristics of the Existing Road .....                                  | 11 |
| C. Current and Projected Daily Traffic .....                                   | 12 |
| D. Proposed Improvement .....  | 13 |
| E. Material Investigation.....   | 18 |
| F. Construction Schedule.....  | 20 |
| IV. DESCRIPTION OF THE ENVIRONMENT .....                                       | 21 |
| A. Introduction.....   | 21 |
| B. Physical Environment .....  | 21 |
| C. Ecological Resources .....  | 30 |
| D. Economic Development.....   | 34 |
| V. ANTICIPATED ENVIRONMENTAL IMPACTS AND MITIGATION MEASURES.....              | 37 |
| A. Impact on Physical Environment Design Stage.....                            | 37 |
| B. Construction Stage .....  | 38 |
| C. Impacts during operation stage.....   | 47 |
| D. Climate Change Impacts and Risks .....                                      | 49 |
| E. Cumulative and Induced Impacts.....   | 52 |
| VI. PUBLIC CONSULTATION AND INFORMATION DISCLOSURE .....                       | 54 |
| A. Objectives of the Public Consultation:.....                                 | 54 |
| B. Methodology for Consultations .....   | 54 |
| C. Results of Consultation with Local People .....                             | 56 |
| D. Conclusion and Recommendation .....   | 56 |
| VII. ENVIRONMENTAL MANAGEMENT PLAN AND GRIEVANCE REDRESS MECHANISM             |    |
| 56   |    |
| A. Environmental Management Plan .....   | 58 |
| B. EMP Implementation Schedule.....  | 58 |
| C. Emergency Response Plan .....   | 58 |
| D. Environmental Monitoring Plan (EMoP) .....                                  | 58 |

|       |   |    |
|-------|---|----|
| E.    | Institutional Setting and Proposed Implementation Arrangement .....                 | 60 |
| F.    | Institutional Capacity Building .....   | 64 |
| G.    | Grievance Redress Mechanism .....   | 65 |
| H.    | Cost for Environmental Management Plan, Training and Environmental Monitoring ..... | 66 |
| VIII. | CONCLUSIONS AND RECOMMENDATIONS .....   | 68 |
| A.    | Environmental Gains Due to Proposed Work Justifying Implementation .....            | 68 |
| B.    | Potential Impacts and Mitigation .....  | 68 |
| C.    | Irreplaceable Resources .....   | 69 |
| D.    | Post IEE Surveillance and Monitoring .....  | 69 |
| E.    | Public Consultations .....  | 69 |
| F.    | Recommendations .....   | 69 |

## APPENDICES

|             |   |    |
|-------------|---|----|
| APPENDIX 1: | RAPID ENVIRONMENTAL ASSESSMENT CHECKLIST .....                  | 70 |
| APPENDIX 2: | GUIDELINES FOR BORROW AREAS MANAGEMENT .....                    | 74 |
| APPENDIX 3: | ENVIRONMENTAL MANAGEMENT PLAN .....                             | 77 |
| APPENDIX 4: | ENVIRONMENTAL MONITORING PROGRAMME .....                        | 87 |
| APPENDIX 5: | NATIONAL AMBIENT AIR QUALITY STANDARDS .....                    | 88 |
| APPENDIX 6: | INDIAN STANDARD DRINKING WATER SPECIFICATION-IS 0500:1991 ..... | 89 |
| APPENDIX 7: | AMBIENT AIR QUALITY STANDARDS IN RESPECT OF NOISE .....         | 90 |
| APPENDIX 8: | PUBLIC CONSULTATION PHOTOS AND RECORDS .....                    | 91 |
| APPENDIX 9: | GRM PROCEDURES IN HINDI .....                                   | 97 |

## LIST OF TABLES

|           |  |    |
|-----------|--|----|
| Table 1:  | Proposed Improvement Plan for MDRs .....                                   | 1  |
| Table 2:  | Primary and Secondary Information Sources .....                            | 3  |
| Table 3:  | Summary of Relevant Environmental Legislation .....                        | 6  |
| Table 4:  | Permissions/Clearances Required for the Subproject .....                   | 8  |
| Table 5:  | Summary Road Components and Design Standard .....                          | 10 |
| Table 6:  | Existing Town/Settlements .....  | 11 |
| Table 7:  | Stretches for Improvements .....   | 12 |
| Table 8:  | Summary of Annual Average Daily Traffic (AADT) of KM Road .....            | 12 |
| Table 9:  | Summary of Projected Total Traffic Volume (Vehicles/day and PCU/day) ..... | 12 |
| Table 10: | Substandard Geometry .....   | 13 |
| Table 11: | Proposed Widening Scheme .....   | 15 |
| Table 12: | Locations of Realignment .....   | 16 |
| Table 13: | Major Intersections .....  | 16 |
| Table 14: | List of Minor Intersections .....  | 16 |
| Table 15: | Cement Concrete Lined Drain .....  | 17 |
| Table 16: | Bus Stop Locations .....   | 18 |
| Table 17: | Geological features of the State .....                                     | 21 |

|   |    |
|---|----|
| Table 18: Soil Quality along the Project road .....   | 23 |
| Table 19: Climate condition of project district .....                                       | 25 |
| Table 20: List of Hand pumps/Wells along the Project Road .....                             | 25 |
| Table 21: Ground/Water Quality along the Project Road (Physical & Chemical Parameters) .... | 27 |
| Table 22: Ground/Water Quality along the Project Road (Microbiological Requirement) .....   | 27 |
| Table 23: Techniques Used for Ambient Air Quality Monitoring.....                           | 28 |
| Table 24: Ambient Air Quality along the Project Road.....                                   | 28 |
| Table 25: Day and Night Time Leq in the Area.....   | 29 |
| Table 26: Land Use Pattern in the State .....   | 29 |
| Table 27: Land Use Pattern along the project road .....                                     | 30 |
| Table 28: List of Trees within Proposed Corridor.....                                       | 31 |
| Table 29: Demographic Profile of the State and the Project Districts.....                   | 36 |
| Table 30: Sensitive receptors along the project road.....                                   | 36 |
| Table 31: Annual Average Daily Traffic for different vehicle categories .....               | 50 |
| Table 32: CO2 Emission Factors .....  | 50 |
| Table 33: Project CO2 Emissions Intensity Indicators .....                                  | 51 |
| Table 34: List of Public consultation and Date.....   | 55 |
| Table 35: Peoples' Perception about Environmental Scenario .....                            | 56 |
| Table 36: Environment Management, Monitoring and Training Programme Costs .....             | 66 |

## LIST OF FIGURES

|  |    |
|--|----|
| Figure 1: Location Map .....   | 5  |
| Figure 2: Typical Cross-section of Flexible Pavement.....  | 14 |
| Figure 3: Typical Cross-section of CC Pavement.....  | 14 |
| Figure 4: Quarry Chart .....   | 20 |
| Figure 5: Geological Map of MP .....   | 22 |
| Figure 6: Soil Map of MP .....   | 23 |
| Figure 7: Seismic Zone Map of India.....   | 24 |
| Figure 8: Forest Cover in the District of Madhya Pradesh .....   | 31 |
| Figure 9: Agriculture Map of Madhya Pradesh .....  | 35 |
| Figure 10: Plot of CO2 Emissions Considering Improvement in Surface Roughness and Road<br>Capacity ..... | 51 |
| Figure 11: GRM Process .....   | 66 |





## **EXECUTIVE SUMMARY**

### **A. Introduction**

1. The Madhya Pradesh District Connectivity Sector Project will improve transport connectivity in the state by rehabilitating and upgrading Major District Roads (MDRs). The Project constitutes: (i) rehabilitating and upgrading about 1,600 km of MDRs, (ii) improving road maintenance and asset management, and (iii) developing an efficient accident response system. MPRDC specifically targets MDRs to form key linkage between rural, semi urban and urban areas and complete the state roads connectivity.

2. Madhya Pradesh Road Development Corporation Ltd (MPRDC), the Government of Madhya Pradesh, has started the improvements of State highway and Major District Roads network for meeting the supply-demand gap of the traffic in near future. As a part of this strategy MPRDC has taken up the up-gradation of Katra-Mauganj Road. The main objectives are to improve the regional as well as inter- and intra-state transport flows to improve access to services and making the State attractive to developers and investors. To fulfil the above objectives and due considerations to environmental feasibility of above road section, this initial environmental examination (IEE) was carried out for this section.

3. Since the project is following the sector loan modality four subprojects were selected as sample roads. But the sub-project road Katra-Mauganj is not a sample road. This subproject is categorized as Category "B" and hence, an initial environmental examination (IEE) has been undertaken. The IEE is carried out in accordance applicable laws and regulations of the Government of India and in ADB's Safeguard Policy Statement (SPS), 2009. The report is also consistent with the requirements of the Environment Assessment and Review Framework (EARF). Since the project road will be upgraded within existing available Row, no Environmental Clearance is required for the proposed road widening project as per EIA Notification 2006.

### **B. Description of Project**

4. Katra-Mauganj(KM) road is situated in the eastern part of Madhya Pradesh and traverses through Rewa District with a total length of 38.010 Kilometres. Rewa District is bounded by U.P state to the north and northeast, Satna District to the west, Sidhi District to the south. The subproject road takes off from Mangawan– Allahabad Road (NH-27) in Ghuma (Katra) & terminates by Making T Intersection with Rewa - Varanasi Road (NH-7) in Mauganj Town at Km 38+010.

5. The existing carriageway is single-lane with asphalt pavement having varying widths from 3.0 m to 4.2 m along the entire stretch with earthen shoulder both sides. The project involves widening within available ROW to intermediate-lane carriageway, 5.5 m wide and 2.25m paved shoulders for flexible pavement and 7.0m carriageway with 2.50m shoulder both side for CC pavement.

### **C. Description of Environment**

6. The proposed project road is located on the Central Plateau and Hill Region agro-climate zone and forms Keymore Plateau & Satpura Hills sub-group. The soil type in the area is medium black and land use pattern is agricultural with intermittent semi-urban and rural stretches.

7. The region has a tropical climate characterized by hot summer season, except during the southwest monsoon season. It has four seasons: cold from December to February, hot from March to mid-June, southwest monsoon from mid-June to September, and post monsoon from October and November. The maximum temperature during summers ranges from 33°C to 44°C while minimum temperature from 30°C to 19°C. During winter season, temperature ranges between of 27°C to 10°C. The monsoon season spreads from June to September with average rainfall of 1,000 mm in the west to 2,000 mm in the east parts of the state. The mean annual rainfall in the state is 1100 mm.

8. Baseline data on ambient air quality including noise levels meet the national air quality standards. Water quality from hand pumps along the project road complies with the drinking water standards.

9. KM Road does not pass through any Forest land, protected area, wildlife sanctuary, national park, or bio-reserve and its buffer zones. Approximately 86 trees will be cleared within the right-of-way to accommodate needed road upgrading. No rare or endangered species were found along the subproject road's impact area. There are no archaeological and historical monuments along or near the road. No community religious properties will be affected by during road widening.

#### **D. Anticipated Environmental Impacts and Mitigation Measures**

##### **1. Design and Construction Phase**

##### **a. Impact on Physiographic and Topography**

10. Since proposed project is only widening of existing road within available ROW without any land acquisition, impact on the physiographic of the area is not significant. The design will consider the improvement of roadside drainage conditions through the improvement of cross-drainage structures. Design of the cross drainage structures will follow IRC Guidelines.

##### **b. Potential Environmental Impacts on Soil**

11. **Loss of Productive Soil** .All activities will occur within the available RoW, no adverse environmental impact is anticipated on the productive soil. Lands taken on lease for access road and for construction camp will be restored its original land use.

12. **Soil Erosion.** Land clearing and grubbing will remove vegetation and soil cover which may cause some soil erosion during monsoon. Excavations in borrow pits may lead to loss of top soil and soil erosion. The risks of stream and river bank erosion near bridges and cross drainage works are significant. To avoid or minimize erosion, land clearing and grubbing will be conducted during dry season, productive top soils from borrow pits will be stored and reused in road embankment slope protection. Erosion control measures like silt screens will be installed along rivers and nallahs.

13. **Contamination of Soil.** There is the risk of contamination of soil from construction material and oil spills. Contractors are required to ensure proper handling materials and able to implement spills containment. Oil contaminated waste will be properly collected, stored disposed through 3rd party service providers. All fuel and lubricant storage and handling areas will be located at least 500 meters from the nearest water body and provided with perimeter interceptor drains. All construction debris will disposed by the Contractor on pre-designated

area as identified by the CSC-Environmental Specialist.

**c. Impact on Water Resources and Drainage**

14. Deterioration of water quality may occur near the construction camp and active construction camps. This will be minimized by timing land clearing and earthmoving during the dry season; proper handling of materials including oil, and lubricants; prohibiting the disposal of untreated sewage; and proper erosion control near rivers and nallahs.

**d. Impact on Ambient Air Quality**

15. Significant amount of dust will be generated during project construction. The following mitigation measures will also be undertaken:

- (i) Asphalt and hot-mix plants will be located at least 1 km away from any inhabited urban and rural stretches along the road with the clearance from MP Pollution Control Board.
- (ii) Sprinkling of water on the active construction fronts and construction yard.
- (iii) Regular maintenance of machinery and equipment.

16. Substantial noise will be generated from the use of heavy equipment and processing of rocks and asphalt. Adequate distance separating the rock crusher and hotmix plants will be required and the sourcing of “ready-made” gravel and asphalt will be promoted to avoid the establishment of these plants. Along the road particularly near sensitive sites like schools and hospitals, the use of less noisy equipment, scheduling of noisy activities, and provision of noise barriers will be implemented by the contractor to minimize disturbance.

**e. Impact on Flora, Fauna and Ecosystem**

17. Clearing and grubbing activities will result to the removal of shrubs, grasses, and an estimated 86 trees, majority of which are Babul or *Acacia nilotica* species. All cut trees will be compensated at the rate of 1:10 with preference to fast growing local species that are more efficient in absorbing carbon emissions.

**f. Construction Workers' Camp**

18. As the Contractor is required to source labour from the local communities along the subproject road, the size of the construction camps will be relatively small. It is the contractual responsibility of the Contractors to maintain a hygienic camp with adequate water and electric supply; toilet facilities located away from the water bodies and wells; proper disposal of domestic refuse; temporary medical facilities; pest control; clean and adequate food; and security.

**g. Impacts on Social Environment**

19. Construction and operation phases of project road will have some beneficial impact on social environment. Some increase in income of local people is expected as local unskilled, semiskilled and skilled persons may gain direct or indirect employment during construction phase. Since the immigration of work force during construction phase is likely to be very small, the social impacts on literacy, health care, transport facilities and cultural aspects are expected

to be insignificant.

## **2. Operation Phase**

20. Increase in vehicular emissions, noise level, road crashes due to higher speed vehicular speed, and oil contaminated road surface runoff will occur during project operation phase. The impact on air quality is not expected to be significant given the low projected traffic. Community safety is enhanced through the crash barriers, speed brakes, traffic signs, and pavement markers. Oil contamination will occur but expected to be in trace amounts based on the low level vehicular traffic. To control the anticipated increase in noise level the following measures will be implemented; good road surface will reduce the road-tire noise, prohibition of horns along sensitive areas, road widening will increase capacity and decrease congestion of vehicles, and compensatory tree plantation will be located near sensitive areas.

## **E. Public Consultation and Information Disclosures**

21. Public consultations have been carried out in the project area during the feasibility as well as detailed design stage. Key issues raised during the consultations were:

- (i) Provision of suitable drainage in the settlements areas.
- (ii) Provisions of safety measures in school and settlement areas.
- (iii) Suitable mitigation measures to address air and noise pollution.
- (iv) Provision of safety signage near school.
- (v) Avoid sourcing water for construction from public water sources.
- (vi) Minimize the cutting of trees.
- (vii) Construction labour camps should not be located near settlements area.
- (viii) Avoid borrow of earth near settlement and schools.
- (ix) Start tree plantation during construction phase.

## **F. Environmental Management Plan and Grievance Redress Mechanism**

### **1. Environmental Management Plan**

22. The KM Road specific Environment Management Plan has been formulated which consists of mitigation and monitoring measures, and clear definition of roles and responsibilities. The project will have one grievance redress mechanism for social and environment issues comprising a village level and district level committee. The nodal officer under the PIU will be the key person to coordinate the receiving of complaints and addressing them.

### **2. Environmental Monitoring Program (EMoP)**

23. A comprehensive monitoring plan has been prepared for all stages of the project. This includes parameters to be measured, methods to be used, sampling locations, frequency of measurements, detection limits, cost and responsibility for implementation and supervision. Construction Stage Monitoring to be carried out by contractor under supervision of construction supervision consultant (CSC).

24. Monitoring will focus on air, water, noise, soil erosion, drainage congestion and compensatory tree plantation. For tree plantation, the 75% survival rate of re-plantation shall be monitored for three years of the operation phase.

### **3. Institutional Arrangement and Capacity Building**

25. The implementation arrangements basically follow the ongoing MPSRSP-II with the following improvements: i) expansion of the Environmental and Social cell (ESC) staff from 1 to 4 with the recruitment of two social safeguard and one environmental safeguard officers; ii) MPRDC ten division offices acting as Project Implementation Units (PIUs) will appoint a social and environment safeguards focal person; and iii) Construction Supervision Consultant's environmental specialist from the CSC will provide technical support to MPRDC and the PIU for implementation of environment safeguards.

26. To enable MPRDC officials to implement for environmental safeguard requirements effectively, a training programme will be conducted for the EA and IA of the sector loan to improve environmental awareness, construction practices, legislative compliance requirements, EMP and EMoP implementation requirements, and roles and responsibilities.

### **G. Conclusions and Recommendations**

27. The findings of the IEE show that overall the project has limited and short term environmental impacts. Effective EMP implementation will ensure elimination and minimisation of identified adverse impacts. MPRDC shall ensure that EMP and EMoP is included in Bill of Quantity (BOQ) and forms part of bid document and civil works contract. If there is any change in the project design the EMP and EMOP will accordingly. MPRDC needs capacity building and practical exposure. Adequate training shall be imparted as proposed under environmental management plan to enhance the capability of concerned EA and IA officials.



## I. INTRODUCTION

### A. Project Background

1. The Madhya Pradesh District Connectivity Sector Project (MPDCSP) will improve transport connectivity in the state by rehabilitating and upgrading Major District Roads (MDRs). The Project constitutes (i) rehabilitating and upgrading about 1600 km of MDRs (ii) improving road maintenance and asset management and (iii) developing an efficient accident response system. MPRDC specifically targets MDRs to form key linkage between rural, semi urban and urban areas and complete the state roads connectivity. A consulting service will be provided to supervise the implementation of civil works and a piggy-backed technical assistance (TA) will support the development of an accident response system and a computerized road asset management system (RAMS). A sector lending modality is preferred considering the large number of distributed MDRs and MPRDC has the requisite institutional capacity to prepare and implement a sector development plan and prepare the individual road packages.

2. Government of Madhya Pradesh (GoMP) has been using a combination of budgetary, PPP, and ADB financing, to improve state highways. Rural roads are specifically addressed through MPRRDA and funds are made available from the Pradhan Mantri Gram Sadak Yojana (PMGSY) which is the national rural roads plan. ADB's funds are made available to the rural roads in the state through past loans to the central line ministry. However, the intermediate tier – the major district roads or MDRs – have not been specifically targeted for improvement. MDRs form the key linkage between rural, semi urban and urban areas and needs to be developed to complete state road connectivity. The GoMP is now proposing to improve the MDRs through the plan indicated in Table No 1.

**Table 1: Proposed Improvement Plan for MDRs**

| <b>Total MDRs in Madhya Pradesh</b>                                | <b>(Km) 19,574</b> |
|--|--------------------|
| Under construction by MPPWD<br>(Under Central Road Fund Scheme)    | 5,398              |
| Under Major District Roads Scheme                                  | 1,134              |
| Under Construction by MPRDC<br>(Under build operate transfer (BOT) | 1,992              |
| Toll + Annuity & Annuity Scheme)                                   |                    |
| Total Under Construction   | 8,524              |
| Balance to be constructed  | 11,050             |
| <b>Proposed under the Project <sup>a</sup></b>                     | <b>1,600</b>       |

<sup>a</sup> The actual estimates will depend on the assessment from the DPRs.

Source: MPRDC

3. Since the project will follow a sector loan modality, the present KM road was selected to screen significance of potential impacts and determine the environmental assessment required to address the safeguard issues, and needed disclosure and consultation requirements. This report focuses on the sub-project **Katra-Mauganj (KM)** road.

### B. Nature, Size and Location of the Project

4. The upgrading involves the upgrading of the existing single-lane, 38.010 km section of the KM Road. KM Road traversing through Rewa districts of Madhya Pradesh. The road

widening activities primarily will comprise of raising the embankment at certain locations and its stabilization including construction of retaining wall if required especially near water bodies overlay on the existing carriageway, junction improvement, and construction of major/minor bridges, culvert and RCC drain in built-up section. The location of the KM Road is shown in Figure 1.

### **C. Purpose and Scope of the Study**

5. This IEE report documents the environmental assessment of the KM Road subproject and identifies the environmental issues to be considered in the project planning and design stages. In this report, the different activities that are likely to take place to achieve the project objectives have been analyzed and the potential impacts that may accompany them have been identified, assessed for significance, and concomitant avoidance, mitigation, and compensation measures were prepared in consultation with stakeholders to be incorporated on the engineering design and project implementation. The IEE addresses the environmental management requirements of the Government of India (GOI) and Asian Development Bank. Specifically, this report:

- (i) Provides information about the baseline environmental setting of the subproject;
- (ii) Provides information on potential environmental impacts of the proposed subproject activities with its magnitude, distribution and duration.
- (iii) Provides information on required mitigation measures with cost to minimize the impacts.
- (iv) Analyses the alternatives options considering alternative locations, designs, management approaches for selection of most feasible and environmental acceptable options.
- (v) Provides details of stakeholder's consultations.
- (vi) Designs an environmental management and monitoring plan with institutional measures for effective implementation of mitigates measures proposed and addressing grievances.

6. The IEE was based on proposed road alignment and key construction activities such as site clearing, removal of trees, excavation, filling, grading and embankment formation, excavation for utility trenches, sub grade preparation, base course and asphalt overlay, shoulder, and construction of permanent structures like retaining walls, culverts and drains. The IEE also covered ancillary activities like camp site establishment and maintenance, sourcing of materials, and operation of equipment like rock crusher and hot mix plant. The corridor of impact is taken as 10 meters either side of the alignment. However, the study area impact zone is considered up to 5 km on both sides of road alignment to allow for coverage of indirect and induced impacts and a larger analysis of land use and other environmental features. Assessment is carried out on the following environment components: terrestrial and aquatic ecology, soil, water, air, noise, and socio economic aspects.

7. This IEE report is presented in eight chapters as follow:

- Chapter 1 – Introduction
- Chapter 2 – Policy, Legal and Administrative framework
- Chapter 3 – Description of Project
- Chapter 4 – Description of Environment
- Chapter 5 – Anticipated Impacts and Mitigation Measures
- Chapter 6 – Information Disclosure, Consultation, and Participation



## D. Methodology

8. The methodology for IEE adopted complies with the ADB Safeguard Policy Statement (SPS) 2009 and environmental guidelines. The study was carried out using reconnaissance survey, field visits, consultation with stakeholders, review of existing data, identification of adverse impacts and preparation of environmental management and monitoring plans. The stepwise activities carried out include:

- (i) Review of legal requirements
- (ii) Review of feasibility study
- (iii) Reconnaissance survey for identification of key issues data requirement and preliminary consultation
- (iv) Primary and secondary data collection
- (v) Consultation with stakeholders
- (vi) Identification of impacts and mitigation measures

### 1. Data Collection

9. Primary and secondary data on the physical, ecological, and socio-economic resources were collected to provide baseline conditions to be used in impact assessment and monitoring plan design. The type and source of information compiled in this IEE are below:

**Table 2: Primary and Secondary Information Sources**

| Information   | Sources   |
|---|---|
| Technical information on existing road features and proposed Rehabilitation work. Investigation of road features; viz. Water bodies community structures, environmental sensitive location areas, congested locations, etc. | MPRDC<br>Design Consultant Ground physical surveys and graphics consultants   |
| Climatic Condition  | Indian Meteorological Department, ENVIS Website, NIC, primary data collection |
| Geology, Seismicity, Soil and Topography  | Geological survey of India, SOI Topo sheets, Primary data collection          |
| Land Use/ Land Cover  | Survey of India (Sol) Topo sheet, Observation during survey.                  |
| Drainage Pattern  | Survey of India Toposheet and field observation                               |
| Status of forest areas, Compensatory afforestation norms etc.   | Divisional Forest Office, Rewa District.                                      |
| Status of Fishing Activity  | District Fisheries Offices at Rewa District                                   |
| Air quality Noise, Soil and Water   | Onsite monitoring and Analysis of Field samples during field visit            |
| Borrow Areas, Quarries and other construction material source   |   |
| River geo-morphology, hydrology, drainage, flood Patterns   | Feasibility report, field observations  |

|                           |   |
|---------------------------|---|
| Socioeconomic Environment | Primary Census Abstract of Rewa District 2001. Official websites maintained by state Govt., and Public Consultation during the Field survey |
|---------------------------|---|

## 2. Public Consultation

10. Extensive consultations were held during different stages (reconnaissance, detailed design and design review) with key stakeholders that includes local and beneficiary population, government departments/agencies, road users, and project-affected persons. These consultations allowed the interaction between the stakeholders and road designers to identify road features and construction methods that will enhance road upgrading and minimize potential impacts. Information gathered was integrated in the project design and formulating mitigation measures and environmental management plan. Detailed description of public consultation is presented in Chapter 6.

### E. Organizational Setting of Implementing Agency

11. The Madhya Pradesh Road Development Corporation (MPRDC) is mandated for construction and maintenance of roads in behalf of the Government of Madhya Pradesh. MPRDC is the executing agency (EA) for this project and a PIU is created within MPRDC at headquarter which is responsible for the proper implementation of all ADB funded road projects. The EA capability for effective implementation of Environmental Management Plan (EMP) has been assessed and presented in Chapter 7.



Figure 1: Location Map

## II. POLICY AND LEGAL FRAMEWORK

12. India has well defined institutional and legislative framework. The legislation covers all components of environment viz air, water, soil, terrestrial and aquatic flora and fauna, natural resources, and sensitive habitats. The environmental legislations in India are framed to protect the valued environmental components and comply with its commitment to international community under various conventions and protocols as well. Asian Development Bank has also developed interventions to guide social and environment safeguards, in their Safeguard Policy Statement, 2009. This assessment is about the applicability of above laws and regulations, and safeguards. This chapter summarizes the following:

- (i) Applicability of various National and local laws and regulations at different stages of project implementations
- (ii) Applicability of ADB safeguards policies and categorization of the project.

### A. Country's Legal Framework and Regulatory Requirements for the Project

13. The legal framework of the country consists of several acts, notifications, rules, and regulations to protect environment and wildlife. Key policies, acts and regulations relevant for the project are provided in Table 3 below.

**Table 3: Summary of Relevant Environmental Legislation**

| Act   | Objective   | Responsible Institution       |
|---|---|-------------------------------|
| Environment (Protection) Act (1986) and Rules (1986)  | To protect and improve the overall environment  | MoEF                          |
| Environmental Impact Assessment (EIA) Notification under Environmental Protection Rules (2006, 2009, 2011) and relevant Office Memorandums (OM) | To provide guidance on environmental clearance requirements and clarification on related specific technical issues                      | MoEF                          |
| Wildlife Protection Act (1972 and amended in 1993)  | To protect wild animals and birds through the creation of National Parks and Sanctuaries  | MoEF                          |
| The Water (Prevention and Control of Pollution) Act 1972 (Amended 1988) and Rules 1974  | To provide for the prevention and control of water pollution and the maintaining or restoring of wholesomeness of water.                | CPCB                          |
| The Air (Prevention and Control of Pollution) Act, 1981(Amended 1987) and Rules 1982  | To provide for the prevention, control and abatement of air pollution, and for the establishment of Boards to carry out these purposes. | CPCB and Road Authorities     |
| Hazardous Waste (Management, Handling and Trans-boundary Movement) Rules 2008 (Amended 2009),   | To protection the general public against improper handling, storage and disposal of hazardous wastes                                    | State Pollution Control Board |
| The Forest (Conservation) Act 1980 (Amended 1988) and Rules 1981 (Amended 2003)   | To protect and manage forests   | MoEF                          |

| <b>Act</b>  | <b>Objective</b>   | <b>Responsible Institution</b>    |
|---|--|-----------------------------------|
| Central Motor Vehicle Act (1988) and Rules (1988)   | To control vehicular air and noise pollution. To regulate development of the transport sector, check and control vehicular air and noise pollution.          | State Transport Department        |
| Ancient Monuments and Archaeological Sites and Remains Act (1958)   | Conservation of Cultural and historical remains found in India.  | Archaeological Dept. GOI          |
| Building and Other construction workers (Regulation and the Employment and conditions of service) Act, 1996 | To regulate the employment and conditions of service of building and other construction workers and to provide for their safety, health and welfare measures | Ministry of Labour and Employment |
| Child labour (Prohibition and Regulation) Act, 1986   | To regulate the employment of children including age limits, type of employment, timing of work, information disclosure and health and safety.               | Ministry of Labour and Employment |

### **1. Requirement of Environmental Clearance**

14. As per provisions of Environmental Impact Assessment Notification 2006 amended (2009), and its amendments, vide notification S.O.3067(E), dated the 1st December 2009 all State Highway expansion projects, except those in hilly terrain (above 1000 m AMSL) and ecologically sensitive areas, have been exempted from Environmental Clearances.

15. Since, the project road is a major district road and not a state, the above EIA Notification, 2006 (amended till date) promulgated under Environment (Protection) Act 1986 is not applicable for the project road and hence no Environmental Clearance is required for the proposed road widening project.

### **2. Forests Clearance**

16. As per Indian Forests Conservation Act (1980), any project requiring diversion of forests land for non-forestry purposes require forest clearance from MoEF for the same. The forestry clearance is granted through two stages process.

17. Since no diversion of forestland is involved in KM Road, no forest clearance is required for this road.

### **3. Permission to Withdraw Ground Water**

18. As per the power Granted under Environmental Protection Act, 1986, Permission from Central Ground Water Authority is required for extracting ground water for construction purposes, from areas declared as critical or semi critical from ground water potential prospective.

#### 4. Required Clearances/Permissions

19. For up-gradation of the project road, required clearances/ permissions related to environment has been summarized in Table 4.

**Table 4: Permissions/Clearances Required for the Subproject**

| Sr. No.   | Permissions/ Clearances                                    | Acts/ Rules/ Notifications/Guidelines  | Concerned Agency  | Responsibility |
|-----------|--|--|---|----------------|
| <b>A.</b> | <b>Pre-construction Stage</b>                              |  |   |                |
| 1         | Permission for cutting of trees                            | Forest Conservation Act (1980) Procedural Guidelines developed by the Department of Environment, Government of M.P. under the orders of the Honourable High Court Tree removal will be guided as per state government rules. | District Forest Office/State Forest Department for trees felling in forest areas and District Authorities in non-forests Areas (Compensatory tree plantation to be made 1:10 as per the permission granted) | MPRDC          |
| <b>B.</b> | <b>Implementation Stage</b>                                |  |   |                |
| 2         | Consent to operate hot mix plant, Crushers, Batching plant | Air (Prevention and Control Pollution) Act of 1981   | M.P. State Pollution Control Board (To be obtained before installation)   | Contractor     |
| 3         | Authorization for Disposal of hazardous waste              | Hazardous Waste (Management and Handling) Rules 1989   | M.P. State Pollution Control Board (To be obtained before generation)   | Contractor     |
| 4         | Consent for Disposal of sewage from labour camps           | Water (Prevention and Control of Pollution) Act 1974   | M.P. State Pollution Control Board (Before setting up the camp)   | Contractor     |
| 5         | Pollution Under Control Certificate                        | Central Motor and Vehicle Act 1988   | Department of Transport, Government of M.P. authorized testing centres  | Contractor     |
| 6         | Employing Labour/Workers                                   | The Building and Other Construction Workers (Regulation and Employment Conditions of Service) Act, 1996  | District Labour Commissioner  | Contractor     |

#### B. International Agreements

20. India has been playing an active role in environmental conservation since the first United Nations (UN) conference on Human Environment in Stockholm in 1972 and recognizes that protection of environment is closely linked to combating poverty. Key international agreements that India is signatory to and relevant for the project are provided below:

- (i) Convention Relative to the conservation of Flora and Fauna in their Natural State (1933)
- (ii) International Plan Protection Convention (1951)
- (iii) Convention on Wetlands of International Importance, Especially as Waterfowl Habitat (Ramsar, 1971)
- (iv) Convention concerning the Protection of the World Cultural and Natural Heritage (Paris, 1972)
- (v) Convention in International Trade in Endangered Species of Wild Fauna and Flora (Washington, 1973)
- (vi) Convention on Migratory Species of Wild Animals (Bonn, 1979)
- (vii) Convention on the Prior Informed Procedure for Certain Hazardous Chemicals and Pesticides in International Trade (PIC or Rotterdam, 1990)
- (viii) United Nations Framework Convention on Climate Change (Rio De Janeiro, 1992)
- (ix) Convention on Biological Diversity (Rio De Janeiro, 1992)
- (x) Protocol to the United Nations Convention on Climate Change (Kyoto, 1997)

21. The above list of international conventions served as requirements for the project to comply. However, due to the limited scale of the road upgrading and the predicted traffic increase during operation, the expected environmental issues that are governed by these international conventions would be insignificant.

### **C. Asian Development Bank Safeguard Policies**

22. The Asian Development Bank has defined its safeguard requirements in the Safeguard Policy Statement 2009 (SPS). The prime objectives of these safeguard policies are to: (i) Avoid adverse impacts of projects on the environment and affected people, where possible; and (ii) minimize, mitigate, and/or compensate for adverse project impacts on the environment and affected people when avoidance is not possible.

### **D. Category of the Project as per SPS**

23. Using the prescribed ADB Rapid Environmental Assessment Checklist (see Appendix 1), KM Road was classified as environmental category "B." This categorization was primarily based on the following considerations:

- (i) subproject road is existing and upgrading activities are limited to the RoW,
- (ii) anticipated impacts from road upgrading on relatively flat terrain along agricultural land are mostly site specific and easily mitigated through proper design and good construction practices,
- (iii) majority of the activities have short-term duration co-terminus with the construction phase

24. Subproject road does not pass through or located within 10 km from any wildlife sanctuary, national park, or any other environmentally sensitive or protected areas

### III. PROJECT DESCRIPTION

#### A. Rational and Project Settings

25. Katra-Mauganj(KM) road is situated in the eastern part of Madhya Pradesh and traverses through Rewa District with a total length of 38.010 Kilometres. Rewa District is bounded by U.P state to the north and northeast, Satna District to the west, Sidhi District to the south.

26. The subproject road takes off from Mangawan – Allahabad Road (NH-27) in Ghuma (Katra) & terminates by Making T Intersection with Rewa - Varanashi Road (NH-7) in Mauganj Town at Km 38+010.

27. The existing carriageway is single-lane having flexible pavement, with widths varying between 3.0 m to 4.2 m along the entire length of project road with earthen shoulder on either sides. The project involves widening of existing roads within available ROW to intermediate-lane carriageway (5.5 m wide carriageway and 2.25m earthen shoulder either side).

28. The salient Features of the KM Road is given in Table 5.

**Table 5: Summary Road Components and Design Standard**

|                                  |   |
|----------------------------------|---|
| <b>Road Length</b>               | 38.010 Km   |
| <b>Alignment</b>                 | Follow the exits road alignment. Except some of the Locations where geometric improvements is required.   |
| <b>Flyovers/underpasses/ ROB</b> | There are two underpasses under construction at km 0+310&at Km 36+685   |
| <b>Major Bridges</b>             | Three major bridges   |
| <b>Other Structures</b>          | No minor bridges, seven causeways and thirty nine culverts along the Project road.  |
| <b>Embankment Design</b>         | Embankment height established for 1m free board on 20 years frequency HFL Embankment height up to 3.0 m with 2H: 1V for embankment height from 3.0 m to 6.0 m with 15H: 1V. Construction of embankment of height more than 3.0 m, using borrow soil is recommended. However high embankment have been restricted within Row providing returning walls |
| <b>Design Standard</b>           | As per IRC Codes and MORSTH Guidelines.<br>Vertical Clearance 0.60 m above HFL for bridges up to 30 m length 0.90m above HFL for bridges above 30 m length The discharges for which the bridge has been designed are maximum flood discharge on record for a period of 100 years for major bridges and 50 years for minor bridges.                    |
| <b>Speed</b>                     | Design : 100 Km/h<br>Permissible : 80 km/h  |
| <b>Horizontal Controls</b>       | As per IRC: 73 – 1980<br>Maximum value of 7% for super elevation and 15% for side friction factor, the minimum radius for horizontal curves is 230m for design speed 80Km/hr  |
| <b>Vertical Controls</b>         | Grade break of 0.5%, vertical curves will be provided.  |
| <b>Carriageway</b>               | Carriageway: 5.5m for Flexible Pavement and 7.0 m for CC.<br>Cross fall will be 2.5% for pavement and 3% for earthen shoulder for flexible & for CC they are 2% and 3% respectively   |

Source: Detailed Project Report, 2014



## B. Characteristics of the Existing Road

29. The existing road passes through plain terrain predominantly agricultural & open lands and scattered urban and village settlements of Gumha, Jatpvar, Hakariya, Mahewa, Rampur, Dabhi, Lalganj, Bahutigaon, Tendua, Dhamahi, Maujanj Village etc. (Table 6).

**Table 6: Existing Town/Settlements**

| Town/Settlements Name      | Chainage (km) |        |
|----------------------------|---------------|--------|
|                            | Start         | End    |
| Gumha Village              | 0.000         | 1.200  |
| Jatpvar                    | 3.000         | 3.200  |
| Jaikara Village            | 4.400         | 5.000  |
| Hakariya Village           | 5.000         | 5.800  |
| Kot Village                | 5.800         | 6.400  |
| Mahewa Village             | 9.600         | 11.200 |
| Rampur Village             | 15.200        | 15.600 |
| Dubi Village               | 15.600        | 16.600 |
| Shahpur Village            | 17.000        | 17.200 |
| Parasiya Pahad Village     | 17.600        | 18.000 |
| Shivrajpur Village         | 18.200        | 19.600 |
| Dabhi Village              | 19.600        | 20.000 |
| Beohariya Village          | 20.600        | 20.800 |
| Tituri Village             | 21.400        | 22.000 |
| Lalganj Village            | 22.400        | 22.600 |
| Patharauda Kalan Village   | 23.400        | 24.400 |
| Bahutigaon                 | 25.000        | 25.200 |
| Sumeda Kalan Village       | 26.200        | 26.600 |
| Bahati Village             | 26.800        | 27.400 |
| Madau Village              | 27.400        | 28.600 |
| Chhuiya                    | 30.000        | 30.200 |
| Sipinhai Village           | 30.400        | 31.400 |
| Chhiriuha Village          | 32.000        | 32.600 |
| Chamarhar Village          | 33.600        | 34.200 |
| Tendua Village             | 35.000        | 35.600 |
| Mudariya Ram Naval Village | 36.000        | 37.000 |
| Dhamahi Village            | 37.000        | 37.800 |
| Maujanj Village            | 37.800        | 38.010 |

30. The pavement type is flexible throughout the length of project road. The condition of the pavement is generally fair to poor. The condition of shoulders is also poor and now covered with vegetation. There is no formal drainage system along the KM Road and the existing shoulders slope does not facilitate proper drainage. Suitable measures will be carried out by site specific drainage designs. Stretches of telephone and electric utilities need to be shifted to allow planned upgrading.

**Table 7: Stretches for Improvements**

| Sr. No. | Existing Chainage |        | Length (Km) | Existing Carriageway Width (m) | Existing Formation Width (m) | Type of Road | Existing Condition |
|---------|-------------------|--------|-------------|--------------------------------|------------------------------|--------------|--------------------|
|         | From              | To     |             |                                |                              |              |                    |
| 1       | 0+000             | 38+010 | 38.0100     | 3.0-4.0                        | 7.0-8.0                      | BT           | Fair to Poor       |

### C. Current and Projected Daily Traffic

31. Based on Classified Volume Count (CVC), Origin Destination, and Axle Load Surveys conducted for project and consistent with applicable IRC Guidelines<sup>1</sup> the average annual daily traffic at the monitoring stations in Ghuma Village (ch3+000 km) is 1006 PCU.

32. 6.5% traffic growth rate is the taken for traffic projection, determination of lane requirement and financial analysis. The actual and projected traffic data for KM Road are provided in the succeeding Tables.

**Table 8: Summary of Annual Average Daily Traffic (AADT) of KM Road**

| VEHICLE TYPE                     | AADT       | PCU         |
|----------------------------------|------------|-------------|
| Two Wheeler                      | 281        | 141         |
| Three Wheeler                    | 0          | 0           |
| Car / Jeep / Van / Taxi          | 155        | 155         |
| Mini Bus                         | 0          | 0           |
| Bus                              | 22         | 66          |
| LCV                              | 21         | 32          |
| 2 - Axle Truck                   | 52         | 156         |
| 3 - Axle Truck                   | 89         | 401         |
| Multi Axle Truck                 | 0          | 0           |
| Tractor with Trailer             | 2          | 9           |
| Tractor without Trailer          | 5          | 8           |
| Total Fast Moving Vehicles (FMV) | 627        | 966         |
| Cycles                           | 79         | 40          |
| Cycle Rickshaw                   | 0          | 0           |
| Bullock Cart                     | 0          | 0           |
| Horse Drawn                      | 0          | 0           |
| Hand Cart                        | 0          | 0           |
| Total Slow Moving Vehicles (SMV) | 79         | 40          |
| <b>TOTAL</b>                     | <b>706</b> | <b>1006</b> |
| <b>CVPD</b>                      | <b>184</b> |             |

**Table 9: Summary of Projected Total Traffic Volume (Vehicles/day and PCU/day)**

| Section      |                | Year          |               |                |                |                |                |
|--------------|----------------|---------------|---------------|----------------|----------------|----------------|----------------|
|              |                | 2014          | 2019          | 2024           | 2029           | 2034           | 2039           |
| <b>Katra</b> | <b>Mauganj</b> | 706<br>(1006) | 962<br>(1369) | 1315<br>(1868) | 1799<br>(2553) | 2464<br>(3496) | 3372<br>(4783) |

<sup>1</sup> IRC: SP 19-2001, IRC: 108-1996, IRC SP: 41-1994, IRC: 102-1998, IRC 103- 1988 Pedestrian facilities and IRC: 09-1972

## D. Proposed Improvement

33. KM Road will receive the following upgrades under the project:

- (i) Curvature improvement and realignment
- (ii) Widening
- (iii) Flexible pavement
- (iv) Rearrangement of junctions
- (v) Road side drains
- (vi) Bridge and cross drainage structures
- (vii) User facilities
- (viii) Traffic control and safety measures

### 1. Realignment and Curvature Improvement

34. Based on approved geometric standards the alignment plan of the existing road requires correction of sub-standard geometry at various locations.

35. On sections with substandard geometry, improvements will require merging two or more existing curves resulting to a minor geometric realignment to achieve the desired geometric standards. Reverse curves will be modified to accommodate required rate of super elevation and provide smooth riding quality. However, at locations with space constraints design speed has been restricted as low as 65 km/h.

**Table 10: Substandard Geometry**

| Sr. No. | Chainage |        | Radius (mt) | Speed (kmph) | Remarks                      |
|---------|----------|--------|-------------|--------------|------------------------------|
|         | Start    | End    |             |              |                              |
| 1       | 5+150    | 5+250  | 20          | 20           | Substandard Horizontal Curve |
| 2       | 15+350   | 15+420 | 30          | 25           | Substandard Horizontal Curve |
| 3       | 18+000   | 18+060 | 30          | 25           | Substandard Horizontal Curve |

### 2. Proposed Cross Section Details

36. **Carriageway Width:** The carriageway configuration of intermediate lane with hard shoulder is proposed for the project road having a 5.5m carriageway width in rural areas and 7.0 m carriageway in built-up areas.

37. **Hard Shoulder:** Hard shoulders are proposed to be 2.25m wide both sides of the bituminous pavement for rural plain and rolling terrains. 2.50 m wide shoulder on both sides of the CC pavement has been provided.

38. **Footpath:** No footpath has been provided.

39. **Utility Corridor:** Minimum width of utility corridor for rural sections will be 2.0m and for urban/ built-up sections will be 1.00m.

40. **Embankment Slopes:** Side slopes shall not be steeper than 2H: 1V unless soil is retained by suitable soil retaining structures.

41. The Typical Cross Section for the proposed project road is given in Figures 2 and 3.

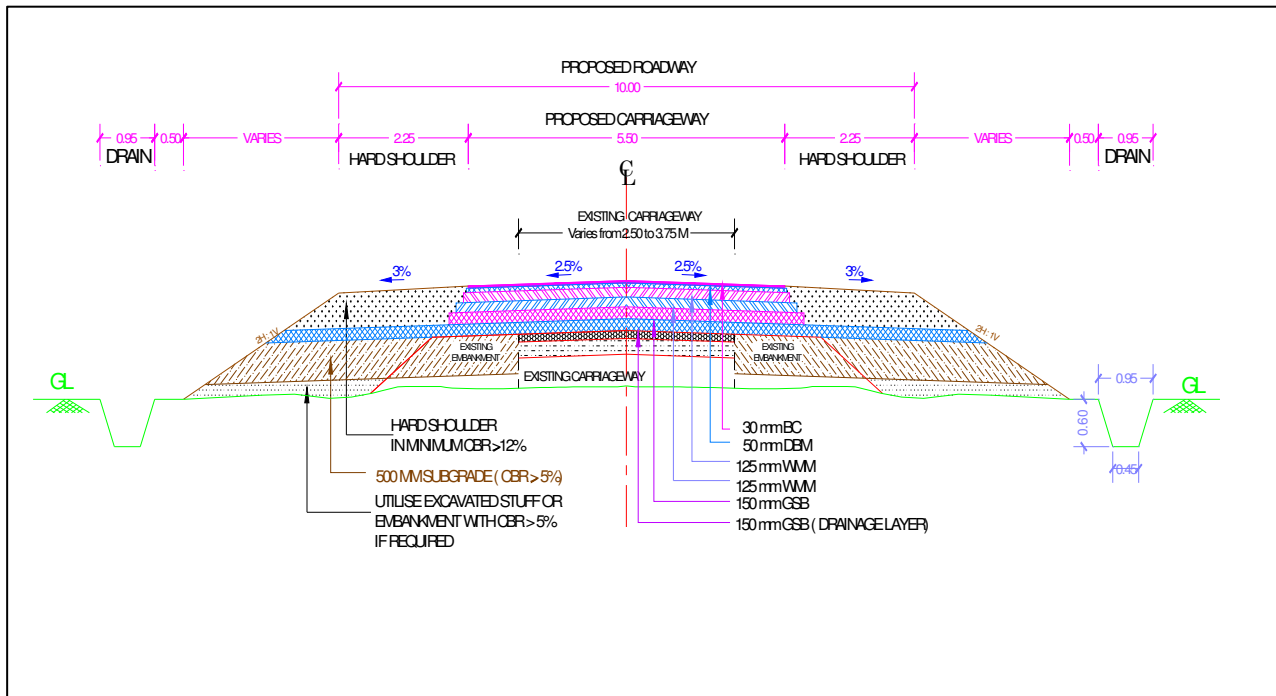


Figure 2: Typical Cross-section of Flexible Pavement

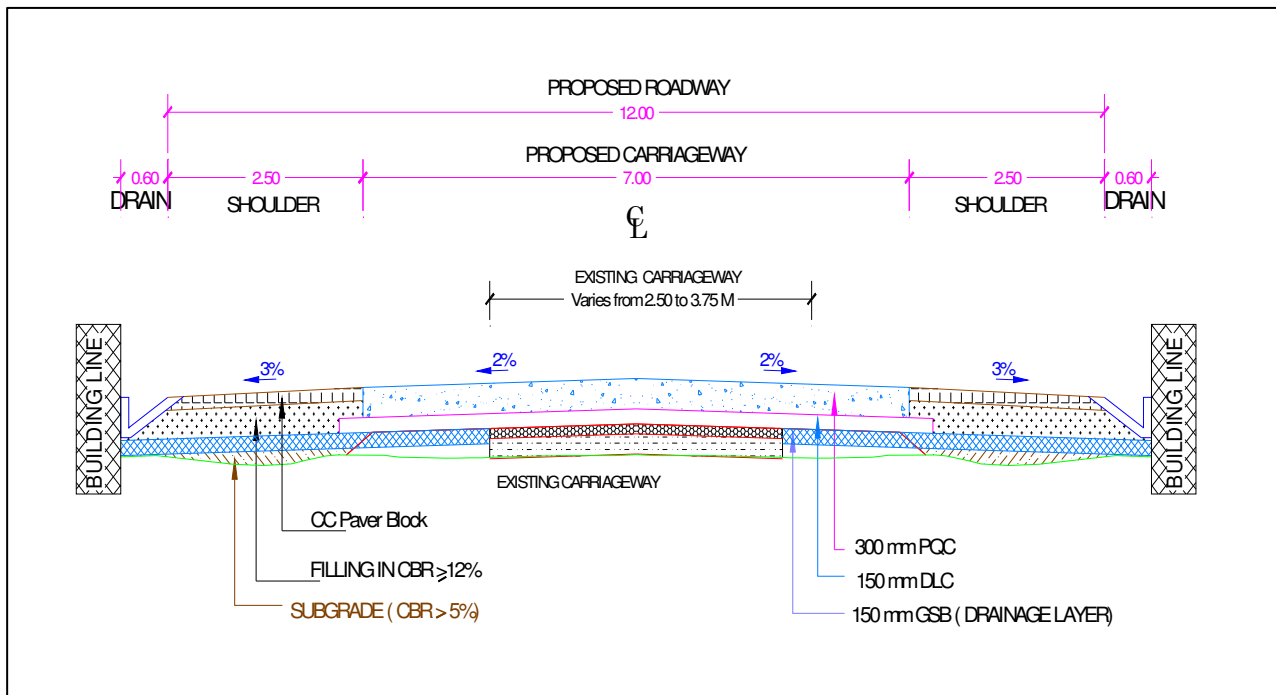


Figure 3: Typical Cross-section of CC Pavement

### 3. Widening Proposal

42. In order to meet future traffic requirements, the existing carriageway is proposed to be upgraded to intermediate-lane with hard shoulder for flexible pavement and two-lane with shoulder with paver blocks for CC pavement. Concentric widening scheme is followed to minimise land acquisition issues and to ensure maximum utilisation of existing configuration. The chainage wise details of widening scheme are given at Table 11.

**Table 11: Proposed Widening Scheme**

| Sr. No | Design Chainage (Km) |        | Length (m) | Type of Pavement | Carriageway Width (m) | Remarks |
|--------|----------------------|--------|------------|------------------|-----------------------|---------|
|        | From                 | To     |            |                  |                       |         |
| 1      | 0.000                | 1.000  | 1000       | CC               | 7                     |         |
| 2      | 1.000                | 4.550  | 3550       | Bituminous       | 5.5                   |         |
| 3      | 4.550                | 4.750  | 200        | CC               | 7                     |         |
| 4      | 4.750                | 5.000  | 250        | Bituminous       | 5.5                   |         |
| 5      | 5.000                | 5.250  | 250        | CC               | 7                     |         |
| 6      | 5.250                | 5.850  | 600        | Bituminous       | 5.5                   |         |
| 7      | 5.850                | 6.000  | 150        | CC               | 7                     |         |
| 8      | 6.000                | 9.400  | 3400       | Bituminous       | 5.5                   |         |
| 9      | 9.400                | 9.750  | 350        | CC               | 7                     |         |
| 10     | 9.750                | 15.200 | 5450       | Bituminous       | 5.5                   |         |
| 11     | 15.200               | 16.000 | 800        | CC               | 7                     |         |
| 12     | 16.000               | 18.750 | 2750       | Bituminous       | 5.5                   |         |
| 13     | 18.750               | 19.000 | 250        | CC               | 7                     |         |
| 14     | 19.000               | 19.650 | 650        | Bituminous       | 5.5                   |         |
| 15     | 19.650               | 20.000 | 350        | CC               | 7                     |         |
| 16     | 20.000               | 21.550 | 1550       | Bituminous       | 5.5                   |         |
| 17     | 21.550               | 21.900 | 350        | CC               | 7                     |         |
| 18     | 21.900               | 22.450 | 550        | Bituminous       | 5.5                   |         |
| 19     | 22.450               | 22.600 | 150        | CC               | 7                     |         |
| 20     | 22.600               | 26.350 | 3750       | Bituminous       | 5.5                   |         |
| 21     | 26.350               | 26.750 | 400        | CC               | 7                     |         |
| 22     | 26.750               | 27.100 | 350        | Bituminous       | 5.5                   |         |
| 23     | 27.100               | 27.950 | 850        | CC               | 7                     |         |
| 24     | 27.950               | 30.900 | 2950       | Bituminous       | 5.5                   |         |
| 25     | 30.900               | 31.300 | 400        | CC               | 7                     |         |
| 26     | 31.300               | 32.000 | 700        | Bituminous       | 5.5                   |         |
| 27     | 32.000               | 32.650 | 650        | CC               | 7                     |         |
| 28     | 32.650               | 33.650 | 1000       | Bituminous       | 5.5                   |         |
| 29     | 33.650               | 34.100 | 450        | CC               | 7                     |         |
| 30     | 34.100               | 35.050 | 950        | Bituminous       | 5.5                   |         |
| 31     | 35.050               | 35.650 | 600        | CC               | 7                     |         |
| 32     | 35.650               | 36.000 | 350        | Bituminous       | 5.5                   |         |
| 33     | 36.000               | 38.100 | 2100       | CC               | 7                     |         |

#### 4. Realignment

43. Proposed alignment has almost followed the existing one. No realignments are proposed in any locations.

**Table 12: Locations of Realignment**

| Sr. No                  | Design Start Chainage | Design End Chainage |
|-------------------------|-----------------------|---------------------|
| No realignment proposed |                       |                     |

#### 5. Intersections

44. Only three major intersections are along the project road.

**Table 13: Major Intersections**

| Sr. No | Design Chainage | Left | Right | Surface Type | Type       | Improvement Proposal | Category |
|--------|-----------------|------|-------|--------------|------------|----------------------|----------|
| 1      | 0.000           | Left | Right | CC           | T-Junction | yes                  | Major    |
| 2      | 22.550          |      | Right | Bituminous   | T-Junction | yes                  | Major    |
| 3      | 38.010          | Left | Right | CC           | T-Junction | yes                  | Major    |

**Table 14: List of Minor Intersections**

| Sr. No | Chainage (Km) | Type         | Side | Improvement Proposal |
|--------|---------------|--------------|------|----------------------|
| 1      | 0.750         | T - Junction | RHS  | N/A                  |
| 2      | 2.200         | T - Junction | RHS  | N/A                  |
| 3      | 3.250         | T - Junction | RHS  | N/A                  |
| 4      | 7.850         | T - Junction | RHS  | N/A                  |
| 5      | 9.750         | T - Junction | RHS  | N/A                  |
| 6      | 10.450        | T - Junction | RHS  | N/A                  |
| 7      | 11.050        | T - Junction | LHS  | N/A                  |
| 8      | 11.650        | T - Junction | RHS  | N/A                  |
| 9      | 11.875        | T - Junction | RHS  | N/A                  |
| 10     | 13.100        | X - Junction | Both | N/A                  |
| 11     | 14.200        | X - Junction | Both | N/A                  |
| 12     | 15.800        | X - Junction | Both | N/A                  |
| 13     | 16.600        | X - Junction | Both | N/A                  |
| 14     | 18.025        | X - Junction | Both | N/A                  |
| 15     | 18.900        | T - Junction | RHS  | N/A                  |
| 16     | 19.650        | T - Junction | RHS  | N/A                  |
| 17     | 21.950        | X - Junction | Both | N/A                  |
| 18     | 23.300        | X - Junction | Both | N/A                  |
| 19     | 24.250        | T - Junction | RHS  | N/A                  |
| 20     | 25.550        | T - Junction | RHS  | N/A                  |
| 21     | 26.450        | T - Junction | RHS  | N/A                  |
| 22     | 31.250        | X - Junction | Both | N/A                  |
| 23     | 32.200        | T - Junction | LHS  | N/A                  |

## 6. Design of Road Side Drains

45. The following drainage improvements are incorporated in the design:

46. Road-side lined drains of L-shaped sections (please refer Typical Drawings) on both sides CC pavement,

**Table 15: Cement Concrete Lined Drain**

| Sr. No | Chainage (km) (both side) |        | Length (m) | Remarks |
|--------|---------------------------|--------|------------|---------|
|        | From                      | To     |            |         |
| 1      | 0.000                     | 1.000  | 2000       |         |
| 2      | 4.550                     | 4.750  | 400        |         |
| 3      | 5.000                     | 5.250  | 500        |         |
| 4      | 5.850                     | 6.000  | 300        |         |
| 5      | 9.400                     | 9.750  | 700        |         |
| 6      | 15.200                    | 16.000 | 1600       |         |
| 7      | 18.750                    | 19.000 | 500        |         |
| 8      | 19.650                    | 20.000 | 700        |         |
| 9      | 21.550                    | 21.900 | 700        |         |
| 10     | 22.450                    | 22.600 | 300        |         |
| 11     | 26.350                    | 26.750 | 800        |         |
| 12     | 27.100                    | 27.950 | 1700       |         |
| 13     | 30.900                    | 31.300 | 800        |         |
| 14     | 32.000                    | 32.650 | 1300       |         |
| 15     | 33.650                    | 34.100 | 900        |         |
| 16     | 35.050                    | 35.650 | 1200       |         |
| 17     | 36.000                    | 38.100 | 4200       |         |

## 7. Pavement Design

47. The project road envisages intermediate lane carriageway with hard shoulders and upgrading of the existing pavement to carry the anticipated traffic over the design period. This would involve the construction of new pavement on the widened side and strengthening and rehabilitation of the existing pavements. Flexible asphalt pavement is proposed for the entire length of project road. The applicable IRC Guidelines would be used for this purpose, but using other internationally accepted design method(s) to ensure that the recommended design is the most appropriate one would further check the design.

## 8. Traffic Control and Safety Measures

48. In addition to adequate provisions for roadway width, geometric elements and junction improvement, the following provisions will enhance the safety of road users. Due consideration has been made for the provisions contained in IRC: SP 44-1994, "Highway Safety Code". Also, various measures have been proposed to increase traffic control for the High-speed highway.

### a. Road Signs

49. Adequate road signs are proposed for the project road in order to provide advance information to regulate/control traffic flow and ensure safety of operations. All road signs are provided in accordance with IRC 67.

50. Appropriate road markings are provided with stop signs, give-way signs, traffic merging and diverging signs, lane closure signs, compulsory keep left/right signs or any other signs as per IRC-67. Advance cautionary signs will be installed on sharp curves along with chevron signs at the outer edge of the curves. In hilly areas, curve-ahead signs are accompanied with appropriate delineators.

51. The signs will be of retro reflective sheeting of high intensity grade with encapsulated lens and fixing details as per clause 801 of MoRT&H Specifications for Road and Bridge Works, 2001 (4th Revision, latest reprint).

### b. Pavement Markings

52. In project road, pavement will comply with the IRC: 35-1997, "Code of Practice for Road Marking" with centre-line, edge line, continuity line, stop line, give way lines, diagonal/chevron markings. The pavement marking shall be of hot applied thermoplastic paint with glass beads as per the MORT&H specification for Road and Bridge Works, 2001(4th Revision, latest reprint).

## 9. User Facilities

53. **Bus Stop.** No new bus stop has been proposed. Details of existing bus stops are given in Table 16. Existing bus stops are proposed to be retained. Appropriate maintenance measures shall be made to keep it in working conditions.

**Table 16: Bus Stop Locations**

| Sr. No. | Existing Chainage (Km) | Proposed Chainage (Km) | Side | VillageName   |
|---------|------------------------|------------------------|------|---------------|
| 1       | 19+813                 | 19+800                 | RHS  | Dabhi Village |

## 10. Improvement Proposal for Bridges and Drainage Structure

54. There are three major bridge, two minor bridges, seven causeway, and thirty nine culverts along the KM Road. All the minor bridges will be retained

### E. Material Investigation

#### 1. Borrow Soil

55. Borrow soil will be collected from a distance of average 3.0 km along the project road.

#### 2. Aggregate Quarry

56. One crusher is located at Bankuiya, 50 km from project road and another at Ramnai, 40 km from the project road. Aggregates will be collected from both of these crushers.



### **3. Granular Material**

57. Granular material is used for the Drainage layer (GSB) in the pavement crust. This layer is laid up to the formation width level of the pavement for effective drainage. Granular material used in the GSB layer should have liquid limit and plasticity index restricted to 25% and 6%, respectively. In case of non-availability of suitable granular material in vicinity of project area within the reasonable lead distance, Soil, Sand and Aggregate are to be blended with suitable proportion (preferably 60:10:30) so as to achieve specified test value and gradation as per the clause 401 of MORTH specification.

### **4. Sand**

58. Sand is generally used in the concrete work in construction. The sand will be collected from Sone River which is about 90 km from the project road.

### **5. Cement**

59. There are many cement producing factories located in Madhya Pradesh State. Cement will be collected from the local market.

### **6. Bitumen**

60. Bitumen will be collected from Mathura refinery and the distance from the project road is about 640 km

### **7. Steel**

61. There are a number of steel rolling factories in Madhya Pradesh with availability of various grade of steel. The required type of Steel is to be procured from the local market.

### **8. Water**

62. Ground water and surface water in the vicinity of the project road is considered as a source of water. The water for construction can be made available by constructing bore at plant site with prior consents from state and local authorities.

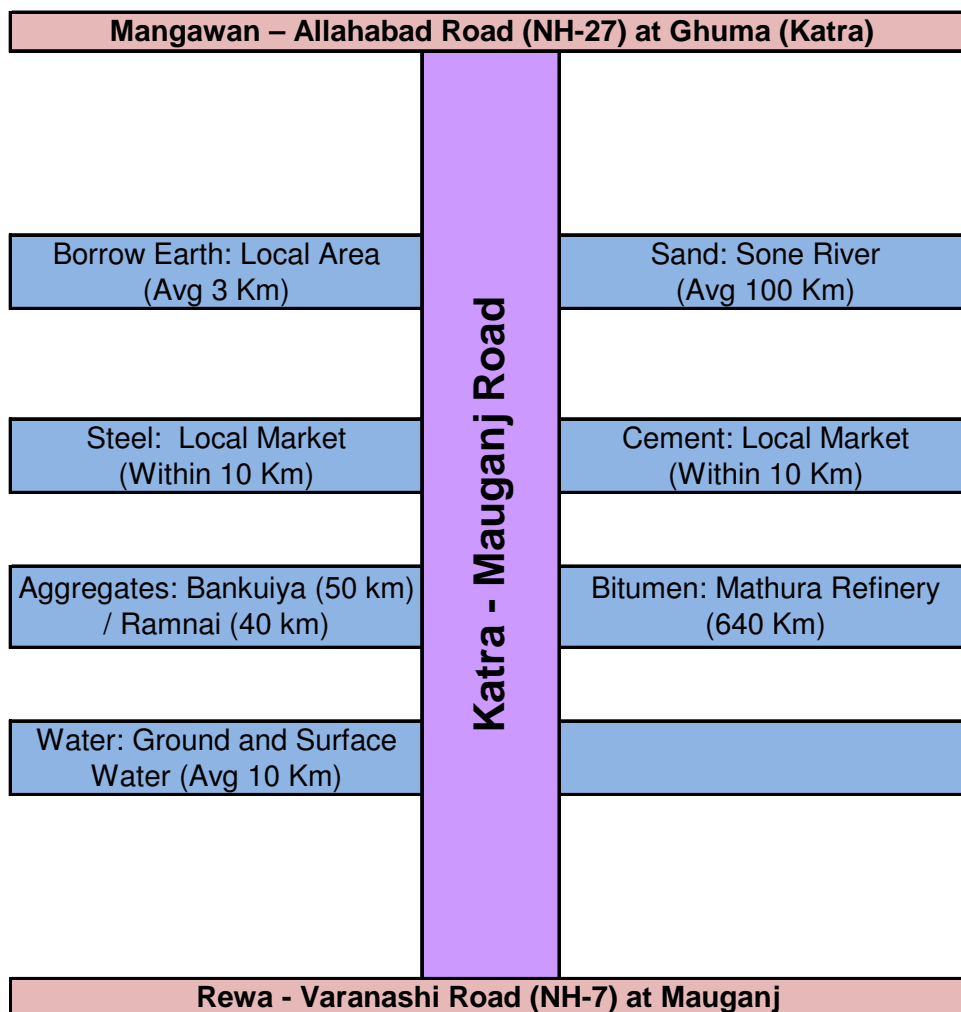


Figure 4: Quarry Chart

#### F. Construction Schedule

63. The upgrading of KM Road is planned to be completed within 24 months from the construction start date.

## IV. DESCRIPTION OF THE ENVIRONMENT

### A. Introduction

64. The collection of baseline information on biophysical, social and economic aspects of the project area is the most important reference for conducting Initial Environmental Examination (IEE) study. The description of environmental settings includes the characteristic of area in which the activity of the project road would occur and cover area affected by all impacts. The existing baseline line conditions has been analysed based on primary data collection with regard to air quality, water quality, noise, soil, biodiversity and socio- economic aspects and secondary data collection from published source and various government agencies. Efforts have been made to collect the latest information both at regional as well as local level especially along the project roads alignment. The primary survey for water, air, noise and soil was carried out during July 2014. The sampling has been done along the project alignment. The existing baseline data and analysis around KM Road is presented in the following sections.

### B. Physical Environment

#### 1. Topography, Geology & Soil

65. Madhya Pradesh nicknamed the "heart of India" due to its geographical location in India is bordered by Uttar Pradesh to the northeast, Chhattisgarh to the southeast, Maharashtra to the south, Gujarat to the west, and Rajasthan to the northwest. Madhya Pradesh the second largest state of the country has a geographic area of 30.82 million hectare, which constitutes 9.37% of the land area of the country. Geologically the State is divided in two zones; Central Plateau and Hill Region, and the Western Plateau and Hill Region. The Central Plateau and Hill Region is further divided into 7 sub-regions, namely:

66. Bundelkhand, Madhya Pradesh Hills, Keymore Plateau and Satpura Hills, Vindhya Plateau, Satpura Plateau, Central Narmada Valley, and Gird. The Western Plateau and Hill Region has 2 sub-regions: Jhabua Hills, and Malwa and Nimar Plateau.

**Table 17: Geological features of the State**

| Zone            | Sub-group (Region)              | District covered   | Rain fall (mm) | Climate         | Type of Soil            |
|-----------------|---------------------------------|--|----------------|-----------------|-------------------------|
| Central Plateau | Bundelkhand                     | Chatterpur, Datia, Tikamgarh   | 700            | Dry sub humid   | Mixed red & Black       |
| and Hill Region | Madhya Pradesh Hills            | Mandla, Dindori  | 1570           | Moist sub humid | Red & Yellow            |
|                 | Keymore Plateau & Satpura Hills | Jabalpur, Panna, Satna, Rewa, Sidhi, Seoni, Katni, Balaghat, Shahdol, Anoopur, Umariya | 1100           | Dry sub humid   | Medium Black            |
|                 | Vindhya Plateau                 | Bhopal, Damoh, Raisen, Sagar, Sehore, Vidisha  | 1130           | Dry subhumid    | Shallow to Medium Black |
|                 | Satpura Plateau                 | Betul, Chhindwara, Narsinghpur   | 1220           | Dry subhumid    | Shallow to Medium Black |
|                 | Central Narmada Valley          | Hosangabad, Harda  | 1300           | Dry subhumid    | Deep Black              |
|                 | Gird                            | Morena, Bhind,   | 670            | Semi-arid       | Medium Black            |

| Zone                            | Sub-group (Region) | District covered   | Rain fall (mm) | Climate   | Type of Soil         |
|---------------------------------|--------------------|--|----------------|-----------|----------------------|
|                                 |                    | Gwalior, Guna, Shivpuri, Ashoknagar, Sheopur   |                |           | alluvial             |
| Western Plateau and Hill Region | Jhabua Hills       | Jhabua   | 988            | Semi-arid | Medium to deep black |
|                                 | Malwa&Nimarlateau  | Indore, Dhar, Ujjain, Ratlam, Dewas, Mandsaur, Rajgarh, Shajapur, Khandwa, Khargone, Neemuch, Badwani, Burhanpur | 874            | Semi-arid | Medium to deep black |

67. Figures 5 and 6 show the geological and soil map of MP.

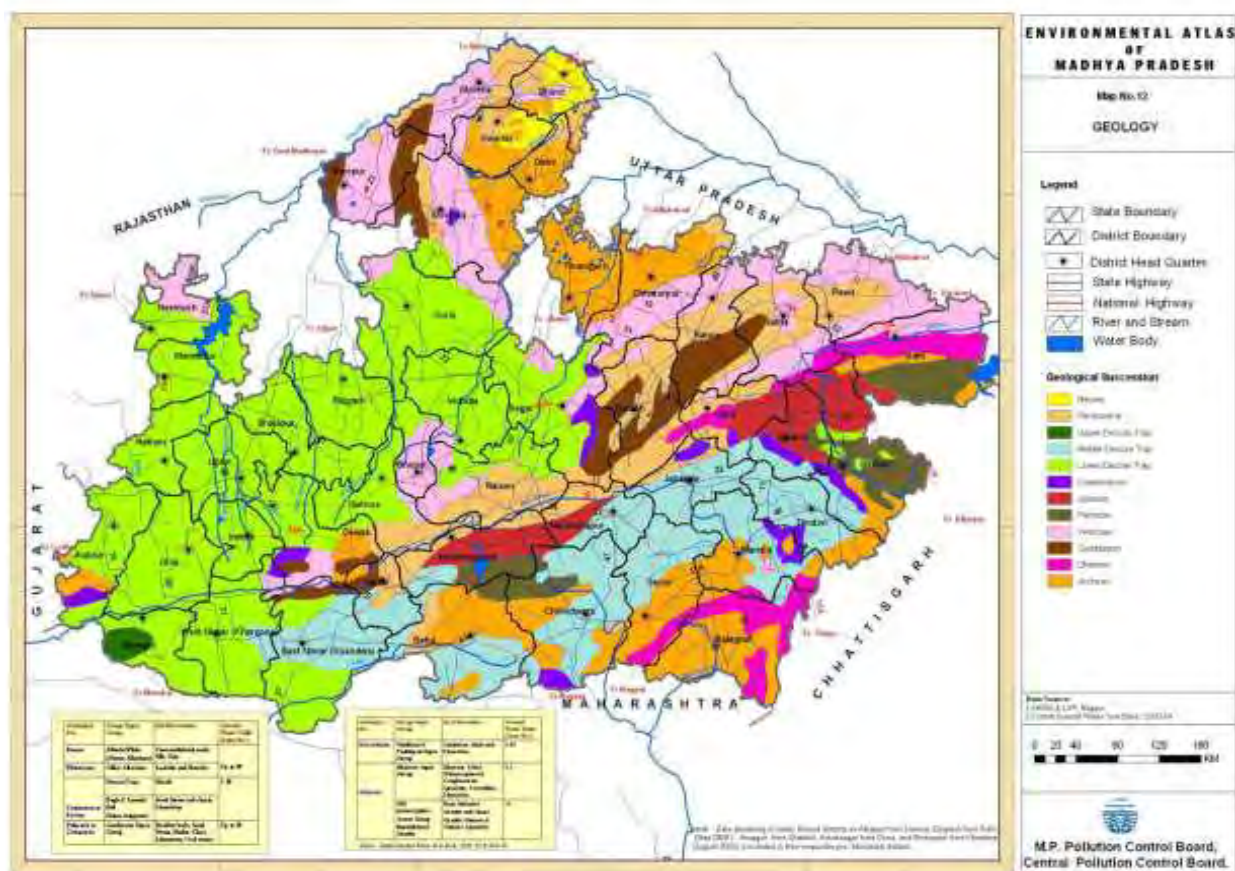
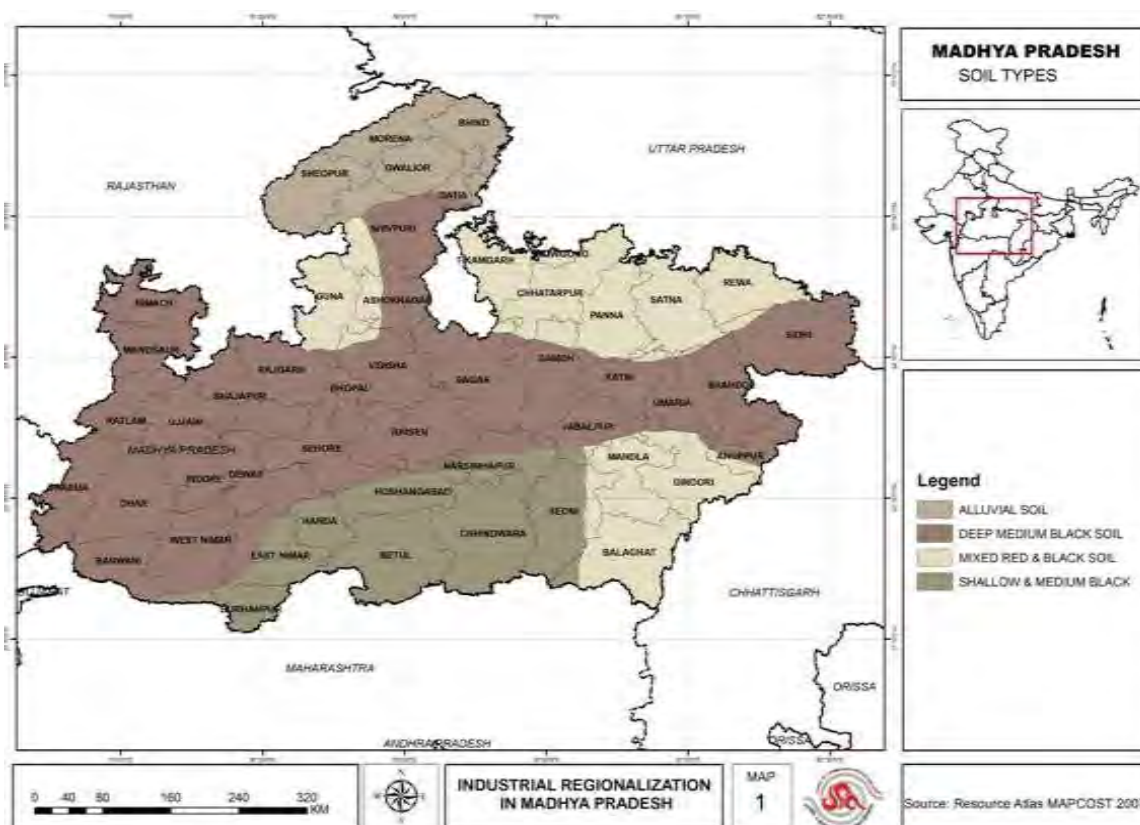


Figure 5: Geological Map of MP

68. The proposed KMroad between is situated on the Central Plateau and Hill Region agro climate zone and forms Keymore plateau & Satpura Hills sub-group. The soil type in the area is medium black. Collected soil samples along the project corridor were analyzed and results are presented in Table 18.

**Table 18: Soil Quality along the Project road**

| Sr. No. | Parameters  | Test method       | Unit                | Katara Village, (Km. 1+00) | BhautiPrapat Village, (Km. 29+00) |
|---------|---|-------------------|---------------------|----------------------------|-----------------------------------|
| 1       | pH(1:5 suspension)                                | IS:2720 (Part-26) | -                   | 7.66                       | 7.56                              |
| 2       | Electrical Conductivity at 25°C (1:5 suspension.) | IS:2720 (Part-21) | µmhos/c m           | 62.6                       | 27.8                              |
| 3       | Sand  | STP/SOIL          | % by mass           | 60                         | 64                                |
| 4       | Clay  | STP/SOIL          | % by mass           | 30                         | 25                                |
| 5       | Silt  | STP/SOIL          | % by mass           | 10                         | 11                                |
| 6       | Texture   | STP/SOIL          | -                   | Sandy Clay Loam            | Sandy Clay Loam                   |
| 7       | Bulk Density                                      | STP/SOIL          | gm /cm <sup>3</sup> | 1.44                       | 1.41                              |
| 8       | Moisture  | STP/SOIL          | %                   | 22                         | 22                                |
| 9       | Calcium   | STP/SOIL          | mg/1000 g           | 2.8                        | 1.42                              |
| 10      | Magnesium   | STP/SOIL          | mg/1000 g           | 1.86                       | 1.55                              |
| 11      | Organic Carbon                                    | STP/SOIL          | %by mass            | 0.21                       | 0.26                              |
| 12      | Cation Exchange Capacity                          | STP/SOIL          | mg/ kg              | 2.36                       | 1.64                              |
| 13      | Nitrogen  | STP/SOIL          | mg/1000 g           | 66.2                       | 42.6                              |
| 14      | Potassium (as K)                                  | STP/SOIL          | mg/kg               | 0.6                        | 0.8                               |
| 15      | Phosphorus  | STP/SOIL          | mg/1000 g           | 86                         | 66                                |

**Figure 6: Soil Map of MP**



## 2. Seismicity

69. The entire Madhya Pradesh falls under zone least active to moderate zone as per seismic map of India. In the moderate damage risk zone structures are at risk of a Medvedev–Sponheuer–Karnik (MSK) scale VII with very strong earthquake where most people are frightened and try to run outdoors causing serious damage to older buildings, masonry chimneys collapse and small landslides. In the least active zone an MSK VI or less and is classified as the Low Damage Risk Zone where earthquake can frighten most people dishes and glassware may break and visible damage to masonry structures, cracks in plaster may occur. Figure 7 shows seismic Zone map of India.



Figure 7: Seismic Zone Map of India

## 3. Climate

70. The region experiences typical tropical climate. It is characterized by hot summer season and general dryness except in the southwest monsoon season. The year may be divided into four seasons; cold season from December to February is followed by the hot

season from March to about the middle of June. The periods from mid-June to September is the southwest monsoon season, and from October to November constitute the post monsoon or retreating monsoon season. The maximum temperature during summers ranges from 33°C to 44°C while minimum temperature from 30°C to 19°C. The temperature during the winter season ranges between of 27°C to 10°C. The monsoon season spreads from the month of June to September with average rainfall of 1000 mm in the west to 2000 mm in the eastern part of state. The mean annual rainfall in the state is 1200 mm. Table 19 shows the climate condition of Rewa district.

71. The salient climatic features of the state are as follow:

|                                |   |  |
|--------------------------------|---|--|
| Average Annual Rainfall        | - | 1100 mm  |
| Concentration of precipitation | - | June to September                                  |
| Humidity                       | - | 25 to 75 %   |
| Cloudiness                     | - | Heavily clouded in monsoon                         |
| Wind                           | - | Generally light                                    |
| Mean Temperature               | - | summer 29 <sup>0</sup> C & Winter 9 <sup>0</sup> C |

**Table 19: Climate condition of project district**

|                     | <b>Rewa District</b>     |
|---------------------|--------------------------|
| Climate             | warm sub-tropical        |
| Maximum temperature | 47 <sup>0</sup> c in May |
| Minimum temperature | 2 <sup>0</sup> c in Jan  |
| Average Rainfall    | 1100 mm                  |

#### **4. Surface and Ground Water Hydrology**

##### **a. Surface Water Hydrology**

72. There are ten major rivers that originate from the State. As Madhya Pradesh is located in the centre of India, most of the rivers are interstate rivers. The rivers Chambal, Sindh, Betwa, Ken flow northward and meet with Yamuna whereas the river Sone falls directly into Ganga. Narmada, Tapti and Mahi rivers flow westward and meet Arabian Sea whereas Wainganga and Pench rivers meet Godavari in the south. Rivers in Madhya Pradesh are mostly seasonal and rain fed, receiving maximum water flow during the monsoon season. The non -monsoon flow in some perennial rivers is mainly due to flow from groundwater.

##### **b. Ground Water Hydrology**

73. Ground water is the major water source in the area for drinking purpose. The source of recharging of ground water is mostly from rainfall and canals. Hand pumps are commonly used to draw the water from ground in the villages. Static water levels vary along the project road stretch. The details of hand pumps along the project road are given in Table 20.

**Table 20: List of Hand pumps/Wells along the Project Road**

| <b>SI No.</b> | <b>Chainage (Km)</b> | <b>H.P/Well</b> | <b>Side</b> | <b>Distance from Existing Centerline (m)</b> |
|---------------|----------------------|-----------------|-------------|--|
| 1             | 0+500                | Hand Pump       | Right       | 6.0  |
| 2             | 0+800                | Hand Pump       | Left        | 7.0  |

| SI No. | Chainage (Km) | H.P/Well  | Side  | Distance from Existing Centerline (m) |
|--------|---------------|-----------|-------|---------------------------------------|
| 3      | 1+000         | Hand Pump | Right | 7.0                                   |
| 4      | 1+100         | Hand Pump | Left  | 7.0                                   |
| 5      | 1+200         | Hand Pump | Right | 6.0                                   |
| 6      | 3+500         | Hand Pump | Right | 6.0                                   |
| 7      | 4+700         | Hand Pump | Right | 6.0                                   |
| 8      | 4+800         | Hand Pump | Right | 6.0                                   |
| 9      | 5+000         | Well      | Right | 6.0                                   |
| 10     | 5+100         | Hand Pump | Right | 7.0                                   |
| 11     | 5+200         | Hand Pump | Right | 4.0                                   |
| 12     | 5+700         | Hand Pump | Right | 6.0                                   |
| 13     | 9+900         | Hand Pump | Right | 7.0                                   |
| 14     | 10+700        | Hand Pump | Left  | 5.0                                   |
| 15     | 10+900        | Hand Pump | Left  | 4.0                                   |
| 16     | 11+100        | Hand Pump | Left  | 5.0                                   |
| 17     | 11+500        | Hand Pump | Left  | 5.0                                   |
| 18     | 11+800        | Hand Pump | Right | 6.0                                   |
| 19     | 13+700        | Hand Pump | Right | 4.8                                   |
| 20     | 13+800        | Hand Pump | Right | 7.0                                   |
| 21     | 13+900        | Hand Pump | Left  | 4.0                                   |
| 22     | 16+100        | Hand Pump | Left  | 5.5                                   |
| 23     | 16+800        | Hand Pump | Right | 7.0                                   |
| 24     | 17+400        | Hand Pump | Right | 6.0                                   |
| 25     | 17+400        | Hand Pump | left  | 6.0                                   |
| 26     | 18+100        | Hand Pump | Left  | 15.5                                  |
| 27     | 20+200        | Hand Pump | Right | 5.0                                   |
| 28     | 20+300        | Hand Pump | Right | 6.0                                   |
| 29     | 20+400        | Hand Pump | Left  | 6.0                                   |
| 30     | 22+000        | Hand Pump | Left  | 6.0                                   |
| 31     | 24+100        | Hand Pump | Right | 5.0                                   |
| 32     | 24+800        | Hand Pump | Right | 6.0                                   |
| 33     | 27+600        | Hand Pump | Right | 6.0                                   |
| 34     | 27+800        | Hand Pump | Left  | 4.0                                   |
| 35     | 27+900        | Hand Pump | Left  | 6.0                                   |
| 36     | 28+500        | Hand Pump | Left  | 5.0                                   |
| 37     | 29+000        | Hand Pump | Left  | 5.0                                   |
| 38     | 29+800        | Hand Pump | Left  | 5.0                                   |
| 39     | 31+300        | Hand Pump | Right | 4.0                                   |
| 40     | 31+600        | Hand Pump | Right | 5.0                                   |
| 41     | 32+700        | Hand Pump | Right | 4.5                                   |
| 42     | 33+300        | Hand Pump | Right | 3.0                                   |
| 43     | 38+500        | Hand Pump | Right | 7.0                                   |
| 45     | 37+500        | Hand Pump | Right | 5.0                                   |
| 46     | 37+000        | Hand Pump | Right | 6.0                                   |
| 47     | 35+600        | Hand Pump | Left  | 4.0                                   |



## 5. Water Quality

74. Water quality along the sample roads were sampled and analysed for a physico-chemical characteristics based on procedures specified in 'Standard Methods for the Examination of Water and Wastewater' published by American Public Health Association (APHA). Results were compared to the standards for drinking water as per IS: 10500 and were all found suitable for drinking water and all parameters are within desirable limit.

**Table 21: Ground/Water Quality along the Project Road  
(Physical & Chemical Parameters)**

| Sr. No.                                       | Parameter                              | Test method      | Unit  | Requirement (Acceptable Limit) | Permissible Limit in absence of alternate source | Katara Village, (Km. 1+00) | BhautiPrapat Village, (Km. 29+00) |
|---|--|------------------|-------|--------------------------------|--|----------------------------|-----------------------------------|
| <b>Organoleptic &amp; Physical Parameters</b> |  |                  |       |                                |  |                            |                                   |
| 1   | pH value                               | IS-3025(P- 11)   | -     | 6.5-8.5                        | -  | 7.84                       | 7.68                              |
| 2   | Total dissolve solid ( TDS)            | IS-3025(P- 16)   | mg/l  | 500                            | 2000   | 545                        | 654                               |
| <b>Chemical Parameters</b>                    |  |                  |       |                                |  |                            |                                   |
| 3   | Calcium (as Ca)                        | IS: 3025 (P- 40) | mg/l  | 75                             | 200  | 275                        | 270                               |
| 4   | Chloride (as Cl)                       | IS: 3025 (P- 32) | mg/l  | 250                            | 1000   | 60                         | 58                                |
| 5   | Magnesium (as mg)                      | IS: 3025 (P- 46) | mg/l  | 30                             | 100  | 61                         | 75                                |
| 6   | Nitrate (as NO <sub>3</sub> )          | IS: 3025 (P- 34) | mg/l  | 45                             | No Relaxation                                    | 5.4                        | 4.6                               |
| 7   | Sulphate (as SO <sub>4</sub> )         | IS: 3025 (P- 24) | mg/l  | 200                            | 400  | 46                         | 40.4                              |
| 8   | Alkalinity (as CaCO <sub>3</sub> )     | IS: 3025 (P- 23) | mg/l  | 200                            | 600  | 255                        | 322                               |
| 9   | Total hardness (as CaCO <sub>3</sub> ) | IS: 3025 (P- 23) | mg/l  | 200                            | 600  | 336                        | 345                               |
| 10  | COD (as O <sub>2</sub> )               | APHA- 5220B      | mg/l  | -                              | -  | BDL                        | BDL                               |
| 11  | Dissolve Oxygen                        | IS-3025(P- 38)   | mg/l  | -                              | -  | 4.2                        | 4.2                               |
| 12  | Total Suspended Solid                  | IS-3025(P- 17)   | mg/l  | -                              | -  | <1.0                       | <1.0                              |
| 13  | Conductivity @250C                     | IS-3025(P- 14)   | μS/cm | -                              | -  | 838                        | 1090                              |
| 14  | Sodium (as Na)                         | IS-3025(P- 45)   | mg/l  | -                              | -  | 35                         | 52                                |
| 15  | Potassium (as K)                       | IS-3025(P- 45)   | mg/l  | -                              | -  | 5.5                        | 4.5                               |
| 16  | Temperature                            | IS-3025(P- 9)    | 0C    | -                              | -  | 30                         | 30                                |
| 17  | Phosphate (as P)                       | IS-3025(P- 31)   | mg/l  | -                              | -  | <0.1                       | <0.1                              |
| 18  | BOD (at 270C 3- Days)                  | IS-3025(P- 44)   | mg/l  | -                              | -  | BDL                        | BDL                               |

**Table 22: Ground/Water Quality along the Project Road (Microbiological Requirement)**

| Sr. No. | Parameter       | Test Method | Required as per IS- 10500:2012 | Katara Village, (Km. 1+00) | BhautiPrapat Village, (Km. 29+00) |
|---------|-----------------|-------------|--------------------------------|----------------------------|-----------------------------------|
| 1       | Faecal Coliform | IS-1622     | 0                              | Absent                     | Absent                            |
| 2       | Total Coliform  | IS-1622     | 10 Max                         | Absent                     | Absent                            |

## 6. Ambient Air Quality

75. The baseline status of the ambient air quality has been established through ambient air quality monitoring at selected points along the project roads. The ambient air quality has been monitored along the project road for particulate matter (PM<sub>2.5</sub> and PM<sub>10</sub>), sulphur dioxide (SO<sub>2</sub>), oxides of nitrogen (NO<sub>x</sub>); and carbon monoxides (CO) using standard analysis technique (Table 23).

**Table 23: Techniques Used for Ambient Air Quality Monitoring**

| Sl. No. | Parameter                               | Technique                   | Minimum Detectable Limit (ug/m <sup>3</sup> ) |
|---------|---|-----------------------------|---|
| 1       | Particulate Matter (PM <sub>2.5</sub> ) | Gravimetric Method          | 1.0   |
| 2       | Particulate Matter (PM <sub>10</sub> )  | Gravimetric Method          | 1.0   |
| 3       | Sulphur dioxide                         | Modified West and Gaeke     | 5.0   |
| 4       | Nitrogen Oxide                          | Modified Jacob & Hochheiser | 5.0   |
| 5       | Carbon Monoxide                         | Non Dispersive Infrared     | 1.0   |
|         |   | Spectroscopy (NDIR)         |   |

76. Ambient air quality monitoring results for PM<sub>2.5</sub>, PM<sub>10</sub>, SO<sub>2</sub>, NO<sub>x</sub> and CO concentrations are given in Table 24 and summarized below. The monitored values are compared with National Ambient Air Quality Standards prescribed by Central Pollution Control Board (CPCB) for residential, rural and other areas. The Ambient air quality levels meet the National air quality standards for rural, residential and industrial area all along the project road.

- (i) **PM<sub>2.5</sub>**: The mean PM<sub>2.5</sub> concentration at ambient air quality monitoring locations varies from 22 to 30 µg/m<sup>3</sup>.
- (ii) **PM<sub>10</sub>**: The mean PM<sub>10</sub> concentration at ambient air quality monitoring locations varies from 65 to 82 µg/m<sup>3</sup>. The values are within the permissible limit at all the stations.
- (iii) **SO<sub>2</sub>**: The mean concentrations of SO<sub>2</sub> at all ambient air quality monitoring locations varies from 6.5 to 8.8 µg/m<sup>3</sup>. The values are within the permissible limit at all the stations.
- (iv) **NO<sub>x</sub>**: The mean concentrations of NO<sub>x</sub> at all AAQM locations range from 17.2 to 22.4 µg/m<sup>3</sup>. The values are within the permissible limit at all the stations.
- (v) **CO**: The mean concentrations of CO at all AAQM locations range from 0.480 to 0.880 µg/m<sup>3</sup>. The values are within the permissible limit at all the stations.

**Table 24: Ambient Air Quality along the Project Road**

| Sr. No. | Parameter   | Test Method            | Units             | Limits as per Environment (Protection) Act. | Katara Village, (Km. 1+00) | BhautiPrapat Village, (Km. 29+00) |
|---------|---|------------------------|-------------------|---|----------------------------|-----------------------------------|
| 1       | Particulate Matter (PM <sub>10</sub> )                      | IS:5182 Part- XXIII    | µg/m <sup>3</sup> | 100   | 82                         | 65                                |
| 2       | Particulate Matter (PM <sub>10</sub> ) (PM <sub>2.5</sub> ) | CPCB Volume – 1 / Grav | µg/m <sup>3</sup> | 60  | 30                         | 22                                |
| 3       | Sulphur Dioxide   | IS:5182 Part-II        | µg/m <sup>3</sup> | 80  | 8.8                        | 6.5                               |
| 4       | Nitrogen Dioxide  | IS:5182 Part-VI        | µg/m <sup>3</sup> | 80  | 22.4                       | 17.2                              |
| 5       | Carbon Monoxide   | IS:5182 Part-X         | mg/m <sup>3</sup> | 4   | 0.880                      | 0.480                             |

## 7. Noise Measurements

77. Preliminary reconnaissance survey was undertaken to identify the major noise generating sources in the area. The noise at different noise generating sources has been identified based on the industrial, commercial and residential activities, traffic and noise at sensitive areas. Sound Pressure Level (SPL) measurements were undertaken at all locations, with an interval of about 5 seconds over a period of 10 minutes per hour for 24 hr. The day noise level has been monitored during 6 AM to 10 PM and night levels during 10 P.M. to 6 AM at all locations. Day and night-time Leq have been calculated from hourly Leq values and compared with the stipulated standards. Table 25 gives the day and night-time Leq noise levels. Measured Leq noise levels exceed prescribed standards during the day time due to various commercial activities and the location of monitoring points close to the road.

**Table 25: Day and Night Time Leq in the Area**

| Locations                            | Day Time<br>dB(A) | Night Time<br>dB(A) | Prescribed Standards dB(A) |          |            |
|--------------------------------------|-------------------|---------------------|----------------------------|----------|------------|
|                                      |                   |                     | Category of<br>Area/ Zone  | Day Time | Night Time |
| Katara Village,<br>(Km. 1+00)        | 61.4              | 42.8                | Commercial<br>Area         | 65       | 55         |
| BhautiPrapat Village,<br>(Km. 29+00) | 58.2              | 42.4                | Commercial<br>Area         | 65       | 55         |

Source: Field monitoring, August 2014

## 8. Land Use

78. The most of the geographical area of the state or 307,560 sq. km or about 98% is available for utilisation. Major portion of the land use is under agriculture followed by forest cover (about 48 per cent). About 28% is under forest cover. Agriculture is the major land use in state followed by forests. The area under various land uses in the state is presented in Table 26.

**Table 26: Land Use Pattern in the State**

| Land Use                               | Area in '000 ha | Percentage |
|--|-----------------|------------|
| Total Geographical area                | 30,825          | -          |
| Reporting Area for land utilization    | 30,756          | 100.00     |
| Forests *                              | 8699            | 28.28      |
| Not available for cultivation          | 3398            | 10.05      |
| Permanent Pasture & Grazing land       | 1348            | 4.38       |
| Land under misc. tree crops & groves   | 19              | 0.06       |
| Cultivable waste land                  | 1177            | 3.83       |
| Fallow land other than current fallows | 612             | 1.99       |
| Current fallows                        | 769             | 2.50       |
| Net area Sown                          | 14735           | 47.91      |

Source: Land Use Statistics Ministry of Agriculture, GOI 2006

**Table 27: Land Use Pattern along the project road**

| Sr. No. | Chainge (Km) |        | Land Type              |                        | Village/Town                   |
|---------|--------------|--------|------------------------|------------------------|--------------------------------|
|         | From         | To     | Left                   | Right                  |                                |
| 1       | 0.000        | 1.200  | Agricultural/Built Up  | Built up               | Gumha Village                  |
| 2       | 1.200        | 4.400  | Agricultural Land      | Built up               | Jatpvar                        |
| 3       | 4.400        | 6.400  | Agricultural/Built Up  | Agricultural/Built Up  | Jaikara, Hakariya, Kot Village |
| 4       | 6.400        | 9.600  | Agricultural Land      | Agricultural Land      |                                |
| 5       | 9.600        | 12.200 | Built up               | Built up               | Mahewa Village                 |
| 6       | 12.200       | 15.200 | Agricultural/Open Land | Agricultural/Open Land |                                |
| 7       | 15.200       | 16.600 | Agricultural/Built Up  | Agricultural/Built Up  | Rampur, Dubi Village           |
| 8       | 16.600       | 17.000 | Agricultural/Open Land | Agricultural/Open Land |                                |
| 9       | 17.000       | 17.200 | Built up               | Built up               | Shahpur Village                |
| 10      | 17.200       | 17.600 | Agricultural Land      | Agricultural Land      |                                |
| 11      | 17.600       | 18.000 | Open/Built Up          | Open/Built Up          | ParasiyaPahad Village          |
| 12      | 18.000       | 18.200 | Agricultural/Open Land | Agricultural/Open Land |                                |
| 13      | 18.200       | 20.000 | Built up               | Built up               | Shivrajpur, Dabhi village      |
| 14      | 20.000       | 20.800 | Agricultural/Open Land | Agricultural/Open Land | Beohariya Village              |
| 15      | 20.800       | 21.400 | Agricultural/Open Land | Agricultural/Open Land |                                |
| 16      | 21.400       | 22.000 | Agricultural/Built Up  | Agricultural/Built Up  | Tituri Village                 |
| 17      | 22.000       | 22.600 | Open Land              | Built up Area          | Lalganj Village                |
| 18      | 22.600       | 23.400 | Open Land              | Open Land              |                                |
| 19      | 23.400       | 24.400 | Agricultural/Built Up  | Agricultural/Built Up  | Patharauda Kalan Village       |
| 20      | 24.400       | 26.200 | Open Land              | Open Land              |                                |
| 21      | 26.200       | 26.600 | Agricultural/Built Up  | Agricultural/Built Up  | Sumeda Kalan Village           |
| 22      | 26.600       | 26.800 | Agricultural Land      | Open Land              |                                |
| 23      | 26.800       | 28.600 | Built up               | Built up               | Bahati Village                 |
| 24      | 28.600       | 30.400 | Agricultural Land      | Agricultural Land      |                                |
| 25      | 30.400       | 31.400 | Agricultural Land      | Agricultural Land      | Sipinhai Village               |
| 26      | 31.400       | 32.000 | Agricultural Land      | Agricultural Land      |                                |
| 27      | 32.000       | 32.600 | Agricultural Land      | Agricultural Land      | Chhiriuha Village              |
| 28      | 32.600       | 33.600 | Agricultural Land      | Agricultural Land      |                                |
| 29      | 33.600       | 34.200 | Agricultural/Built Up  | Agricultural/Built Up  | Chamarhar Village              |
| 30      | 34.200       | 35.000 | Agricultural Land      | Agricultural Land      |                                |
| 31      | 35.000       | 35.600 | Built up               | Built up               | Tendua Village                 |
| 32      | 35.600       | 36.000 | Open Land              | Open Land              |                                |
| 33      | 36.000       | 38.010 | Built-up               | Built-up               | Madariya, Dhamahi, Mauganj     |

## C. Ecological Resources

### 1. Forests

79. The forest cover has been classified as dense forest and open forest. The latest estimates of Forest Survey of India (FSI), published in the State of Forest Report (SFR) 2003, suggest that the total forest cover of M.P. is 76,429 sq. km., constituting 24.79% of the State's total land area. Of the total forest cover, dense forest accounts for 13.57% and open forest about 11.22%. Central, eastern, and southern parts of the state are rich in forest cover. Figure 8

show the forest map of the state.

80. The project districts have a forest cover of 10% of the total geographical area. Out of which 4% is dense forest rest is open forest. The project road is not passing through forest area. Hence, no forest land diversion is required for the proposed widening.



**Figure 8: Forest Cover in the District of Madhya Pradesh**

## 2. Wild Life and Protected Areas

81. The project road does not pass through any protected area such as Wildlife Sanctuary, National park or bio –reserve. There is no wildlife sanctuary Wildlife Sanctuary, National park or bio –reserve within 10 km from the project road.

## 3. Trees

82. Moderate tree density is observed all along the KM Road. The main tree species observed are Babool, Neem, Mango, Ashok, and Pipal. An estimated 86 trees will be cleared to accommodate the require road upgrading of which 65-70% are Babool (*Acacia nilotica*). Photographs of Tree inventory is given in the Appendix.

83. Summary of tree along the project corridor is given in Table 28.

**Table 28: List of Trees within Proposed Corridor**

| Sr. No | Chainage (Km) | Distance from Center line (m) | Girth Size (Cm) | Approx. Ht. (m) | Side  | Local Name | Scientific Name |
|--------|---------------|-------------------------------|-----------------|-----------------|-------|------------|-----------------|
| 1      | 0.000         | 4.30                          | 180             | 3.0             | Right | Pipal      | Ficus religiosa |
| 2      | 0.100         | 5.20                          | 80              | 3.0             | Left  | Babul      | Acacia arabica  |

| Sr. No | Chainage (Km) | Distance from Center line (m) | Girth Size (Cm) | Approx. Ht. (m) | Side  | Local Name | Scientific Name    |
|--------|---------------|-------------------------------|-----------------|-----------------|-------|------------|--------------------|
| 3      | 0.400         | 5.10                          | 110             | 3.5             | Left  | Babul      | Acacia arabica     |
| 4      | 0.700         | 5.00                          | 70              | 4.0             | Right | Babul      | Acacia arabica     |
| 5      | 0.710         | 4.60                          | 50              | 4.0             | Left  | Babul      | Acacia arabica     |
| 6      | 0.710         | 4.80                          | 70              | 4.0             | Left  | Babul      | Acacia arabica     |
| 7      | 0.710         | 5.20                          | 70              | 4.0             | Left  | Aam        | Mangifera indica   |
| 8      | 0.710         | 5.00                          | 60              | 3.0             | Left  | Shaal      | —                  |
| 9      | 4.200         | 6.00                          | 220             | 2.0             | Right | Mahua      | Madhuca longifolia |
| 10     | 4.200         | 5.90                          | 90              | 2.5             | Left  | Shisam     | —                  |
| 11     | 4.400         | 4.80                          | 110             | 4.0             | Left  | Gamaja     | —                  |
| 12     | 4.600         | 5.00                          | 40              | 2.0             | Left  | Gamaja     | —                  |
| 13     | 4.601         | 5.00                          | 40              | 2.0             | Left  | Gamaja     | —                  |
| 14     | 4.602         | 5.00                          | 40              | 3.0             | Left  | Gamaja     | —                  |
| 15     | 4.603         | 5.00                          | 40              | 3.5             | Left  | Gamaja     | —                  |
| 16     | 4.700         | 5.30                          | 70              | 3.0             | Right | Suke       | —                  |
| 17     | 5.000         | 4.70                          | 100             | 4.0             | Left  | Pipal      | Ficus religiosa    |
| 18     | 5.000         | 5.00                          | 90              | 3.0             | Right | Bura       | —                  |
| 19     | 5.000         | 5.00                          | 60              | 3.5             | Right | Neem       | Azadirachta indica |
| 20     | 5.000         | 5.50                          | 130             | 3.0             | Right | Neem       | Azadirachta indica |
| 21     | 6.100         | 5.00                          | 30              | 4.0             | Left  | Gavar      | —                  |
| 22     | 6.100         | 5.50                          | 60              | 4.0             | Left  | Pipal      | Ficus religiosa    |
| 23     | 7.000         | 6.00                          | 370             | 1.5             | Right | Bargad     | Ficus bengalensis  |
| 24     | 9.700         | 5.30                          | 300             | 2.0             | Right | Bargad     | Ficus bengalensis  |
| 25     | 9.700         | 4.10                          | 160             | 3.0             | Right | Pipal      | Ficus religiosa    |
| 26     | 9.900         | 4.50                          | 40              | 4.0             | Left  | Babul      | Acacia arabica     |
| 27     | 9.900         | 4.50                          | 60              | 4.0             | Left  | Babul      | Acacia arabica     |
| 28     | 10.000        | 4.50                          | 75              | 2.0             | Left  | Bargad     | Ficus bengalensis  |
| 29     | 10.800        | 5.00                          | 100             | 3.0             | Right | Chirul     | —                  |
| 30     | 10.900        | 5.00                          | 900             | 1.5             | Right | Imli       | Tamarindus indica  |
| 31     | 10.900        | 4.50                          | 60              | 3.0             | Left  | Berry      | Zizyphus jujuba    |
| 32     | 11.000        | 5.40                          | 80              | 3.0             | Left  | Babul      | Acacia arabica     |
| 33     | 11.000        | 5.00                          | 60              | 2.4             | Right | Berry      | Zizyphus jujuba    |
| 34     | 11.200        | 5.00                          | 60              | 2.0             | Right | Berry      | Zizyphus jujuba    |
| 35     | 11.300        | 5.20                          | 40              | 3.0             | Right | Mehgul     | —                  |
| 36     | 11.400        | 4.50                          | 30              | 3.0             | Right | Mehgul     | —                  |
| 37     | 11.400        | 4.40                          | 40              | 4.0             | Right | Neem       | Azadirachta indica |
| 38     | 11.400        | 5.50                          | 110             | 4.0             | Left  | Berry      | Zizyphus jujuba    |
| 39     | 11.400        | 5.10                          | 90              | 3.0             | Left  | Berry      | Zizyphus jujuba    |
| 40     | 11.900        | 5.20                          | 60              | 3.0             | Left  | Berry      | Zizyphus jujuba    |
| 41     | 12.100        | 5.70                          | 170             | 2.5             | Left  | Pipal      | Ficus religiosa    |
| 42     | 12.100        | 5.80                          | 30              | 4.0             | Right | Babul      | Acacia arabica     |
| 43     | 12.900        | 5.80                          | 50              | 4.0             | Left  | Berry      | Zizyphus jujuba    |

| Sr. No | Chainage (Km) | Distance from Center line (m) | Girth Size (Cm) | Approx. Ht. (m) | Side  | Local Name | Scientific Name         |
|--------|---------------|-------------------------------|-----------------|-----------------|-------|------------|-------------------------|
| 44     | 12.900        | 5.80                          | 50              | 3.0             | Right | Berry      | Zizyphusjuba            |
| 45     | 12.900        | 5.80                          | 50              | 3.5             | Right | Berry      | Zizyphusjuba            |
| 46     | 12.900        | 5.80                          | 50              | 3.5             | Right | Berry      | Zizyphusjuba            |
| 47     | 13.500        | 5.80                          | 50              | 3.5             | Right | Berry      | Zizyphusjuba            |
| 48     | 13.500        | 5.80                          | 50              | 4.0             | Right | Berry      | Zizyphusjuba            |
| 49     | 13.600        | 4.60                          | 40              | 4.0             | Left  | Chola      | —                       |
| 50     | 13.600        | 4.90                          | 80              | 2.0             | Left  | Chola      | —                       |
| 51     | 13.600        | 4.90                          | 80              | 2.5             | Left  | Chola      | —                       |
| 52     | 13.800        | 6.00                          | 120             | 3.0             | Right | Chola      | —                       |
| 53     | 14.300        | 5.50                          | 40              | 4.0             | Right | Chola      | —                       |
| 54     | 15.600        | 5.00                          | 400             | 1.5             | Right | Mahua      | Madhucalongifolia       |
| 55     | 15.800        | 6.00                          | 100             | 4.0             | Left  | Neem       | Azadirachtaindica       |
| 56     | 16.000        | 4.80                          | 80              | 3.0             | Right | Neem       | Azadirachtaindica       |
| 57     | 16.800        | 4.70                          | 120             | 3.0             | Right | Pipal      | Ficusreligiosa          |
| 58     | 17.000        | 5.00                          | 370             | 2.0             | Right | Berry      | Zizyphusjuba            |
| 59     | 17.600        | 5.00                          | 200             | 2.0             | Right | Berry      | Zizyphusjuba            |
| 60     | 18.000        | 5.00                          | 80              | 4.0             | Left  | Babul      | Acacia arabica          |
| 61     | 19.300        | 5.00                          | 40              | 2.0             | Right | Babul      | Acacia arabica          |
| 62     | 20.100        | 4.50                          | 100             | 3.0             | Left  | Babul      | Acacia arabica          |
| 63     | 20.500        | 5.00                          | 50              | 4.0             | Right | Eucalyptus | Eucalyptus tereticornis |
| 64     | 20.500        | 5.40                          | 160             | 3.0             | Right | Babul      | Acacia arabica          |
| 65     | 21.600        | 5.30                          | 120             | 2.5             | Right | Babul      | Acacia arabica          |
| 66     | 21.700        | 4.50                          | 500             | 1.5             | Left  | Mahua      | Madhucalongifolia       |
| 67     | 22.000        | 4.30                          | 180             | 2.0             | Left  | Babul      | Acacia arabica          |
| 68     | 22.000        | 4.30                          | 180             | 3.0             | Right | Babul      | Acacia arabica          |
| 69     | 22.000        | 5.00                          | 110             | 3.5             | Right | Aam        | Mangiferaindica         |
| 70     | 22.000        | 4.90                          | 80              | 3.0             | Right | Babul      | Acacia arabica          |
| 71     | 25.300        | 4.20                          | 80              | 4.0             | Left  | Eucalyptus | Eucalyptus tereticornis |
| 72     | 26.200        | 4.30                          | 40              | 3.0             | Left  | Berry      | Zizyphusjuba            |
| 73     | 28.100        | 4.40                          | 60              | 3.0             | Left  | Eucalyptus | Eucalyptus tereticornis |
| 74     | 28.600        | 4.40                          | 60              | 3.0             | Left  | Eucalyptus | Eucalyptus tereticornis |
| 75     | 28.600        | 4.40                          | 60              | 4.0             | Right | Eucalyptus | Eucalyptus tereticornis |
| 76     | 28.700        | 4.40                          | 60              | 5.0             | Left  | Babul      | Acacia arabica          |
| 77     | 29.100        | 4.20                          | 100             | 3.0             | Left  | Curul      | —                       |
| 78     | 29.100        | 4.50                          | 100             | 2.0             | Left  | Curul      | —                       |
| 79     | 29.100        | 4.50                          | 100             | 2.0             | Left  | Curul      | —                       |
| 80     | 29.100        | 4.50                          | 100             | 2.5             | Left  | Curul      | —                       |
| 81     | 30.900        | 5.50                          | 100             | 3.0             | Left  | Eucalyptus | Eucalyptus tereticornis |
| 82     | 30.800        | 5.50                          | 100             | 2.5             | Left  | Babul      | Acacia arabica          |
| 83     | 30.500        | 5.50                          | 120             | 2.5             | Left  | Neem       | Azadirachtaindica       |
| 84     | 30.200        | 5.50                          | 110             | 3.0             | Left  | Eucalyptus | Eucalyptus tereticornis |

| Sr. No | Chainage (Km) | Distance from Center line (m) | Girth Size (Cm) | Approx. Ht. (m) | Side | Local Name | Scientific Name   |
|--------|---------------|-------------------------------|-----------------|-----------------|------|------------|-------------------|
| 85     | 29.600        | 4.50                          | 110             | 2.0             | Left | Bargad     | Ficus bengalensis |
| 86     | 29.200        | 4.30                          | 80              | 3.0             | Left | Babul      | Acacia arabica    |

#### **4. Aquatic Ecology and Fisheries**

84. There are 3 rivers named Asthabhiji, Bahuti and Nihai with season flows along the subproject road crossed by project road where water is available during rainy season only and dry the rest of the year. There are three major bridges, no minor bridges, seven causeways, and thirty nine culverts along the KM Road.

#### **5. Rare or Endangered Species**

85. No rare or endangered species found in corridor of impact along the project road.

#### **6. Fauna and Wild life**

86. The project road traverses mainly through agricultural fields and during field survey no wild animals were spotted. However in discussion with the Forestry Department and during the public consultations, it was found that common fauna in the study area are chital or Indian Spotted Deer (*Axis axis*); monkey (*Rhesus macaque*), and hare (*Lepus nigricolis*) are listed as least concern by the IUCN based on the wide

### **D. Economic Development**

#### **1. Agriculture**

87. Madhya Pradesh is predominantly a kharif crop growing state. Kharif crops occupy about 54-56% whereas rabi crops occupy 44 – 46% area out of the total cropped area in the state. About 38% of the cropped area is generally occupied by cereal crops; while pulses occupy 22% area and oilseed occupy 31% area. Vegetables, fruits, fodder and other horticultural crops occupy the remaining 6% area.

88. Some of the important food and cash crops that are vital to agriculture in Madhya Pradesh are Rice, Wheat, Jowar, Gram, Soyabean, Pulses etc.





Figure 9: Agriculture Map of Madhya Pradesh

## 2. Social and Cultural Environment

89. Madhya Pradesh is a land-locked state in the central part of country with a population of about 60.3 million with more than 74 per cent of the population living in the rural areas. The State has 50 districts consisting of 313 blocks and 55393 villages. The human population density is 196 persons/km<sup>2</sup> compared to 325 persons/km<sup>2</sup> for the entire country. Sex ratio is against the 933 in the country. The demographic feature of Madhya Pradesh is unique in that there are many recognized tribes (about 40 per cent of country), which inhabit mostly the remote areas and each with distinct culture, ethos, and traditional knowledge systems. The major minority groups in the state namely Gonds, Bhils and Oraons. The majority of the people survive on subsistence economy based mainly on the agriculture, supplemented with forest products, animal husbandry, and crafts/handloom.

90. Total population of Madhya Pradesh as per 2011 census is 72,626,809 of which male and female are 37,612,306 and 35,014,503 respectively. The state has a growth rate of about 20.3% which is above the national average of about 17 and thus the population of the state is rising considerably.

91. About 73% of the state's population resides in rural areas. The state also has one of the largest tribal populations with 18 districts being predominantly tribal districts in the country. The share of schedule tribes and the schedule castes is 20.27% and 15.17% respectively. The overall literacy ratio in the state is 69.32 with male literacy being 78.73% and female literacy of 63.74%.

92. The BPL survey of 2002-03 with updated figures to October 2010 highlight that 46.48 lakh (47.4 per cent) of households of rural Madhya Pradesh are living below the poverty line. The state accounts for nearly 11 per cent of the total rural population in the country. The tribal households are the poorest among the most deprived social groups in India. In rural areas, 58.6

per cent of the tribal population was found to be poor as compared to 42.8 per cent among the SC in Madhya Pradesh.

93. The total BPL households/families comprise of 23.1 per cent of SC, 33.4 per cent of ST and 34.4 per cent of Other Backward Class (OBC) and the remaining from the general category.

**Table 29: Demographic Profile of the State and the Project Districts**

|                             | <b>Madhya Pradesh</b> | <b>Rewa District</b> |
|-----------------------------|-----------------------|----------------------|
| Total Population            | 72,626,809            | 23,63,744            |
| Males                       | 37,612,306            | 12,24,738            |
| Females                     | 35,014,503            | 11,39,006            |
| Sex Ratio                   | 931                   | 930                  |
| Density of Population/Sq KM | 236                   | 380                  |
| % growth (2001-2011)        | 20.35                 | 19.79                |
| Literacy Rate %             | 69.32                 | 66.09                |
| Literacy Rate (Male) %      | 78.73                 | 78.50                |
| Literacy rate (Female) %    | 54.49                 | 67.60                |
| ST Population               | 20.27 %               | 10.11%               |
| SC Population               | 15.17 %               | 13.20%               |

### **3. Archaeological and Historical Monuments**

94. No archaeological and historical monument is located along the project road.

### **4. Sensitive Receptors**

95. During the environmental and social screening survey, it was observed that few small religious structures, school etc. are located along the project road. However, no religious structures will be directly affected during widening of the project road. Details of sensitive receptors/community structure along the project road are shown in Table 30.

**Table 30: Sensitive receptors along the project road**

| <b>Sr. No</b> | <b>Chainage (Km)</b> | <b>Type of Structure</b> | <b>Side</b> | <b>Distance from existing centreline (m)</b> |
|---------------|----------------------|--------------------------|-------------|--|
| 1             | 1.150                | School                   | LHS         | 10.96  |
| 2             | 9.000                | School                   | RHS         | 8.60   |
| 3             | 20.800               | School                   | RHS         | 13.00  |
| 4             | 26.350               | Panchayat Bhavan         | LHS         | 33.00  |
| 5             | 27.600               | Mandir                   | LHS         | 15.36  |
| 6             | 34.750               | Mandir                   | LHS         | 23.16  |

## **V. ANTICIPATED ENVIRONMENTAL IMPACTS AND MITIGATION MEASURES**

96. Impact identification, screening for significance, and recommended mitigation measures for KM Road was guided by the use of ADB Rapid Environmental Assessment (REA) Checklist for Roads and Highways as provided in Appendix 1. The environmental screening of KM Road revealed that the entire alignment is not located inside or near a cultural heritage site, protected area, wetland, and mangrove, estuarine, buffer zone of protected area or special area for protecting biodiversity.

97. The potential impacts of the proposed upgrading includes: removal of avenue trees, increase in ambient dust concentration, increase in noise, generation of construction debris and camp wastes, and loss of community structures.

### **A. Impact on Physical Environment Design Stage**

#### **1. Natural Hazard**

98. The entire Madhya Pradesh falls under zone least active to moderate zone as per seismic map of India and therefore the risk of damage to the project road due to earthquake is minimal. Nonetheless, relevant IS codes were adopted in the design the civil structures.

#### **2. Road Widening, Utilities shifting and Safety Planning**

99. The entire road section has enough available ROW to accommodate the proposed road improvement works and will be undertaken along the existing alignment. Road widening will result to shifting of utilities and encroaching structures. Poor coordination with local authorities and communities will increase the risk of accidental damage to drainage canals and temporary disruption of water and electric supplies along active construction fronts. The further contraction of the useable carriageway during construction will exacerbate traffic and will hinder direct access across the road by residents along the road. Temporary detention of sewage on depressed areas during the reconstruction of drainage canals may occur.

100. Road formation widening will be made on the basis of minimizing tree cutting, utility shifting, and damage to community properties. Road design has incorporates the drainage system to avoid accumulation of sewage and surface run-off. Temporary pits will constructed side- and cross drains to collect sewage from demolished or damage drainage canals which will either be hauled for off-site treatment through septic tanks prior to disposal or land application.

101. Adequate safety provisions like crash barriers on accident prone areas rumble strips in community areas to regulate speed, retro-reflective warning sign boards near school, hospital, and religious places are incorporated in the design. All utilities requiring shifting shall be largely made before start of construction. Prior to shifting, the Contractor will coordinate with the concerned agencies regarding the time and extent of shifting and community affected will be informed of potential service disruption at least 1 week in advance.

#### **3. Terrestrial Ecology**

102. There is no national park, wildlife sanctuaries or any other similar eco-sensitive areas within 10 km distance of the project area. However, 86 no of trees are likely to be affected. The impact and mitigation due to tree cutting has been discussed in following paragraphs.

103. The road has direct bearing on tree resources. Road widening option is made to minimize the cutting of tree. However efforts have been made in designing to reduce the tree cutting to only eighty six only. Compensatory plantation of 1:10 has been planned under the project to address this impact.

## **B. Construction Stage**

### **1. Air Quality**

104. The potential sources of air emission during the construction phase of the project are:(i) dust re-suspension from earthworks including materials loading and unloading; (ii) quarrying and rock crushing; (iii) operation of construction equipment and machines; (iv) fugitive emissions from unpaved road travel; and (v) combustion of fuels from equipment, machineries, and vehicles. Particulate matter, comprising the majority from road construction, Particle size distribution from road construction is dominantly large, with 85.5% > 10 $\mu$ m and 55% > 20  $\mu$ m<sup>2</sup> which can settle within close proximity of the source. Hot mix plant will generate carbon monoxide (CO), un-burnt hydrocarbon, sulphur dioxide, particulate matters, and nitrogen oxides (NO<sub>x</sub>) emissions. This may affect the air quality of nearby areas especially due to emission discharge from low height stack. The deterioration of the air quality within the immediate vicinity of the road construction activities will be significant but temporary.

105. **Mitigation Measures.** Following measures are proposed to minimize the dust and emission generation:

- Vehicles delivering loose and fine materials like sand and aggregates shall be covered.
- Loading and unloading of construction materials in project area or provisions of water fogging around these locations.
- Storage areas should be located downwind of the habitation area.
- Water shall be sprayed on earthworks and unpaved haulage roads regularly.
- Regular maintenance of machinery and equipment. Vehicular pollution check shall be made mandatory.
- Explore the potential for using ready-made asphalt and crushed rocks to avoid or minimize the use of hot mix and rock crushing plants
- Mixing plants and asphalt (hot mix) plants shall be located at least 1 km downwind of the human settlements. The asphalt plants, crushers and the batching plants shall be sited at least 500m in the downwind direction from the nearest settlement and after securing a No-Objection Certificate (NOC) from the SPCB. Hot mix plant shall be fitted with stack of adequate height as may be prescribed by SPCB to ensure enough dispersion of exit gases.
- Only crushers licensed by PCB shall be used.
- LPG should be used as fuel source in construction camps instead of wood. Tree cutting shall be restricted.
- Mask and other PPE shall be provided to the construction workers.
- Diesel Generating (DG) sets shall be fitted with adequate height as per regulations (Height of stack = height of the building + 0.2  $\sqrt$ KVA).
- Low sulphur diesel shall be used in DG sets as well as machineries.
- Air quality monitoring should be carried out during construction phase. If monitored parameters are above the prescribed limit, suitable control measures must be taken.

## 2. Noise

106. The scale of the construction necessary to upgrade the road and the corresponding slight increase in traffic are not expected to generate adverse impacts. Ambient noise level may increase temporarily in the close vicinity of various construction activities, maintenance workshops and vehicles and earthmoving equipment. These construction activities are expected to generate noise levels in the range of 80 – 95 dB(A) at a distance of about 5 m from the source.

107. Although this level of noise is higher than the permissible limit of ambient noise in residential/commercial areas, it will occur only intermittently and temporary. This noise level will attenuate with increase in distance from noise source, decreasing by 10dB at a distance of about 55m and 20 dB at 180 meters. Impact due to noise during construction activities will be minimal to communities as construction camps are located at least 50 meters from community areas.

108. Along the project road, a number of noise sensitive places are located which includes schools and temples. Noise impacts during project construction will be significant and temporary.

109. **Mitigation Measures.** Since the baseline noise levels already exceed prescribed standards the target for the operational stage monitoring will be to ensure that the noise levels do not exceed baseline levels.

110. All equipment shall be fitted with silencers and will be properly maintained to minimize its operational noise. Noise level will be one of the considerations in equipment selection, which will favour lower sound power levels. Stationary noise making equipment shall be placed along uninhabited stretches.

111. In addition to preferring less noise generating equipment, the timing of operation can be scheduled to avoid disruption of activities like school and prayer times. Finally, provision of temporary noise barriers will be made near identified sensitive locations or near the noise source during construction.

112. To protect workers operating in noisy environment, ear plugs or ear muffs will be provided by the Contractor to the workers and occupational exposure limits will be strictly implemented

## 3. Impact on Land and Soil

113. Borrow areas may lose its productivity if top soil is not preserved. Similarly, land area used for locating construction camp may lose its productivity, if it is not restored to its original stage after disbanding the construction camp.

114. **Mitigation Measures.** The top soil from the productive land shall be preserved and reused for plantation purposes. It shall also be used as top cover of embankment slope for growing vegetation to protect soil erosion. It shall be ensured that the land taken on lease for access road and construction camp is restored back to its original land use before handing it over back to land owner

#### 4. Soil Erosion

115. Soil erosion may take place at locations of sharp bend near bridge construction locations, along steep and incompact embankment slope, and wherever vegetation is cleared. Soil erosion may have cumulative effect viz. siltation, embankment damage, and drainage problem. Loss of soil due to run off from earth stock-piles may also lead to siltation of nearby water bodies. The intensity of soil erosion at different locations will be influenced by the lithology, topography, soil type and climatic condition (mainly rainfall) and drainage pattern.

116. **Mitigation measures.** Following mitigation measures are proposed for prevention of soil erosion:

- Bank protection measures shall be taken at erosion prone areas. The protection measures may include use of geo-textiles matting, bio (vegetative) – turfing
- Provision of side drain to guide the water to natural outfalls.
- Stone pitching wherever necessary.
- When soil is spread on slopes for permanent disposal, it shall be buttressed at the toe by retaining walls.
- Side slopes of the embankment shall not be steeper than 2H:1V. .
- In rural stretches, longitudinal side drains shall be intercepted by drains serving as outlet channels to reduce the erosion.
- IRC: 56 -1974 recommended practice for treatment of embankment slopes for erosion control shall be taken into consideration.
- Soil erosion shall be visually checked on slopes and high embankment areas. In case soil erosion is found, suitable measures shall be taken to control the soil erosion further including bio-turfing.
- While planning or executing excavations, the Contractor will take all adequate precautions against soil erosion as per MoRTH 306.
- The earth stockpiles to be located downwind and provided with gentle slopes to prevent soil erosion

#### 5. Borrow Areas and Quarries

117. The project area is flat terrain. Farmers are willing to provide earth from their field up to certain depth on adequate compensation; it is recommended that borrowing from agricultural land shall be minimized to the extent possible.

118. Borrow areas if left un-rehabilitated may pose risk to people, particularly children and animals of accidentally falling into it as well as become potential breeding ground for mosquitoes and vector born disease

119. Illegal quarrying may lead to unstable soil condition; destroy the landscape of the terrain, air and noise pollution. Opening of new quarries is not envisaged due to the proposed project. Quarry material will be sourced from existing nearby quarries.

120. **Mitigation measures.** Borrow pits shall be selected from barren land/wasteland to the extent possible. Borrow areas should not be located on cultivable lands except in the situations where land owners desires to level the land. The top soil shall be preserved and depth shall be restricted to the desired level.

121. Borrow areas should be excavated as per the intended end use by the owner. The Indian Road Congress (IRC):10-1961 guideline should be used for selection of borrow pits and amount that can be borrowed.

122. The depths in borrow pits to be regulated so that the sides shall not be steeper than 25%. To the extent possible, borrow areas shall be sited away from inhabited areas. Borrow areas shall be levelled with salvaged material or other filling materials which do not pose contamination of soil. In addition, it shall be converted into fishpond in consultation with fishery department and if desired by land owner/community. The borrow shall be

123. Rehabilitated following the broad guidelines given at Appendix 2.

124. Aggregates will be sourced from existing licensed quarries. Copies of consent/approval/rehabilitation plan for a new quarry or use of existing source will be submitted to EO, PIU. The contractor will develop a Quarry Redevelopment plan, as per the Mining Rules of the state and submit a copy of the approval to EA if new quarries are opened.

## **6. Compaction and Contamination of Soil**

125. Soil in the adjoining productive lands beyond the ROW, haulage roads, and construction camp area may be compacted due to movement of construction vehicles, machineries and equipment, and due to sitting of construction camps and workshops. Approach road either paved or unpaved is available for most the bridge approaches. However, for some bridges approach road has to be constructed.

126. Soil may be contaminated due to inappropriate disposal of liquid waste, (lubricating oil and fuel spills, waste oil and lubricant and vehicle/equipment washing effluent) and solid waste (fuel filters, oily rags) likely to be generated from repair and maintenance of transport vehicles, construction equipment and machinery. Soil may be contaminated due to inappropriate disposal of domestic solid waste and sewage from construction camps.

127. **Mitigation Measures.** Fuel and lubricants shall be stored at the predefined storage location and away from drainage channels. The storage area shall be paved with gentle slope to a corner and connected with a chamber to collect any spills of the oils. Construction Vehicles and equipment will be maintained and refuelled in such a fashion that oil/diesel spillage does not contaminate the soil.

128. All efforts shall be made to minimize the waste generation. Unavoidable waste shall be stored at the designated place prior to disposal. To avoid soil contamination at the wash-down and re-fuelling areas, oil interceptors shall be provided. Oil and grease spill and oil soaked materials are to be collected and stored in labelled containers (Labelled: WASTE OIL; and hazardous sign be displayed) and sold off to SPCB/ MoEF authorized Waste Oil Recycler.

129. To prevent soil compaction in the adjoining productive lands beyond the ROW, the movement of construction vehicles, machinery and equipment shall be restricted to the designated haulage route.

- Approach roads shall be designed along the barren and hard soil area to reduce the compaction induced impact on soil.
- The productive land shall be reclaimed after construction activity.
- Septic tank or mobile toilets fitted with anaerobic treatment facility shall be

provided at construction camp.

- Domestic solid waste at construction camp shall be segregated into biodegradable and non-biodegradable waste. The non-biodegradable and recyclable waste shall be sold off.
- Efforts shall be made that biodegradable waste shall be composted in the mechanized and movable composter by the contractor. Non bio-degradable and non-saleable waste shall be disposed off to authorized land fill site. Non-bituminous wastes to be dumped in borrow pits with the concurrence of landowner and covered with a layer of topsoil conserved from opening the pit.
- Bituminous wastes will be disposed off in an identified dumping site approved by the State Pollution Control Board

130. Construction waste constitutes debris, which are generated due to dismantling of pavement, quarry dust and unused iron bars or damaged support structures. Uncontrolled disposal of these wastes may affect soil and even receiving water bodies may cause contamination of soil, and landscape of the area.

131. **Mitigation Measures.** Construction waste shall be disposed of in environmentally acceptable manner. Some of the measures are as follows:

- The existing bitumen surface can be utilized for paving of cross roads, access roads, and paving works in construction sites and camps, temporary traffic diversions, and haulage routes. All excavated materials from roadway, shoulders, drains, cross drainage should be used for backfilling embankments, filling pits, and landscaping. Unusable debris material should be suitably disposed off at pre designated disposal locations, with approval of the concerned authority.
- The bituminous wastes shall be disposed in secure landfill sites only in environmentally accepted manner. For removal of debris, wastes and its disposal MoRTH guidelines should be followed.
- The locations of dumping sites should be selected with following considerations.

132. Unproductive/wastelands shall be selected for dumping sites.

- Away from residential areas and located at least 1000 m downwind side of these locations,
- Dumping sites do not contaminate any water sources
- Dumping sites have adequate capacity equal to the amount of debris generated.
- Public perception and consent from the village Panchayats about the location of debris disposal site shall be obtained before finalizing the location.

## 7. Groundwater

133. Contamination of groundwater is not envisaged since construction camps will have septic tanks or mobile toilets depending on the number of workers in each camp.

134. **Mitigation Measures.** Requisite permission as applicable shall be obtained for abstraction of groundwater. The contractor shall make arrangements for water required for construction in such a way that the water availability and supply to nearby communities remain



unaffected. Water intensive activities shall not be undertaken during summer season.

## 8. Surface Water Bodies

135. Temporary pollution of water bodies may occur due to spillage of chemicals and oil at construction sites and disposal of waste from construction camps. Installation of a haul road or temporary access across the river/nala maybe required while construction work is ongoing in the existing minor bridges and culverts. This may cause sedimentation and other disturbances to the water body.

136. **Mitigation Measures.** To prevent siltation of road side ponds, provision of retaining wall is made along the road for the ponds located next to the road. As enhancement measures, efforts shall be made to increase the water holding capacity of the ponds (other than those affected) in the region by using the bed material as borrow earth. Following measures shall be followed additionally:

- Bridge construction activity including piling is recommended during non-monsoon (October to End of May) period.
- Check dams must be created during construction to catch the silt or debris generated from construction activities across the water channels
- All chemicals and oil shall be stored away from water and concreted platform with catchment pit for spills collection.
- All equipment operators, drivers, and warehouse personnel will be trained in immediate response for spill containment and eventual clean-up.
- Readily available, simple to understand and preferably written in the local language emergency response procedure, including reporting, will be provided by the contractors.
- Silt fencing and/or brush barrier shall be installed along drainage path, erosion prone areas for collecting sediments before letting them into the water body. Silt/sediment should be collected and stockpiled for possible reuse as surfacing of slopes where they have to be re-vegetated.
- All wastes arising from the construction should be disposed in an environmentally accepted manner so as not to block the flow of water in the channels. The wastes should be collected, stored and transported to the approved disposal sites.
- No vehicles or equipment should be parked or refuelled near water bodies, so as to avoid contamination from fuel and lubricants
- Substructure construction should be limited to the dry season.
- Construction camps shall be located away from habitation (at least 1 Km Away) and water bodies. Sewage from labour camps will be treated through septic tanks. No untreated/treated sanitary wastewater shall be discharged into surface water bodies as these are used for bathing and washing purpose.
- The borrow areas may also be converted into ponds with the concurrence of the land owners. Fisheries activity can be encouraged in such ponds through institutional support from concerned department

## 9. Hydrology and Drainage

137. Construction material and waste may contaminate or clog the small drains if stored or disposed close to water body.

138. **Mitigation Measures.** Adequate cross drainage structures shall be provided. Additional balancing culverts shall be provided in flood prone areas. The embankment height shall be designed consistent with the existing topography of the region and shall be higher than the HFL. Elaborate drainage system shall be provided to drain the storm water from the roadway and embankment and to ensure minimum disturbance to natural drainage of surface and subsurface water of the area.

139. The design of drainage system such as surface and sub-surface drainage shall be carried out as per IRC: SP: 42 and IRC: SP: 50. Surface runoff from the main highway, embankment slopes and the service roads shall be discharged through longitudinal drains, designed for adequate cross section, bed slopes, invert levels and the outfalls. If necessary, the walls of the drains shall be designed to retain the adjoining earth.

140. IRC: 34-1970: Recommendations for road construction in waterlogged area and IRC: 75 and MORT&H guidelines for Design of High Embankments shall be referred.

141. No construction material will be stored or disposed near any water body except for reusing it for enhancement measures such as embankment rising.

## **10. Impact on Biological Environment**

### **a. Terrestrial Ecology**

142. There is no national park, wildlife sanctuaries or any other similar eco-sensitive areas within 10 km distance of the project area. However, some trees are likely to be affected. The impact and mitigation due to tree cutting has been discussed in following paragraphs.

143. One month before the construction starts, clearing and grubbing will be performed by the contractor. All trees within the ROW with 300 mm diameter at 1m above the ground will be cut, including the removal of stumps. A total of 86 trees are likely to be affected due to the proposed project. The cutting of trees will have minor to negligible impact on local environment.

144. **Mitigation Measures.** Requisite permission from Forest Department shall be obtained for cutting of roadside trees located in forest land otherwise; permission will be taken from district commissioner.

145. One month before the construction starts, clearing and grubbing will be performed by the contractor. All trees within the ROW with 300 mm diameter at 1m above the ground will be cut, including the removal of stumps. A total of 86 trees are likely to be affected due to the proposed project. The cutting of trees will have minor to negligible impact on local environment.

146. Requisite permission from Forest Department shall be obtained for cutting of roadside trees located in forest land otherwise; permission will be taken from district commissioner.

147. The project envisages plantation of approximately 860 trees along both sides of road as per IRC SP: 21 specifications. This will include the compensatory plantation as per prevailing guidelines of States forest department on 1:10 basis replacement rate or as per permission granted by district authorities for cutting of tree located on non-forest land, which vary from 1:3 to 1:10. Besides, additional plantation shall be done on banks of water bodies near bridge sites to enhance the aesthetics and check soil erosion. All tree plantations will be carried out through

forest department, local community or the civil works contractor. Tree species selected for plantation must be suitable for local climatic conditions and be equal to or better in sequestering carbon than the trees removed/be good for sequestering carbon (only for roads where there is no tree cutting). Necessary advice maybe sought from the local Forestry office in the selection of tree species.

148. A range of 10-15 m Centre-to-Centre is recommended for spacing of trees (parallel to the road). Setback distance of trees in different situations shall be based on IRC: SP: 21 and IRC: 66. The distance between the kerb, if any, and the nearest edge of tree trunk shall be at least 2 m. The plantation in median shall comprise shrubs whose height would normally not exceed 1 - 1.5 m and shall be as per IRC SP: 21.

149. For safe traffic operation, vertical clearance between the crown of the carriageway and lowest part of overhang of the tree available across the roadway shall conform to the standards laid down in IRC: SP: 21. The pit size, fencing, watering, and manuring requirements shall also conform to the above standard. The use of pesticides shall be avoided or minimized to the extent possible. Planting shall be such that it does not obstruct the visibility of traffic from any side and shall be pleasing in appearance.

#### **b. Aquatic Ecology**

150. Temporary sedimentation and water quality deterioration is expected from the project during the construction stage. Accidental spill of materials, chemicals, and fuels may also deteriorate receiving water quality and hence the aquatic ecology.

151. **Mitigation Measures.** It is proposed to undertake construction activities near waterbodies during summer season when most of water bodies are practically dry. Best construction practices shall be adopted to prevent increase in siltation level of the water. All precautionary efforts shall be taken as given under surface water section to prevent accidental damage of water quality.

### **11. Socio-Economic Impact**

152. KM Road project will have both positive and negative impact on socioeconomic aspects as narrated below.

#### **a. Positive Impacts**

153. Economic activities supporting transport like fuel stations, automotive repair shops, lodging, and restaurants are expected to increase with increase of traffic and induced development of the area. The improved road will provide better connectivity which will result in (i) Reduction in travel time (ii) better mode and frequency of transport (iii) access to quality health care facilities, educational and other infrastructural facilities (iv) enhanced tourism activities in the area and state which in many terms will boost the local economy (v) better investment climate for industries creating more employment opportunities to local people.

#### **b. Negative Impacts**

154. The other impacts are expected due to sitting and operation of construction camp during construction.

## 12. Labour and Construction Camp

155. Construction workers expected to be about 150 per day per package are likely to be employed during construction. Most of the workers will be employed locally. However, some may be from nearby areas. This will cause additional burden on local resources. However, this impact will be temporary and will not have the potential for changes in the demographic scenarios of the area. The outside workers will be housed at the construction camp, which is expected to one per package. Poor sitting and improper management of construction camp may lead to several adverse impacts on environment viz. (i) loss of vegetation due to use of wood as fuel source for cooking (ii) deterioration in nearby surface water bodies" quality (iii) compaction and contamination of soil due to uncontrolled disposal of solid waste (iv) Poor sanitation may result to transmission of communicable diseases among the workers and the host communities. This includes the possible spread of sexually transmitted disease, diseases from improper handling and supply of foodstuffs, poor water supply, and insect-borne diseases.

156. **Mitigation Measures.** Construction camp shall be sited at such locations so as to utilize the existing infrastructure. No productive land should be utilized for construction camp. All sites must be graded, ditched and rendered free from depressions to avoid water stagnation. Accommodation and ancillary facilities including recreational facility for workers shall be erected and maintained to standards and scales approved by the resident engineer. All camps should maintain minimum distance of 1000 m from habitation and water bodies.

157. All construction camps shall be provided sanitary latrines and urinals with provision of septic tanks attached with soak pits or mobile toilets fitted with anaerobic digestion system. Storm water drains shall be provided for the flow of used water outside the camp. Drains and ditches shall be treated with bleaching powder on a regular basis. Garbage bins must be provided in the camp and regularly emptied and disposed of in a hygienic manner. LPG cylinders shall be provided as fuel source for cooking to avoid any tree cutting. The Contractor will ensure the following:

- The good health and hygiene of all workers to prevent sickness and epidemics. These include the HIV/AIDS prevention program to reduce the risk and transfer of HIV virus between and among the workers and community, promote early diagnosis and assist affected individuals. Activities under the program include monthly information, education, and consultation communication campaigns to workers, drivers, delivery crew, and communities on the risk, dangers, and impacts of STD and HIV/AIDS. Contractor will also provide first aid facilities at the camp and organize regular health check-up camps as well.
- Availability of safe drinking water and sufficient supply of suitable and hygienically prepared food at reasonable price is available to the workers.
- Adoption of all precautions to protect the workers from insect and pest to reduce the risk to health. This includes the use of insecticides, which should comply with local regulations.
- Prohibition on supply or availability of alcoholic liquor or prohibited drugs at the camp.
- Regular health check-up and immunization camps shall also be organized for the workers and nearby population.

### 13. Safety

158. The road construction activities may create various unsafe situations. This will require attention to the following safety aspects viz. (i) safety of construction workers, (ii) safety of road users including pedestrians and cyclists (iii) safety to cattle; (iv) safety of local community (iv) unsafe/ hazardous traffic conditions due to construction vehicle movement need to be considered during design and construction stage and (v) conduct of safety audit.

159. **Mitigation Measures.** During the construction phase, contractors shall be required to adopt and maintain safe working practices. Internationally accepted and widely used safety procedures should be followed during (i) road works (ii) handling of large construction equipment and machineries, (iii) handling of chemicals and hazardous materials and inflammable substances (iii) welding and (iv) electrical works. Contractor shall also arrange required PPEs for workers, first aid and firefighting equipment at construction sites. Contractor will also prepare an emergency preparedness plan, which shall be duly approved by EA to respond to any emergency and unsafe conditions. To avoid disruption of the existing traffic due to construction activities, comprehensive traffic management plan shall be drawn up by the contractor.

160. Reflectorized traffic caution signs shall be used during construction. Regular safety audit or periodic review shall be made to assess the effectiveness of safety measures adopted during construction.

161. Adequate caution signage near school, sensitive locations, speed control, caution notes shall be fixed at appropriate locations. These shall be preferably of PCC with Retro-reflective paints. Steel base signage shall be avoided to prevent theft of the same. Crash barrier shall also be installed at appropriate locations particularly near school to provide safety to school children. Provision of speed breakers shall be made near schools and religious places.

### C. Impacts during operation stage

162. The subproject road is located in vast open agricultural land, which will provide adequate dispersion of gaseous emission from vehicle. Further, proposed plantation will ameliorate/enhance the micro climate. No adverse climatic changes/impacts are anticipated during operation stage other than GHG (CO<sub>2</sub>) emission due to increased traffic, which would be largely offset with better fuel efficiency and reduced vehicle idling due to improved road conditions.

#### 1. Air Quality

163. Vehicular emissions will be the principle source of pollution during operation stage. The subproject road is mostly located in vast open agricultural land, which will provide adequate dispersion dynamics of gaseous pollutants. Moreover, majority of the traffic on the subproject will be diverted traffic from the existing highways.

164. **Mitigation Measures.** Plantation is one of the preferred solutions to check air pollution. Plants serve as a sink for pollutants, reduce the spread of dust. Tree plantation along roadsides and other places shall include pollution absorbent species. Awareness signboards shall be installed at prominent location to educate drivers for good driving and vehicle maintenance practices.

## 2. Noise

165. During the operational Stage, movement of traffic will be the prime source of noise. Traffic congestion and pedestrian interferences increase the use of horns. This may result in increased noise levels at nearby schools and religious places.

166. **Mitigation Measures.** Effective traffic management and good riding conditions shall be maintained to reduce the noise level throughout the stretch. Speed limitation and honking restrictions may be enforced near sensitive locations. Increased plantation along the road and boundary wall will also work as noise barrier. Since most of the schools buildings are away from the road, therefore impact of noise is expected to be insignificant. Since improved road conditions and multi-layered plantation will be helpful in attenuation of noise levels, the effectiveness of these measures shall be monitored. If noise levels are still found higher than the prescribed ambient noise standards at these sensitive receptors, adequate noise barrier shall be fixed.

## 3. Land and Soil

167. The better access can lead to conversion of agriculture land for residential and commercial purposes close to roads and especially in rural and urban area.

168. **Mitigation Measures.** The EA may explore the feasibility of restricting about 30 meter either side of the road as no development zone on the line restriction are imposed for National Highways authority of India.

## 4. Soil Erosion

169. No impact on soil is anticipated during operation phase of the project except bridge approaches where unexpected rainfall may erode the embankment formation and deterioration of borrow areas if not rehabilitated properly.

170. **Mitigation Measures.** Embankment stabilization shall be check periodically during operation stage and suitable stabilization measures shall be taken wherever any erosion is identified. Borrow areas will also be rehabilitated following the guidelines given at Appendix 2.

## 5. Groundwater

171. No impact is anticipated on groundwater due to the project during operation phase of the project hence, no specific mitigation measure is proposed.

## 6. Surface Water Bodies

172. No major or long-term impact is anticipated during the operation phase on the surface water bodies due to the project implementation activities. Oil contaminated runoff from the road during monsoon will have minimal impacts considering their low concentration.

## 7. Hydrology and Drainage

173. Regular removal/cleaning of deposited silt shall be done from drainage channels and outlet points before the monsoon season. Rejuvenation of the drainage system by removing encroachments/ congestions will be regularly conducted.

## 8. Impact on Biological Environment

### a. Terrestrial ecology

174. Positive impacts on terrestrial ecology are expected during the project operation stage due to the increase in vegetation and landscaping along the road. The project will coordinate with the local communities to maintain and enhance the trees planted along the state road. "No adverse impact is anticipated during operation stage except accidental damages or absence of proper tree management.

175. **Mitigation Measures.** Arrangement shall be made to ensure survivability of the tree plantation. The tree survivability audit shall also be conducted at least once in a year to assess the effectiveness of the programme.

### b. Aquatic Ecology

176. No impact is envisaged during operation phase of the project and hence no mitigation proposed. However, periodic surveillance shall be conducted to check erosion and siltation in major water bodies.

## 9. Community Health and Safety

177. During operation phase, the projected increase in the number of motorized road users travelling at higher speeds also increases the chances of injuries and fatalities from road crashes.

178. **Mitigation Measures.** Adequate caution signage near school, sensitive locations, speed control, caution notes shall be fixed at appropriate locations. These shall be preferably of PCC with Retro-reflective paints. Steel base signage shall be avoided to prevent theft of the same. Crash barrier shall also be installed at appropriate locations particularly near school to provide safety to school children. Provision of speed breakers shall be made near schools and religious places.

## D. Climate Change Impacts and Risks

### 1. Climate Change Mitigation

179. The Transport Emissions Evaluation Model for Projects (TEEMP)<sup>2</sup> developed by Clean Air Asia<sup>3</sup> was utilized to assess the CO<sub>2</sub> gross emissions with and without the project improvements. The main improvement from the project that was considered for the model is better surface roughness which was translated into impacts on traffic speed and hence fuel consumption. The model also allows for the inclusion of impacts related to traffic congestion with and without project through provisions for inserting data on the traffic numbers, lane width, number of lanes and volume/capacity saturation limit.

180. Information that was fed into the model for projecting the CO<sub>2</sub> emissions was:

<sup>2</sup> TEEMP is an excel-based, free-of-charge spreadsheet models to evaluate emissions impacts of transport projects

<sup>3</sup> A network of 250 organizations in 31 countries established by the Asian Development Bank, World Bank, and USAID to promote better air quality and livable cities by translating knowledge to policies and actions that reduce air pollution and greenhouse gas emissions from transport, energy and other sectors.

- (i) The road will rehabilitate 38.010 km of major district roads;
- (ii) The existing road having single-lane with a 3.5 m carriageway width will be improved and maintained to the intermediate-lane;
- (iii) Construction will take place over a period of 24 months (2015-16) and road operations will begin in 2017.
- (iv) The design life of the road is 20 years. Hence the midpoint of the design life is after 10 years or 2026.
- (v) Other improvements include the repair or reconstruction of damaged culverts, introduction of lined longitudinal and cross drains for the road and removal of irregularities on the existing vertical profile and road safety appurtenances.

181. The traffic forecast data was taken from the traffic studies and economic analysis for the road disaggregated into vehicle types and annual average daily traffic. Key vehicle categories considered for the road and the annual average daily traffic in 2014 (baseline scenario) without project and in 2039 with the project is given in the table below.

**Table 31: Annual Average Daily Traffic for different vehicle categories**

| Vehicle category         | 2014 (without the project) | 2014 (with project) |
|--------------------------|----------------------------|---------------------|
| 2-wheeler                | 281                        | 1511                |
| 3-wheeler/auto rickshaw  | 0                          | 0                   |
| Car/jeep/taxi/van        | 155                        | 834                 |
| Light Commercial Vehicle | 21                         | 113                 |
| Minibus and standard bus | 22                         | 118                 |
| Heavy commercial vehicle | 143                        | 769                 |
| <b>TOTAL</b>             | <b>622</b>                 | <b>3345</b>         |

182. The volume/capacity saturation limit was taken at 2.0 or twice the designed road capacity and beyond which traffic congestion will result to less than optimum travel speed and increase in fuel consumption. Emission factors were taken from the CBCP/MOEF (2008) Draft Report on Emission Factor Development for Indian Vehicles, the Automotive Research Association of India, and C. Reynolds et.al (2011) Climate and Health Relevant Emissions from in-Use Indian for three-wheelers rickshaw as follows:

**Table 32: CO2 Emission Factors**

| Vehicle Type | Gas/Petrol | Diesel    |
|--------------|------------|-----------|
| 2-Wheel      | 2.28 kg/l  |           |
| 3-Wheel      |            | 2.63 kg/l |
| Cars/bus/bus | 2.59 kg/l  | 2.68 kg/l |
| LCV          |            | 3.21 kg/l |
| Bus          |            | 3.61      |
| HCV          |            | 3.50      |

## 2. Estimated carbon emissions

183. The proposed road upgrading resulting to surface roughness and road capacity improvements have implications in CO2 emissions. Improved roughness results to higher speed and lesser emissions while increase road users increases emissions. These factors are further




affected by traffic congestion once the volume/capacity saturation limit.

184. CO<sub>2</sub> emissions will also result from the processing and manufacturing of raw materials needed to upgrade the road and in the case of Katra-Mauganj, a total of 1,67,960 tons of cement,

185. 233 tons of steel and 640 tons of bitumen will be needed. These construction materials will produce an estimated 1,66,882 tons of CO<sub>2</sub>.

186. The Figure below presents the impacts on emissions due to road improvements. Total CO<sub>2</sub> emission at business-as-usual scenario was estimated at 4,39,145 tons for the entire project life and without- and with- induced traffic are 2,36,684 and 6,44,287 tons respectively. These values are below the 100,000 tons per year threshold set in the ADB SPS 2009. Therefore it is not necessary to implement options to reduce or offset CO<sub>2</sub> emissions under the project.

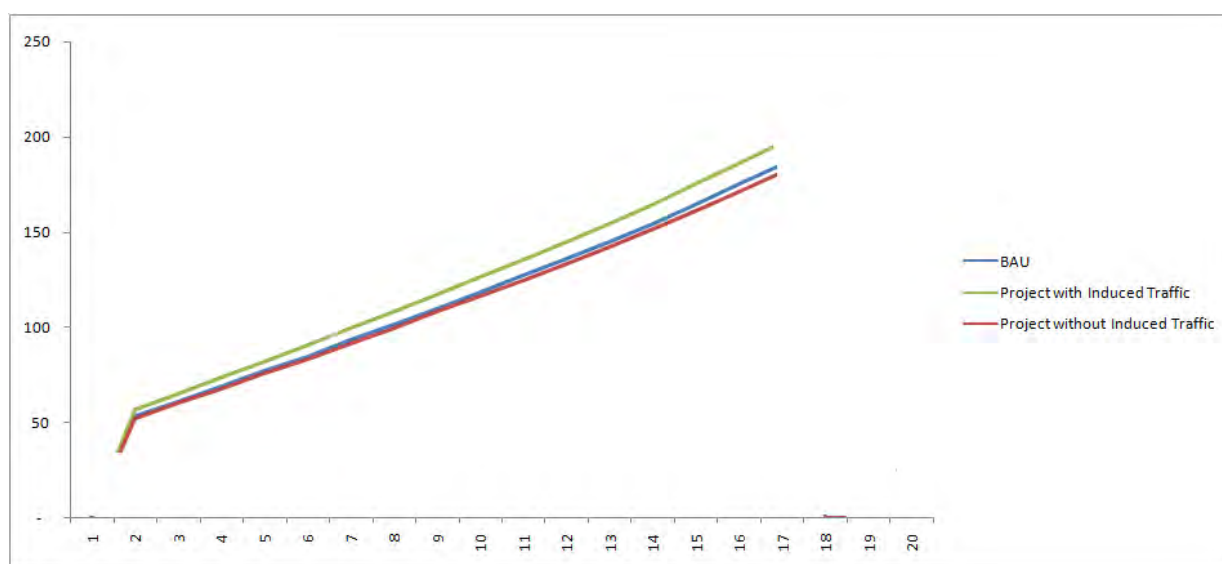

**Figure 10: Plot of CO<sub>2</sub> Emissions Considering Improvement in Surface Roughness and Road Capacity**

187. The design life of the roads is 20 years. The project's CO<sub>2</sub> emission intensity indicators are provided in the succeeding Table 33.

**Table 33: Project CO<sub>2</sub> Emissions Intensity Indicators**

| Details      | CO <sub>2</sub>   |                                      |                                   |
|--------------|-------------------|--------------------------------------|-----------------------------------|
|              | Business-As-Usual | Project<br>(without Induced Traffic) | Project<br>(with Induced Traffic) |
| tons/km      | 2,073.20          | 2,166.87                             | 2,372.91                          |
| tons/year    | 3,924.79          | 3,986.10                             | 4,223.91                          |
| tons/km/year | 83.66             | 88.34                                | 92.65                             |
| g/pkm        | 104.68            | 105.02                               | 104.94                            |
| g/tkm        | 44.65             | 41.06                                | 41.09                             |

### 3. Climate Risks and Adaptation needs

188. Climate risks were identified following both top down and bottom up approaches. Under the top down approach changes of key climate parameters, mainly temperature and precipitation were projected for 2050 using an ensemble of Global Climate Models (GCMs). Given the projected variations of temperature and precipitation the project roads were screened for 9 types of climate risks:

- (i) Landslide triggered by increased precipitation
- (ii) Fire
- (iii) Flood
- (iv) Drought
- (v) Tsunami
- (vi) Cyclone wind
- (vii) Cyclone surge
- (viii) Sea level rise
- (ix) Coastal erosion

189. Climate risk maps based on information from the GCMs were created for the project area using Geographic Information System (GIS) maps. After overlaying the road locations on the climate risk maps low to medium risks identified for the project roads were flooding, landslides triggered by precipitation, coastal erosion and tsunami.

190. The overall climate change risk level identified from the above exercise is low. The key risk identified is flooding (increased storminess). Bridges and road embankments are the main project components that will be prone to flooding. Increase in temperature may also affect road safety.

191. Under the bottom up approach the flood prone areas in the project road were identified based on field surveys for the engineering design.

192. Key engineering measures taken to address the risk of flooding in the design are: increase in road embankment height in flood prone areas/sections, improvement and provision of lined longitudinal and cross drains and new culverts, improvement and new construction of minor and major bridges. Bridge heights have been designed to have a height of 0.6m above HFL for minor bridges and 0.9m above HFL for major bridges. Flood return period of 50 years for minor bridges and 100 years for major bridges have been considered.

### E. Cumulative and Induced Impacts

193. According to the ADB Environment Safeguards Sourcebook<sup>4</sup> cumulative impact is described as: "The combination of multiple impacts from existing projects, the proposed project, and anticipated future projects that may result in significant adverse and/or beneficial impacts that cannot be expected in the case of a stand-alone project." The sourcebook also describes induced impacts as: "Adverse and/or beneficial impacts on areas and communities from unintended but predictable developments caused by a project, which may occur at later or at a different location.

---

<sup>4</sup> Environment Safeguards, A Good Practice Sourcebook, Draft Working Document, December 2012.

194. Economic activities supporting transport like fuel stations, automotive repair shops, lodging, and restaurants are expected to increase with increase of traffic and induce development in the project area. The improved road will provide better connectivity and result in (i) Reduction in travel time (ii) better mode and frequency of transport (iii) access to quality health care facilities, educational and other infrastructural facilities (iv) enhanced tourism activities in the area and state which in many terms will boost the local economy (v) better investment climate for industries creating more employment opportunities to local people.

195. In terms of environment safeguard issues the improved road surface is expected to result in less dust and noise due to traffic plying on the damaged roads. However, the increased traffic due to the improved road will generate more air pollution due to vehicle exhaust and noise. The smoother road conditions will also result in increase of traffic speeds, hence creating more risks for accidents amongst traffic users as well as the local communities in the project area.

196. For addressing the impacts of air pollution and noise, regular maintenance of the road surface, maintenance and monitoring of newly planted trees and installation of noise barriers where necessary have been included in the EMP for implementation during operation stage. For addressing safety related impacts, regular maintenance of the road furniture include safety Information on future development projects along the project road was not available. Hence, it is difficult to assess cumulative impacts from other projects which may get implemented in the project

## **VI. PUBLIC CONSULTATION AND INFORMATION DISCLOSURE**

197. Meaningful consultations were held early and throughout the project development stage to allow the incorporation of relevant views of the stakeholders in the final project design, mitigation measures, implementation issues, and enhance the distribution of benefits. All the five principles of information dissemination, information solicitation, integration, co-ordination, and engagement into dialogue were incorporated in the consultation process. The analysis of environmental impacts likely from the project was strengthened and modified based on opinions of all those consulted, especially in the micro level by setting up dialogues with the village people from whom information on site facts and prevailing conditions were collected. The requirement of public consultation during the implementation of the project has been proposed as part of the mitigation plan.

### **A. Objectives of the Public Consultation:**

198. Stakeholder's consultations were held with intent to understand their concerns, apprehensions, overall opinion and solicit recommendations to improve project design and implementation. Informal meetings, interviews were organized covering the entire project design stage. Consultations provide affected people a platform to ensure incorporation of their concerns in the decision making process and foster co-operation among officers of MPRDC, the community and the stakeholders to achieve a cordial working relationship for smooth implementation of the project. It inculcates the sense of belongingness in the public about the project.

199. The discussions were designed to receive maximum inputs from the participants regarding their acceptability and environmental concerns arising out of the sub-project. They were given the brief outline of the project to which their opinions was required particularly in identifying and mitigating any potential adverse impact.

### **B. Methodology for Consultations**

200. Consultation with the stakeholders, beneficiaries, and community leaders were carried out using standard structured questionnaires as well as unstructured questionnaires. Questionnaire survey/ discussions were designed to obtain background information and details of general environmental issues that concern people in the project area. In addition, environmental issues were discussed with relevant organizations, government officials, beneficiaries, community leaders and experts. In addition, personal discussions with officials, on site discussion with affected stakeholders, and reconnaissance visits have also been made to the project area. Public consultation has been carried out at five locations during initial surveys as shown in Table 34. The total numbers of participants in the consultations are 68 out of which 35 or 52% are women.

**Table 34: List of Public consultation and Date**

| <b>Sr. No.</b> | <b>Date and Location</b>                                | <b>Issues Discussed</b>   | <b>Measures Taken</b>  | <b>Participant</b>    |
|----------------|---|---|--|-----------------------|
| 1              | Date: 23/07/2014<br>village: Bahuti<br>Chainage- 27.000 | <ul style="list-style-type: none"> <li>People are facing acute problem related to poor condition of the road. · Where the road passing through the settlements here should be provision of Speed breakers<br/>Suggestion viz. (i) design shall take into hydrological aspects into consideration (ii) minimal loss of structures (iii) adequate resettlement and rehabilitation measures including provision of jobs to land losers.</li> </ul>   | <ul style="list-style-type: none"> <li>Proposed widening and strengthening of the road will provide better level of services in terms of improved riding quality and smooth traffic flow.</li> <li>There will be considerable reduction in the number of accident and level of pollution.</li> <li>Accessibility to social health and educational infrastructure will increase through all-weather road.</li> <li>As the proposed road shall be an widened one, it shall provide an efficient public transportation system besides ensuring reduction in congestion level · The non-title holders shall also be compensated as per ADB guidelines.· Drainage system is mention in built-up area and earthen drainage for rural area.</li> <li>Drainage system is mention in built-up area and earthen drainage for rural area.</li> <li>Road safety features like Traffic signs, Overhead Sign Boards, Road Illumination, Delineators, pavement marking, pedestrian path and rumble strips has been included in the design.</li> <li>Proper Rehabilitation measures will be taken for Project Affected Household's and compensation will be as per market rate.</li> </ul> | Total Participants-12 |
| 2              | Date: 23/07/2014<br>Village: Tendua<br>Chainage-35.000  | <ul style="list-style-type: none"> <li>Local people informed that present road in some sections of this area submerges during normal rainfall also. Adequate measures shall be taken to avoid water logging during normal rainfall.</li> <li>They suggested that existing alignment shall also be improved and maintained properly. · Suggestion viz., Minimal loss of structures, Adequate rehabilitation and resettlement ,measures Area is one of the congested stretches due to that problem of traffic jam and accident is common.</li> <li>Stress was put by the community on adequate safety provisions to be made along the road particularly at locations of school, cattle underpass, provision of bus stop and provision of green belt development</li> <li>Compensation should be as per market value.</li> </ul> |  | Total Participants-10 |
| 3              | Date: 23/07/2014<br>Village: Dhadani<br>Chainage.37.500 |   |  | Total Participants-16 |
| 4              | Date: 24/07/2014<br>Village: Kot<br>Chainage- 6.000     |   |  | Total Participants-14 |
| 5              | Date: 27/07/2014<br>Village: Rampur<br>Chainage- 15.500 |   |  | Total Participants-16 |

201. Most of the people interviewed were well aware of the environmental conditions in and around their villages. A major percentage was ignorant about any deterioration in the air and noise quality due to expansion of existing highway. However, their major concern was related to the loss of fertile agricultural land. The villagers are quite enthusiastic about the proposed project as it will give fillip to rural economy and present them many employment opportunities during construction of project road. Overall positive approach towards the project is observed.

### C. Results of Consultation with Local People

202. Most of the people interviewed strongly support the project. The people living in the entire project area expect the different project elements to facilitate transport, employment, tourism, boost economic development and thereby provide direct, or indirect, benefits to them. In order to access the existing environment and likely impacts on surrounding population, an interview survey was carried out. A sample of the population was interviewed through a designed questionnaire. Precaution has been exercised during the survey to ensure that the sample interviewed is truly representative of the affected groups and the questions are worded so as not to generate a bias response.

203. It is observed from the interview survey that there is increased environmental awareness among the people. It can also be seen from Table 37 that about 85 percent of the persons are in the opinion that an environmental condition of the area is good. About 90 percent of the people are agreed that the quality of air, in the area is good; whereas, only about 5 to 10 percent responded feel that the environmental quality is being deteriorated. Poor road condition and vehicular emissions are the major sources they feel responsible for this. People are unaware about presence of archaeological, historical and cultural sites. There is no major history of natural disasters in the region and local people have mixed response about natural disasters. Overall, the general environmental conditions in the region are good and people have increased environmental awareness. Table 35 shows the result of public opinion survey carried out in the region.

**Table 35: Peoples' Perception about Environmental Scenario**

| Sr. No. | Question asked about                    | No. of people interviewed | Positive response (%) | Negative response (%) | No response (%) |
|---------|---|---------------------------|-----------------------|-----------------------|-----------------|
| 1       | Noise quality of the area               | 68                        | 90                    | 8                     | 2               |
| 2       | Air quality of the area                 |                           | 85                    | 0                     | 15              |
| 3       | Archaeological sites                    |                           | 0                     | 95                    | 5               |
| 4       | Natural disaster                        |                           | 10                    | 85                    | 5               |
| 5       | Rare species of animals and birds found |                           | 0                     | 100                   | 0               |
| 6       | Cultural sites i.e. market, melas       |                           | 78                    | 5                     | 17              |

### D. Conclusion and Recommendation

204. Overall, most of the people interviewed strongly support the project. The people living in the entire project area expect the different project elements to facilitate transport, employment, tourism, boost economic development and thereby provide direct, or indirect, benefits to them. Construction camps may, however, put stress on local resources and the infrastructure in nearby communities. In addition, local people raised construction-process related grievances with the workers. This sometimes leads to aggression between residents and migrant workers.

To prevent such problems, the contractor should provide the construction camps with facilities such as proper housing, health care clinics, proper drinking water and timely payment. The use of local labourers during the construction will, of course, increase benefits to local peoples and minimise these problems. Wherever possible, such people should be employed.

205. The following are the Consultants' initial findings in regard to likely positive and negative impacts.

### **1. Positive Impacts**

- (i) The improved road: will reduce travel times, fuel consumption and emissions from base traffic volumes
- (ii) Drainage conditions will be considerably improved: this because of the provision of improved side drains, culverts and causeways;
- (iii) Economic development and access will be stimulated
- (iv) Health, Agricultural and Education facility will improve.

### **2. Negative Impacts**

- (i) Few tree loss which reduce the green cover but simultaneously plantation will take place to improve the green cover.
- (ii) Minor deteriorations in the present minimum levels of air, water and noise quality may be expected during construction- but this should be short-term and localised in order to minimise the impacts, the mitigation measures recommended
- (iii) During construction the traffic will slow and messy.

206. On the basis of available information, field visits over the entire length of the project road, discussions with the project authorities; other discussions amongst the project team, NGOs, local people and various governmental officials, it has been concluded that overall:

- (i) All elements of the projects will be beneficial;
- (ii) All negative impacts, during and post construction, including those deemed "significant" can be properly mitigated; and
- (iii) No comprehensive, broad, diverse or irreversible adverse impacts have been identified.

## **VII. ENVIRONMENTAL MANAGEMENT PLAN AND GRIEVANCE REDRESS MECHANISM**

207. The environmental impacts associated with any development project are eliminated or minimized to an acceptable level through development of appropriate mitigation measures based on most suitable techno-economic options. The Environmental Management Plan (EMP) is a well-established tool to ensure effective implementation of the recommended mitigations measures throughout the subsequent project development stages. The EMP also ensures that the positive impacts are conserved and enhanced. An EMP provides location and time specific actions to be taken with defined responsibility. It also provides measures for institutional strengthening and effectiveness assessment through defined monitoring plan, reporting and corrective & preventive action planning.

### **A. Environmental Management Plan**

208. The KM Road specific Environment Management Plan has been formulated which consists of a set of mitigation; monitoring and institutional measures applicable to design, construction and operation stages of the project (Appendix 3). The components of this EMP includes (i) mitigation of potentially adverse impacts (ii) monitoring of impacts and mitigation measures during project implementation and operation (iii) institutional capacity building and training (iii) compliance to statutory requirements (iv) integration of EMP with project planning, design, construction and operation.

### **B. EMP Implementation Schedule**

209. The EMP provided in Appendix 3 provides measures. However, specific mention is made for location specific measures. The package specific EMP costs are separately assessed. These EMP will form part of bidding document as well. The construction period for KM Road is considered as 24 months from the date of start of construction.

### **C. Emergency Response Plan**

210. Assessment of nature, type and extent of project activities establishes that this project may have only one environmental emergency i.e. accidents on paved roads and consequent spillage due to damage of oil tank of the vehicle. It is suggested to develop a communication and response system to minimize the response time. The project authorities shall be prepared to counteract against such emergency either by developing in-house capabilities or by associating with any competent agency.

### **D. Environmental Monitoring Plan (EMoP)**

211. The purpose of the environmental monitoring program is to ensure that the envisaged objectives of the project are achieved and result in desired benefits. To ensure the effective implementation of the mitigation measures and Environmental Management Plan (EMP), it is essential that an effective monitoring program be designed and carried out. The board objectives of environmental monitoring plan are:

- (i) To evaluate the performance of mitigation measure proposed in the EMP,
- (ii) To evaluate the adequacy of Environmental Assessment
- (iii) To suggest improvements in management plan, if required,



- (iv) To assess change in environmental quality,

212. A comprehensive monitoring plan has been prepared for all stages of the project and provided as Appendix 4. This includes parameters to be measured, methods to be used, sampling locations, frequency of measurements, detection limits, cost and responsibility for implementation and supervision. The monitoring programme is designed for monitoring during construction and operation stages with details on budget and responsible agencies:

- (i) Construction Stage: (three years of construction period)
- (ii) Monitoring to be carried out by construction supervision consultant (CSC). The costs to form part of CSC budget.
- (iii) Six Monthly monitoring by external agency to be arranged by PIU ADB from Project cost budget. This report will be directly submitted by agency to MPRDC.
- (iv) Monitoring Programme and schedule for Key Performance Indicators (Physical, biological and environmental management components identified as of particular significance) are given in the following section:

### **1. Ambient Air Quality (AAQ) Monitoring**

213. Ambient air quality parameters recommended for road transportation developments are Fine Particular Matter (PM<sub>2.5</sub>), Respirable Particular Matter (PM<sub>10</sub>), Carbon Monoxide (CO), Oxide of Nitrogen (NO<sub>x</sub>) and Sulphur Dioxide (SO<sub>2</sub>). These are to be monitored at designated locations starting from the commencement of construction activities. Data should be generated twice in a week at all identified locations in accordance to the National Ambient Air Quantity Standards (Appendix 5). The locations and environmental parameters to be monitored are detailed out in the Environmental Monitoring Plan (Appendix 4).

### **2. Water Quality Monitoring**

214. The physical and chemical parameters recommended for analysis of water quality relevant to road development project are pH, total solids, total dissolved solids, total suspended solids, and oil & grease. The monitoring of the water quality is to be carried out at all identified locations in accordance to the Indian Standard Drinking Water Specification – IS 10500 (Appendix 6). The locations, duration and the pollution parameters to be monitored are detailed in the Environmental Monitoring Plan (Appendix 4).

### **3. Noise Levels Monitoring**

215. The measurements for monitoring noise levels would be carried out at designated locations in accordance to the ambient Noise Standards formulated by Ministry of Environment and Forests (MoEF) as given (Appendix 7). Noise level would be monitored on a twenty-four hours basis. Noise should be recorded at “A” weighted frequency using a slow time response mode of the measuring instrument. The measurement location, duration and the noise pollution parameters to be monitored and the responsible institutional arrangements are detailed in the Environmental Monitoring Plan (Appendix 4).

### **4. Tree Plantation**

216. The 75% survival rate of re-plantation shall be monitored for three years of the operation phase. If the survival rate is found below 75%, additional compensatory plantation shall be

carried out by agency responsible for plantation and maintenance. The survival rate monitoring shall be again taken up after 1 year again. This cycle should continue until the 75% survival rate is achieved. Since tree plantation would be made through forest department, monitoring would be carried out through MPRDC.

## **5. Soil Erosion and Drainage Congestion**

217. No significant soil erosion problem is anticipated due to the project either in the construction phase or in the operation phase. However, in the construction phase, some localized soil erosion may be noticed owing to construction activities. However, if soil erosion is noticed during construction and operation phase, the corrective action shall be initiated and frequency of check be increased to assess the tendency of occurrence.

## **E. Institutional Setting and Proposed Implementation Arrangement**

218. The Executing Agency for the project will be GoMP through MPRDC. MPRDC is wholly owned by GoMP and has been equipped with adequate capacity to implement the project. The implementation arrangements basically follow the ongoing MPSRSP-II. A General Manager (GM) at MPRDC headquarter has been designated as person in charge for project implementation. The Environmental and Social cell (ESC) at MPRDC headquarters, reporting to the General Manager, will be responsible for ensuring compliance with environmental and social safeguards of project roads. This cell currently has only one officer to cover both social and environment safeguards. To support this officer, two more social safeguard officers and one environmental safeguard officer will be appointed or recruited. This will allow the ESC to have a total of four officers, 2 for social safeguards and 2 for environment safeguards.

219. MPRDC has ten division offices (Bhopal, Jabalpur, Sagar, Gwalior I, Gwalior 2, Ujjain , Indore I, Indore II, Rewa I, and Rewa II) acting as Project Implementation Units (PIUs). Each PIU is headed by a Divisional Manager (Tech.) who is responsible for project implementation at the field level. Each PIU will be responsible for one to two contracts depending on the location of the sub projects, and one project manager will be assigned for each contract package. The project manager will be delegated adequate technical and administrative authority for expeditious project implementation. In each PIU one of the Assistant Engineers or Managers under the Divisional Manager will be appointed as the social and environment safeguards focal person. MPRDC will engage Construction Supervision Consultants to act as the engineer for the construction contracts. An environmental specialist from the CSC will provide technical support to MPRDC and the PIU for implementation of environment safeguards under the project. The engineer will be responsible for approving plans, engineering drawings, release of payments to contractor etc. while the CSC environmental specialist or environmental officer will be responsible for providing recommendations to “the engineer” for approving activities specific to environment safeguards. Environmental awareness and EMP implementation training will be held for MPRDC staff, contractors and CSC.

220. Six monthly monitoring reports will be prepared by the CSC environmental specialist to report on compliance with construction contracts, effectiveness of mitigation measures, and complaints (also known as project performance monitoring), and the state and health of nearby environmental resources (also known as ambient environmental monitoring).

221. Monitoring during operation shall be conducted for five years (once a year basis) as part of CSC contract and budget as this project will have a five year performance based maintenance works to be implemented by the contractor. Thereafter it will be done on an as-

needed basis depending on the design or change in project activity.

222. The detailed responsibilities of MPRDC, PIUs, CSC, Contractor, and ADB are provided:

#### **1. MPRDC's Responsibilities**

- Ensure that Project complies with ADB's SPS and GOI's laws and regulation
- Ensure that the project complies with all environment safeguard requirements as given in this EARF
- Prepare IEE reports including EMP as may be required and hire an environmental consultant as required
- Prepare the Rapid Environmental Assessment screening checklist and forward this checklist to ADB for evaluation and confirmation of the project category;
- Based on the confirmation of the environmental categorization of the subprojects, prepare TORs to conduct IEE studies including preparation of EMP and Environmental Monitoring Plan in accordance with the environmental policy principles and safeguard requirements under the ADB SPS;
- Ensure that the preparation of environmental studies will be completed with meaningful consultations with affected people and other concerned stakeholders, including civil society throughout the project preparation stages as required by the ADB SPS
- Undertake initial review of the IEE and EMP reports to ensure its compliance with the Government's and ADB's requirement;
- Review the budgetary needs for complying with the Government's and ADB's requirements on environment safeguards
- Obtain necessary consents or permissions (e.g. environment permission, forest clearance) from relevant Government Agencies to minimize risks to the environment and mitigate environmental impacts associated. Also ensure that all necessary regulatory clearances will be obtained prior to commencing any civil work of the subproject;
- Submit to ADB the final IEE including EMP reports with consent letter for disclosure of the report on the ADB website
- Ensure that the EMP which includes required mitigation measures and monitoring requirements forms part of bidding document after seeking concurrence from ADB. EMP items may be included in the Bill of Quantities (BOQ) as necessary. For example if a subproject is required to construct noise barriers, the costs will need to be included in the BOQ;
- Ensure that contractors have access to the IEE report including EMP of the subprojects;
- Organize training and awareness programs on implementation of environment safeguards for relevant staff of MPRDC, PIU, CSC and contractors
- Ensure that contractors understand their responsibilities to mitigate environmental problems associated with their construction activities
- Ensure and Monitor that the EMP including Environmental Monitoring Plan will be properly implemented;
- In case of unanticipated environmental impacts during project implementation stage arrange to prepare and implement an updated EMP to account for such impacts after seeking concurrence from ADB. The updating shall be carried out after due consultation with the stake holders;

- In case during project implementation a subproject needs to be realigned, review the environmental classification and revise accordingly, and identify whether supplementary IEE study is required. If it is required, prepare the TOR for undertaking supplementary IEE and hire an environment consultant to carry out the study;
- Ensure that construction workers work under safe and healthy working environment in accordance with the World Bank EHS guidelines relating to occupational health and safety;
- Ensure effective implementation of Grievance Redress Mechanism to address affected people's concerns and complaints, promptly, using understandable and transparent process that is gender responsive, culturally appropriate, and readily accessible to all segments of the affected people;
- Submit semi-annual monitoring reports for all sub-projects on the implementation of EMPs to ADB for disclosure on the ADB website.
- Ensure proper implementation of corrective action plan if identified in the monitoring report; and
- Disclose information as defined in this EARF.

## **2. PIU Responsibilities**

- Ensure that Project complies with ADB's SPS and GOI's laws and regulations
- Ensure that the project complies with all environment safeguard requirements as given in this EARF
- Obtain necessary consents or permissions (e.g. forest clearance, no objection certificate) from relevant Government Agencies. Also ensure that all necessary regulatory clearances will be obtained prior to commencing any civil work of the subproject;
- Ensure that contractors have access to the IEE report including EMP of the subprojects;
- Ensure that contractors understand their responsibilities to mitigate environmental problems associated with their construction activities
- Participate in training and awareness programs on implementation of environment safeguards and organize further on the job or subject specific training for the contractor during project implementation as necessary with the support of the CSC environmental specialist
- Conduct regular on site monitoring to ensure proper implementation of the EMP including Environmental Monitoring Plan;
- Verify and approve monitoring checklists and/or reports that will be prepared and submitted by the CSC
- In case of unanticipated environmental impacts during project implementation stage, identify the need to prepare and implement an updated EMP to account for such impacts after seeking concurrence from ADB.
- Ensure that construction workers work under safe and healthy working environment;
- Ensure effective implementation of Grievance Redress Mechanism in accordance with the steps given in figure 11 to address affected people's concerns and complaints, promptly, using an understandable and transparent process that is gender responsive, culturally appropriate, and readily accessible to all segments of the affected people;

- Ensure timely submission of semi-annual monitoring reports for all sub-projects on the implementation of EMPs to MPRDC for further submission to ADB for disclosure on the ADB website; and
- Ensure proper implementation of corrective action plan if identified in the monitoring report

### **3. CSC Responsibilities**

- Ensure that Project complies with ADB's SPS and GOI's laws and regulations
- Ensure that the project complies with all environment safeguard requirements as given in this EARF
- Provide necessary technical advice and support to the PIU and/or contractor to obtain consents or permissions (e.g. forest clearance, no objection certificate) from relevant Government Agencies. Also ensure that all necessary regulatory clearances will be obtained prior to commencing any civil work of the subproject;
- Ensure that contractors have access to the IEE report including EMP of the subprojects;
- Ensure that contractors understand their responsibilities to mitigate environmental problems associated with their construction activities
- Closely coordinate and communicate with the contractor to facilitate implementation of all mitigation measures identified in EMP
- Conduct training and awareness programs on implementation of environment safeguards for MPRDC, PIU and the contractors during the pre-construction stage and further organize on the job or subject specific training for the contractor during project implementation as necessary
- Conduct regular on site monitoring to ensure proper implementation of the EMP including Environmental Monitoring Plan;
- Prepare monitoring checklists and/or reports based on the site monitoring and submit them to the PIU for approval
- In case of unanticipated environmental impacts during project implementation stage, upon the advice from the PIU and/or MPRDC prepare an updated EMP to account for such impacts after seeking concurrence from ADB.
- Ensure that construction workers work under safe and healthy working environment;
- Facilitate effective implementation of the Grievance Redress Mechanism in accordance with the steps given in figure 11 to address affected people's concerns and complaints, promptly, using an understandable and transparent process that is gender responsive, culturally appropriate, and readily accessible to all segments of the affected people;
- Prepare semi-annual monitoring reports for all sub-projects on the implementation of EMPs for submission to PIU and MPRDC and further submission to ADB for disclosure on the ADB website

### **4. Contractor's Responsibilities**

- Ensure that adequate budget provisions are made for implementing all mitigation measures specified in the EMP
- Participate in training and awareness programs on implementation of environment safeguards

- Identify further needs for conduction of on the job or subject specific training during project implementation by the CSC or MPRDC or PIU
- Obtain necessary environmental permission etc. from relevant agencies as specified by EARF for project road works, quarries, hot-mix plant etc. prior to commencement of civil works contracts
- Implement all mitigation measures as given in the EMP in the contract documents
- Ensure that all workers, site agents, including site supervisors and management participate in training sessions organized by the PIU, MPRDC or CSC.
- Ensure compliance with environmental statutory requirements and contractual obligations
- Respond promptly to grievances raised by the local community or any stakeholder and implement environmental corrective actions or additional environmental mitigation measures as necessary.
- Based on the results of EMP monitoring, cooperate with the PIU and CSC to implement environmental corrective actions and corrective action plans, as necessary.

## 5. ADB's Responsibilities

- Review REA checklist and endorse or modify the project classification proposed by the MPRDC;
- Review IEE reports, including this environmental assessment and review framework, and disclose draft and final reports through ADB's website as required;
- Issue subproject's approval based on the respective IEE reports;
- Monitor implementation of environment safeguard requirements under the project through due diligence missions;
- Provide assistance to MPRDC, if required, in carrying out its responsibilities for implementing environment safeguards and for building capacity for safeguard compliance;
- Review and approve semi-annual environmental monitoring reports submitted by MPRDC and disclose them on the ADB website
- Monitor MPRDC's commitments under EARF

## F. Institutional Capacity Building

223. To ensure that all parties clearly understand their role and responsibilities for implementing environment safeguards under the project, the following training and awareness programme is proposed:

- (i) Awareness programme on environmental issues associated with construction and improvement of road projects and legislative compliance requirements.  
**Target audience:** designated engineers from field units, contractor's  
**Faculty:** Environmental Expert and Environment Expert of CSC.  
**No of Programmes:** Minimum one per contract package
- (ii) EMP and EMoP implementation requirements, its benefits and roles of different level and functions.  
**Target audience:** designated engineers from field units, contractor's officials,

and key workers, other officials of MPRDC associated for the project.

**Faculty:** EE and Environment Expert of CSC.

**No of Programmes:** Minimum one per contract package

## **G. Grievance Redress Mechanism**

224. Grievances related to the implementation of the project, particularly regarding the environmental management plan will be acknowledged, evaluated, and responded to the complainant with corrective action proposed. The outcome shall also form part of six monthly compliances report to ADB. Complaints may be lodged verbally directly to the contractor or CSC or PIU at the site level. To the extent possible efforts will be made by the contractor, CSC or PIU to address these complaints immediately on site. Only those complaints that cannot be addressed immediately at the site level will be submitted to the Grievance Redress Committee (GRC). Necessary assistance for completing the complaint form or lodging a written complaint will be made to illiterate complainants by the respective receiver of the complaint. Grievance Redress Committee (GRCs) should be established at the MPRDC state level and PIU level to assure accessibility for APs. The GRCs are expected to resolve the grievances of the eligible persons within a stipulated time. The decision of the GRCs is binding, unless vacated by the court of law. The GRC will be constituted at MPRDC level and at the PIU level.


225. The State level GRC will comprise of the:

- (i) General Manager, MPRDC, Bhopal
- (ii) Superintended Engineer, PWD, Bhopal
- (iii) DGM, MPRDC, Bhopal
- (iv) Manager (Environment & Social) , MPRDC, Bhopal

226. The PIU level GRC will comprise of the:

- (i) Divisional Manager
- (ii) A representative from local NGOs or a local person of repute and standing in the society, elected representative from ZilaParisad /District Council.
- (iii) Two representatives of affected persons including vulnerable groups and women in the committee.

227. The GRC will continue to function, for the benefit of the APs, during the entire life of the project including the five year maintenance period. The following flow chart defines the process of GRM. The details of GRM, procedures and formats in local language i.e. Hindi are provided in Appendix 9.

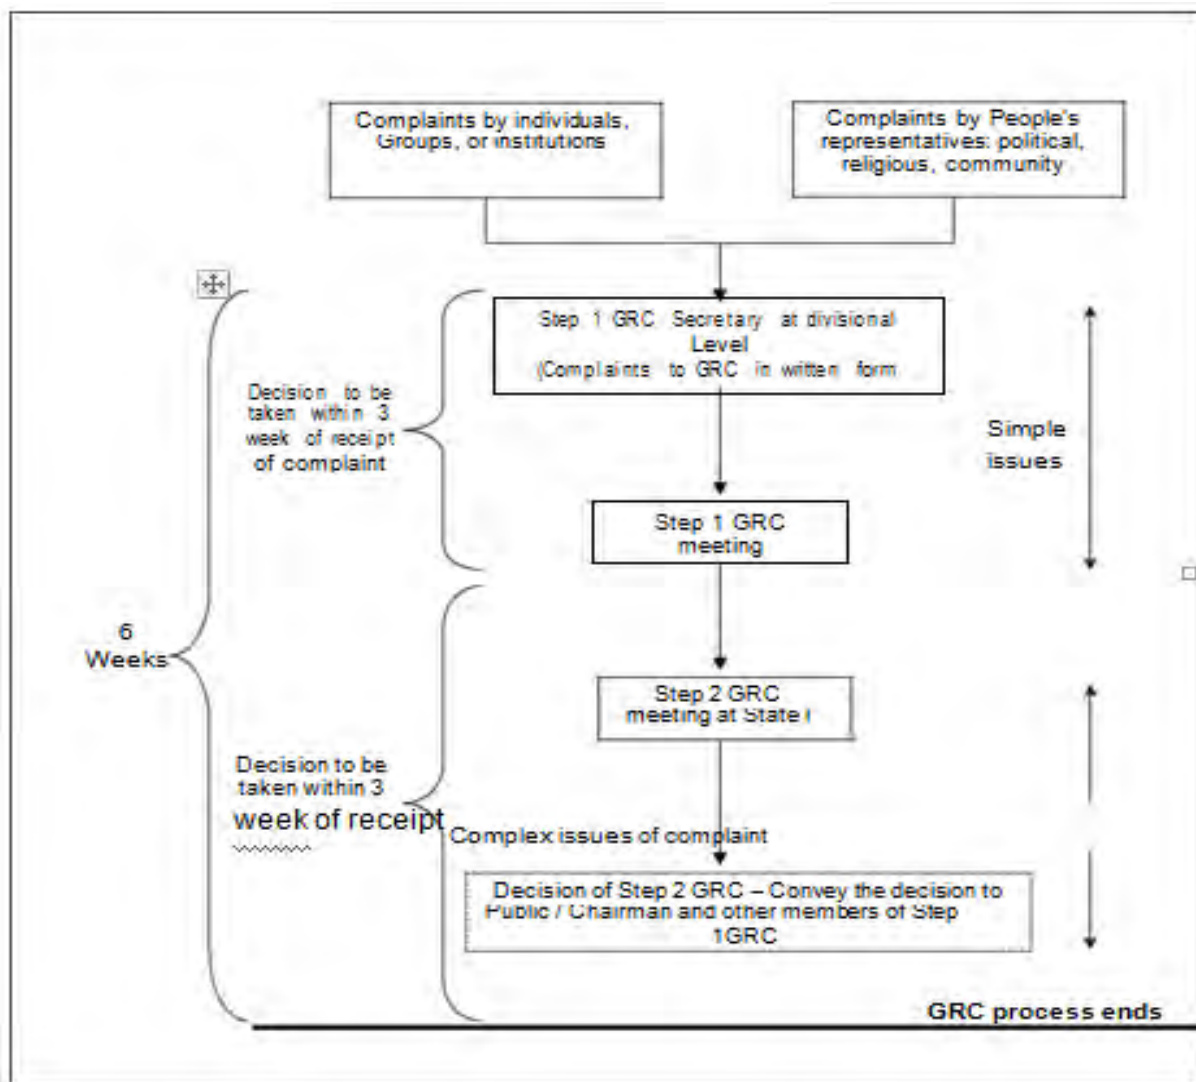

**Figure 11: GRM Process**

#### H. Cost for Environmental Management Plan, Training and Environmental Monitoring

228. The cost of environment management, monitoring & Training programme is given in Table 36.

**Table 36: Environment Management, Monitoring and Training Programme Costs**

| Sr. no | Parameters / Components   | Parameter to be monitored  | Guidelines  | Unit Cost (Rs) | Total Cost(Rs) |
|--------|---|----------------------------|---|----------------|----------------|
| 1      | Ambient Air Monitoring: 3 times in a year for 3 years or construction period at 3 sites & Five years during operation/ defect liability period ,once in a year at three sites | PM10, PM2.5, SO2, NOx & CO | High Volume samplers to be used and located 50 m from the construction site | 9000           | 378000         |



| Sr. no | Parameters / Components  | Parameter to be monitored  | Guidelines  | Unit Cost (Rs)                                 | Total Cost(Rs)   |
|--------|--|--|---|--|------------------|
| 2      | Water Monitoring: 3 times in year for 3 years or Construction period At 3 locations  | pH, BOD, COD, TDS, TSS, DO, Total coliform, Conductivity, Oil & Grease | Analyse as per the standard methods or examination of water and waste water                 | 5000   | 135000           |
| 3      | Noise Monitoring: 3 times in a year for 3 years or construction period , 3 locations & Five years during operation/ defect liability period ,once in a year at three sites   | Noise levels on dB (A) scale   | Using an integrated noise level meter kept at a distance of 15 m from the construction site | 3000   | 126000           |
|        | <b>Total Monitoring Cost</b>   |  |   |  | <b>639000</b>    |
| 4      | Opening, running and restoration of stone quarry/sand extraction pits along the entire project length  |  | IRC Code of Practice and MoSRT&H manual   | LS   | Engineering cost |
| 5      | Gabion walls (above height 4 m) along elevated embankment  |  | IRC Code of Practice and MoSRT&H manual   | LS   | Engineering cost |
| 6      | Dust Suppression along the entire project length<br>Three tankers in a days for 240 Days   |  | IRC Code of Practice and MoSRT&H manual   | Rs2000/- per day per tanker                    | 1440000/--       |
| 7      | Solid Waste management during entire project period  |  | As per MoEF guidelines  | 3000/ month                                    | 108000/-         |
| 8      | Erosion Control Measures (Turving / Pitching / Seeding & Mulching) Provision of Cross drainage & side drainage structures General Borrow area management and maintenance of haul roads related to borrow areas Air/noise pollution control measures in construction equipment Management and disposal of scarified waste bituminous material Provision of Informatory Signs Bus shelters Construction of Speed Humps Management of quarries Redevelopment of Borrow Areas Construction Camp Management Costs Safety measures for workers |  | As per IRC Guidelines   | Shall be included in contractor's quoted rates | Engineering cost |
|        | <b>Total Mitigation Cost (B)</b>   |  |   |  | <b>1548000/-</b> |
| 9      | Training: Three training sessions during construction period.  |  | As per modules developed by MPRDC   | 50000 per session                              | 150000           |
|        | <b>Total Training Cost (C)</b>   |  |   |  | <b>150000/-</b>  |
|        | <b>Total Environmental Cost (A+B+C)</b>  |  |   |  | <b>2337000/-</b> |

## **VIII. CONCLUSIONS AND RECOMMENDATIONS**

229. The assessment of environment impacts for the sub-project shows that there are no significant, long term impacts. Most impacts are short term and limited to the construction stage. Key conclusions on the environmental implications of the project are given in the paragraphs below.

### **A. Environmental Gains Due to Proposed Work Justifying Implementation**

230. The project entails various impacts on the project setting. There are many impacts bearing benefits to the area against the limited number and magnitude of negative impacts. These include the following: (i) the project will substantially improve the transport efficiency on the roads. (iii) The project once implemented will improve the overall environmental conditions with better roads, fuel efficiency and environmental protection measures (iv) will reduce traffic congestion particularly at junctions hence, air pollution due to idling of the vehicles.

### **B. Potential Impacts and Mitigation**

231. The finding of IEE indicates that project is unlikely to cause any significant adverse environmental impacts. While some of the impacts are negative, there are many bearing benefits to the area. Most of the impacts are likely to occur during construction stage and are temporary in nature. Anticipated minor impacts will be mitigated through the implementation of mitigation measures summarized in the Environmental Management Plan.

232. Factors contributing to minimal impacts include, widening of the project road confined within the available RoW, presence of no sensitive environmental issue like wildlife sanctuary, national park, bio reserve, with 10 km from the project road and most of water body crossed by the road are non-perennial in nature except one which is already bridged. However, some of the impacts are unavoidable. These impacts with mitigation measures are indicated below:

- (i) About 86 trees will need to be cut with prior permission of district or forest authorities. Compensatory Tree plantation on the basis of 1:10 will be made to compensate this loss. Preventive measures shall be taken into consideration during construction phase especially in rainy months, to prevent soil erosion because of tree cutting and alteration of ground flora.
- (ii) Air pollution due to construction activities and operation of hot mix plant will be controlled through adoption of dust suppression measures and provision of high stack for good dispersion of gaseous emission from hot mix plant.
- (iii) Noise levels may increase during the construction phase due to operation of construction machineries. All the construction equipment and DG set will be well maintained and fitted with silencers.
- (iv) Waste materials generated during construction phase may contaminate soil, surface and ground water resources. Waste shall be segregated and reused or disposed off in environmentally acceptable manner.
- (v) Along the project stretch, few religious structures are located. Appropriate design options are exercised to minimize the loss of such structures.
- (vi) The social issues are addressed through Social Safeguards Due Diligence reports prepared as per SPS of ADB.

### **C. Irreplaceable Resources**

233. The project does not pass through any protected areas, or eco sensitive areas. The construction material will also be sourced from identified and approved sources. As such, there are no environmental sensitive resources found in the project area, which is likely to be affected due to the project.

### **D. Post IEE Surveillance and Monitoring**

234. While an IEE is meant to provide a comprehensive understanding of the environment status of the area under the study, post IEE surveillance is the means to ensure that the significant impacts identified are adequately mitigated as per the proposed mitigation plan. A detailed monitoring plan has been provided as part of the Environmental Management Plan. Air, water quality, noise, soil erosion, and tree survival rate monitoring and reporting along with the follow up actions in case of deviation from the norms have been detailed out. The frequency has been set in consideration of the likely impacts.

### **E. Public Consultations**

235. The project received support and consent from most of local people. The local people did not perceive any adverse impact due to the proposed project. Environmental awareness and likewise concern were found generally low. People, however expressed the desire of minimising the tree cutting.

### **F. Recommendations**

236. Adequate mitigations shall be taken up both during construction and operation stage of the project to avoid/minimise adverse environmental impacts due to this event and any such event in future as suggested in IEE.

237. Effective EMP implementation is essential for elimination or minimization of the identified impacts. The MPRDC shall ensure that EMP and EMoP is included in Bill of Quantity (BOQ) and forms part of bid document and civil works contract. The same shall be revised if necessary during project implementation or if there is any change in the project design.

238. MPRDC needs capacity building and practical exposure. Adequate training shall be imparted as proposed under environmental management plan to enhance the capability of concerned EA officials.

## APPENDIX 1: RAPID ENVIRONMENTAL ASSESSMENT CHECKLIST

### Instructions:

- (i) The project team completes this checklist to support the environmental classification of a project. It is to be attached to the environmental categorization form and submitted to the Environment and Safeguards Division (RSES), for endorsement by Director, RSES and for approval by the Chief Compliance Officer.
- (ii) This checklist focuses on environmental issues and concerns. To ensure that social dimensions are adequately considered, refer also to ADB's (a) checklists on involuntary resettlement and Indigenous Peoples; (b) poverty reduction handbook; (c) staff guide to consultation and participation; and (d) gender checklists.
- (iii) Answer the questions assuming the "without mitigation" case. The purpose is to identify potential impacts. Use the "remarks" section to discuss any anticipated mitigation measures.

|                          |   |
|--------------------------|---|
| Country / Project Title: | India: Madhya Pradesh District Connectivity Sector Project: Subproject :<br><b>Katra-Mauganj Road</b> |
| Sector Division:         | South Asia Transport and Communications Division  |

| Screening questions   | Yes | No | Remarks   |
|---|-----|----|---|
| <b>A. Project Siting</b>  |     |    |   |
| Is the project area adjacent to or within any of the following environmentally sensitive areas?                       |     |    |   |
| Cultural heritage site  |     | X  | No archaeologically protected monument or cultural heritage site is located within the road.  |
| Protected Area  |     | X  | No protected area is located close to roads and nearby.   |
| Wetland   |     | X  | No protected or classified wet land is located close to the Project area.   |
| Mangrove  |     | X  | Project road is not located in Coastal areas.   |
| Estuarine   |     | X  | No Estuarine is located in the Project area.  |
| Buffer zone of protected area   |     | X  | No such area is located in the Project vicinity.  |
| Special area for protecting biodiversity  |     | X  | No such area is located in the project vicinity.  |
| <b>B. Potential Environmental Impacts</b>   |     |    |   |
| Encroachment on historical/cultural areas; disfiguration of landscape by road embankments, cuts, fills, and quarries? |     | X  | <p>The topography of project road is mainly plain. There is no encroachment of historical places. However, some small temples exist along the project road which may get impacted. Since road widening will be confined to available ROW, no change in landscape is expected.</p> <p>Opening of new Quarries is not envisaged. Only operational and licensed quarry will be used for road construction. Earth material will be sourced from pre identified areas (located within 15 to 20 Km from the road) and with the consent of landowner. All borrow areas will be suitably rehabilitated.</p> |

| Screening questions  | Yes | No | Remarks  |
|--|-----|----|--|
| Encroachment on precious ecology (e.g. Sensitive or protected areas)?  |     | X  | There is no National Parks, Wild Life sanctuaries or any other similar eco-sensitive areas in and around the project area. Only cutting of 86 roadside trees is involved. Attempts have been made to minimising the cutting of trees while finalising the road widening options.   |
| Alteration of surface water hydrology of waterways crossed byroads, resulting in increased sediment in streams affected by increased soil erosion at construction site?      |     | X  | The proposed alignment is crossing only small natural drains. All drainage courses will be maintained to avoid alteration in surface water hydrology so that water courses are not affected. The temporary soil stockpiles will be designed so that runoff will not induce sedimentation of waterways. Silt fencing during construction will be provided.  |
| Deterioration of surface water quality due to silt runoff and sanitary wastes from worker-based camps and chemicals used in construction?                                    |     | X  | Adequate sanitary facilities including Soak pits treatment facilities will be provided at construction camps, which will be set-up away from habitat and water bodies. No harmful ingredients are likely to be used in the construction activities. Surface water quality is not impacted due to construction.<br><br>Measures like embankment slop stabilisation, RCC retaining walls are proposed to prevent siltation of ponds located next to the road due to surface runoff.  |
| Increased local air pollution due to rock crushing, cutting and filling works, and chemicals from asphalt processing?  | X   |    | Localised air pollution level is likely to increase for short duration during construction period due to construction vehicle movement and asphalt processing. The asphalt mixing plant (hot mix plant) will be located away from habitat areas with adequately high stack for effective dispersion of likely emissions. Dust separation measures like spraying of water on unpaved vehicle movement areas are proposed to minimise the dust generation.   |
| Risks and vulnerabilities related to occupational health and safety due to physical, chemical biological and radiological hazards during project construction and operation? | X   |    | Workers may get exposed to dust and noise during construction activities. However the exposure levels are likely to be short and insignificant. Workers will be provided requisite PPEs to minimise such exposure and associated harmful occupational health effects.<br><br>Traffic on the road is expected to below and as such, no occupational health hazard is anticipated during operation phase.  |
| Noise and vibration due to blasting and other civil work?  |     | X  | No blasting is involved. No significant noise generation is expected during construction activities except normal construction equipment operational noise. These noise levels will be impulsive in nature and its impact will be confined within few meters of either side of the road. All stationary noise making sources equipment like DG set, compressors will be installed with acoustic enclosures.<br><br>There is little noise sensitive locations especially schools close to the alignment where noise level may increase due to increased traffic during operation stage. Provision of no horn zone will be made wherever noise level is likely to increase beyond the prescribed ambient noise levels. |

| Screening questions  | Yes | No | Remarks  |
|--|-----|----|--|
| Dislocation or involuntary resettlement of people  |     | X  | The project road will be widened within existing Row. The project affected persons are also expected to be very less. This aspect will be addressed as per Government rules and ADB's Social Safeguard Policies (SPS09) separately in a Resettlement Plan.   |
| Dislocation and compulsory resettlement of people living in right-of- way?   |     | X  | No displacement of people involved.  |
| Disproportionate impacts on the poor, women and children, Indigenous Peoples or other vulnerable groups?   |     | X  | No such impact is anticipated.   |
| Other social concerns relating to inconveniences in living conditions in the project areas that may trigger cases of upper respiratory problems and stress?          | X   |    | No such social concern is expected. Concern may arise during construction stage due to increase in ambient air pollution level, which is expected to be localised and temporary in nature. This aspect will be effectively controlled with the proposed dust suppression and other mitigation measures. As such people at large are supportive of project and are least bothered about above air pollution concern as well.  |
| Hazardous driving conditions where construction interferes with existing roads?  | X   |    | Hazardous driving condition may arise around bridge construction areas and at locations of road interface with non-project roads. To minimize the impact, suitable traffic management plan will be designed and implemented by the contractor to prevent any hazardous driving condition in above situations.  |
| Poor sanitation and solid waste disposal in construction camps and work sites, and possible transmission of communicable diseases from workers to local populations? | X   |    | Proper provisions for sanitation (sewage treatment), health care (drinking water supply) and periodic health check-ups) and solid waste disposal (through composting) facilities will be made at each construction camp. Awareness will be created amongst the workers about hygiene and health protection.  |
| Creation of temporary breeding habitats for mosquito vector of disease?  |     | X  | No such condition is anticipated. Each borrow area will be rehabilitated as per pre agreed used and rehabilitation plan  |
| Accident risks associated with increased vehicular traffic, leading to accidental spills of toxic material and loss of life?   | X   |    | Adequate safety measures will be adopted to avoid accidents during construction and operation stages. Measures, like signage, speed control, crash barriers will be taken close to sensitive locations such as schools, temples or hospitals.  |
| Increased noise and air pollution resulting from traffic volume?   | X   |    | <p>Increase in noise and air pollution is expected during construction phase but is likely to be confined within few meters of either side of the road. Adequate mitigation measures will be adopted to minimise the same.</p> <p>During operation phase vehicular traffic will be the main source of air and noise pollution. Improved road conditions, extensive plantation including multi-layered plantation along the road will reduce the noise and air pollution impact.</p> <p>Moreover, most of the road stretch passes through open agricultural land, which will provide adequate dispersion to vehicular emission.</p> |

| Screening questions   | Yes | No | Remarks   |
|---|-----|----|---|
| Increased risk of water pollution from oil, grease and fuel spills, and other materials from vehicles using the road?   | X   |    | This possibility is minimal but cannot be ruled out. Controlled construction activities and proper drainage system will reduce this possibility.<br><br>Provision is made for adequate signage and crash barriers near water bodies, which will minimise the possibilities of accidental water pollution. |
| Social conflicts if workers from other regions or countries are hired?  |     | X  | Most of the workers will be hired locally.  |
| Large population influx during project construction and operation that causes increased burden on social infrastructure and services (such as water supply and Sanitation systems)?   |     | X  | Most of the workers will be hired locally. One construction camp is proposed per package with expected workers population of only 60-70. This is unlikely to cause any significant burden on social infrastructure and services.  |
| Risks to community health and safety due to the transport, storage, and use and/or disposal of materials such as explosives, fuel and other chemicals during construction and operation?  |     | X  | The construction material (aggregate from approved quarries, borrow earth, bitumen) will be sourced from nearby and approved sources. No explosive or chemicals are likely to be used. Bitumen waste if any generated during construction will either recycled or disposed off in controlled manner.      |
| Community safety risks due to both accidental and natural causes, especially where the structural elements or components of the project are accessible to members of the affected community or where their failure could result in injury to the community throughout project construction, operation and decommissioning |     | X  | No such impacts are anticipated. Adequate awareness will be created amongst people and workers through information disclosure, safety signage and public consultation about safety aspects.   |
| Based on above assessment and the project is <b>categorized as 'B'</b>  |     |    |   |

## **APPENDIX 2: GUIDELINES FOR BORROW AREAS MANAGEMENT**

### **A. Selection of Borrow Areas**

1. Location of borrow areas shall be finalized as per IRC: 10-1961 guidelines. The finalization of locations in case of borrows areas identified in private land shall depend upon the formal agreement between landowners and contractor. If, agreement is not reached between the contractor and landowners for the identified borrow areas sites, arrangement for locating the source of supply of material for embankment and sub-grade as well as compliance to environment requirements in respect of excavation and borrow areas as stipulated from time to time by the Ministry of Environment and Forests, Government of India, and local bodies, as applicable shall be the sole responsibility of the contractor. The contractor in addition to the established practices, rules and regulation will also consider following criteria before finalizing the locations.

- (i) The borrow area should not be located in agriculture field unless unavoidable i.e. barren land is not available.
- (ii) The borrow pits preferably should not be located along the roads.
- (iii) The loss of productive and agriculture soil should be minimum.
- (iv) The loss of vegetation is almost nil or minimum.
- (v) The Contractor will ensure that suitable earth is available.

### **B. Contractor's Responsibility**

2. The Contractor shall obtain representative samples from each of the identified borrow areas and have these tested at the site laboratory following a testing programme approved by the Engineer. It shall be ensured that the sub-grade material when compacted to the density requirements shall yield the design CBR value of the sub-grade. Contractor shall begin operations keeping in mind following;

- (i) Haulage of material to embankments or other areas of fill shall proceed only when sufficient spreading and compaction plants is operating at the place of deposition.
- (ii) No excavated acceptable material other than surplus to requirements of the Contract shall be removed from the site. Contractor should be permitted to remove acceptable material from the site to suit his operational procedure, then shall make consequent deficit of material arising there from.
- (iii) Where the excavation reveals a combination of acceptable and unacceptable materials, the Contractor shall, unless otherwise agreed by the Engineer, carry out the excavation in such a manner that the acceptable materials are excavated separately for use in the permanent works without contamination by the unacceptable materials. The acceptable material shall be stockpiled separately.
- (iv) The Contractor shall ensure that he does not adversely affect the stability of excavation or fills by the methods of stockpiling materials, use of plants are siting of temporary buildings or structures.

### **C. Borrowing From Different Land-Forms**

#### **1. Borrow Areas located in Agricultural Lands**



- a. The preservation of topsoil will be carried out in stockpile.
- b. A 15 cm topsoil will be stripped off from the borrow pit and this will be stored in stockpiles in a designated area for height not exceeding 2m and side slopes not steeper than 1:2 (Vertical: Horizontal).
- c. Borrowing of earth will be carried out up to a depth of 1.5m from the existing ground level.
- d. Borrowing of earth will not be done continuously throughout the stretch.
- e. Ridges of not less than 8m widths will be left at intervals not exceeding 300m.
- f. Small drains will be cut through the ridges, if necessary, to facilitate drainage.
- g. The slope of the edges will be maintained not steeper than 1:4 (vertical: Horizontal).
- h. The depth of borrow pits will not be more than 30 cm after stripping the 15 cm topsoil aside.

## **2. Borrow Areas located in Elevated Lands**

- a. The preservation of topsoil will be carried out in stockpile.
- b. A 15 cm topsoil will be stripped off from the borrow pit and this will be stored in stockpiles in a designated area for height not exceeding 2m and side slopes not steeper than 1:2 (Vertical: Horizontal).
- c. At location where private owners desire their fields to be levelled, the borrowing shall be done to a depth of not more than 1.5m or up to the level of surrounding fields

## **3. Borrow Areas near River Side**

- a. The preservation of topsoil will be carried out in stockpile.
- b. A 15 cm topsoil will be stripped off from the borrow pit and this will be stored in stockpiles in a designated area for height not exceeding 2m and side slopes not steeper than 1:2 (Vertical: Horizontal).
- c. Borrow area near to any surface water body will be at least at a distance of 15m from the toe of the bank or high flood level, whichever is maximum.

## **4. Borrow Areas near Settlements**

- a. The preservation of topsoil will be carried out in stockpile.
- b. A 15 cm topsoil will be stripped off from the borrow pit and this will be stored in stockpiles in a designated area for height not exceeding 2m and side slopes not steeper than 1:2 (Vertical: Horizontal).
- c. Borrow pit location will be located at least 0.75 km from villages and settlements. If un-avoidable, the pit will not be dug for more than 30 cm and drains will be cut to facilitate drainage.
- d. Borrow pits located in such location will be re-developed immediately after borrowing is completed. If spoils are dumped, that will be covered with a layers of stockpiled topsoil in accordance with compliance requirements with respect MOEF/SPCB guidelines.

## **5. Borrow Pits along the Road**

3. Borrow pits along the road shall be discouraged and if deemed necessary and permitted by the Engineer; following precautions are recommended

- a. The preservation of topsoil will be carried out in stockpile.
- b. A 15 cm topsoil will be stripped off from the borrow pit and this will be stored in stockpiles in a designated area for height not exceeding 2m and side slopes not steeper than 1:2 (Vertical: Horizontal).
- c. Ridges of not less than 8m widths should be left at intervals not exceeding 300m.
- d. Small drains shall be cut through the ridges of facilitate drainage.
- e. The depth of the pits shall be so regulated that there bottom does not cut an imaginary line having a slope of 1 vertical to 4 horizontal projected from the edge of the final section of bank, the maximum depth of any case being limited to 1.5m.
- f. Also, no pit shall be dug within the offset width from the toe of the embankment required as per the consideration of stability with a minimum width of 10m.

## **6. Rehabilitation of Borrow Areas**

- a. The objective of the rehabilitation programme is to return the borrow pit sites to a safe and secure area, which the general public should be able to safely enter and enjoy. Securing borrow pits in a stable condition is fundamental requirement of the rehabilitation process. This could be achieved by filling the borrow pit floor to approximately the access road level.
- b. Re-development plan shall be prepared by the Contractor before the start of work in line with the owners will require and to the satisfaction of owner. The Borrow Areas shall be rehabilitated as per following;
- c. Borrow pits shall be backfilled with rejected construction wastes and will be given a vegetative cover. If this is not possible, then excavation sloped will be smoothed and depression will be filled in such a way that it looks more or less like the original round surface.
- d. Borrow areas might be used for aquaculture in case landowner wants such development. In that case, such borrow area will be photographed after their post use restoration and Environment Expert of Supervision Consultant will certify the post use redevelopment.

4. The Contractor will keep record of photographs of various stages i.e., before using materials from the location (pre-project), for the period borrowing activities (construction Phase) and after rehabilitation (post development), to ascertain the pre and post borrowing status.

### APPENDIX 3: ENVIRONMENTAL MANAGEMENT PLAN

| S/N                              | Remedial Measure   | Reference to laws   | Location  | Monitoring indicators  | Monitoring Methods  | Mitigation Costs              | Institutional Responsibility |
|----------------------------------|--|---|---|--|---|-------------------------------|------------------------------|
|                                  |  |   |   |  |   |                               | Implementation               |
| Construction and Design Stage    |  |   |   |  |   |                               |                              |
| Operational Hazards              |  |   |   |  |   |                               |                              |
| 1                                | <ul style="list-style-type: none"><li>Construction of concrete pavement in habitat areas considering alignment level and drainage.</li><li>Raise road level above the nearby areas with provision of adequate side drains to evacuate the rain water and domestic discharges (drained by habitats occasionally) to prevent damage to road and rain water entry to habitats' houses.</li><li>Provision of adequate no of cross drainage structures based on drainage pattern around the alignment.</li></ul>  | Design requirement  | All habitat areas throughout the alignment          | Design of both cross & side drains, no. of slab/box culverts, no. & size of Hume pipes | Review of detail design documents & drawings                    | Included in construction cost | Design Consultant            |
| 2                                | <ul style="list-style-type: none"><li>Make provisions of crash barriers at accident prone areas as identified in the road safety studies.</li><li>Provision of rumble strips in habitat areas to regulate speed.</li><li>Provision of retro-reflective warning sign boards near school, hospital, religious places and forests areas.</li><li>Provision of proper sidewalks/pedestrian zone along the road near habitat areas, school, hospital, religious places and forests.</li><li>Compliance with norms specified in IRC codes for state highway for curvature and grading.</li><li>Provision of safety kerb at all bridges.</li><li>The design should attempt to equalize cut and fill.</li><li>Minimize the cutting in hill areas. Incorporate slope stabilization measures to prevent any landslide situation.</li></ul> | Design requirement  | Places where height of embankment is more than 3.0m | No. of accident & vehicle collision  | Field observation, interview of locals                          | Included in construction cost | Design Consultant            |
| Operational Hazards              |  |   |   |  |   |                               |                              |
| 3                                | <ul style="list-style-type: none"><li>Design considering relevant IRC guidelines for earthquakes in bridges.</li></ul>   |   | Throughout the stretch                              | Incorporation of IRC guidelines for earthquake in bridge design                        | Review of bridge design   | Project preparation Cost      | Design Consultant            |
| 4                                | <ul style="list-style-type: none"><li>Raise embankment high above the HFL levels in the flood prone areas.</li><li>Provision of adequate balancing culverts.</li><li>Improvement in existing culverts/Bridges to increase the carrying capacity.</li></ul>   | IRC:34 Recommendations for road construction in water logged area and IRC:75and MORT&H guidelines for | All the existing culverts/ bridges                  | Design of both cross & side drains, no. of slab/box culverts, no & size of Hume pipes  |   | Included in construction cost | Design Consultant            |
| Protection of utility structures |  |   |   |  |   |                               |                              |
| 5                                | <ul style="list-style-type: none"><li>All telephone and electrical poles/wires and underground cables should be shifted before start of construction.</li><li>Necessary permission and payments should be made to relevant utility service agencies to allow quick shifting and restoration of utility services.</li><li>Local people must be informed through appropriate means about the time of shifting of utility structures and potential disruption of services if any.</li></ul>   | Project requirement   | Throughout the corridor                             | Utility shifting plan complaints from local people<br>Status of local utility services | Interaction with concerned utility authorities and local public | Included in construction      | Contractor/SQC               |

## Appendix 3

| Impact                                 | Remedial Measure  | Reference to laws  | Location   | Monitoring indicators   | Monitoring Methods  | Mitigation Costs  | Institutional Re |
|--|---|--|--|---|---|---|------------------|
|  |   |  |  |   |   |   | Implementation   |
| Construction Stage                     |   |  |  |   |   |   |                  |
| Air Quality                            |   |  |  |   |   |   |                  |
| Construction of air on and             | <ul style="list-style-type: none"><li>Transport, loading and unloading of loose and fine materials through covered vehicles.</li><li>Paved approach roads.</li><li>Storage areas to be located downwind of the habitation area.</li><li>Waters spraying on earth works, unpaved haulage roads and other dust prone areas.</li><li>Provision of PPEs to workers.</li></ul>   | MORT&H Specifications for Road and Bridge works<br>Air (P and CP) Act 1974 and Central Motor and Vehicle Act1988   | Throughout Project corridor  | PM10 level measurements<br>Dust pollution or complain of locals | Standards<br>CPCB methods<br>Observation s<br>Public consultation | Included in project cost                                | Contractor       |
| of air (HC, K, CO due to n and t and y | <ul style="list-style-type: none"><li>Regular maintenance of machinery and equipment.</li><li>Batching, asphalt mixing plants and crushers at downwind (1km) direction from the nearest settlement.</li><li>Only crushers licensed by the PCB shall be used DG sets with stacks of adequate height and use of low sulphur diesel as fuel.</li><li>Ambient air quality monitoring follow traffic management plan as given in Section8.</li></ul>   | The Air (Prevention and Control of Pollution) Act, 1981 (Amended 1987) and Rules 1982  | Asphalt mixing plants, crushers, DG sets locations   | Monitoring of ambient air quality & checking PUC certificates   | Standards<br>CPCB methods   | Included in project cost                                | Contractor       |
| Noise                                  |   |  |  |   |   |   |                  |
| n on t y.                              | <ul style="list-style-type: none"><li>All equipment to be timely serviced and properly maintained.</li><li>Bottle necks to be removed.</li><li>Construction equipment and machinery to be fitted with silencers and maintained properly.</li><li>Only IS approved equipment shall be used for construction activities.</li><li>Timing of noisy construction activities shall be done during night time and weekends near schools and selected suitable times near temples when the rear no visitors, concurrent noisy operations may be separated to reduce the total noise generated, and if possible re-route traffic during construction to avoid the accumulation of noise beyond standards. Else provision of temporary noise barrier at sensitive locations or near sources.</li><li>Time regulation near residential, built-up and forest areas construction shall be restricted to daylight hours.</li><li>Initiation of multi layered plantation, to serve as mitigation option for operation phase.</li><li>Honking restrictions near sensitive areas PPEs to workers Noise monitoring as per EMoP.</li></ul> | Legal requirement Noise Pollution (Regulation and Control) Rules, 2000 and amendments thereof + Clause No 501.8.6. MORT&H Specifications for Road and Bridge works | Throughout Project section especially at construction sites, residential and identified sensitive locations. | Noise levels Measurements<br><br>Complaints from local people   | As per Noise rule, 2000<br><br>Consultation with local people     | Included in Project Cost<br>Plantation cost is separate | Contractor       |
| Soil                                   |   |  |  |   |   |   |                  |
| e/                                     | <ul style="list-style-type: none"><li>Non-agricultural areas to be used as borrow areas to the extent possible.</li><li>If using agricultural land, top soil to be preserved and laid over either on the embankment slope for growing vegetation to protect soil erosion.</li></ul>   | Project requirement  | Throughout the project section and borrow areas  | Borrow pit locations<br>Top soil storage area                   | Review Borrow area plan, site visits                              | Included in construction cost                           | Contractor       |

| Activity                                  | Remedial Measure  | Reference to laws  | Location  | Monitoring indicators   | Monitoring Methods  | Mitigation Costs              | Institutional R                  |
|---|---|--|---|---|---|-------------------------------|----------------------------------|
|   |   |  |   |   |   |                               | Implementation                   |
| re<br>ne to<br>on<br>earth<br>cut<br>rock | <ul style="list-style-type: none"> <li>Bio-turfing of embankments to protect slopes.</li> <li>Slope protection by providing frames, dry stone pitching, masonry retaining walls, planting of grass and trees.</li> <li>The sides slopes of all cut and fill areas will be graded and covered with stone pitching, grass and shrub as per design specifications. Care should be taken that the slope gradient shall not be greater than 2:1.</li> <li>The earth stockpiles to be provided with gentle slopes to prevent soil erosion.</li> </ul>   | IRC:56-1974 Recommended practice for treatment of embankment slopes for erosion control Clause No. 306 and 305.2.2 MORT&H Specifications for Road and Bridge Works Guidelines IX for Soil erosion                                | Throughout The entire project road especially along hilly areas | Occurrence of Slope failure or erosion issues   | Review of design document sand site observation                       | Included in Construction cost | Design consultant and Contractor |
| ea<br>ent                                 | <ul style="list-style-type: none"> <li>Non-productive, barren lands, upland shall be used for borrowing earth with the necessary permissions/consents.</li> <li>Depths of borrow pits to be regulated and sides not steeper than 25%.</li> <li>Top soil to be stock piled and protected for use at the rehabilitation stage.</li> <li>Transportation of earth materials through covered vehicles.</li> <li>IRC recommended practice for borrow pits (IRC 10:1961).</li> <li>Borrow areas not to be dug continuously.</li> <li>To the extent borrow areas shall be sited away from habituated areas. Borrow areas shall be levelled with salvaged material or other filling materials which do not pose contamination of soil. Else, it shall be converted in to fish ponding consultation with fishery department and land owner/community.</li> <li>Rehabilitation of the borrow areas as per Guidelines for development of Borrow Areas.</li> </ul> | IRC Guidelines on Borrow areas and for quarries (Environmental Protection Act and Rules, 1986; Water Act, Air Act) + Clause No. 305.2.2 MORT&H Specifications for Road and Bridge works Guidelines V for Borrow Areas management | Borrow sites location   | <p>Existence of Borrow area sin inappropriate unauthorized locations.</p> <p>Poor borrow area management practices.</p> <p>Incidents of accidents.</p> <p>Complaints from local people.</p> | Review of design document sand site observation                       | Included in Construction cost | Design consultant and Contractor |
| s   | <ul style="list-style-type: none"> <li>Aggregates will be sourced from existing licensed quarries.</li> <li>Copies of consent/approval/ rehabilitation plan for anew quarry or use of existing source will be submitted to EO, MPRDC.</li> <li>The contractor will develop a Quarry Redevelopment plan, as per the Mining Rules of the state and submit a copy of the approval to EA.</li> </ul>  | Clause No. 111.3 MORT&H Specifications for Road and Bridgeworks Guidelines VI for Quarry Areas Management  | Quarry area locations   | <p>Existence of licenses for all quarry areas from which materials are being sourced</p> <p>Existence of a quarry redevelopment</p> <p>Complaints from local people</p>                     | Review of design documents, contractor document sand site observation | Included in Construction cost | Contractor                       |
| on of<br>ul<br>to<br>t of<br>and          | <ul style="list-style-type: none"> <li>Construction vehicles, machinery, and equipment to be stationed in the designated ROW to avoid compaction.</li> <li>Approach roads/haulage roads shall be designed along the barren and hard soil area to reduce the compaction.</li> <li>Transportation of quarry material to the dumping site through heavy vehicles shall be done through existing major roads to the extent possible to restrict wear and</li> </ul>   | Design requirement   | Parking areas, haulage roads and construction yards.            | <p>Location of approach and haulage roads</p> <p>Presence of destroyed/ compacted</p>   | Site observation  | Included in construction cost | Contractor                       |

## Appendix 3

| Impact                              | Remedial Measure  | Reference to laws  | Location  | Monitoring indicators   | Monitoring Methods  | Mitigation Costs               | Institutional Responsibility |
|-------------------------------------|---|--|---|---|---|--------------------------------|------------------------------|
|                                     |   |  |   |   |   |                                | Implementation               |
| Impact on local roads               | <ul style="list-style-type: none"> <li>Land taken for construction camp and other temporary facility shall be restored to its original conditions.</li> </ul>   |  |   | agricultural land or land which has not been restored to its original condition                   |   |                                |                              |
| Impact on environment and health    | <ul style="list-style-type: none"> <li>Construction vehicles and equipment</li> <li>Will be maintained and refuelled in such a fashion that oil/diesels spillage does not contaminate the soil.</li> <li>Fuel storage and refuelling sites to be kept</li> <li>Away from drainage channels.</li> <li>Unusable debris shall be dumped in ditched sand low lying areas.</li> <li>To avoid soil contamination Oil-Interceptors shall be provided at wash down and Refuelling areas.</li> <li>Waste oil and oil soaked cotton/cloth shall be stored in containers labelled 'Waste Oil' and 'Hazard do us' sold off to MoEF/SPCB authorized vendors.</li> <li>Non-bituminous wastes to be dumped in borrow pits with the concurrence of landowner and covered with a layer of topsoil conserved from opening the pit.</li> <li>Bituminous wastes will be disposed off in an identified dumping site approved by the State Pollution Control Board</li> </ul> | Design requirement   | Fuelling station, construction sites, and construction Camps and disposal location. | Quality of soil near Storage area<br><br>Presence of spilled oil or bitumen in project area       | Site observation  | Included in Construction cost. | Contractor                   |
| <b>Water Resources</b>              |   |  |   |   |   |                                |                              |
| Impact on groundwater               | <ul style="list-style-type: none"> <li>Requisite permission shall be obtained for abstraction of groundwater from Central Groundwater Authority Arrangements shall be made by contractor that the water availability and supply to nearby communities remaining affected.</li> </ul>  | -  | Throughout the Project section  | Approval from competent authority<br><br>Complaints from local people on water availability       | Checking of documentation<br><br>Talk to local people             | Included in construction cost  | Contractor                   |
| Impact on surface water             | <ul style="list-style-type: none"> <li>Provisions shall be made to connect road side drains with exiting nearby ponds otherwise make provision of water harvesting pits intermittently.</li> </ul>  | Clause No. 1010 EP Act 1986 MORT&H Specifications for Road and Bridge Works      | Throughout the Project section  | Design of road side drains<br><br>Existence of proper drainage system for disposal of waste water | Standards methods<br><br>Site observation and review of documents | Included in construction cost  | Contractor                   |
| Impact on water due to construction | <ul style="list-style-type: none"> <li>Existing drainage system to be maintained and further enhanced.</li> <li>Provisions shall be made for adequate size and number of cross drainage structures esp. in the areas where land is sloping towards road alignment.</li> <li>Road level shall be raised above HFL level wherever road level is lesser than HFL.</li> </ul>   | Design requirement, Clause No 501.8.6. MORT&H Specifications for Road and Bridge | Near all drainage channels, river crossings etc.                                    | Design of road side drains  | Review of design documents<br><br>Site observation                | Included in construction cost  | Contractor                   |
| Impact on soil                      | <ul style="list-style-type: none"> <li>Embankment slopes to be modified suitably to restrict the soil debris entering water bodies.</li> <li>Provision of Silt fencing shall be made at water bodies.</li> <li>Silt/sediment should be collected and stockpiled for</li> </ul>  | Design requirement, Clause No 501.8.6. MORT&H Specifications for                 | Near all water bodies, river embankment slopes                                      | Siltation of rivers, streams, ponds and other water bodies in project area                        | Field observation   | Included in construction cost  | Contractor                   |

| Title                            | Remedial Measure   | Reference to laws   | Location  | Monitoring indicators  | Monitoring Methods   | Mitigation Costs              | Institutional Responsibility |
|----------------------------------|--|---|---|--|--|-------------------------------|------------------------------|
|                                  |  |   |   |  |  |                               | Implementation               |
|                                  | <p>possible reuse as surfacing of slopes where they have to be re-vegetated.</p> <ul style="list-style-type: none"> <li>Earthworks and stone works to be prevented from impeding natural flow of rivers, streams and water canals or existing drainage system.</li> </ul>  | Road and Bridge works (CP and CP) and worldwide best practices                    |   |  |  |                               |                              |
| on<br>ity<br>om<br>nd<br>s<br>on | <ul style="list-style-type: none"> <li>No vehicles or equipment should be parked or refuelled near water-bodies, so as to avoid contamination from fuel and lubricants.</li> <li>Oil and grease traps and fuelling plat forms to be provided at re-fuelling locations.</li> <li>All chemicals and oil shall be stored away from water and concreted plat form with catchment pit for spills collection.</li> <li>All equipment operators, drivers, and ware house personnel will be trained in immediate response for spill containment and eventual clean-up. Readily available, simple to understand and preferably written in the local language emergency response procedure, including reporting, will be provided by the contractors construction camp to be sited away from water bodies.</li> <li>Wastes must be collected, stored and taken to approve disposal site only.</li> <li>Water quality shall be monitored periodically.</li> </ul> | The Water (Prevention and Control of Pollution) Act, 1974 and amendments thereof. | Water bodies, Refuelling stations, construction camps | <p>Water quality of ponds, streams, rivers and other water bodies in project</p> <p>Presence of oil floating in water bodies in project area</p> | <p>Conduction of water quality tests as per the monitoring plan</p> <p>Field observation</p> | Included in construction cost | Contractor                   |

**Fauna**

|              |  |  |                             |  |   |   |  |
|--------------|--|--|-----------------------------|--|---|---|--|
| o<br>n<br>on | <ul style="list-style-type: none"> <li>Minimize tree cutting to the extent possible.</li> <li>Roadside trees to be removed with prior approval of competent authority.</li> <li>Compensatory plantation at 1:10 basis and additional plantation as per the IRC Guidelines in consultation with Forest Department.</li> <li>Regular maintenance of all trees planted.</li> <li>Provision of LPG in construction campus fuel source to avoid tree cutting, wherever possible.</li> <li>Plantation of trees on both sides of the road. Integrate vegetation management (IVM) with the carriageway completely clear of vegetation. From the edge of the road to the boundary of ROW, vegetation structured with smaller plants near the line and larger trees further away to avoid costly and provide habitats for a wide variety of plants and animals.</li> <li>Additional plantation near river banks to check erosion as part of compensatory plantation.</li> <li>In the event of design changes during the construction stages additional assessments including the possibility to save trees shall be made by the EA.</li> <li>Road side Plantation Strategy as per IRC Specifications including manuring.</li> <li>Control use of pesticides/fertilizers</li> </ul> | Forest Conservation Act1980 + IRC SP: 21 and IRC SP:66 | Throughout project corridor | <p>ROW width</p> <p>Number of trees for felling</p> <p>Compensatory plantation plan</p> <p>Number of trees replanted</p> | <p>Review of relevant documents tree cutting permit, compensatory plantation plan</p> <p>Field observations</p> | Road side Plantation cost is included in project costs. | Relevant agency Specialized in afforestation |
|--------------|--|--|-----------------------------|--|---|---|--|

## Appendix 3

| S.No.                                   | Remedial Measure  | Reference to laws  | Location                        | Monitoring indicators   | Monitoring Methods   | Mitigation Costs              | Institutional Responsibility |
|---|---|--|---------------------------------|---|--|-------------------------------|------------------------------|
|   |   |  |                                 |   |  |                               | Implementation               |
| Construction Camps                      |   |  |                                 |   |  |                               |                              |
| 1                                       | <ul style="list-style-type: none"><li>All camps should maintain minimum distance from following:<ul style="list-style-type: none"><li>#500m from habitation</li><li>#500m from forest areas where possible</li><li>#500m from water bodies where possible</li><li>#500m from through traffic route where possible</li></ul></li><li>The average distance between two camps should be 50 km.</li></ul>   | Design Requirement   | All construction camps          | Location of Camp sites and distance from habitation, forest areas, water bodies, through traffic route and other construction camps | On site observation<br><br>Interaction with workers and local community                  | Included in construction cost | Contractor and EO            |
| 2                                       | <ul style="list-style-type: none"><li>The location, layout and basic facility.</li><li>Provision of each labour camp will be submitted to SQC prior to their construction. The construction shall commence only after approval of SQC.</li><li>The contractor will maintain necessary living accommodation and ancillary facilities in functional and hygienic manner as approved by the EA.</li><li>Adequate water and sanitary latrines with septic tanks attached to soak pits shall be provided.</li><li>Preventive medical care to be provided to workers including a First-Aid kit that must be available in the camp.</li><li>Waste disposal facilities such as dust bins must be provided in the camps and regular disposal of waste must be carried out.</li><li>The Contractor will take all precautions to protect the workers from insect and pest to reduce the risk to health. This includes the use of insecticides which should comply with local regulations.</li><li>No alcoholic liquor or prohibited drugs will be imported to, sell, give, and barter to the workers of host community.</li><li>Awareness rising to immigrant workers/local community on communicable and sexually transmitted diseases.</li></ul> | The Building and other construction workers (Regulation of Employment and Conditions of Service) Act 1996 and The Water (Prevention and Control of Pollution) Act, 1974 and amendments thereof | All construction camps          | Camp health records<br><br>Existence of proper first aid kit in campsite<br><br>Complaints from local people                        | Camp records<br><br>Site observation<br><br>Consultation with local people living nearby | Part of the Contractors costs | Contractor                   |
| Management of Construction Waste/Debris |   |  |                                 |   |  |                               |                              |
| 3                                       | <ul style="list-style-type: none"><li>Unproductive/wastelands shall be selected for dumping sites.</li><li>Away from residential areas and water bodies dumping sites have adequate capacity equal to the amount of debris generated.</li><li>Public perception and consent from the village Panchayats has to be obtained before finalizing the location.</li></ul>  | Design Requirement and MORT&H guidelines   | At all Dumping Sites            | Location of Dumping sites<br><br>Public complaints  | Field survey and interaction with local people   | Included in Construction cost | Contractor                   |
| 4                                       | <ul style="list-style-type: none"><li>The existing bitumen surface shall be utilized for paving of cross roads, access roads, and paving works in construction sites and camps, temporary traffic diversions, and haulage routes.</li><li>All excavated materials from roadway, shoulders, verges, drains, cross drainage will be used for back filling embankments,</li><li>Filling pits, and landscaping.</li></ul>   | MORT&H guidelines  | Throughout the project corridor | Percentage of Reuse of existing surface material<br><br>Method and location of disposal site of construction                        | Contractor records<br><br>Field observation<br><br>Interaction with local people         | Included in Construction cost | Contractor                   |



| Serial                       | Remedial Measure   | Reference to laws   | Location   | Monitoring indicators  | Monitoring Methods  | Mitigation Costs               | Institutional Re |
|------------------------------|--|---|--|--|---|--------------------------------|------------------|
|                              |  |   |  |  |   |                                | Implementation   |
|                              | <ul style="list-style-type: none"> <li>Unusable and non-bituminous debris materials should be suitably disposed off at pre-designated disposal locations, with approval of the concerned authority. The bituminous wastes shall be disposed in secure and fill sites only in environmentally accepted manner. For removal of debris, wastes and its disposal MOSRTH guidelines should be followed.</li> <li>Unusable and surplus materials, as determined by the Project Engineer, will be removed and disposed off-site.</li> </ul>   |   |  | debris   |   |                                |                  |
| <b>Management and Safety</b> |  |   |  |  |   |                                |                  |
| ent                          | <ul style="list-style-type: none"> <li>Temporary traffic diversion shall be planned by the contractor and approved by the 'Engineer'.</li> <li>The traffic control plans shall contain details of diversions; traffic safety arrangements during construction; safety measures for night time traffic and precautions for transportation of hazardous materials. Traffic control plans shall be prepared in line with requirements of IRC's SP 55 document'.</li> <li>The Contractor will ensure that the diversion/detour is always maintained in running condition, particularly during the monsoon to avoid disruption to traffic flow.</li> <li>On stretches where it is not possible to pass the traffic on the part width of existing carriageway, temporary paved diversions will be constructed.</li> <li>Restriction of construction activity to only one side of the existing road.</li> <li>The contractor shall inform local community of changes to traffic routes, and pedestrian access arrangements with assistance from "Engineer".</li> <li>Use of adequate signages to ensure traffic management and safety. Conduct of regular safety audit on safety measures.</li> </ul> | Design requirement and IRC SP:55  | Throughout the Project corridor especially at intersections  | Traffic management plan<br><br>Safety signs on site<br><br>Number of traffic accidents | Review traffic management plan<br><br>Field observation of traffic management and safety system<br><br>Interaction with people in vehicles using the road | Included in Construction cost  | Contractor       |
| s,                           | <ul style="list-style-type: none"> <li>Temporary access and diversion, with proper drainage facilities.</li> <li>Access to the schools, temples and other public places must be maintained when construction takes place near them.</li> <li>Fencing wherever cattle movement is expected.</li> <li>To avoid the need for cattle underpasses, some of the proposed culverts near habitations may be widened to facilitate cattle movement.</li> </ul>  | Design requirement and IRC: SP: 27 -1984 Report Containing Recommendation s of IRC Regional Workshops on Highway Safety IRC:SP: 32 -1988 Road Safety for Children (5-12 Years Old) IRC:SP: 44 -1994 Highway Safety Code IRC: SP: 55 -2001 | Near habitation on both sides of schools, temples, hospitals, graveyards, construction sites, haulage roads, diversion sites | Road signage & drainage as per IRC guideline<br><br>Complaints from local people       | Field observation<br><br>Interaction with local people  | Included in construction cost. | Contractor       |

## Appendix 3

| Activity                                      | Remedial Measure  | Reference to laws   | Location  | Monitoring indicators  | Monitoring Methods  | Mitigation Costs                       | Institutional R          |
|---|---|---|---|--|---|--|--------------------------|
|   |   |   |   |  |   |  | Implementation           |
| Construction and site preparation             | <ul style="list-style-type: none"> <li>Contractors to adopt and maintain safe working practices.</li> <li>Usage of fluorescent and retroreflectory signage, in local language at the construction sites.</li> <li>Training to workers on safety procedures and precautions.</li> <li>Mandatory appointment of safety officer.</li> <li>All regulations regarding safe scaffolding, ladders, working platforms, gangway, stairwells, excavations, trenches and safe means of entry and egress shall be complied with.</li> <li>Provision of PPEs to workers.</li> <li>Provision of a readily available first aid unit including an adequate supply of dressing materials.</li> <li>The contractor will not employ any person below the age of 18 years for any work.</li> <li>Use of hazardous material should be minimized and/or restricted.</li> <li>Emergency plan (to be approved by engineer) shall be prepared to respond to any accidents or emergencies.</li> <li>Accident Prevention Officer must be appointed by the contractor.</li> </ul> |   | Construction sites  | Availability of Safety gears to workers<br><br>Safety signage<br><br>Training records on safety<br><br>Number of safety related accidents          | Site observation<br><br>Review records on safety training and accidents<br><br>Interact with construction workers                         | Included in construction cost          | Obligation of Contractor |
| Access control                                | <ul style="list-style-type: none"> <li>Restrict access to construction sites to authorized personnel.</li> <li>Physical separation must be provided for movement of vehicular and human traffic.</li> <li>Adequate signage must be provided for safe traffic movement</li> </ul>  |   | Construction sites  | Safety signs and their location<br><br>Incidents of accidents<br><br>Complaints from local people  | Site inspection<br><br>Consultation with local people   | Included in construction cost          | Contractor               |
| <b>Restoration and rehabilitation</b>         |   |   |   |  |   |  |                          |
| Site restoration, clean-up and demobilization | <ul style="list-style-type: none"> <li>Contractor will prepare site restoration plans, which will be approved by the Engineer.</li> <li>The clean-up and restoration operations are to be implemented by the contractor prior to demobilization.</li> <li>All construction zones including river-beds, culverts, road-side areas, camps, hot mix plant sites, crushers, batching plant sites and any other area used/affected by the project will be left clean and tidy, at the contractor's expense, to the satisfaction of the Environmental officer.</li> <li>All the opened borrow areas will be rehabilitated and 'Engineer' will certify in this regard.</li> </ul>  | Project requirement   | Throughout the project corridor, construction camp sites and borrow areas | Clean and restored camp sites<br><br>Presence/ absence of construction material/debris after completion of construction works on construction site | Site observation<br><br>Interaction with locals<br><br>Issue completion certificate after restoration of all sites are found satisfactory | Included in construction cost          | Contractor               |
| <b>Post-construction stage</b>                |   |   |   |  |   |  |                          |
| Post-construction monitoring and maintenance  | <ul style="list-style-type: none"> <li>Roadside tree plantations shall be maintained.</li> <li>Regular maintenance of the road will be done to ensure good surface condition</li> <li>Vehicular air pollution will be managed and monitored.</li> </ul>   | Environmental Protection Act, 1986; The Air (Prevention and Control of Pollution) | Throughout the Corridor   | Ambient air quality (PM10, CO, NOx)<br><br>Survival rate of trees  | As per CPCB requirements<br><br>Site inspection   | Included in Operation/Maintenance cost | MPRDC (SQC)              |

| S.No.  | Remedial Measure  | Reference to laws   | Location   | Monitoring indicators   | Monitoring Methods   | Mitigation Costs                        | Institutional Responsibility |
|--|---|---|--|---|--|---|------------------------------|
|  |   |   |  |   |  |   | Implementation               |
| 1  | <ul style="list-style-type: none"> <li>Ambient air quality monitoring. If monitored parameters are above the prescribed limit, suitable control measures must be taken.</li> <li>Technological and behavioural changes road signs shall be provided reminding the motorist to properly maintain their vehicles to economize on fuel consumption and protect the environment.</li> </ul>   | Act, 1981   |  | planted   |  |   |                              |
| 2  | <ul style="list-style-type: none"> <li>Effective traffic management and good riding conditions shall be maintained to reduce the noise level throughout the stretch and speed limitation and honking restrictions may be enforced near sensitive locations.</li> <li>The effectiveness of the multi-layered plantation should be monitored and if need be, solid noise barrier shall be placed</li> <li>Create awareness amongst the residents about likely noise levels from road operation at different distances, the safe ambient noise limits and easy to implement noise reduction measures while constructing a building close to the road.</li> </ul> | Noise Pollution (Regulation and Control) Rules, 2000 and amendments thereof | Sensitive receptors  | Noise levels  | Noise monitoring as per noise rules 2000<br><br>Discussion with people in sensitive receptor sites | Included in Operation/ Maintenance cost | MPRDC (SQC)                  |
| 3  | Soil  |   |  |   |  |   |                              |
| 4  | <ul style="list-style-type: none"> <li>Periodic checking to be carried to assess the effectiveness of the stabilization measures viz. turfing, stone pitching, river training structures etc.</li> <li>Necessary measures to be followed wherever there are failures.</li> </ul>  | Project requirement   | At bridge locations and embankment slopes and other probable soil erosion areas. | Existence of soil erosion sites<br><br>Number of soil erosion sites | On site observation  | Included in Operation/ Maintenance cost | MPRDC (SQC)                  |
| <b>Water Resources/Flooding and Inundation</b> |   |   |  |   |  |   |                              |
| 5  | <ul style="list-style-type: none"> <li>Regular checks shall be made for soil erosion and turfing conditions of river training structures for its effective maintenance.</li> </ul>  | Project requirement   | Near surface Water bodies  | Water quality   | Site observation   | Included in Operation/ Maintenance cost | MPRDC (SQC)                  |
| 6  | <ul style="list-style-type: none"> <li>Regular visual checks and cleaning of drains shall be done along the alignment to ensure that flow of water is maintained through cross drains and other channels/ streams.</li> <li>Monitoring of water borne diseases due to stagnant water bodies.</li> </ul>   | Project requirement   | Near surface Water bodies  | Presence of flooded areas or areas with water stagnation            | Site observation   | Included in Operation/ Maintenance cost | MPRDC (SQC)                  |
| 7  | <ul style="list-style-type: none"> <li>MPRDC will ensure that all drains (side drains and all cross drainages) are periodically cleared especially before monsoon season to facilitate the quick passage of rainwater and avoid flooding.</li> </ul>  | Project requirement   | Flood prone sections   | Incidents of flooding and road inundation with details on chainage  | Field observation<br>Interaction with local community  | Included in Operation/ Maintenance cost | MPRDC (SQC)                  |
| 8  | <ul style="list-style-type: none"> <li>Planted trees, shrubs, and grasses to be properly maintained.</li> <li>The tree survivalist audit to be conducted at least once in</li> </ul>  | Forest Conservation Act 1980  | Project tree Plantation sites  | Minimum of 70% of tree survival                                     | Records and fields observations  | Operation and Maintenance Cost          | MPRDC (SQC)                  |

### Appendix 3

| Risk Category                                | Remedial Measure   | Reference to laws   | Location                       | Monitoring indicators  | Monitoring Methods  | Mitigation Costs                        | Institutional Responsibility |
|--|--|---------------------|--------------------------------|--|---|---|------------------------------|
|  |  |                     |                                |  |   |   | Implementation               |
|  | a year to assess the effectiveness.  |                     |                                |  |   |   |                              |
| <b>Protection of Right of Way and Safety</b> |  |                     |                                |  |   |   |                              |
| Skidding and erosion                         | <ul style="list-style-type: none"> <li>Efforts shall be made to make shoulder completely clear of vegetation.</li> <li>Regular maintenance of plantation along the roadside.</li> <li>Invasive plant not to be planted near the road.</li> </ul>   | Project requirement | Throughout the Project route   | Presence of and extent of vegetation growth on either side of road<br><br>Accident data  | Visual inspection<br><br>Accident records                           | Included in Operation/Maintenance cost  | MPRDC (SQC)                  |
| Accidents                                    | <ul style="list-style-type: none"> <li>Traffic control measures, including speed limits, will be enforced strictly.</li> <li>Further encroachment of squatters within the ROW will be prevented.</li> <li>No school or hospital will be allowed to be established beyond the stipulated planning line as per relevant local law Monitor/ensure that all safety provisions included in design and construction phase are properly maintained Highway patrol unit(s) for round the clock patrolling. Phone booths for accidental reporting and ambulance services with minimum response time for rescue of any accident victims, if possible.</li> <li>Tow-away facility for the break down vehicles if possible.</li> </ul> | IRC:SP:55           | Throughout the Project route   | Police records on accident<br><br>Condition and existence of safety signs, rumble strips etc. on the road<br><br>Presence/absence of sensitive receptor structures inside the stipulated planning line as per relevant local law | Review accident records<br><br>Site observations                    | Included in Operation/Maintenance cost  | MPRDC (SQC)                  |
| Spill of hazardous material                  | <ul style="list-style-type: none"> <li>Existence of spill prevention and control and emergency responsive system</li> <li>Emergency plan for vehicles carrying hazardous material</li> </ul>   |                     | Throughout the project stretch | Status of emergency system—whether operational or not  | Review of spill prevention & emergency response system<br><br>Spill | Included in Operation/Maintenance cost. | MPRDC (SQC)                  |

Legend: EA: Executing Agency, MPRDC: Madhya Pradesh Road Development Corporation, SQC: Supervision Quality Controller, EO: Environmental Officer, IRC: Indian Road Congress

- a) The “Project engineer” or “the engineer” is the team of Construction Supervision Consultants (CSC) responsible for approving the plans, engineering drawing, release of payment to contractor etc. on behalf of the employer (MPRDC). It is usually the team leader of the CSC that takes the responsibility of signing approval documents on behalf of the CSC team.
- b) The “environmental officer” is the environmental specialist under the CSC who is responsible for providing recommendations to the CSC team leader for approving activities specific to environment safeguards on behalf of “the engineer”.

**APPENDIX 4: ENVIRONMENTAL MONITORING PROGRAMME**

| Environmental Components | Monitoring  |   |   | Location  | Frequency   | Institutional Responsibility                  |                |
|--------------------------|---|---|---|---|---|---|----------------|
|                          | Parameters  | Special Guidance  | Standards   |   |   | Implementation                                | Supervision    |
| Air                      | PM <sub>2.5</sub> , PM <sub>10</sub> , SO <sub>2</sub> , NO <sub>x</sub> , CO | As per CPCB guidelines  | The Air (Prevention and Control of Pollution) Rules, CPCB, 1982                   | At sites where hot mix plant/ batching plant is located                                       | 3 times in a year for 3 years or construction period at 3 sites & once in a year for five years at 3 sites during operation/defect liability period | Contractor through approved monitoring agency | PIU, MPRDC, SC |
| Water                    | pH, BOD, COD, TDS, TSS, DO, Total coliform, Conductivity, Oil and Grease      | Grab sample collected from source and analyze as per standard methods for examination of water and wastewater | Water quality standards by CPCB   | River tributaries, Road side ponds and ground water at construction campsites                 | Once during pre-construction stage<br>3 times in a year for 3 years or construction period at 3 locations   | Contractor through approved monitoring agency | PIU, MPRDC, SC |
| Noise Levels             | Noise level for day and night on dB(A) scale                                  | In free field at 1m distance from the Equipment to be monitored   | Noise standard by CPCB  | At equipment yards, camped villages along the alignment.                                      | 3 times in a year for 3 years or construction period, 3 locations & once in a year for 5 years at 3 sites during operation/defect liability period. | Contractor through approved monitoring agency | PIU, MPRDC, SC |
| Soil quality             | Monitoring of NPK & heavy metals and grease                                   |   | As per IRC code of practice   | Ad hoc if accident / spill locations involving bulk transport of carrying hazardous materials | -   | PIU through an Approved agency                | PIU, MPRDC     |
| Road side Plantation     | Monitoring of felling of trees  | It should be ensured that the marked trees are felled only  | As given in the IEE report  | All along the corridor  | During the felling of trees   | Forest department                             | PIU, MPRDC     |
|                          | Survival rate of trees, success of re-vegetation                              | The number of trees surviving during each visit should be compared with the number of saplings planted        | The survival rate should be at-least 75% below which re-plantation should be done | At locations of compensatory afforestation  | Every year for 3 years  | PIU   | PIU, MPRDC     |

**APPENDIX 5: NATIONAL AMBIENT AIR QUALITY STANDARDS**  
**Concentration in Ambient Air**

| Sl. No. | Pollutant  | Time Weighted Average | Industrial Residential, Rural & Other Areas | Ecologically Sensitive Area (Notified by Central Government) |
|---------|--|-----------------------|---|--|
| 1       | Sulphur dioxide (SO <sub>2</sub> ) (µg/m <sup>3</sup> )                              | Annual Average*       | 50  | 20   |
|         |  | 24 Hours**            | 80  | 80   |
| 2       | Oxides of Nitrogen (NO <sub>x</sub> ) (µg/m <sup>3</sup> )                           | Annual Average*       | 40  | 30   |
|         |  | 24 Hours**            | 80  | 80   |
| 3       | Particulate Matter (Size Less Than 10 µm) or PM <sub>10</sub> (µg/m <sup>3</sup> )   | Annual Average*       | 60  | 60   |
|         |  | 24 Hours**            | 100   | 100  |
| 4       | Particulate Matter (Size Less Than 2.5 µm) or PM <sub>2.5</sub> (µg/m <sup>3</sup> ) | Annual Average*       | 40  | 40   |
|         |  | 24 Hours**            | 60  | 60   |
| 5       | Ozone O <sub>3</sub> (µg/m <sup>3</sup> )  | 8 Hours*              | 100   | 100  |
|         |  | 1 Hours**             | 180   | 180  |
| 6       | Lead (Pb) (µg/m <sup>3</sup> )   | Annual Average*       | 0.5   | 0.5  |
|         |  | 24 Hours**            | 1   | 1  |
| 7       | Carbon Monoxide (CO) (mg/m <sup>3</sup> )  | 8 Hours*              | 2   | 2  |
|         |  | 1 Hours**             | 4   | 4  |
| 8       | Ammonia (NH <sub>3</sub> ) (µg/m <sup>3</sup> )                                      | Annual Average*       | 100   | 100  |
|         |  | 24 Hours**            | 400   | 400  |
| 9       | Benzene (C <sub>6</sub> H <sub>6</sub> ) (µg/m <sup>3</sup> )                        | Annual*               | 5   | 5  |
| 10      | Benzo (a) Pyrene (BaP) particulate phase only (µg/m <sup>3</sup> )                   | Annual*               | 1   | 1  |
| 11      | Arsenic (As) (µg/m <sup>3</sup> )  | Annual*               | 6   | 6  |
| 12      | Nickel (Ni) (µg/m <sup>3</sup> )   | Annual*               | 20  | 20   |

**Note:**

\* Annual arithmetic mean of minimum 104 measurements in a year taken twice a week 24 hourly at uniform interval.

\*\* 24 hourly or 8 hourly or 1 hourly monitored values, as applicable shall complied 98% of the time in a year. However 2% of the time, it may exceed but not on two consecutive days.

**APPENDIX 6: INDIAN STANDARD DRINKING WATER SPECIFICATION-IS 0500:1991**

| Sr. No     | Parameters   | Essential Standards  | Relaxed Standards    |
|------------|--|--|----------------------|
| <b>1.0</b> | <b>Physical Standards</b>  |  |                      |
| 1.1        | Colour (Hazen units)   | 10   | 50                   |
| 1.2        | Taste  | Agreeable  | Agreeable            |
| 1.3        | Odour  | Unobjectionable  | Unobjectionable      |
| 1.4        | PH   | 6.5-8.5  | 6.5-8.5              |
| 1.5        | Turbidity (NTU)  | 10   | 25                   |
| 1.6        | TDS (mg/l)   | 500(without treatment)   | 1500(with treatment) |
| 1.7        | Total Hardness (mg/l)  | 300  | 600                  |
| <b>2.0</b> | <b>Inorganic Parameters</b>  |  |                      |
| 2.1        | Ca (mg/l)  | 75   | 200                  |
| 2.2        | Mg (mg/l)  | 30   | 100                  |
| 2.3        | Fe (mg/l)  | 0.3  | 1                    |
| 2.4        | Mn (mg/l)  | 0.1  | 0.5                  |
| 2.5        | Cl (mg/l)  | 250  | 1000                 |
| 2.6        | SO <sub>4</sub> (mg/l)   | 150  | 400 if Mg<30mg/l     |
| 2.7        | NO <sub>3</sub> (mg/l)   | 45   | 45                   |
| 2.8        | F (mg/l)   | 0.6-1.2  | 1.5                  |
| 2.9        | Free Cl (mg/l)   | 0.2  | 0.5                  |
| <b>3.0</b> | <b>Heavy Metals</b>  |  |                      |
| 3.1        | Hg (mg/l)  | 0.001  | 0.001                |
| 3.2        | Cd (mg/l)  | 0.01   | 0.01                 |
| 3.3        | Se (mg/l)  | 0.01   | 0.01                 |
| 3.4        | As (mg/l)  | 0.05   | 0.05                 |
| 3.5        | Pb (mg/l)  | 0.1  | 0.1                  |
| 3.6        | Zn (mg/l)  | 5  | 10                   |
| 3.7        | Cr+6 (mg/l)  | 0.05   | 0.05                 |
| 3.8        | Cu (mg/l)  | 0.05   | 1.5                  |
| <b>4.0</b> | <b>Other Parameters</b>  |  |                      |
| 4.1        | Phenolic Compounds<br>(mg/l) (as C <sub>6</sub> H <sub>5</sub> HO) | 0.001  | 0.002                |
| 4.2        | CN (mg/l)  | 0.05   | 0.05                 |
| 4.3        | Anionic Detergents<br>(mg/l) (as MBAS)                             | 0.2  | 1.0                  |
| 4.4        | Mineral Oil (mg/l)   | 0.01   | 0.03                 |
| 4.5        | Pesticides   | Absent   | Absent               |
| <b>5.0</b> | <b>Microbiological Parameters</b>                                  |  |                      |
| 5.1        | Mean Probable Number<br>Of Total Coliforms<br>(Number/100 ml)      | 50 without treatment<br>500 outdoor bathing<br>5000 with treatment |                      |
| <b>6.0</b> | <b>Radiological Parameters</b>                                     |  |                      |
| 6.1        | Gross alpha (uc/ml)  | 10 <sup>-6</sup>   |                      |
| 6.2        | Gross beta (uc/ml)   | 10 <sup>-7</sup>   |                      |

**Note:** A – Desirable or essential

B – Relax able under certain circumstances such as no alternate source being available

**APPENDIX 7: AMBIENT AIR QUALITY STANDARDS IN RESPECT OF NOISE**

| Area Code | Category of Area | Leq. Limits in dB(A) |            |
|-----------|------------------|----------------------|------------|
|           |                  | Day Time             | Night Time |
| A         | Industrial Area  | 75                   | 70         |
| B         | Commercial Area  | 65                   | 55         |
| C         | Residential Area | 55                   | 45         |
| D         | Silence Zone     | 50                   | 40         |

- Note:**
1. Day time shall mean from 6.00 a.m. to 10.00 p.m.
  2. Night time shall mean from 10.00 p.m. to 6.00 a.m.
  3. Silence zone is defined as an area comprising not less than 100 meters around hospitals, educational institutions and courts. The silence zones are zones, which are declared as such by the competent authority.
  4. Mixed categories of areas may be declared as one of the four above-mentioned categories by the competent authority.



## APPENDIX 8: PUBLIC CONSULTATION PHOTOS AND RECORDS

## PUBLIC CONSULTATION PHOTOGRAPHS



Public Consultation at Bahuti Village



Public Consultation at Dhandani Village



Public Consultation at Tendua Village



Public Consultation at Rampur Village



Public Consultation at Kot Village



Public Consultation at Falkaransingh Village

Reporting of Public Consultations  
Attendance Sheet  
Public Consultation no.

Name of the village: रामपुर  
District / Block: नईगाँवी  
Sub Project: सीवा (कटरा - मऊजं)  
Date: 24/07/14  
Name of the surveyor: कासिम खान

| Name of the participant | Male | Female | Signature    |
|-------------------------|------|--------|--------------|
| मकाड चौधुरिया           |      |        |              |
| रतनवती चौधुरिया         |      |        |              |
| राविकी साहू             |      |        | रतनवती साहू  |
| कुसुमिमा नामदेव         |      |        |              |
| रामकली साहू             |      |        |              |
| श्यामला कुशवाहा         | ✓    |        |              |
| सुनीता साहू             |      |        | सुनीता साहू  |
| मिहिर उमाद साहू         | ✓    |        |              |
| रामनरेश साहू            | ✓    |        |              |
| जुद्ध सेन चौधुरिया      | ✓    |        |              |
| कला उमाद नामदेव         | ✓    |        |              |
| जोषा उमाद साहू          |      |        | कमला कुशवाहा |
| रामवती साहू             |      | ✓      |              |
| राज रवि साहू            |      | ✓      |              |
| विद्यावती साहू          |      |        | विद्यावती    |
| गीता कुशवाहा            |      | ✓      |              |

Signature of Facilitators

1. Kasim Khan

2. ....



Reporting of Public Consultations:  
Attendance Sheet  
Public Consultation no.

Name of the village: कोट  
District / Block: नईगढ़ी / शीवा  
Sub Project: (कटरा - महुगंज)  
Date: 24/07/14  
Name of the surveyor: कासिम खान

| Name of the participant | Male | Female | Signature           |
|-------------------------|------|--------|---------------------|
| विमला आदिवासी           |      | L      | विमला               |
| सुविता आदिवासी          |      | L      |                     |
| संजना                   |      | L      | संजना               |
| अर्चना                  |      | L      | अर्चना              |
| पिम्पल                  | L    |        |                     |
| Arshita Tiwari          | L    |        | Arshita             |
| नारायण / विमली          | L    |        |                     |
| जवाहर लाल गुप्ता        | L    |        | जवाहर लाल गुप्ता    |
| शमशेर लाल गुप्ता        | L    |        | शमशेर लाल गुप्ता    |
| राजेश कुमार खिवाड़ी     | L    |        | राजेश कुमार खिवाड़ी |
| गीता गुप्ता             |      | L      | गीता गुप्ता         |
| माखन लाल गुप्ता         | L    |        | माखन लाल गुप्ता     |
| पुरन गुप्ता             | L    |        |                     |
| जीवन लाल                | L    |        | जीवन लाल            |
|                         |      |        |                     |
|                         |      |        |                     |
|                         |      |        |                     |
|                         |      |        |                     |
|                         |      |        |                     |
|                         |      |        |                     |





Signature of Facilitators

1. 

2. ....

Reporting of Public Consultation:  
Attendance Sheet  
Public Consultation no.

Name of the village: बहुली  
 District / Block: महाराज  
 Sub Project: सीआर (कटरा-महाराज)  
 Date: 23/09/14  
 Name of the surveyor: काशिम खान

| Name of the participant | Male | Female | Signature   |
|-------------------------|------|--------|---|
| कपूर चंद्र उड्डाला      | L    |        | कपूर चंद्र उड्डाला  |
| के.एस. कुशवाहा          | L    |        |    |
| जगदीश प्रसाद खड्का      | L    |        | जगदीश प्रसाद खड्का  |
| रामराम खड्का            | L    |        | रामराम खड्का  |
| Harimand Sahel          | L    |        | Harimand Sahel  |
| Omsh Kumar Verma        | L    |        |     |
| Sukhrayil               |      | L      |    |
| शीला साकेत              |      | L      | शीला साकेत  |
| माता साकेत              |      | L      | माता साकेत  |
| सोना साकेत              |      | L      | सोना साकेत  |
| मुलान                   |      | L      |  |
| इन्दुवती कुशवाहा        |      | L      | इन्दुवती कुशवाहा  |
|                         |      |        |   |
|                         |      |        |   |
|                         |      |        |   |
|                         |      |        |   |
|                         |      |        |   |
|                         |      |        |   |
|                         |      |        |   |

Signature of Facilitators

1. 


2. ....

Reporting of Public Consultation:  
Attendance Sheet  
Public Consultation no.

Name of the village: Tendur  
District / Block: नईगाढ़ी / शीवा  
Sub Project: कटरा - महुआज  
Date: 23/4/14  
Name of the surveyor: अजय शर्मा

| Name of the participant | Male | Female | Signature  |
|-------------------------|------|--------|--|
| अनंद कुशवाह             |      | ✓      |   |
| कलावती कुशवाह           |      | ✓      |   |
| शबकली साकेत             |      | ✓      |    |
| शमला कुशवाह             | ✓    |        |  |
| नाथी साकेत              | ✓    |        |  |
| पुष्पेन्द्र कुशवाह      | ✓    |        |  |
| जगन्नाथ कुशवाह          | ✓    |        |  |
| लीलावती कुशवाह          |      | ✓      |  |
| गोविंद कुशवाह           | ✓    |        |  |
| जगन्नाथ कुशवाह          |      | ✓      |  |
|                         |      |        |  |
|                         |      |        |  |

Signature of Facilitators

1. 

2. ....

Reporting of Public Consultation:  
Attendance Sheet  
Public Consultation no.

Name of the village:

हडनी

District / Block:

मऊगंज

Sub Project:

(क२२५-मऊगंज) रीर

Date:

23/07/14

Name of the surveyor:

काविम खान

| Name of the participant           | Male | Female | Signature        |
|-----------------------------------|------|--------|------------------|
| Suryamani Sahu                    | L    |        | सुर्यमणि सारंग   |
| Brajesh Sahu                      | L    |        | ब्रजेश सारंग     |
| Umesh Kumar Sahu                  | L    |        | उमेश कुमार सारंग |
| Vishnu                            | L    |        | विष्णु सारंग     |
| Rajkalya Sahu                     |      | L      |                  |
| Savitri Sahu                      |      | L      |                  |
| Kamla nali Saket                  |      | L      | कमला नाली साकेत  |
| Munni Saket                       |      | L      |                  |
| Geeta Saket                       |      | L      | गीता             |
| Munni Saket                       |      | L      |                  |
| Shanti Saket                      |      | L      |                  |
| Munni Saket                       |      | L      |                  |
|                                   |      |        |                  |
|                                   |      |        |                  |
| Ram gari                          | L    |        |                  |
|                                   |      |        |                  |
| Chandree <del>Shree</del> Shekhar | L    |        | चन्दर शैखर       |
| Shyamkali                         |      | L      | श्यामकली         |
| Michki                            |      | L      |                  |
|                                   |      |        |                  |

Signature of Facilitators

1. 

2. ....



## APPENDIX 9: GRM PROCEDURES IN HINDI

### सहमति पत्र

(व्यक्तिगत रूप से हस्ताक्षर करने हेतु )

यह सहमति पत्र दिनांक ..... 2014 को श्री/श्रीमति .....  
निवासी ..... (जिन्हे बाद में प्रथम पक्ष कहा जायेगा) एवं मध्य प्रदेश  
रोड डेक्कलपमेंट कार्पोरेशन की तरफ से श्री..... (पद)  
..... (जिन्हे बाद में द्वितीय पक्ष कहा जायेगा) के मध्य हस्ताक्षरित किया गया।

गवाहों/साक्षी की उपस्थिति में यह दस्तावेज निष्पादित किया गया है।

- 1- यह कि प्रथम पक्ष दुकान का स्वामी/किरायेदार/अतिक्रमणधारी /फंसी वाला है। तथा वह अपना .....व्यवसाय पिछले .....वर्षों से इस स्थान पर चला रहा है। दुकानदार इस दुकान का पट्टेदार है/नहीं है। प्रस्तावित सड़क के निर्माण के दौरान व्यवसाय का स्वामी/पट्टेदार का व्यवसाय तथा आमदनी सड़क निर्माण के दौरान बाधित होने की आशंका है। यह कालावधी 30 दिन से अधिक नहीं होगी।
- 2- यह कि प्रथम पक्ष ने मध्य प्रदेश जिला कनेक्टिविटी क्षेत्र परियोजना (MPDCSP) की आवश्यकताओं के तहत आयोजित तार्वजनिक लोक सहमति में भाग लिया है, रोड निर्माण से प्राप्त होने वाले लाभ को समझ लिया है एवं रोड निर्माण हेतु सहमति दे दी है।
- 3- यह कि प्रथम पक्ष द्वारा अपनी मर्जी से ग्राम.....तहसील .....में MPDCSP अंतर्गत रोड निर्माण विकास हेतु आपनी आजीविका में संभावित अस्थायी व्यवधान को देखते हुये भी सहमति प्रदान की है।
- 4- यह कि प्रथम पक्ष रोड निर्माण से होने वाले अस्थायी आजीविका व्यवधान के खिलाफ किसी भी प्रकार के मुआवजे का दावा नहीं करेगा।
- 5- यह कि द्वितीय पक्ष को अस्थायी आजीविका व्यवधान संबंधित सहमति स्वीकार है।

- 6- यह कि द्वितीय पक्ष निर्माण कार्य के दौरान रोड के समीप स्थित सभी व्यवसायिक इकाईयों को नुकसान से बचाने के लिये सभी संभव सावधानियां पूर्वक कार्य करेगा।
- 7- यह कि प्रथम पक्ष द्वारा द्वितीय पक्ष को यह आश्वासन दिया जाता है कि वह MPDCSP अंतर्गत रोड निर्माण को किसी प्रकार का नुकसान नहीं पहुँचायेगा, ना ही सार्वजनिक वाहनों के आवागमन में व्यवधान पैदा करेगा एवं ना ही ऐसे कार्यों में शामिल होगा।
- 8- यह कि दोनों पक्ष MPDCSP अंतर्गत प्रस्तावित इस रोड निर्माण हेतु सहमत है।
- 9- यह कि हस्ताक्षरित किये जाने की तारीख से यह सहमति पत्र प्रभावी होगा।
- साक्षी/गवाहों की उपस्थिति में दोनों पक्षों ने उपर लिखित तारीख को इस पत्रक को हस्ताक्षरित किया है।

हस्ताक्षर प्रथम पक्ष

द्वितीय पक्ष की ओर से अधिकृत  
(मोहर सहित)

गवाह

गवाह

1- हस्ताक्षर.....

1- हस्ताक्षर.....

नाम —.....

नाम —.....

पूरा पता —.....

पूरा पता —.....

2-हस्ताक्षर.....

2. हस्ताक्षर.....

नाम —.....

नाम —.....

पूरा पता —.....

पूरा पता —.....



(गवाह/साक्षी में गांव के सरपंच, ग्राम पंचायत के सदस्य, डी.पी.आर. कंसलटेंट के प्रतिनिधि, गैर शासकीय संगठनों के प्रतिनिधि तथा ग्राम के बुजुर्ग/वरिष्ठ नागरिकों को शामिल किया जा सकता है)

### शिकायत निवारण तंत्र

- 5.1 सड़क निर्माण परियोजना से संबंधित विशेष शिकायत निवारण तंत्र (GRM) स्थापित किया जायेगा जिसके तहत विस्थापित व्यवसायिक इकाईयों, संबंधित शिकायतों, सामाजिक तथा पर्यावरण संबंधित शिकायतों का निराकरण करने की सुविधापरियोजना स्तर पर प्रदान की जायेगी, यह तंत्र सामाजिक तथा पर्यावरण संबंधी समस्या, शिकायत या शकाओं के निवारण में सहायक सिद्ध होगा। यह परियोजना प्रभावित व्यक्तियों की शंकाओं तथा समस्या निराकरण करने के उद्देश्य से निर्मित किया गया है। GRM का उद्देश्य शासन की निवारण प्रक्रिया को नज़र अंदाज करना नहीं है बल्कि जन साधारण को निर्माण से होने वाले लाभ को बताना तथा पारदर्शिता के साथ समस्या तथा शंकाओं का निवारण करना है।
- 5.2 निवारण प्रक्रिया (RP) यह तंत्र प्रभावी तरीके से जन साधारण/लोक सामान्य को इस कार्य के लाभ बतलाते हुए सार्वजनिक सहमति प्राप्त करेगा शिकायत निवारण सहमति (GRC) एक समय सीमा में समस्या निवारण कार्य करेगी। कमेटी का निर्णय मा. न्यायालय के आदेश पूर्व बाध्यकारी होगा इस समिति को MPRDC के प्रबंध संचालक की अध्यक्षता में गठित किया जायेगा। PIU स्तर पर प्रबंधक (PM) पुर्नवास अधिकारी, NGO के प्रतिनिधि, समाज के प्रतिष्ठित व्यक्ति, जन प्रतिनिधि, जिला परिषद प्रतिनिधि, कमजोर तबके के व्यक्ति तथा 2 महिला प्रतिनिधि शामिल होंगे जो परियोजना कार्य पूर्ण होने तक पदस्थ रहेंगे।
- 5.3 शिकायत निवारण समिति द्वारा शिकायत के 3 सप्ताह के दौरान प्रतिक्रिया करेगी। निर्माण कार्य के पूर्व समस्त शिकायतों व शंकाओं का समाधान कर लिया जायेगा।

शिकायत निवारण समिति की बैठक 3 सप्ताह में कम से कम एक बार अवश्य होगी, माननीय न्यायालय के तहत स्वामित्व अधिकारी से संबंधित विवादों के अलावा यह समित समस्त पुर्नवास स्थानांतरण, मुआवजे के भुगतान तथा अन्य सहायता हेतु चरण बद्ध कार्य करेगी।

### शिकायत निवारण प्रक्रिया तंत्र



अनुलग्न 1

## (A) लोक शिकायत प्रपत्र / प्रलेखन (शिकायत निवारण)

| क्र | शिकायत का प्रकार | शिकायत प्राप्त होने की तारीख | प्रभावित स्थान ग्राम/शहर | चैनेज 0.00 से लैण्ड मार्क | शिकायतकर्ता का नाम | पूरा पता एवं मोबाईल नं० | रिमार्क की गई कार्यवाही का संक्षिप्त विवरण | स्थिति       |                     |              |
|-----|------------------|------------------------------|--------------------------|---------------------------|--------------------|-------------------------|--|--------------|---------------------|--------------|
|     |                  |                              |                          |                           |                    |                         |  | निवारण हो गई | कार्य प्रगति पर है। | अपूर्ण लंबित |
| 1   |                  |                              |                          |                           |                    |                         |  |              |                     |              |
| 2   |                  |                              |                          |                           |                    |                         |  |              |                     |              |
| 3   |                  |                              |                          |                           |                    |                         |  |              |                     |              |
| 4   |                  |                              |                          |                           |                    |                         |  |              |                     |              |
| 5   |                  |                              |                          |                           |                    |                         |  |              |                     |              |
| 6   |                  |                              |                          |                           |                    |                         |  |              |                     |              |
| 7   |                  |                              |                          |                           |                    |                         |  |              |                     |              |
| 8   |                  |                              |                          |                           |                    |                         |  |              |                     |              |

अनुलग्न 1

## (B) शिकायत का प्रकार

- घर की दीवार और छत को कंपन/विस्फोट/भारी वाहनों के कारण नुकसान
- उपयोग में आ रही सड़क, पुलिया, नहरों को नुकसान
- सड़क के उपयोग में आ रहे अवरोध
- निजी संपत्ति को नुकसान
- विस्फोट के कारण निजी या सार्वजनिक जल स्रोतों में जल स्तर की कमी या जल में प्रदूषण
- व्यावसायिक इकाई को/ व्यावसायिक परिसर में नुकसान
- दूषित जल का जमाव या बाढ़
- घरों के समीप (सॉलिड) कचरे को फेंकना
- मूर्तियां अथवा स्मारकों को नुकसान होने का भय
- विस्थापना की स्थिति में वैकल्पिक भूमि या अधिग्रहित भूमि को मुआवजे के लिये अनुरोध पत्र
- भूमि स्वामित्व के अधिकार संबंधित किसी प्रकार का विवाद