



Initial Environmental Examination

---

Project Number: 48444

Date: February 2020

Document status: Draft

## **PNG: Sustainable Highlands Highway Investment Program -Tranche 2**

**Volume II: Jogi River Bridge (Km 298+900) to Waghi River Bridge (Km 463+900)**

Prepared by the Department of Works (DOW) for Asian Development Bank

This Initial Environmental Examination (Volume II) is a document of the borrower. The views expressed herein do not necessarily represent those of ADB's Board of Directors, Management, or staff, and may be preliminary in nature.

In preparing any country program or strategy, financing any project, or by making any designation of or reference to a particular territory or geographic area in this document, the Asian Development Bank does not intend to make any judgments as to the legal or other status of any territory or area.




**DEPARTMENT OF WORKS AND IMPLEMENTATION**  
**OFFICE OF THE SECRETARY**

PO Box 1108  
BOROKO,  
National Capital District  
Papua New Guinea

Tel: (675) 324 1114  
Tel: (675) 324 1117  
Fax: (675) 324 1102

Date: 28 April 2020  
File: TR2/SSS/PMO/1

Mr. David Hill  
Country Director  
Papua New Guinea Resident Mission  
Asian Development Bank  
Westpac Building, Third Floor  
Port Moresby  
National Capital District

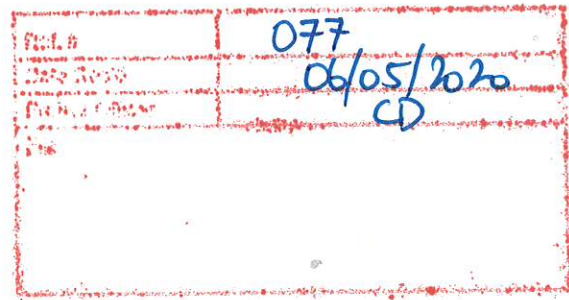

Dear Country Director,

**SUBJECT: ADB L3547/3548 & GO538-PNG - SUSTAINABLE HIGHLANDS  
HIGHWAY INVESTMENT PROGRAM (SHHIP) - TRANCHE 2 -  
ENVIRONMENTAL AND SOCIAL SAFEGUARD, DOCUMENTS FOR  
ADB DISCLOSURE**

We are pleased to enclose herewith the Environmental and Social Safeguard documents for their disclosure on the ADB website as is required for the SHHIP Tranche 2 purposes.

Appreciate your valuable cooperation as always.

Yours sincerely,

  
**DAVID WEREH**  
Secretary

- Encl: (i) Initial Environmental Examination Reports (Volumes 1&2)  
(ii) Resettlement Plans (Volumes 1&2)  
(iii) Land Acquisition and Resettlement Framework (1)

## CURRENCY EQUIVALENTS

(as of February 2020)

Currency Unit	–	Kina (K)
K1.00	=	\$0.294
\$1.00	=	K3.396

## ABBREVIATIONS

ADB	–	Asian Development Bank
AIDS	–	Acquired Immunodeficiency Syndrome
AP	–	Affected Persons
BOD	–	Biochemical Oxygen Demand
CEMP	–	Contractor’s Environmental Management Plan
CEPA	–	Conservation and Environmental Protection Authority
CSC	–	Construction Supervision Consultant
DC	–	Design Consultant
DFAT	–	Department of Foreign Affairs and Trade of the Government of Australia
DMS	–	Detailed Measurement Survey
DNPM	–	Department of National Planning and Monitoring
DOW	–	Department of Works
EARF	–	Environmental Assessment and Review Framework
EHSO	–	Environmental Health and Safety Guidelines
EHSO	–	Environment, Health and Safety Officer
EMP	–	Environmental Management Plan
EP	–	Environmental Permit
EPAR	–	Environmental (Prescribed Activities) Regulations
ESSB	–	Environmental and Social Safeguards Branch
ESO	–	Environmental and Safety Officer
ENSO	–	El Niño Southern Oscillation
GCMs	–	Global Circulation Models
GOPNG	–	Government of Papua New Guinea
GRM	–	Grievance Redress Mechanism
GFP	–	Grievance Focal Points
HCRN	–	Highlands Core Road Network
HH	–	Highlands Highway
HIV	–	Human Immunodeficiency Virus
HRMG	–	Highlands Road Management Group
HRRIIP	–	Highlands Region Road Infrastructure Investment Program
IEE	–	Initial Environmental Examination
LIR	–	Land Investigation Report
LLG	–	Local Level Government
MFF	–	Multi-tranche Financing Facility
MPFF	–	Multi-partner Financing Facility
PACCSAP	–	Pacific - Australia Climate Change Science and Adaptation Planning
PCR	–	Physical Cultural Resources
PFR	–	Periodic Financing Request

PMO	–	Program Management Office
PMV	–	Public Motor Vehicle
PNG	–	Papua New Guinea
PPE	–	Personnel Protection Equipment
QMP	–	Quarry Management Plan
QPR	–	Quarterly Progress Report
SCPP	–	Stakeholder Consultation and Participation Plan
SHHIP	–	Sustainable Highlands Highway Investment Program
SPS	–	Safeguards Policy Statement
SR	–	Safeguard Requirement
TSS	–	Total Suspended Solids
VEC	–	Valuable Environmental Components
WHO	–	World Health Organisation

#### **NOTE**

NOTE In this report, “\$” refers to United States dollars.

## Table of Contents

EXECUTIVE SUMMARY .....	7
1. INTRODUCTION .....	13
A. SHHIP Background.....	13
B. SHHIP-Tranche 2 .....	15
C. Project Cost and Implementation Schedule .....	16
D. IEE for SHHIP Tranche 2 – Volume 2 bridge locations.....	17
2. LEGAL AND POLICY FRAMEWORK .....	19
A. Papua New Guinea Environmental Laws .....	19
B. Asian Development Bank Safeguard Requirements.....	20
3. DESCRIPTION OF SHHIP TRANCHE 2 – PACKAGE 2.....	22
A. In-situ Replacement Bridges at Existing Locations .....	22
B. Relocated Bridge to New Locations .....	23
C. In-situ Replacement Culvert by Bridge .....	23
D. Repair/Reinforcement of Existing Bridge .....	24
E. Design.....	26
4. DESCRIPTION OF THE ENVIRONMENT .....	28
A. Physical Environment.....	28
B. Environmental Quality .....	37
C. Biological Environment.....	44
C1. Biological Environment in PNG and Highlands Region.....	44
C2. Biological Environment in the Project Area .....	49
D. Socio-Economic Environment .....	53
5. ANTICIPATED ENVIRONMENTAL IMPACT AND MITIGATION MEASURES.....	63
A. Design Phase .....	63
B. Pre-Construction Phase .....	63
C. Construction Phase.....	70
D. Operation Phase .....	79
E. Cumulative Impacts .....	82
6. ANALYSIS OF ALTERNATIVES.....	89
A. Alternative No.1 -"No Bridge Improvement" .....	89
B. Alternatives for Bridges Improvement.....	89
7. INFORMATION DISCLOSURE, CONSULTATION, AND PARTICIPATION.....	90
A. Results of Consultations .....	90
B. Further Consultations during Design and Implementation Stages.....	92
8. GRIEVANCE REDRESS MECHANISM.....	93
9. ENVIRONMENTAL MANAGEMENT PLAN .....	94
A. Institutional Arrangements and Responsibilities .....	95

B. Monitoring and Reporting .....	101
C. Environmental Management Plan (EMP) and Monitoring Matrix.....	104
D. Environmental Claims and Penalty System .....	195
E. Budget for EMP Implementation .....	195
10. CONCLUSIONS AND RECOMMENDATION.....	196
ANNEXES .....	198
Annex A: List of Bridges for SHHIP-Tranche 2.....	199
Annex B: List of International Treaties and Agreements to which PNG is a Signatory.....	203
Annex C: Results of Ecological Survey Undertaken by SHHIP Team and Research & Conservation Foundation (Goroka, EHP) in December 2019 .....	204
Annex D: Cost Estimated for Environmental Quality Monitoring .....	209
Annex E: Location Map of Volume II for Environmental Quality Monitoring .....	211
Annex F: Public Consultation Meetings .....	212
Annex G: References.....	216

### **List of Tables**

Table 1-1: Location of SHHIP -Tranche 2.....	15
Table 1-2: Summary of Bridge Investigation.....	16
Table 3-1: Bridges to be Replaced at Existing Locations.....	22
Table 3-2: Bridges to be Replaced at New Locations .....	23
Table 3-3: List of Bridges to be Reinforced/Repaired .....	24
Table 4-1: Geology at Critical Sections .....	30
Table 4-2: Summary of Soil Types at Critical Sections .....	31
Table 4-3: Average Monthly and Annual Rainfall for Highlands Highway 1998 – 2000.....	33
Table 4-4: Climate Change Projections.....	35
Table 4-5: Active Mines in PNG with type of waste (tailings) disposal and annual tailing waste discharged into receiving water bodies. ....	36
Table 4-6: Air Monitoring Locations.....	37
Table 4-7: Air monitoring results .....	38
Table 4-8: Noise Monitoring Locations .....	38
Table 4-9: Noise monitoring results.....	39
Table 4-10: Surface Water Monitoring Locations.....	40

Table 4-11: Results of Surface Water Monitoring .....	41
Table 4-12: Ground Water Monitoring Locations .....	41
Table 4-13: Results of Ground Water Monitoring .....	42
Table 4-14: Species richness of PNG .....	44
Table 4-15: Change in rainforest area (km <sup>2</sup> ) in project area (2002 – 202014) .....	48
Table 4-16: Summary of Sites and Habitat Types .....	49
Table 4-17: Administrative Units (for Provinces included in Package 2) .....	53
Table 4-18: Population Count and Growth Rate .....	54
Table 4-19: Population by Districts and LLGs Served by Highlands Highway: 2011 Census.....	54
Table 4-20: Educational facilities along the Highlands Highway .....	60
Table 4-21: Health Facilities along the SHHIP Highlands Highway Scope .....	61
Table 5-1: List of in-situ New Bridge Constructions Requiring Temporary Acquisitions .....	64
Table 5-2: Impacts Due to Volume II Bridge Works Requiring Permanent Acquisitions.....	65
Table 5-3: Emission factors of some diesel equipment.....	70
Table 5-4: Mitigation measures for PM emission from construction.....	70
Table 5-5: Terrestrial Fauna Impacts .....	73
Table 5-6: Potential areas affect to the livelihood and market patterns of local people .....	79
Table 5-7: Types of Activities, Environmental Impact Assessment Coding.....	83
Table 5-8: Environment Impacts Matrix.....	84
Table 9-1: Institutional Responsibilities for Environmental Safeguards.....	99
Table 9-2: Key Tasks for Environmental Monitoring .....	103
Table 9-3: Environmental Management Plan and Monitoring Matrix for In-situ Replacement Bridge Construction at Existing Locations (19 Bridges) .....	105
Table 9-4: Environmental Management Plan and Monitoring Matrix for Relocated Bridge Construction to New Locations (3 Bridges) .....	136
Table 9-5: Environmental Management Plan and Monitoring Matrix for one Culvert Replacement by a Double-lane Bridge.....	159
Table 9-6: Environmental Management Plan and Monitoring Matrix for Repair/Reinforcement of Existing Bridges (4 bridges) .....	182

### **List of Figures**

Figure 1-1: Map Showing the SHHIP Highlands Highway Section.....	13
Figure 1-2: Map of SHHIP-Tranche 2.....	17

Figure 3-1: The Existing Culvert at Km 289+450 .....	24
Figure 3-2: Map of Volume II Bridges.....	25
Figure 3-3: Cross Section Layout for new bridge.....	26
Figure 3-4: New Bridge Type Selection.....	26
Figure 3-5: Site Layout of Single Span Bridge Construction .....	27
Figure 3-6: Site Layout of Multi Span Bridge Construction .....	27
Figure 4-1: Mean Monthly Rainfall for the Highland and Lowland Regions, 1998-2000.....	33
Figure 4-2: Main Mineral Occurrences of Papua New Guinea.....	36
Figure 4-3: Map of Baseline Monitoring Locations-Volume II.....	43
Figure 4-4: Map of Biodiversity Priorities .....	46
Figure 4-5: Map of Protected areas.....	47
Figure 4-6: Administrative Boundaries along the Highlands Highway .....	56
Figure 9-1: Institutional Arrangement for SHHIP, Safeguards Management.....	96



## EXECUTIVE SUMMARY

1. Background: The Highlands Highway traverses the Highland Region to Lae in Morobe Province of Papua New Guinea (PNG). These regions are major contributors to the PNG economy through agricultural production and mineral resources, as well as commercial and shipping activities. While the Government of PNG has made significant investments in improving the road network, a lack of maintenance has resulted in deterioration not only of its core road network but also the Highlands Highway itself where only about 3% of the investment program section is in good condition.

2. In order to address the further deterioration of the Highlands Highway, the Government of Papua New Guinea requested the Asian Development Bank (ADB) to support financially the implementation of a Sustainable Highlands Highway Investment Program (SHHIP) through a multi-tranche financing facility (MFF). This includes four highlands provinces of Western Highlands, Jiwaka, Simbu, and Eastern Highlands (excluding Enga and Southern Highlands), and Morobe Province of the Momase Region from the Nadzab Airport turnoff near Lae City to the Kagamuga Airport turnoff in Mt. Hagen. The executing agency for the Program is the Department of National Planning and Monitoring (DNPM) and the implementing agency is the Department of Works (DOW).

3. Objectives, impacts and outcome of the investment program: The overarching objectives are to (i) improve access to health and education, and to raise standards of living; (ii) increase opportunities for equality and prosperity in rural areas; and (iii) provide well-integrated, safe, financially and environmentally sustainable transport systems. The expected outcome of the investment program is to make the movement of people, goods and services between the Highlands Region and domestic and international markets safer and more efficient. The program is also expected to benefit the environment in terms of reduced soil erosion and landslides through slope stabilization measures and construction of retaining structures.

4. Program description and components: The SHHIP is a 10-year Program designed to (i) restore, upgrade and effectively maintain the entire 430 km section of the Highlands Highway between Nadzab and Kagamuga airports; (ii) increase the resilience to climate change and the safety of pedestrians and vehicle occupants; (iii) improve transport logistics and services between the provincial capitals; and (iv) develop DOW managerial and operational capacity to deliver the program and sustain its benefits.

5. The SHHIP is implemented in three tranches with the main components and core activities as follows:

6. SHHIP Tranche 1 - Comprehensive Sustained Maintenance is under implementation and covers the entire 430 km section under specific (repairs) routine and periodic (resurfacing) maintenance from day one to keep the road open to traffic at all time; gradually improve the ride comfort; salvage the sections in fair condition; remove the vegetation encroachment, restore drainage efficacy, and unearth currently suppressed paved shoulders; and secure a quick response to emergency situations. Over the Program period, incrementally resurface or strengthen the pavement structure; increase the drainage capacity and multiply the protections against slope instability following recommendations for adaptation to climate change; improve the traffic safety.

7. SHHIP Tranche 2 - Bridges Improvement to be constructed from 2021 with four-year project period. SHHIP-Tranche 2 comprises of seventy-two (72) structures at seventy-one (71) sites with seventy-one (71) bridges and one (1) culvert on the 430 km of Highlands Highway from Lae Nadzab airport to Kagamuga airport in Mt Hagen to be strengthened or replaced by double-lane bridges. It will allow bi-directional traffic, be physical capable of passing all vehicles expected, be seismic resistant as required, have sufficient hydraulic capacity for the 1:100 year flow, and have pedestrian lanes on both sides.
8. SHHIP Tranche 3 to be constructed between 2022 and 2028. It will build (i) a new two-lane bypass to divert heavy and through traffic around Goroka because the dense urban fabric cannot accommodate a four-lane highway; (ii) about 20 km of truck climbing lanes in the steep slopes of the Kassam and Daulo Passes; (iii) two truck weigh stations in Jiwaka and Goroka; and (iv) two logistics platforms for the trade of fresh produce in Jiwaka and Goroka.
9. Improving the capacity of the PNG DOW and related departments to manage and sustain bridge, road, and infrastructure assets, and to provide greater levels of accountability and transparency of safeguards.
10. SHHIP Tranche 2 Scope of Works: The scope of tranche 2 works is primarily maintenance and upgrading works executed for all 71 bridges and a group of three culverts along the SHHIP Highlands Highway sections. As there are two independent single-lane bridges in a single location over the Bitja River and one group of culverts at Temnaike Creek is also planned to be replaced by new double-lane bridges, the number sites (Rivers) for tranche 2 is 71 while the actual number of crossing structures (bridges) is 72 considering these variations.
11. Four different types/categories of works shall be implemented under tranche 2: (i) in-situ replacement bridges construction at existing locations; (ii); relocation bridges construction at new sites; (iii) in-situ replacement of one culvert with new two-lane bridge; and (iv) repair/reinforcement of existing bridges. The impacts and risks will vary accordingly, hence four separate environmental management plans (EMPs) have been prepared for SHHIP-Tranche 2 works under IEE Volumes I and II; (Nadzab to Goroka as Volume I, and Goroka to Kagamuga section as Volume II ) planned for the design and build (D&B) modality of works. Altogether, 45 bridges including 301 single-lane bridges, 14 double-lane bridges and one culvert are recommended to be replaced by new double-lane bridge. Other 26 double-lane bridges and one single-lane bridge shall be repaired over partial or whole damage area of bridge members.
12. Initial Environmental Examination (IEE): The IEE (Volume II) was conducted as part of the feasibility study to identify potential direct, indirect, cumulative and induced environmental impacts and physical, biological, and socioeconomic risks on physical and cultural resources and provide information for the design that will be developed further by the D&B contractor. It includes environmental management plans (EMPs) which outlines the mitigation measures for the anticipated impacts, environmental monitoring activities and parameters to be monitored, institutional responsibilities, and environmental management capacity building.
13. The IEEs and EMPs shall be developed with more details during the detailed engineering design stage as tranche 2 works are planned to be implemented following design and build modality of contracts. In depth environmental impact assessment on site specific basset will be

---

<sup>1</sup> The double lane Bitja river bridge (Km 157+450) comprises two one lane bridges – the new bridge (build in 2003) will be repaired and reinforced, while the old ones is proposed to be replaced.

conducted specifically for every bridge location and IEEs and EMPs will be updated and finalized accordingly. The D&B contractor will update the IEEs and EMPs during detailed design and will develop a construction EMP (CEMP including a detailed and site-specific EMP for each bridge, setting out the works and approach to that site and measures to mitigate impacts and risks specific to the conditions at that site).

14. Legal and policy framework: The program will comply with the country safeguards system, which include the Environment Act 2000, Environment (Amendment) Act 2014 and Environment (Prescribed Activities) Regulation 2002 (EPAR). The Environment Act provides for the sustainable management of the biological and physical components of the land, air and water resources of the country. The EPAR categorizes projects as “prescribed activities” in two schedules according to the anticipated potential environmental impact. There is no specific activity covering the upgrading or rehabilitation of existing bridges. However, a number of activities associated with the upgrading of the existing roads such as quarrying, extraction of gravel etc. may require environmental permits from the Conservation and Environmental Protection Authority (CEPA).

15. A number of other pieces of legislation will apply to the program. This includes the Public Health Act 1978; the Employment Act 1978; the Forestry Act 1991; the National Cultural Property Preservation Act 1965; Public Health Drinking Water Quality Standards 1984, and Environment (Water Quality Criteria) Regulation 2002; and related legislations administered by CEPA that includes the Fauna Protection and Control Act (1966), the Conservation Areas Act (1978), the International Fauna and Flora Trade Act (1978), and the National Parks Act (1984); regulations related to biosecurity including Fisheries Management Act (1998), Animal Diseases and Control Act (1995), and Plant Diseases Control Act (1952). PNG is also a signatory to a number of international agreements (treaties and conventions).

16. In addition, the SHHIP does not only have to comply with the national safeguards, it has to comply with ADB’s Safeguard Policy Statement 2009 (SPS) which sets out the policies and principles for protecting the environment and people by wherever possible avoiding impacts and/or mitigation and/or compensation for impacts that cannot be avoided.

17. Following country safeguards and the SPS, an Environmental Assessment and Review Framework (EARF) has been prepared and updated for this Program, setting out the procedures for complying with the principles and requirements of SPS. The EARF reflects (i) the policy objectives and relevant policy principles and safeguard requirements governing preparation and implementation of projects and/or components; (ii) explains the general anticipated impacts of the project and/or components; (iii) specifies the requirements that will be followed for subproject such as screening and categorization, assessment, and planning, information disclosure, meaningful consultation, and grievance redress mechanism; (iv) describes implementation procedures including budgets, institutional arrangements, and capacity development.

18. Categorization. The SHHIP-Tranche 2 has been categorized by ADB as environment Category B and this IEE was prepared consistent with the environmental assessment requirements of the SPS.

19. Consultation, participation and information disclosure: Consultations were undertaken with community leaders and local people to present the SHHIP-Tranche 2, to identify issues and concerns that the people, stakeholders, and concerned parties in the impacted area may have relevance to the proposed development. The project preparation team presented and explained to the participants the scope of the SHHIP-Tranche 2 including explanation of the environmental

and social impacts and mitigating measures that will be established during the implementation of the subproject. There was unanimous support for the subproject due to a wide range of economic and social benefits identified by participants (i.e. rehabilitation of coffee gardens; more accessibility of coffee factories; expansion of cash cropping; improved accessibility to markets; reduced costs for transport of goods and lower maintenance costs for vehicles; better access to health care, education and other services; improved family ties and social networking, among others). The EARF, this IEE and other project documents (such as safeguards monitoring reports) will be disclosed locally according to ADB's Access to Information Policy 2018.

20. **Grievance Redress Mechanism:** A grievance redress mechanism (GRM) has been established for the program and has been implemented during SHHIP-Tranche 1 works – which can be implemented for SHHIP-Tranche 2 works as well. The key objective of establishing GRM is to ensure that all grievances regarding any aspect of their environmental or socio-economic rights are resolved in a timely and satisfactory manner. Stakeholders will be made fully aware of their rights (both verbally and in writing), and informed how they can access the GRM, during the initial community consultations, and through an information brochure. The GRM operates on the principle of trying to solve problems locally at the lowest project level, as far as possible taking into account customary problem-solving methods. SHHIP has established a grievance redress committee (GRC) in each province for hearing and resolving any complaints that cannot be resolved at the local level or by the project management office (PMO) based in Goroka, Eastern Highlands Province.

21. **Impacts and mitigations:** The SHHIP-Tranche 2 does not traverse nor is located near within wildlife management and protected areas; the nearest - Chuave protected area is about 3.5Km from the project site. Most of the habitat have had some human modifications to the environment and its vegetation. However, there are 6 sites-Clean Water River Bridge 77+800 (B#4), Gorambam Pam River Bridge 113+000 (B#6), Feonoku River 355+450 (B#51), Nurape River 342+850 (B#52), Kenangi River 345+200 (B#53) and Baikabai River 348+400 (B#54) which still have some primary and secondary forests near the mountains close to the bridges. No endangered terrestrial and/or aquatic species will be affected by the program activities.

22. The construction works at in-situ new (replacement) bridges and repair/reinforcement of existing bridges will be executed within or directly adjacent to the existing cross section and the alignment and longitudinal profile of the bridge. While the relocation bridges require permanent land acquisition at per new bridge construction for approach road re-alienations. Given the nature and scale of proposed works, it is anticipated that there will be site-specific and mostly short-term negative impacts during construction activities. These impacts include: risk of introduction of invasive and alien species (flora and fauna), dust, sedimentation, run-off and erosion, gaseous emissions and noise , waste generation, access and traffic disruption, haulage and disposal of excavated materials, operation of borrow sites and quarries; and potential occupational and community health and safety risks.

23. Health risk to the roadside communities will be reduced due to the bridges' improvement, sustained maintenance, and soil erosion control measures. Road safety will be improved by stabilizing unstable sections; installing road safety barriers including pedestrian safety facilities, footpaths, and pedestrian crossings especially near schools and market areas; proper traffic engineering signs and display boards; traffic control devices with high intensity reflective traffic signs, road delineation and reflective road markings and edge lines; preparation of accident black

spot management program to identify and improve hazardous locations on the main road network; and community road safety awareness raising.

24. Institutional arrangements for environmental management: Overall implementation of environmental and social safeguards including environmental management requirements is a joint responsibility between the DOW/PMO, the construction supervision consultant (CSC), and the D&B contractors. The DOW has established the environmental and social safeguards branch (ESSB) which will monitor the activities and works.

25. Environmental Management Budget: DOW/PMO operating budget and induction cost of contractor to site will be included in the project cost. The cost for CSC to supervise EMP implementation in accordance with the EMP and the project bidding and contractual documents is integrated in the contract with the CSC. The cost for contractor for training, dissemination, procurement, operation of equipment and labour for implementation of management and mitigation measures in accordance with the EMP (and any conditions of permits issued by CEPA) will be included in the bidding and contractual documents requirements and will be costs covered by the works contracts. Cost for monitoring of SHHIP-Tranche 2, a total of Kina 639,990 (\$ 188,157) - \$91,988 for volume-I and \$ 96,169 for volume-II is envisaged to be required.

26. Monitoring and reporting requirements: Throughout implementation of the SHHIP-Tranche 2, the DOW-ESSB, PMO, CSC and ADB will monitor the progress and impact of subprojects, this includes monitoring and inspection/audit of the implementation of safeguards and effectiveness of mitigation measures. DOW/PMO is required to implement safeguard measures and relevant safeguard plans, as provided in the legal agreements, and to submit periodical monitoring reports.

27. Reporting includes: (i) a monthly report prepared during construction by the contractor reporting on progress of the subprojects and including a section on CEMP activities, issues and corrective actions; (ii) quarterly progress reports (QPR) prepared by the PMO that includes a section on safeguards activities and CEMP compliance, and summarizes the monthly reports submitted by the contractor and any actions or citations made by the CSC; (ii) semi-annual safeguards monitoring reports prepared by the PMO and submitted to DOW and ADB for disclosure; and d) a project completion report that will be prepared by DOW-ESSB three months prior to the end of Tranche 2, which will include a section on safeguards implementation, lessons learned and recommendations.

28. Conclusion: By using the conceptual model, as described in section V, to assess cumulative environmental impacts, the IEE revealed that the project has 11 activities that will have a "high impact", 50 activities will have a "medium impact" and 66 activities will have a "low impact" on the physical environment, biological environment and socio-economic environment. The scale of these impacts will be assessed in further during the Detailed Design phase. At present, the IEE reveals that there are no significant and irreversible environmental impacts. Most bridges (40 bridges) are located in remote areas. Homes, businesses, vegetable plots, etc. at other bridge sites are located more than 100m from each end of the bridge. Therefore, construction impacts such as noise, air pollution, and vibration on the communities will be minimal, yet the contractor is required to implement measures to ensure these impacts are kept to a minimum. The highest impact will be from runoff of material from embankment construction, removal and constructing bridge piers. The communities downstream that use the rivers for washing and drinking water may be affected by the runoff. Special measures and procedures are proposed in the EMP for addressing this impact.

29. The type of works identified in the Feasibility Study stage of the Package 2 of SHHIP-Tranche 2 include (i) in-situ replacement bridge construction at existing locations, (ii) relocation bridge construction at new locations, (iii) in-situ replacement of culvert with new double-lane bridge construction, and (iv) repair and reinforce of existing bridges. The Environmental Management Plans (EMPs) are prepared for four (4) major activities. Following stage of Detailed Engineering Design, these EMPs will be developed to be specific at each bridge location.

# 1. INTRODUCTION

## A. Sustainable Highlands Highway Investment Program Background

1. The Highlands of Papua New Guinea (PNG) is a chain of mountains and high valleys stretching in a generally west to east direction from the border with Indonesia in the centre of the island to the eastern coast. The valleys are typically 1,500 m above sea level and are surrounded by peaks up to 4,000 m. These regions are major contributors to the PNG economy through agricultural production and mineral resources, as well as commercial and shipping activities. A well-maintained Highlands Highway is essential to facilitate the movement of goods and people. While the Government of PNG (the government) has made significant investments in improving the road network, a lack of maintenance has resulted in deterioration not only of its core road network but also the Highlands Highway itself where only about 3% of the investment program section is in good condition.

2. The Highlands Highway is a two-lane highway and stretches from Lae in Morobe Province on the eastern coast for over 600 km to Mendi in Southern Highlands Province as shown in Figure 1.1. The Highlands Highway passes through the following provinces: Southern Highlands, Enga, Western Highlands, Jiwaka, Simbu, Eastern Highlands, and Morobe. Although construction started in the 1950s, it was only in the late 1970s that construction commenced on a modern, sealed highway. Till this day, it is the only terrestrial means of communication between the large Highlands population and the rest of PNG and the World.



Figure 1-1: Map Showing the SHHIP Highlands Highway Section

3. In order to address the further deterioration of the Highlands Highway, the government of Papua New Guinea requested the Asian Development Bank (ADB) to support the implementation of the Sustainable Highlands Highway Investment Program (SHHIP) through a multi-partner financing facility. The Program covers four highlands provinces of Western Highlands, Jiwaka, Simbu, and Eastern Highlands (excluding Enga and Southern Highlands), and Morobe Province

of the Momase Region<sup>2</sup> from the Nadzab Airport turnoff near Lae City to the Kagamuga Airport turnoff in Mt. Hagen.

4. **Program Objectives, Impact and Outcome:** The overarching objectives and expected outcome of the Program are: (i) to improve access to health, education and standard of living, (ii) increase opportunities for equality and prosperity in rural areas, (iii) provide well integrated, safe, financially and environmentally sustainable transport systems, and (iv) make the movement of people, goods and services between the Highlands Region and domestic and international markets safer and more efficient.

5. **Context:** The SHHIP aligns with the government's Development Strategic Plan 2010-2030; National Transport Strategy 2014-2030; ADB's Country Partnership Strategy 2016-2020; in with the ongoing ADB-funded Highlands Road Infrastructure Investment Program; DFAT-funded Transport Sector Support Program; and World Bank operations in support of road maintenance.

6. The Program addresses the following risks and constraints:

- i. The failures of the road pavement are primarily due to a prolonged lack of maintenance not to an inadequate structural design, except for flood-prone sections in the Morobe Province;
- ii. Many sections can be restored without engaging into costly reconstruction if corrective actions are implemented rapidly;
- iii. The current two-lane design is sufficient to carry the projected traffic over the next 20 years, except in the vicinity of Goroka; however, there, the dense urban fabric in Goroka town would not accommodate a 4-lane highway so other solutions must be investigated
- iv. Road traffic safety is poor, and pedestrians are especially at risk;
- v. 29 one-lane bridges constitute a primary safety hazard and 40 two-lane bridges need repairs if not reinforcement or full reconstruction;
- vi. The budget is constrained; and
- vii. Climate change, although a real threat, is of an uncertain nature, meaning flexible, adaptive response mechanisms are necessary

7. **Program description:** The SHHIP is a 10-year Program designed to: a) restore, upgrade and effectively maintain the entire 430 km section of the Highlands Highway between Nadzab and Kagamuga airports; b) increase the resilience to climate change and the safety of pedestrians and vehicle occupants; c) improve transport logistics and services between the provincial capitals; and d) develop DOW managerial and operational capacity to deliver the program and sustain its benefits.

8. The program will be implemented in three tranches as following:

- i. Tranche 1 is currently under implementation (2019 and 2022) and includes road maintenance and road investment works, drainage and slope protection works, road safety improvements as well.
- ii. Tranche 2: will be implemented between 2021 and 2025 including (i) Continue road maintenance and road investment works, (ii) Widen all twenty nine (29) single-lane bridges to double-lane bridges with pedestrian footpaths, (iii) Repair, reinforce and reconstruct as appropriate all forty one (41) double-lane bridges. The planned subprojects are depicted in the following table.

---

<sup>2</sup> **Momase Region** is one of four regions of Papua New Guinea and includes Morobe, Madang and Sepik (East and West). Its largest city is Lae, the second city of the nation.



**Table 1-1: Location of SHHIP -Tranche 2**

No.	Province	District
1	Morobe (K40-Km168)	Huon Gulf
		Markham
2	Eastern Highlands (Km168-Km355)	Kainantu
		Henganofi
		Ungai Bena
		Goroka
		Daulo
3	Chimbu (Km355-Km 412)	Kundiawa Gembolg
		Kerowaghi
4	Jiwaka (Km412-Km463)	North Waghi
		Anglimp South Waghi
5	Western Highlands (Km463-Km469)	Mt Hgaen

- iii. Tranche 3: The preparation phase of SHHIP Tranche 3 will be implemented between 2026 and 2028 including: (i) Continue road maintenance and road investment works, (ii) Build a new two-lane bypass to divert heavy and through traffic around Goroka because the dense urban fabric cannot accommodate a four-lane highway, (iii) Build about 20 km of truck climbing lanes in the steep slopes of the Kassam (Eastern Highlands Province) and Daulo Passes (Eastern Highlands Province), (iv) Build two truck weigh stations in Jiwaka and Goroka (Eastern Highlands Province); and build two logistics platforms for the trade of fresh produce in Jiwaka and Goroka (Eastern Highlands Province).

## **B. Sustainable Highlands Highway Investment Program -Tranche 2**

9. SHHIP-Tranche 2 comprises 72 structures at 71 sites including 29 single-lane bridges, 41<sup>3</sup> double-lane bridges and a<sup>4</sup> group of three culverts, which are located on the 430 km of HH from from Lae Nadzab airport to Kagamuga airport in Mt Hagen, and are planned for replacement, repair and reinforcement as follows:

- i. All single lane bridges shall be either replaced or twinned to allow bi-directional traffic.
- ii. All bridges shall have pedestrian lanes on at least one side, separated by physical barriers from the vehicle traffic.
- iii. All bridges shall be physically capable of passing all vehicles expected on the Highlands Highway.
- iv. All bridges shall be seismic resistant as required by the seismic zone of the highlands of PNG.
- v. All bridges shall have sufficient hydraulic capacity for the 1:100-year flow, after taking into account expected climate changes.

10. The 72 structures were inspected in detail by a team of bridge experts between August and September 2019. The inspections are documented in the feasibility study that confirms the

<sup>3</sup> The double lane Bitjia river bridge (Km 157+450) comprises two structures over the Bitjia River – the new bridge (build in 2003) will be repaired and reinforced, while the old ones is proposed to be replaced.

<sup>4</sup> An existing group of three culverts (Km 398+450) at Tem Naike Creek need to be replaced by a new double lane Bridge

dimension, type of bridge structure, and condition (defect and damage) of superstructure-deck, main steel girder beams, and cross beam, substructure-abutment and pier, pavement, expansion joint, bearing, pedestrian walkway, drainage, approach roads, etc. Table 1-2 summarises the results of bridge investigation.

**Table 1-2: Summary of Bridge Investigation**

No.	Type of Structures	Quantity	Remark
1	Single-lane bridges	29	One-lane bridges have no walkway and guardrail excluding some bridges those have temporary walkway
2	Double-lane bridges	41	Generally, Two-lane bridges have walkways at both sides, one side 0.85 meter and 1.55 meter on the other side, and some of the bridges have no walkways installed, or temporary steel walkways at one side
3	Culvert	1	One pipe culverts should be replaced with new bridges due to insufficient flow capacity and possibility of blocking by debris from upstream

11. Total forty 45 bridges including 30<sup>5</sup> single-lane bridges, 14 double-lane bridges and one culvert are recommended to be replaced. Other 26 double-lane bridges and one single-lane bridge should be repaired over partial or whole damage area of bridge members for proper road service.

**C. Project Cost and Implementation Schedule**

12. The estimated cost of the project is US\$ 287.9 million. Two design and build (D&B) contract packages shall be procured through International Competitive Bidding (ICB) to carry out detailed design and construction to repair, reinforcement and replacement of seventy (70) bridges and one (1) culvert under two (2) Civil Contract Packages as follows:

- i. Package 1 includes 44 bridges from Erap River Bridge (Km 46+500) to Kanalipi River Bridge (Km 288+100),
- ii. Package 2 includes 27 bridges from Jogi River Bridge (Km 298+900) to Whagi River Bridge (Km 463+900).

13. Bridges and works of SHHIP Tranche 2 are shown on Figure 1-2.

<sup>5</sup> One old bridge at Bitjia river site (Km 157+450).



**Figure 1-2: Map of SHHIP-Tranche 2**

**D. IEE for SHHIP Tranche 2 – Volume 2 bridge locations**

14. The IEE report was conducted during the feasibility study of SHHIP-Tranche 2 for Volume II bridges, following the Environmental Assessment and Review Framework (EARF) prepared for the Program and in accordance with the requirements of the country safeguard system (CSS) and the ADB Safeguard Policy Statement (SPS) 2009.

15. This IEE identifies potential environmental impacts of the construction and operation of bridge works and to identify the measures required to avoid / mitigate the negative impacts arising during pre-construction, construction and operation. The IEE comprises the following:

- i. Identifying the project impact area and describing the baseline environmental conditions of the sub-project area;
- ii. Identifying the potential environmental impacts of the proposed works and activities at the bridge sites;
- iii. Recommending appropriate mitigation measures to avoid/minimise the environmental impacts; and
- iv. Preparing an environmental management plan for implementation.

16. The IEE is based on the physical environmental baseline survey (i.e. air, water, noise) conducted during March and April 2019 by the SHHIP team, ecological survey undertaken in December 2019, primary and secondary sources of information and data conducted during preparation the report. The team conducted consultations with the local people and leaders in the area to gather relevant social and environment-related information/data and to provide information about the Program overall and the subprojects in Tranche 2. During the site visits, the existing bridges and immediate environment, including watercourses, were visually inspected and photos taken.

17. Public consultations with government stakeholders and communities where the bridges are located were undertaken as part of the information disclosure process and to determine community perceptions and obtain relevant information.

18. **Structure of the report.** This IEE report has been presented in the format prescribed in ADB's Safeguard Policy Statement, 2009. An Executive Summary is also prepared and presented in the beginning of the report. The report is organized into the following Sections:

Section I	:	Introduction
Section II	:	Policy, Legal and Administrative Framework
Section III	:	Description of the SHHIP-Tranche 2 – Package 2
Section IV	:	Description of the Environment
Section V	:	Anticipated Environmental Impacts and Mitigation Measures
Section VI	:	Analysis of alternatives
Section VII	:	Information Disclosure, Consultations and Participation
Section VIII	:	Grievance Redress Mechanism
Chapter IX	:	Environmental Management Plan; and
Chapter X	:	Conclusions and Recommendations.

## 2. LEGAL AND POLICY FRAMEWORK

### A. Papua New Guinea Environmental Laws

19. **Country safeguards system.** The CSS includes Environment Act 2000 and Environment (Prescribed Activities) Regulation 2002 (EPAR) address environmental impact assessment and management. The Environment Act provides for the sustainable management of the biological and physical components of the land, air and water resources of the country. The Conservation and Environmental Protection Authority (CEPA) administers both the Act and the EPAR. The EPAR categorizes projects as “Prescribed Activities” in two schedules according to the anticipated potential environmental impact. Schedule 1 consists of Level 2 activities that are subdivided into two categories (Category A and B). Category B has 13 sub-categories with sub-category 12 addressing Infrastructure Development. While item 12.5 includes construction of new national roads, there is no specific activity covering the upgrading or rehabilitation of existing roads. However, a number of activities associated with upgrading of existing roads such as quarrying, extraction of gravel etc. may require environmental permits (EP) from CEPA. In addition the DOW has established procedures and guidelines for environmental assessment and management for road projects.

20. The mandate of CEPA, as the government’s environmental management agency, is “To ensure PNG’s natural resources are managed to sustain environmental quality, human well-being and support improved standards of living” (CEPA Corporate Plan (2009-2012)). The CEPA consists of three divisions: Environment Protection responsible for environmental approvals; Sustainable Environment Management; and Policy Coordination and Evaluation.

21. CEPA has issued several guidelines including the Notification of preparatory work on level-2 and level-3 activities (IB-ENV/01/2004) dated 1 January 2004; the Guideline for the submission of an application for an environmental permit to discharge waste (GL-Env/03/2004) which covers: noise discharges (IB-ENV/03/2004); air discharges (IB-ENV/02/2004); and water and land discharges (IB-ENV/04/2004).

22. CEPA operates at the national level from its office based in Port Moresby. It does not have offices and staff in the provinces. All environmental approvals are done in the central office in Port Moresby. As part of the government decentralization policy, CEPA has to work in close consultation with the provincial governments through the respective provincial administrations to ensure implementation of environmental legislation at the provincial level. Certain environmental management and monitoring functions are delegated to provincial administrations on an “if and when” basis, meaning “if and when” they have the resources and the capacity to conduct them.

23. The following legislation also applies to Tranche 2 works:

- i. **Public health.** The Public Health Act 1978 protects the general public by regulating and controlling the unplanned disposal of any environmental contaminants such as domestic or industrial waste and/or refuse that will have some kind of impact on the lives of people. The act regulates the proper and planned establishment of waste disposal points such as rubbish dumps and landfills so that such establishments are seen to be causing minimal inconvenience to people’s lives. The act also covers all the activities that pose risks and potential risks, and inconveniences to the usage of the environment surrounding the area of activity. As the subproject will affect the lives of people, especially the local community downstream, this act is applicable and has been taken into consideration.

- ii. **Labour health and safety.** The Employment Act 1978 is an act relating to the employment of nationals and non-citizens. The act covers recruitment, conditions of employment as well as health and safety aspects and is administered by the Department of Labour and Employment. Conditions of this act are relevant to the health and safety of workers employed during construction and are reflected in the IEE.
  - iii. **Forestry.** The Forestry Act 1991 has the objective to manage, develop and protect PNG forest resources and environment in such a way as to conserve and renew them as an asset for succeeding generations.
  - iv. **Cultural resources.** The National Cultural Property Preservation Act 1965 covers the preservation and protection of objects of cultural or historical importance. This act is administered by the National Museum and Art Gallery. Should “chance finds” be made during construction this act will be triggered, provisions for this have been made in the EMP.
  - v. **Water quality.** Drinking water quality standards for raw (untreated) water are contained in the Public Health Drinking Water Quality Standards 1984 while the standards for aquatic life protection are listed in the Environment (Water Quality Criteria) Regulation 2002. Ranges of criteria are given for several parameters including turbidity, which should not exceed 25 NTU. Since many of the water courses in PNG are naturally quite turbid this standard appears to be unrealistic as it is close to drinking water standard. Therefore, the pre-project turbidity in the watercourse is suggested as the standard for assessing turbidity during construction.
  - vi. **Biosecurity.** Fisheries Management Act 1998 aims to promote the management and sustainable development of fisheries with PNG. Animal Diseases Control Act 1952 focuses on both terrestrial and aquatic animal health management through minimising the introduction of exotic species, and Animal Disease and Control Regulation 1995 provides quarantine protocols, including those to be implemented when introducing exotic animals into PNG. Plant Diseases Control Act 1952 focuses on both terrestrial and aquatic plant health management through minimising the introduction of exotic species.
24. Other related legislation administered by CEPA includes; the Fauna Protection and Control Act (1966), the Conservation Areas Act (1978), the International Fauna and Flora Trade Act (1978), and the National Parks Act (1984). PNG is a signatory to a number of international agreements (treaties and conventions). These are listed in Annex A.

## **B. Asian Development Bank Safeguard Requirements**

25. **Safeguard policy.** In addition to the obligation to comply with the CSS, Tranche 2 also has to comply with ADB’s SPS which sets out the policies and principles for protecting the environment and the people by wherever possible avoiding impacts and mitigating and/or compensating for impacts that cannot be avoided. ADB’s SPS is a policy document in respect of safeguards and avoiding, minimizing or mitigating adverse impacts on people and the environment. For projects with a number of components or subprojects, SPS requires the preparation of safeguards (environment and resettlement frameworks) which set out the processes to be followed for screening and assessment of each sub-project.

26. The SPS has the following objectives: (i) avoid adverse impacts of projects on the environment and affected people; (ii) where possible; minimize, mitigate, and/or compensate

for adverse project impacts on the environment and affected people when avoidance is not possible; and (iii) help borrowers/clients to strengthen their safeguard systems and develop the capacity to manage environmental and social risks. The environment safeguard requires due diligence which entails addressing environmental concerns, if any, of a proposed activity in the initial stages of project preparation.

27. The SPS categorizes potential projects or activities into categories of impact (A, B or C) to determine the level of environmental assessment required to address the potential impacts. The EARF prepared for the Program sets out the steps for screening, assessing, mitigating and monitoring the impacts of the subprojects. Tranche 2 works are categorized as Category B for environment because potential adverse environmental impacts are site-specific, few if any of them are irreversible, and in most cases mitigation measures can be designed readily. Accordingly, this IEE has been prepared as the requisite level of assessment to address the potential impacts in line with the SPS.

28. The SPS also requires compliance with the World Bank's Environmental Health and Safety Guidelines (EHSG).

29. **Environmental assessment and review framework.** An EARF has been prepared for SHHIP, setting out the procedures for complying with the principles and requirements of SPS. The EARF: (i) reflects the policy objectives and relevant policy principles and safeguard requirements governing preparation and implementation of projects and/or components; (ii) explains the general anticipated impacts of the project and/or components; (iii) specifies the requirements that will be followed for subproject screening and categorization, assessment, and planning, information disclosure, meaningful consultation, and grievance redress mechanism; (iv) describes implementation procedures, including budgets, institutional arrangements, and capacity development.

30. The EARF also sets out the capacity building measures that will be executed during its implementation. Under the SPS, Volume-II of SHHIP-Tranche 2 is classified Category B because the potential adverse environmental impacts are site-specific, few if any of them are irreversible, and mitigation measures can be designed readily.

### 3. DESCRIPTION OF SHHIP TRANCHE 2 – PACKAGE 2

#### Jogi River Bridge (Km 298+900) to Waghi River Bridge(Km 463+900)

31. The Package 2 of SHHIP-Tranche 2 comprises 27 bridges including 15 double-lane bridges and 12 single-lane bridges and one culvert. The map of pack 2 under SHHIP tranche 2 is shown as the Figure 1-4.

#### A. In-situ Replacement Bridges at Existing Locations

32. There are 8 double-lane bridges, 11 single-lane bridges proposed to be replaced by new one double-lane bridges at the existing locations. The bridge investigation results of the conditions are as follows:

- i. Damage of steel and girders surface and a high level foreign substance contamination,
- ii. Very poor condition and damage of the bridges' pavement caused by segregation, soil accumulation and ponding,
- iii. Cracks and surface damage on the decks,
- iv. Aging bearing
- v. incorrect functioning of the expansion joints,
- vi. Damaged walkway railing of walkways,
- vii. Loss of the sidewalk steel covers,
- viii. Damage of the road pavement section before and after the bridges,
- ix. In case of rain, foreign substances/fluid substances generated on the side of adjacent roads influx the bridges, contaminating its upper surface,
- x. Backfill of abutment and loss of soil due to scour on the side of abutments,
- xi. Insufficient lane marking and safety signs.

33. The following table lists the bridges to be replaced.

**Table 3-1: Bridges to be Replaced at Existing Locations**

No.	Name	Drawing STA	Location	Lane	Grade <sup>6</sup> Evaluation
1	Jogi River (Zokozoi)	298+900	Asariufa/Goroka Town, Goroka District, Eastern Highlands Province	2	C
2	Gouluka Bailey Bridge	299+700	Funeral Home/Okiufa Village, Goroka District, Eastern Highlands Province	1	
3	Baikabai River	348+400	Mangiro Village, Daulo District, Eastern Highlands Province	2	D
4	Chimbu River	376+700	Kundiawa Town, Kundiawa Gembolg District, Chimbu Province	2	D
5	Koronigle River	397+300	Koronigle, Kerowaghi District, Chimbu Province	1	D
6	Garniger River	401+500	Ganige, Kerowaghi District, Chimbu Province	1	C
70	Miunde River	404+500	Miunde Village, North Waghi, Jiwaka Province	2	D

<sup>6</sup> The Grading is based on technical study of existing bridges – evaluating the current bridge health condition based on the “Health Rating Scale” which is a type of weighted average, on a scale of “E” (worst-Critical Condition) to “A” (best – Excellent Condition).



No.	Name	Drawing STA	Location	Lane	Grade <sup>6</sup> Evaluation
8	Ahl River	414+150	Ahl Village, North Waghi District, Jiwaka Province	1	C
9	Wahgi River	414+950	Ahl Village, North Waghi District, Jiwaka Province	1	D
10	Bilu River	422+500	Bilu Village, North Waghi District, Jiwaka Province	1	D
11	Darmena River	423+530	Darmena Village, North Waghi District, Jiwaka Province	1	D
12	Ambeke River	425+000	Ambeke Village, North Waghi District, Jiwaka Province	1	D
13	Mildip River	425+250	Midip Village, North Waghi, Jiwaka Province	1	D
14	Kurumula River	427+800	Kurumul Village, North Waghi, Jiwaka Province	1	D
15	Waganil	432+300	Kudjip, North Waghi District, Jiwaka Province	1	D
16	Tumam River	449+500	Tuman Village, Anglimp District, Jiwaka Province	2	D
17	Pin River	455+400	Api Village, Anglimp South Waghi District, Jiwaka Province	2	C
18	Komun River	462+100	Komun Village, Anglimp South Waghi District, Jiwaka Province	2	D
19	Whagi River	463+900	Paga Village, Mt Hgaen District, Western Highlands Province	2	D

## B. Relocated Bridge to New Locations


34. There are two double-lane bridges, one single-lane bridge proposed to be replaced by new one double-lane bridges at new locations.

**Table 3-2: Bridges to be Replaced at New Locations**

No.	BR. Name	Drawing STA	Location	Lane	Grade Evaluation
1	Feonoku River	335+450	Fionoku Village, Daulo District, Eastern Highlands Province	1	C
2	Nurape River	342+850	Watabung, Daulo District, Eastern Highlands Province	2	C
3	Kenangi River	345+200	Kenangi Village, Daulo District, Eastern Highlands Province	2	D

## C. In-situ Replacement Culvert by Bridge

35. Existing culvert: one culvert located at Km 398+450 and comprised of three (3) waveform steel pipes with the diameter of 3.0m is proposed to be replaced by new one double-lane bridges. The pipes are severe being corrosion and surrounding concrete is in highly damaged condition. It is deemed reasonable to replace the culvert by an new double lane bridge

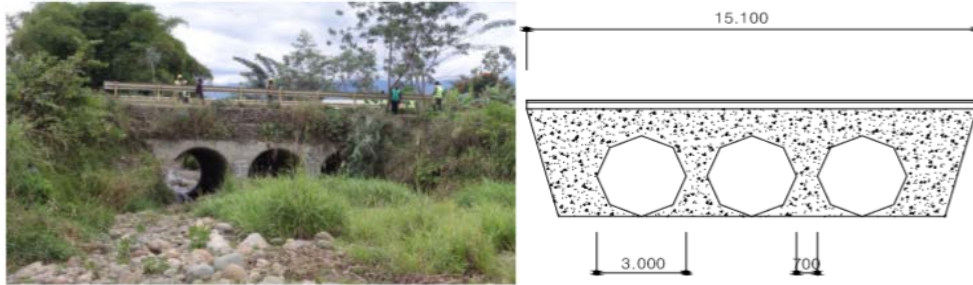

**Figure 3-1: The Existing Culvert at Km 289+450**

36. Proposed new bridge construction: Considered bridge plan is 22m length. The height of the girder and the planning height shall be determined after checking the flood height and the clearance level.

#### **D. Repair/Reinforcement of Existing Bridge**

37. There are 4 double-lane bridges proposed to be repaired and reinforced. The condition of these bridges as per the investigation are as follows:

- i. High level contamination of steel girder,
- ii. Damage on the surface of the decks,
- iii. Soil and foreign substance accumulated on both sides of the carriageways, blocking the drainage holes,
- iv. Partially damage of the rail of the walkways,
- v. In case of rain, foreign substances/fluid substances generated on the side of adjacent roads influx the bridges, contaminating their upper surface
- vi. Lack of lane marking and safety signs

38. The following lists the bridges which would be reinforced or repaired.

**Table 3-3: List of Bridges to be Reinforced/Repaired**

<b>No.</b>	<b>BR. Name</b>	<b>Drawing STA</b>	<b>Location</b>	<b>Lane</b>	<b>Grade Evaluation</b>
1	Kafamo River (Kitamu)	302+800	Kefamo Village, Goroka District, Eastern Highlands Province	2	C
2	Mapemo River (Maniyata)	310+900	Maniyata Village, Goroka District, Eastern Highlands Province	2	C
3	Asaro River 2 (Getayaga)	314+600	Asaro Station, Daulo District, Eastern Highlands Province	2	C
4	Asaro River	315+100	Asaro Station, Daulo District, Eastern Highlands Province	2	C


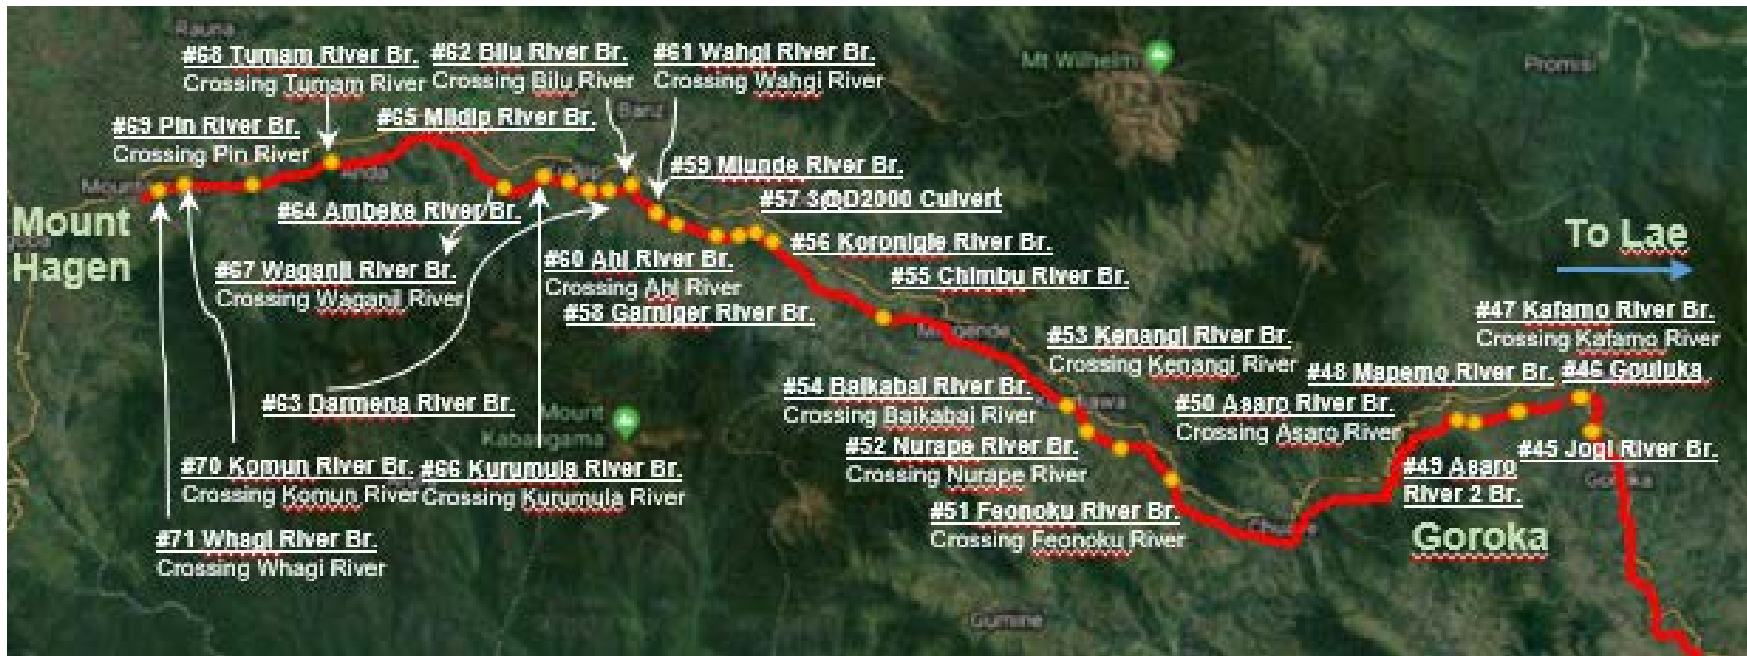


Figure 3-2: Map of Volume II Bridges

**E. Design**



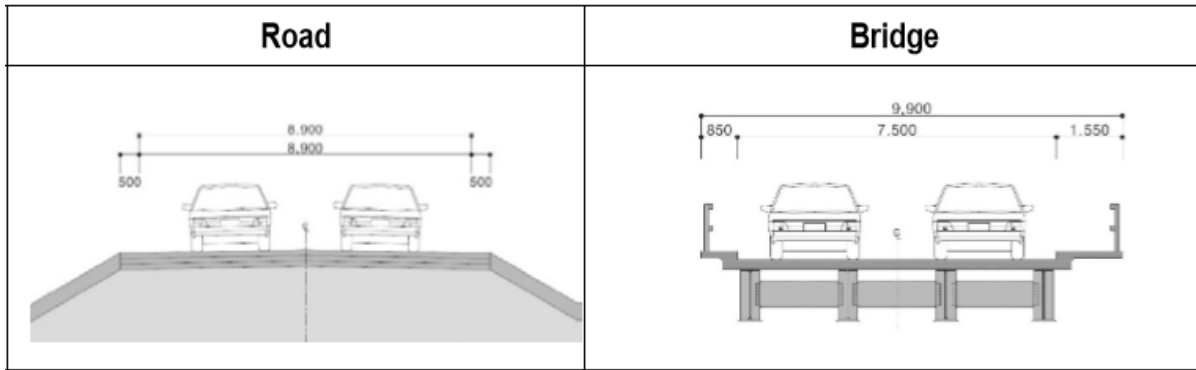

**1. New bridges**

39. Design of new bridges with double-lane (including footpaths) is based on Australian Standards 5100 except for those areas where relevant PNG Standards have been published. Design Truck Load applies with T44.




**Figure 3-3: Cross Section Layout for new bridge**

40. **New bridge type:** Two types of new bridge – two integrated lanes bridge and two separated lanes bridge are considering for replacement the existing bridges. The options of new bridge types are depicted in the following figure.


Classification	Two Integrated Lanes	Two Separated Lanes
Type	<p>Existing One Lane Bridge</p>  <p>↓</p> <p>Construction of two Integrated Lanes Bridge after Demolition of Existing Bridge</p> 	<p>Existing One Lane Bridge</p>  <p>↓</p> <p>Construction of Two Separate Lanes Bridge after Demolition of Existing Bridge</p> 

**Figure 3-4: New Bridge Type Selection**

41. Construction of new bridges will include:
- i. Installation of bailey bridge and construction of new bypass road,
  - ii. Removing superstructure and substructure of the existing bridge from a existing road,
  - iii. Construction of start and end abutments of the new two lanes bridge,
  - iv. Transport the girders form the assembly site to the bridge construction site,
  - v. Step-by-step construction and installation of the girders by two cranes,
  - vi. Concrete placement and pavement of bridge deck of the new two lanes bridge,
  - vii. Adjustment of road alignment according to the new two lanes bridge,

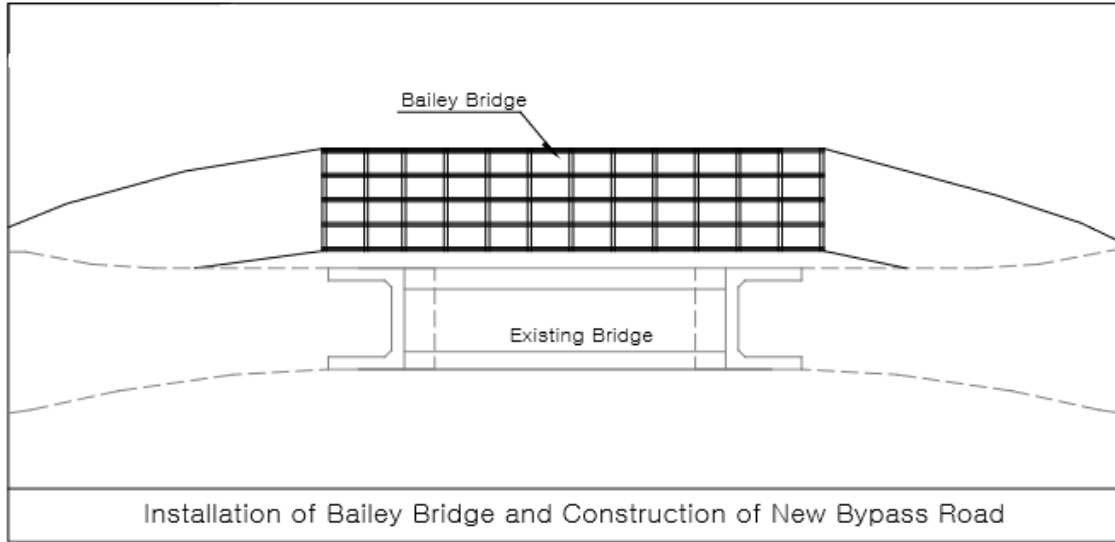

**Figure 3-5: Site Layout of Single Span Bridge Construction**

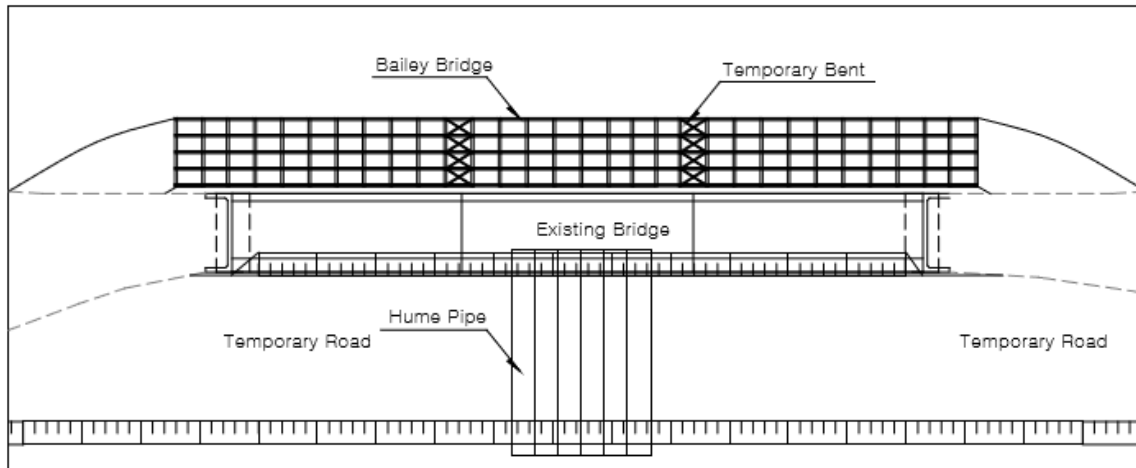

**Figure 3-6: Site Layout of Multi Span Bridge Construction**

## 2. Repair and reinforcement

42. Repair/Reinforcement Plan with Damaged Bridge Items: There are various damages and repair methods for the structure, but no bridges requiring massive repairs were found in the bridges. Grouping the repair/reinforcement items required for all the target bridges, representative repair/reinforcement plans for each damage are as follows.

- i. Spray cleaning and re-painting,
- ii. Cleaning the carriageways,
- iii. Repair the surface of decks, rails of walkways,
- iv. Improvement of the drainage system on the side of the roads,
- v. Installation of safety signs, and lane markings.

#### 4. DESCRIPTION OF THE ENVIRONMENT

43. The description of the environment presented below, is based on the baseline survey, and the collected secondary information.

##### A. Physical Environment

###### 1. Natural Conditions

44. **Geography:** The Volume II, under SHHIP-tranche 2 covers a physically and culturally diverse environment, beginning in the undulating highland valleys of Western Highlands Province (WHP) and Jiwaka, through to rugged mountains in Simbu. Much of the terrain is rugged with very high mountain ranges, steep valleys and fast flowing rivers, which, together with fragile geological conditions, high rainfall and a highly dispersed population, makes the road network difficult to develop and maintain.

45. **WHP** includes the Hagen Range, Mt Giluwe (second highest in PNG), and the mountains of the Sepik-Wahgi Divide. Altitude varies from 600m to over 4000m. Most people live within an altitude range of 1400-2200m. Average rainfall varies between 2300mm and 4000mm. The province has some of the most productive small holder agriculture and coffee plantations in PNG, and there is also some large-scale capital-intensive farming and plantations. People in the Wahgi, Baiyer, Lai and Nebilyer Valleys earn high incomes from sale of fresh produce and coffee. English potatoes, onions and garlic are grown at higher altitudes above 2100m, where Arabica coffee cannot be grown. The HH runs through the Wahgi Valley, but only a short distance of about 2.9 km is within the scope of the Project – from the Kagamuga airport turn off to the Jiwaka border where the road crosses the large Wahgi River. Population density is high in the Wahgi Valley with 163 people per km<sup>2</sup>. There is a lot of in-migration with people seeking better access to services, more productive environments, and wage employment.

46. **Jiwaka**, a new province recently carved out of WHP, includes the Kubor Range, the plains and swamps of the Wahgi Valley, the Minj Valley, the Jimi Valley, and the northern side of the Sepik-Wahgi Divide. It shares a long northern border with Madang province and a southern border with both Simbu and Southern Highlands provinces. The Wahgi and Minj valleys have over 155 persons/km<sup>2</sup> and people near Minj especially, are constrained by land pressure. Average annual rainfall ranges between 2300mm and 4000 mm, increasing from north to south. Most people live between 1400m and 2000m, though the highest point in the province is over 4000m. (Mt Kabangama and Mt Keageraga). People in the central area of the province along the HH have relatively high incomes from the sale of coffee and fresh food. Agriculture is dominated by moderate intensity sweet potato production, using peanut rotations, drainage, tillage, mounding and bedding. Small businesses along the HH are an important source of non-agricultural income.

47. **Simbu Province** includes the highest mountain in PNG, Mt Wilhem, the densely settled Wahgi Valley in the west of the province, and to the south, the lowlands south of Karimui and the Purari Valley. The Chimbu and Koronigl rivers flow south from the slopes of Mt Wilhelm into the Wahgi Valley. Altitude varies from 300m in the Purari Valley in the south to over 4,500m on the summit of Mt Wilhelm. Average annual rainfall varies from 2200mm to 4000mm and increases from north to south. Agricultural incomes are relatively low in the higher mountainous terrain due to steep slopes and weather conditions. Cash income comes from coffee, root crops, fresh vegetables, and firewood. In contrast to WHP and EHP there are no large coffee plantations. The population density overall is 43 per km<sup>2</sup>, but this masks the fact that for occupied areas, the population per square kilometer is 2,575, and there is increasing pressure on agricultural land.

Incomes are constrained by the difficult terrain, high altitude frosts, and lack of market access of many areas.

48. **EHP:** EHP includes the Bismark Range (3,500m), and the Upper Ramu Valley in the north of the province, but the Highlands Highway runs through the valleys of Asaro, Benabena and Dunantina, all of which are in the agriculturally very productive and relatively well-off northern region of the province which supports high intensity gardening. The population density is relatively high averaging of 38.8 per km<sup>2</sup>, while in Goroka district it is very high at 243 per km<sup>2</sup>. There is high potential for agriculture, but this is complicated by the population pressures, and high rates of in-migration. The province divides into two on the basis of the physical environment and level of development. The northern valleys are economically vibrant with intensive smallholder coffee production and good road access to markets in Goroka and Lae. The Asaro Valley is an example of this, with fertile soils, low slope gradients, mild temperatures, optimum rainfall and ample sunlight. The south of the province is mountainous, remote and poor. To the east, the HH drops sharply over the Kassem Pass down to the plains of the Markham Valley in Morobe Province. Average annual rainfall is between 1800mm and 2800 mm with a moderate to long dry season in the eastern half.

49. **Topography Conditions:** Volume II includes works on the 165 Km section of Highlands Highway from Jogi River Bridge (Km 298+900) to Whagi River Bridge (Km 463+900) and includes twenty-seven (27) bridges. The current condition of this section is determined by specific topographical and soil characteristics, and is divided into four zones as follows:

- i. **Zone 1** is from Jogi River Bridge (Km 298+900) to Magiro (Baikabai) River Bridge (Km 348+400) at the border between Eastern Highlands and Chimbu Provinces, a total of 49.5 km. It includes 8 double-lane bridges, one single-lane bridge and one culvert (baily bridge, Km 299+700). In addition, the road crosses many small streams running under the road through culverts. The crossing streams are narrow with fast running water and highly variable discharges.
- ii. **Zone 2** covers all the Highlands Highway in Chimbu Province (Km 348+400 to Km 404+535), from Magiro bridge to Miunde bridge, a total of 57 km. It includes three (3) double-lane, one (1) single-lane bridge and one (1) culvert (Km 398+450). The crossing streams are narrow with fast running water and highly variable discharges. Although much of the land adjacent to the road has a low-medium incline towards the road, there are many stretches with steep to very steep inclines to the road. These stretches face a risk of rock or landslides. This risk is compounded by the nature of the soil in Chimbu which is known to facilitate instability. The water table appears high and water can be observed exfiltration from the soil at many points. Side drains are largely absent or ineffective.
- iii. **Zone 3** starts at Miunde bridge (Km.404+535) at the border between Chimbu and Jiwaka Provinces and travels to Ambeke Bridge (Km 425+000), a total of 21 km. It includes five (5) single-lane bridges. In addition, the road crosses some small streams running through culverts, and the streams are fast running and narrow, with variable discharges. In general, the land adjacent to the road has a low-medium incline to the road, although some stretches in this Zone lie next to very steep inclines with a high danger of rock or landslides. The water table appears high and close to the surface at many points. Side drains are largely absent or ineffective.
- iv. **Zone 4** is from Ambeke Bridge (Km 425+000) to the Kagamuga (Km 463 + 900) airport turn-off, a total of 42 km, mostly in Jiwaka province and only the final 3km lying in Western Highlands Province. It includes four (4) double-lane bridges and three (3) single-lane bridges. It also crosses some small streams running through culverts. In general, the land directly next to the road is low medium inclined to the road and there

appears little danger of rock or landslides. Side drains are absent or ineffective at some points. The water table appears close to the surface at some points.

50. **Geological Conditions:** Based on secondary data, PNG can be generally divided into three geotectonic regions -southwestern, central and north eastern (Davies, 1976), each of which is characterized by different geological features. The Highlands Highway runs through the central geotectonic region, which has developed from tectonism, volcanism and sedimentation through the Quaternary, Mesozoic and Cainozoic periods. For the purpose of this subproject the region can be sub-divided further into two sub-regions, Central Highlands and Sepik-Markham Plain.

51. The Highlands have many defining geographical characteristics some of which are particularly pertinent to this study. First is the prevalence of sharp relief. There is very little flat land in the highlands and a large proportion of the land is steep to very steep. Second is the highly fragmented nature of the watersheds. Much of the Highlands are made up of small and micro-catchments. Third, there are large areas with loose soil and large areas with clay-based soil and large areas where the water table is very high. This latter has resulted in many damp or swampy areas. These geographical characteristics contributed to historical impenetrability of the Highlands; until the middle of the 20th century the Highlands were almost entirely isolated from the rest of the country and the world.

52. The Eastern Highland is characterized mainly by crystalline rocks (metamorphic, intrusive, and volcanic) and by strong faulting and structural complexity (Davies, 1976). The road corridor of these highway sections passes mainly through Miocene deposits such as siltstone, conglomerate, volcanic, granodiorite, diorite, gabbro, limestone and mudstone.

**Table 4-1: Geology at Critical Sections**

Road Section and Area	Geological Sub-Region	Geological Features (Rock Type)
Bena Bena to Goroka	Central Highlands	Unconsolidated alluvial and calcareous deposits.
Daulo Pass to Watabung	Central Highlands	Sedimentary – mixed including undifferentiated calcareous deposits, Igneous rocks – mixed including undifferentiated intrusives.
Chuave Gap through Kundiawa to Koronigl	Central Highlands	Dominantly sedimentary rocks, mainly calcareous deposits, shales, mudstones and greywackes. Limestone.
Kaugle area to Kireni	Central Highlands	Dominantly volcano-alluvial deposits and pyroclastics.
Lumbi	Central Highlands	Composed of sedimentary rocks, mainly calcareous deposits.

Source: Volume 2-Environmental Impact Assessment, Highlands Highway Rehabilitation Project (WB/SMEC 2002)

53. **Soils:** The project area<sup>7</sup> can be divided into two groups with respect to soil types. They are (i) lowland plains soils and (ii) valley soils.

54. Lowland plains soils are generally characterized by soils of the plains and dominated by well to imperfectly drained, undifferentiated soils and slightly to moderately weathered soils with altered B horizons.

<sup>7</sup> Initial Environmental Examination Report, SHHIP, February 2017



55. Valley soils are generally characterized by soils of the valleys. The land in these highway sections is dominated by strongly weathered to poorly drained soils with finer textured subsoils. The soils associations of the above major soil groupings are summarized in Table 4-2.

**Table 4-2: Summary of Soil Types at Critical Sections**

Area(s)	Major Soil Grouping	Soil Association
Weigh Bridge to Yalu Creek	<b>Lowland Plains Soils:</b> Slightly to moderately weathered soils with altered B horizons	Dominantly Eutropepts Subdominantly Troporthents
	<b>Lowland Plains Soils:</b> Well to imperfectly drained undifferentiated soils	Subdominantly Tropofluvents, Hapludolls, and Fluvaquents or Psammaquents
Mutzing through Zumin, Atsunas, Watarais to Gusap	<b>Lowland Plains Soils:</b> Soils with thick, dark topsoil and undifferentiated soils subjected to seasonal moisture stress	Subdominantly Haplustolls, Ustipsamments or Ustifluvents, and Ustorthents
Kassam Pass Summit through Yonki Dam to Umbaka Creek	<b>Soils of the Valleys:</b> Strongly weathered, poorly drained soils with finer textured subsoils	Subdominantly Plinthaquults, Plinthaqualls, Argiaquolls, Plinthohumults or Tropofluvents
Komperi Primary School to Avanmofi Primary School	<b>Soils of the Valleys:</b> Well to imperfectly drained undifferentiated soils	Subdominantly Tropofluvents, Hapludolls Fluvaquents or Psammaquents
Bena Bena to South of Goroka	<b>Soils of the Valleys:</b> Strongly weathered, poorly drained soils with finer textured subsoils	Subdominantly Plinthaquults, Plinthaqualls, Argiaquolls, Plinthohumults or Tropofluvents

Source: Volume 2-Environmental Impact Assessment, Highlands Highway Rehabilitation Project (WB/SMEC 2002)

56. **Geomorphology:** Most of highlands comprise of denudational landforms characterized by fluvial erosion and mass movements. Ridges and deep narrow valleys with steep sides (ravines) are the major land features. However, some areas comprise of depositional landforms.

## 2. Meteorological and Climate Conditions

57. **Meteorological Conditions:** PNG is a tropical country lying roughly between latitudes 2° S and 12° S. The main climate drivers are the El Niño Southern Oscillation (ENSO) and, to a lesser extent, the position of the South Pacific Convergence Zone. ENSO is considered to have a weaker influence on the northern part of the country. There is little variation over the year in terms of maximum and minimum temperatures. The temperature in Port Moresby rarely rises above 32°C. The wet season is from November to April and the dry season from May to October, although, the seasonality of rainfall is considered rather weak except for the region around Port Moresby.

58. Rainfall across PNG exhibits high spatial and temporal variability. For example, annual average rainfall in the capital Port Moresby is 1190mm, whereas at Kavieng (on New Ireland Island) it is 3150 mm. Year-to-year variability is mostly driven by the El Niño Southern Oscillation which has two extreme phases (El Niño and La Niña) and a neutral phase. Generally, El Niño years are drier, and the La Niña are wetter and lead to more flooding and landslides. El Niño is also associated with a late start to the monsoon. Finally, only southern PNG is affected by tropical cyclones and these are not considered to significantly affect rainfall in the Highlands.

59. Generally speaking, the HH passes through two climatic regions: the Highlands, and the Markham Valley. The Highlands lie in a region classified as warm and wet with no marked dry season; the Markham Valley lies in a region classified as hot with a marked dry season. The main

threats posed to the Highway in the Markham valley from rainfall originates from intensive rainfall in the surrounding catchments – not from the rain in the valley itself.

60. **Climate:** The Highlands Highway passes through two major climatic regions. The Markham Valley falls within the Koeppen Aw climate classification. According to McAlpine (1983), this climate classification is described as hot with a marked dry season. The Highland Region falls within Koeppen Cfb climate classification. This climate is warm and wet with no marked dry season (McAlpine, 1983).

61. The greatest climate related threat is extreme rainfall of short duration (within a 24hour period). Prolonged rainfall also presents a risk as the water accumulates. There are no significant risks associated with high temperatures or strong winds. Both short-term and longer-term rainfalls exhibit strong temporal variability. Further, there is also some evidence of spatial variability in the maximum intensity of short-term rainfall and in annual rainfall. Notably, the storms causing extreme rainfall to appear generally small in geographical size.

62. **Rainfall<sup>8</sup>:** The data available on rainfall in the Highlands is dispersed and incomplete. Data from various sources was collected in order to construct the most accurate and most complete picture of rainfall, however, this remains far from complete. Fifty years of annual rainfall was obtained for one site. With regards to daily rainfall, a total of 11 years data spread over 7 points in the Highlands was obtained.

63. The main findings for the Highlands<sup>9</sup> are:

- i. Annual rainfall in the Highlands is highly variable temporarily. For example, at Mendi, during a 52-year period from 1951, the annual rainfall ranged from 1,570 mm to 4,015 mm.
- ii. There is some evidence that annual rainfall in the highlands is also variable spatially – i.e. different sites along the highway have different average annual rainfalls and different maximum annual rainfalls. For example, annual rainfall, at four highlands cities, over the three-year period 1998 – 2000, ranged from 1,282 mm (at Kainantu) to 3,026 mm (Mt. Hagen). The region is subject to intensive rainfall events. Although the data is very limited, the highest recorded rainfall within a 24-hour period was 110 mm (recorded at the 20 km marker along the Mendi-Kandep highway).
- iii. The intensive rainfall events appear to cover a small geographical area. That is, an intensive rainfall event may strongly impact one catchment but not touch a neighbouring catchment. For example, on the day that 110 mm of rain was recorded at the 20 km marker along the Mendi-Kandep highway, the rainfall at Mendi and Kandep, both considerably less than 40 km distant, was only 5.7 and 5.5 mm, respectively.
- iv. There is some evidence of spatial variability in the maximum intensity of short-term rainfall – i.e. the maximum rainfall in a given time (2 or 24 hours) with a given return period (say 2 years) at one site may be quite different from that at a nearby site. For example, for Goroka, the highest recorded daily rainfall over the five years for which data is available is 65.6 mm; however, at the 20 km marker along the Mendi-Kandep highway, more than 80 mm was recorded six times during a six-month period in 2013.
- v. There is no data available for rainfall in time lapses shorter than 24 hours.
- vi. There is insufficient data to understand any trends in annual rainfall in the Highlands. However, the limited data from Mendi is consistent with general findings for the Pacific that annual rainfall may be increasing slightly, and that inter-annual variability may be increasing slightly.

---

<sup>8</sup> Climate Change Vulnerability Assessment Report of SHHIP was conducted on June 2017


<sup>9</sup> Climate Change Vulnerability Assessment Report of SHHIP was conducted on June 2017

64. Average rainfall records from 1998-2000 for Lae, Nadzab, Kainantu, Goroka, Mt Hagen and Mendi along the road alignment are presented in Table below. Based on these records, over the three-year period from 1998 to 2000, average annual rainfall for the Lae and Nadzab was 4595.1mm and 3836.2mm respectively. Nadzab, in particular, exhibited high monthly variations in rainfall with no seasonal pattern apparent. The average for Lae was the highest for the project area. Kainantu had the lowest average annual rainfall over this three-year period with 1282.3mm. For Kainantu and the other highlands locations the months around May to July were the driest. Figure 4-1 compares the average monthly rainfall for the lowland and highland regions.

**Table 4-3: Average Monthly and Annual Rainfall for Highlands Highway 1998 – 2000**

Location	Mean Monthly Rainfall (mm)												Annual Total
	Jan	Feb	Mar	Apr	May	Jun	Jul	Aug	Sep	Oct	Nov	Dec	
Lae	312.5	229.2	272.9	458.6	337.4	480.7	425.7	488.3	454.4	442.9	395.1	297.4	4595.1
Nadzab	354.2	225	143.2	709.3	97.9	614.4	234.1	170.5	366	612.6	87.8	221.2	3836.2
Kainantu	161.5	225.3	165.5	189.0	133.5	51.5	50.0	76.3	119.0	156.7	124.7	179.0	1282.3
Goroka	200.9	210.9	167.1	185.7	51.7	85.8	45	108.2	80.5	144.2	142.8	218.8	2879.1
Mt Hagen	354	379.6	336.3	241.0	166.6	170.0	133.3	211.33	167.0	218.0	368.0	280.3	3025.6
Mendi	232.4	209.6	227.2	296.1	156.9	175.1	247.8	396.3	169.6	150.3	215.3	157.2	2053.3

Source: National Weather Service – Papua New Guinea

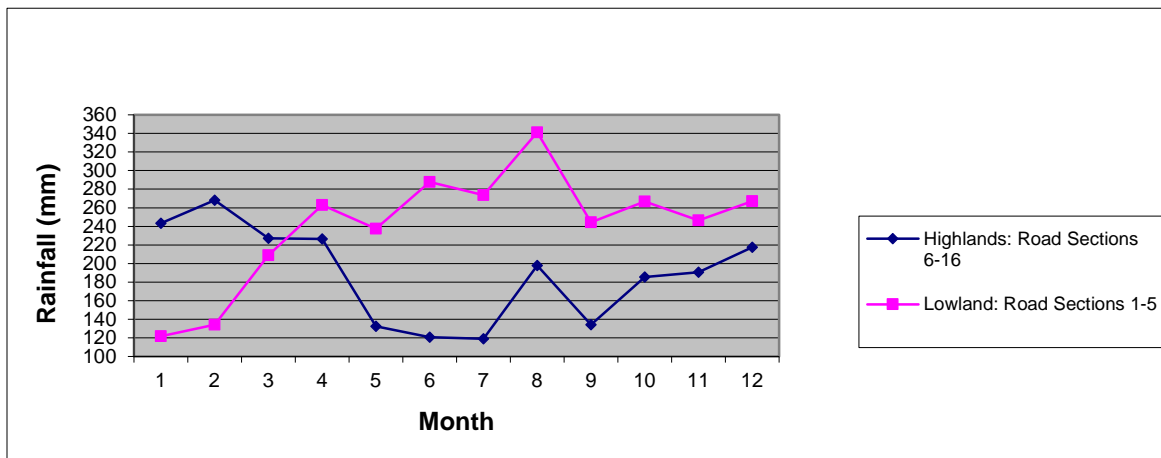

Source: National Weather Service, Papua New Guinea

**Figure 4-1: Mean Monthly Rainfall for the Highland and Lowland Regions, 1998-2000**

65. **Temperature:** Temperatures differ between the lower Markham valley and the Highlands. SMEC (2002) reported that temperature data for the highlands is not available from the National Weather Service. SMEC (2002) using various sources reported a mean annual maximum temperature of 23.7°C and mean annual minimum temperature of 13.0°C (both for Mount Hagen area). It reported that similar temperatures can be expected along the length of the highway within the highlands. However, it reported that temperatures in the lowlands are consistently hotter, falling between 25°C and 35°C and rarely falling below 20°C.

66. Temperatures for the two regions differ, with the highlands experiencing cooler conditions. Temperature data for the highlands is not available from the National Weather Service. However,

Warren (1988) recorded a mean annual maximum temperature of 23.7°C and mean annual minimum of 13.0°C for Mount Hagen area. Similar temperatures can be expected along the length of the highway within the highlands. Temperatures in the lowlands are consistently hot, falling between 25°C and 35°C and rarely falling below 20°C. The climate is humid and tropical.

67. **Wind:** Typically, the Northwest and Southeast trade winds dominate the broad-scale surface wind patterns over the project area. The Northwest winds are predominant during the (monsoon) season: mostly between November and March. April and May are transitional months where the wind starts to shift to southerly. The south-easterly in contrast are dominant from months June to August with September and October being transitional months when wind is variable.

68. **Hydrographical Conditions:** The Highlands Highway traverses many waterways (a combined total of 52 rivers, creeks, including large rivers in the Markham River and Ramu River valleys. Many of these large rivers carry high sediment loads. Some have unstable bed slopes and bed width. Importantly, evolving river morphology poses threats to existing bridges along the highway. This is particularly so at the Yalu, Maniang, Gusap and Bora rivers.

### 3. Natural disaster

69. **Seismicity:** Papua New Guinea lies in the collision zone between two major lithospheric “plates” of the earth’s surface, the Pacific Plate and the Australian Plate. Major earthquakes and volcanic activities are associated with this collision zone. These can cause destruction of properties, injury and death. There are no records of volcanic activity in the project area in the last century, but earthquakes are very common.

70. There are four main earthquake zones in PNG, according to Everingham and Ripper (1976), and they are: (i) most active zone of shallow (0-69 km) earthquakes; (ii) moderately active zone of shallow (0-69 km) earthquakes; (iii) zone of intermediate depth (70-299 km) earthquakes; and (iv) zone of deep (300-600+ km) earthquakes.

71. Road sections in Morobe Province are in the transitional area between earthquake zones (i) and (ii). The road sections in the Eastern Highlands and Simbu Provinces include earthquake zones (i), (ii) and (iii) experiencing both shallow (0-69 km) and intermediate depth (70-299 km) earthquakes. The highway sections in the Western Highland and Southern Highland Provinces experience moderately active shallow (0-69 km) earthquakes (earthquake zone (iii)).

72. Overall, seismic activity along the Highlands Highway is mostly evidenced by landslides and subsidence and to a lesser extent, changes in watercourses. The landslides have an enormous impact on the Highway and those who use it. Subsidence is also responsible for many of the degraded critical areas along the highway.

### 4. Climate change

73. **Climate Change in the PNG Highlands:** The climate change vulnerability study<sup>10</sup> takes the existing best available climate change projections for PNG and uses these to determine how rainfall in the Highlands (and other parameters) may evolve in coming decades. PACCSAP findings, the most comprehensive and recent studies available on climate change in the Pacific were completed with the support of the Australian Government under the Pacific - Australia Climate Change Science and Adaptation Planning (PACCSAP) Program in 2014. This work was undertaken through partnerships between BoM, CSIRO and Meteorological Departments in the Pacific island countries. The summary findings for Papua New Guinea are presented below. It is important to note that the models and knowledge are not sufficiently resolved to focus on the PNG

---

<sup>10</sup> A Climate Change Vulnerability Assessment of SHHIP was conducted on June 2017

Highlands. The information and understanding, to the extent that it does exist, exists at the level of PNG as a whole.

- i. **El Niño and La Niña.** These events are projected to continue, but there is little consensus as to whether these will be more or less frequent, or whether they will be more or less intensive;
- ii. **Temperature.** Annual mean temperatures are projected to continue to rise across PNG. Relative to 1995, they are projected to rise by 1.1°C by 2030, and, by 2090, a further rise of 0.4 – 4.2°C is projected, depending on scenarios and models used;
- iii. Extreme temperatures are also projected to continue to rise, by approximately the same amount as the annual mean temperatures. Further, the frequency of extremely hot days is projected to increase;
- iv. **Annual rainfall.** The long term average rainfall is projected to increase in most areas of PNG. By 2050, annual rainfall is projected to increase by 6% to 8 % depending on the scenario (the entire range of possible increases, using all models, is from -3 to +14%). In addition, rainfall is projected to be more concentrated into the rainy seasons. Based on this, to avoid risk, it may be appropriate to assume that the average annual rainfall will increase by at most 14% by 2050. This figure will be used where pertinent through the remainder of this report;
- v. **Extreme rainfall.** The maximum intensity of rainfall is also projected to increase, although this projection is subject to a lower level of confidence than for annual average rainfall. The PACCSAP report states that, by 2030, the current 1-in-20 year daily rainfall amount is projected to increase by 12-14 mm; and by 2090, it is projected to increase by 21-55 mm. By 2090, the current 1-in-20 year daily rainfall event will become, on average, a 1-in-7 year or even a 1-in-4 year event.

74. The Pacific Climate Futures program has been preparing regionalized climate change projections for application at the national scale. Dynamic downscaling of Global Circulation Models (GCMs) to 60km and 8km grids undertaken for PNG is summarized in the following Table. Given that the expected design life of the road improvements anticipated for this program is 20-30 years, these projections consider 2030 and 2055 timeframes only.

**Table 4-4: Climate Change Projections**

<b>Climate variable</b>	<b>2030 Projections (annual average)</b>	<b>2055 projections (annual average)</b>
Surface air temperature (°C)	+0.8°C	+1.45°C
Total rainfall (%)	+1.2%	+8.8%
Humidity (%)	+0.1%	+0.15%
Sea surface temperature (°C)	+0.7 ±0.4	+1.3 ±0.5
Mean sea level (cm)	+10 (5-14)	+20 (9-30)

Source: Pacific Climate Futures Program; Climate Futures Exploration Tool (February 2012).  
 Note: Ensemble mean data for 2030 and 2055 projections for A1B (medium emissions scenario)

## 5. Natural Resource and Minerals

75. The discovery of Panguna showered that Papua New Guinea was a major porphyry Copper province, and greatest potential for further production lines in this type of deposit. Promising Nickel values have been found in weathering profiles overlying ultramafic rocks.

76. Large-scale mining for minerals such as gold and copper have resulted in both direct impacts from forest clearing (including for infrastructure, access roads, and associated processing infrastructure) as well as extensive crossboundary indirect impacts from pollution and runoff of tailings. The Figure 4-2 and Table 4-5 are depicted the minerals related to the subproject area.

77. **Gold and Silver:** Gold (and alloyed Silver) has been mined in Papua New Guinea since its discovery in Papua in 1888. Until the opening of Panguna mine, almost the Gold had been won from alluvial deposit; primary loges had been worked in mist of the goldfields but had contributed only a small proportion of the goal produces.

78. **Nickel and Cobalt:** Economic concentration of Nickle and Cobalt can be formed by the deep weathering of ultramafic rocks, and Papua New Guinea has large areas of such rocks the chances of finding an economic deposit were thought to be good. However, most of the areas containing ultramafic rocks are of high relief, and consequent rapid erosion prevents the accumulation of a deep-weathering profile.

79. The search for Nickle/Cobalt concentrations has therefore been confined to areas of low relief. Nickeliferous sulphides have been found in boulders from streams draining the Papua ultramafic Belt and Marum Basic Belt, but the only occurrence in the Adau Rever, east Papua. This has been drilled but was of no commercial significance.



Figure 4-2: Main Mineral Occurrences of Papua New Guinea<sup>11</sup>

Table 4-5: Active Mines in PNG with type of waste (tailings) disposal and annual tailing waste discharged into receiving water bodies.

Mine	Province	Mineral	Open	Type of disposal	Tailings disposal/Year
Ok Tedi	Western	Gold, silver and copper	1984	Riverine discharge	>22million tonnes
Porgera	Enga	Gold and silver	1989		
HiddenValley	Morobe	Gold and silver	2009		
Ramu Nickel	Madang	Nickel and cobalt	2012		

<sup>11</sup> A Geological Synthesis of Papua New Guinea, Bureau of Mineral Resources, Geology and Geophysics, Department of Natural Resources, Australian Government Publishing Service, 1977.

## B. Environmental Quality

80. To assess the current status of environmental quality, the SHHIP's Team has undertaken an environmental monitoring study during March and April 2019 as follows:

- i. Ambient air quality: The parameters of PM10 and PM2.5 were sampled and analysed in one-hour averaging period sampling at sensitive receptors along the corridor including schools and residential areas.
- ii. Noise level: In-situ noise level measurements were conducted in the same location as the selected ambient air quality measurement.
- iii. Surface water quality: Parameters of temperature, pH, and turbidity were sampled in-situ by portable sampling equipment. Parameters of Biochemical Oxygen Demand (BOD), Chemical Oxygen Demand (COD), Total Nitrogen, Total Phosphorus, Total Suspended Solids (TSS), Oil and Grease, and Total Coliform Bacteria were sampled and analysed at the Laboratory of Lae University of Technology.
- iv. Groundwater quality: Parameters of temperature, pH, and turbidity were sampled in-situ by portable sampling equipment. Parameters of Total Coliform Bacteria, E. coli, Arsenic, Chloride, Flouride, Total Dissolved Solids, Nitrate, Nitrite, Hardness, Sodium, and Iron were sampled and analyzed at the Laboratory of Lae University of Technology.

### 1. Air quality

81. The samplings of air include public sites, bus stops, marketplaces, schools and health centres, which are located along the project corridor. Air monitoring locations are as the following table.

**Table 4-6: Air Monitoring Locations**

No.	Monitoring location	Chainage (Km)	Coordinate (x;y)	Sampling Code	Description
1	Harpin Black spot	343+150	6°4'56"S 145°10'4"E	AQ1	Few villages around the corner, few stores
2	Kundiawa Town	379+020	6°1'156"S 144°48'22"E	AQ2	main commercial centre of the province
3	Kondom Secondary School	385+100	5°59'29"S 144°56'10"E	AQ3	School and Health centre
4	Mingende Market	391+550	5°57'55"S 144°53'26"E	AQ4	A very busy market, bus stops, school and villages
5	Ganigle Camp site	401+050	5°56'37"S 144°49'9"E	AQ5	Villages and campsite
6	Ganigle Quarry Site	401+440	5°56'581"S 144°49'03"E	AQ 6	Village houses, quarry area
7	Minj Junction	422+350	5°52'52"S 144°40'50"E	AQ7	A very busy market in Jiwaka Province; Villages, schools
8	Kujjip Junction	436+150	5°50'30"S 144°34'59"E	AQ9	Busy market, bus stops, Kudjip Hospital
9	Apien Junction	453+950	5°48'52"S 144°29'23"E	AQ9	A junction where people come to market, buy food

No.	Monitoring location	Chainage (Km)	Coordinate (x;y)	Sampling Code	Description
10	Tuman Junction	453+450	5°48'52"S 144°26'51"E	AQ10	Junction where people exchange goods, and services
11	Kindeng Junction	453+950	5°48'52"S 144°26'51"E	AQ11	Busy junction, market, shopping
12	Avi Junction	461+250	5°49'27"S 144°23'11"E	AQ12	Busy market, small stores
13	Waghi Market	467+750	5°50'16"S 144°19'39"E	AQ13	Busy market, stores and shops cramp
14	Kagamuga Junction	470+850	5°50'26"S 144°17'59"E	AQ14	Stores, people moving back and forth for daily activities

82. **Air quality result:** The parameters of PM10 and PM2.5 were sampled and analysed at 14 locations of sensitive receptors along the corridor including schools and residential areas. As the monitoring results, the parameter of PM10 in 8 locations were from 118 – 125 ( $\mu\text{g}/\text{m}^3$ ) and higher than WHO Standards (50 ( $\mu\text{g}/\text{m}^3$ )). The parameter of PM2.5 in 4 monitoring locations were from 83-84( $\mu\text{g}/\text{m}^3$ ) and higher than WHO Standards (25  $\mu\text{g}/\text{m}^3$ ). These locations are in the Town centres and the business areas. Additionally, dust generation and resuspension also resulted from vehicles passing over unsealed roads particularly in the Highlands Highway section traversing Simbu Province and make the value of PM10 and PM2.5 higher than the standards.

**Table 4-7: Air monitoring results**

Location	Sample Code	Parameters	
		PM10 ( $\mu\text{g}/\text{m}^3$ )	PM2.5 ( $\mu\text{g}/\text{m}^3$ )
Harpin Black spot	AQ 1	6.4	3.7
Kundiawa Town	AQ 2	125.6	18.2
Kondom Secondary School	AQ 3	6.4	3.7
Mingende Market	AQ 4	125.6	18.2
Ganigle Camp site	AQ 5	24.6	83
Ganigle Quarry Site	AQ 6	218.10	84
Minj Junction	AQ 7	125.6	18.2
Kujip Junction	AQ 8	125.6	18.2
Apien Junction	AQ 9	6.4	3.7
Tuman Junction	AQ10	24.8	83
Kindeng Junction	AQ11	125.6	18.2
Avi Junction	AQ12	24.8	83
Waghi Market	AQ13	125.6	18.2
Kagamuga Junction	AQ 14	125.6	18.2
<b>WHO Standards</b>		50( $\mu\text{g}/\text{m}^3$ ) 24-hour Mean	25( $\mu\text{g}/\text{m}^3$ ) 24-hour Mean

## 2. Noise level

83. The samplings of noise were the same locations of air monitoring as the following table.

**Table 4-8: Noise Monitoring Locations**



No.	Monitoring location	Chainage (Km)	Coordinate (x;y)		Sam pling Code	Description
1	Harpin Black spot	343+150	6°4'56"S 145°10'4"E	AQ1	NL 1	Few villages around the corner, few stores
2	Kundiawa Town	379+020	6°1'156"S 144°48'22"E	AQ2	NL 2	main commercial centre of the province
3	Kondom Secondary School	385+100	5°59'29"S 144°56'10"E	AQ3	NL 3	School and Health centre
4	Mingende Market	391+550	5°57'55"S 144°53'26"E	AQ4	NL 4	A very busy market, bus stops, school and villages
5	Ganigle Camp site	401+050	5°56'37"S 144°49'9"E	AQ5	NL 5	Villages and campsite
6	Ganigle Quarry Site	401+440	5°56'581"S 144°49'03"E	AQ 6	NL6	Village houses, quarry area
7	Minj Junction	422+350	5°52'52"S 144°40'50"E	AQ7	NL7	A very busy market in Jiwaka Province; Villages, schools
8	Kujip Junction	436+150	5°50'30"S 144°34'59"E	AQ9	NL8	Busy market, bus stops, Kudjip Hospital
9	Apien Junction	453+950	5°48'52"S 144°29'23"E	AQ9	NL9	A junction where people come to market, buy food
10	Tuman Junction	453+450	5°48'52"S 144°26'51"E	AQ10	NL10	Junction where people exchange goods, and services
11	Kindeng Junction	453+950	5°48'52"S 144°26'51"E	AQ11	NL11	Busy junction, market, shopping
12	Avi Junction	461+250	5°49'27"S 144°23'11"E	AQ12	NL12	Busy market, small stores
13	Waghi Market	467+750	5°50'16"S 144°19'39"E	AQ13	NL13	Busy market, stores and shops cramp
14	Kagamuga Junction	470+850	5°50'26"S 144°17'59"E	AQ14	NL14	Stores, people moving back and forth for daily activities

84. **Noise monitoring result:** Results of monitoring indicate that the noise levels in 2 locations of Kundiawa Town and Waghi Market were 75 dBA and higher than World Bank's EHS Guidelines (70 dB or less in daytime).

**Table 4-9: Noise monitoring results**

Location	Sample Code	Average noise level (dBA)
Harpin Black spot	NL 1	56.6
Kundiawa Town	NL 2	75
Kondom Secondary School	NL 3	67.9
Mingende Market	NL 4	55
Ganigle Camp site	NL 5	66
Ganigle Quarry Site	NL 6	66

Location	Sample Code	Average noise level (dBA)
Minj Junction	NL 7	63.9
Kujip Junction	NL8	53.6
Apien Junction	NL 9	53.6
Tuman Junction	NL 10	68.9
Kindeng Junction	NL 11	58.4
Avi Junction	NL 12	68.0
Waghi Market	NL 13	75.9
Kagamuga Junction	NL14	66.3
<b>World Bank's EHS Guidelines</b>		70 dB or less (day time)

### 3. Water Quality

85. **Surface Water Quality:** Monitoring locations are presented at the following table.

**Table 4-10: Surface Water Monitoring Locations**

Sample Code	Location	Chainage (Km)	Co-ordinate	Description of Sampling Area
SW1	Asaro Bridge 2	314+650	6°0'30"S 145°18'34"E	Local people living about 200m up stream, trade stores, using water for bathing, laundry but not for drinking
SW 2	Fionoku Bridge	335+550	6°4'56"S 145°10'4"E	Houses and settlement in downstream, water using for drinking, cooking and all the house chores.
SW 3	Mangiro Bridge	348+400	6°6'069"S 145°08'246"E	Houses located along the river and using river water for bathing, laundry, recreational activities, not for drinking
SW 4	Kornigle Bridge	397+250	5°56'35"S 144°51'07"E	Villages and houses living along the river and using water river for bathing, laundry, recreational activities, but not for drinking
SW 5	Ganigle Bridge	401+450	5°56'557"S 144°48'945"E	Communities such as the Police Barracks and villages along the river use the water body for drinking, bathing, laundry and recreational activities. Near Quarry and camp site
SW 6	Miunde Bridge	404+520	5°55'39"S 144°47'33"E	Local communities using river water for bathing, laundry, fishing, recreational activities but not drinking.
SW 7	Kukpa Bridge	426+550	5°52'7"S 144°39'19"E	Community living up and down stream commonly using the river water for house chores but not for drinking.
SW 8	Ambeke Bridge	428+350	5°51'45"S 144°38'20"E	water using for washing and other house chores but not for drinking
SW 9	Damne Bridge	426+750	5°51'38"S 144°38'15"E	Community around the area use water for house chores, bathing etc. but not drinking.
SW 10	Kurumula 2 Bridge	428+650	5°50'36"S 144°37'17"E	Villages upstream and downstream used the water for bathing and laundry, not for drinking
SW 11	Kurumula Bridge 1	431+750	5°5037"S 144°35'6"E	Villages up the stream use for drinking and other house chores

Sample Code	Location	Chainage (Km)	Co-ordinate	Description of Sampling Area
SW 12	Kudjip Bridge 1	436+350 436+150	5°50'32"S 144°34'28E	Villages along the river commonly use it for house chores, shower, car wash, etc. but not for drinking.
SW 13	Komon Bridge	465+850	5°55'6"S 144°20'34E	Commonly used for car wash, rubbish dumped on the banks, community use for bathing and laundry, not for drinking
SW 14	Waghi Bridge	467+750	5°55'13"S 144°19'34E	Waste from Mt Hagen town are dumped here.

86. According to surface water analysis results, the parameters such as pH, BOD5, COD, Nitrogen, and Total P were satisfied WHO Standards. However, the parameters such as TSS and Oil and Grease were higher than the permissible value of the regulation. The reasons were that there were flooded in some areas during the monitoring time and local communities are using river water for bathing, laundry, fishing and recreational activities. The analysed results of water monitoring are presented below.

**Table 4-11: Results of Surface Water Monitoring**

Sample Code	Parameters										
	ToC (°C)	pH	DO (mg/L)	BOD 5 (mg/L)	COD (mg/L)	Nitrogen (mg/L)	total P (mg/L)	TSS (mg/L)	Turbidity	Oil and Grease (mg/L)	Coliform total
SW 1	24	7.4	5.4	1.7	7	<10	0.09	270	200	8.0	-
SW 2	24	7.4	5.3	1.5	<5	<10	<0.05	100	53	5.0	-
SW 3	17	7.35	10.8	5.4	10	-	<0.05	4.0		-	-
SW 4	22	7.2	16.7	1.3	<5	-	0.14	390		1.3	-
SW 5	20	7.81	11.3	1.5	<5	-	0.05	10		1.3	-
SW 6	23	7.53	10.9	3.9	7	-	<0.05	20		1.3	-
SW 7	24	7.4	5.1	1.7	30	<10	<0.05	70	73	7.0	-
SW 8	24	7.0	5.3	1.5	20	<10	<0.05	40	65	16	-
SW 9	24	7.3	5.2	1.4	9	<10	<0.05	27	52	61	-
SW 10	24	7.3	5.3	1.4	8	<10	<0.05	47	45	14	-
SW 11	24	7.0	5.1	1.5	10	<10	<0.05	30	84	177	-
SW 12	24	6.9	5.1	1.2	10	<10	0.48	2100	2000	77	-
SW 13	24	7.6	5.3	2.4	30	<10	0.05	150	81	8.0	-
SW 14	24	6.8	4.7	4.4	9	<10	0.06	150	200	4.0	-
<b>WHO Standards</b>			≤ 6.0	≤30	≤125	≤10	≤4	≤50		≤10	≤400

87. **Ground water:** Monitoring locations present as the following table.

**Table 4-12: Ground Water Monitoring Locations**

Sample Code	Location	Chainage (Km)	Co-ordinate	Description of Sampling Area
GW 1	Asaro (Lohuka)		6°0'42" S 145°18'56" E	A small clear ground water at the side of the road. Community use it for drinking and other house hold activity
GW 2	Guaka Spring	354+950	6° 6' 42" S 145° 6' 36"	A bus pit stop along the highway 426+550 with a few houses and a small school
GW 3	Kintinu (5mile)		6°14'29" S 145°30'37" E	Small ground water found within the vicinity of the road that. The villages control the water. It is being used for


Sample Code	Location	Chainage (Km)	Co-ordinate	Description of Sampling Area
				drinking cooking and other house hold activity

88. Parameters of Total Coliform Bacteria, E. coli, Arsenic, Chloride, Flouride, Total Dissolved Solids, Nitrate, Nitrite, Hardness, Sodium, and Iron were sampled and analysed at Laboratory. According to groundwater analysis results, the parameters of ground water were satisfied, as per the permissible value of WHO. The analysed results of the water monitoring are presented below.

**Table 4-13: Results of Ground Water Monitoring**

Parameter	GW 1	GW 2	GW 3	Standards	
				PNG	WHO
Temperature (°c)	20	22	24.1		20-25
pH	NA	7.2	NA		6.5 – 8.0
DO (mg/L)	12.1	16.7	8.8		5
TDS (mg/L)	44	300	18.1		500
Asernic (mg/L)	<0.0002	<0.0002	<0.0002	0.01	0.05
Calcium (mg/L)	5.6	89	31		75
Chloride (mg/L)	11	3.9	22		250
Coliforms, Faecal(colonies/100ml)	0	0	0		0 (CFU/100 mL)
Coliforms, Total (colonies/100ml)	0	0	0		0 (CFU/100 mL)
Colour, Apparent (Hazen)	NA		NA		Colorless
E.Coli (colonies/100ml)	0	0	0		0 (FU/100 mL)
Fluoride (mg/L)	0.1	0	0.2	0.8-1.5	1.5
Hardness (Calculation) (mg/L as CaCO <sub>3</sub> )	27	252	131	≤200	300
Iron (mg/L)	0.079	<0.001	0.016		0.3
Magnesium (mg/L)	3.1	7.2	13	≤0.5	50
Sodium (mg/L)	4.3	4.2	5	≤50	200
Turbidity (N.T.U)	NA	NA	NA		5 NTU



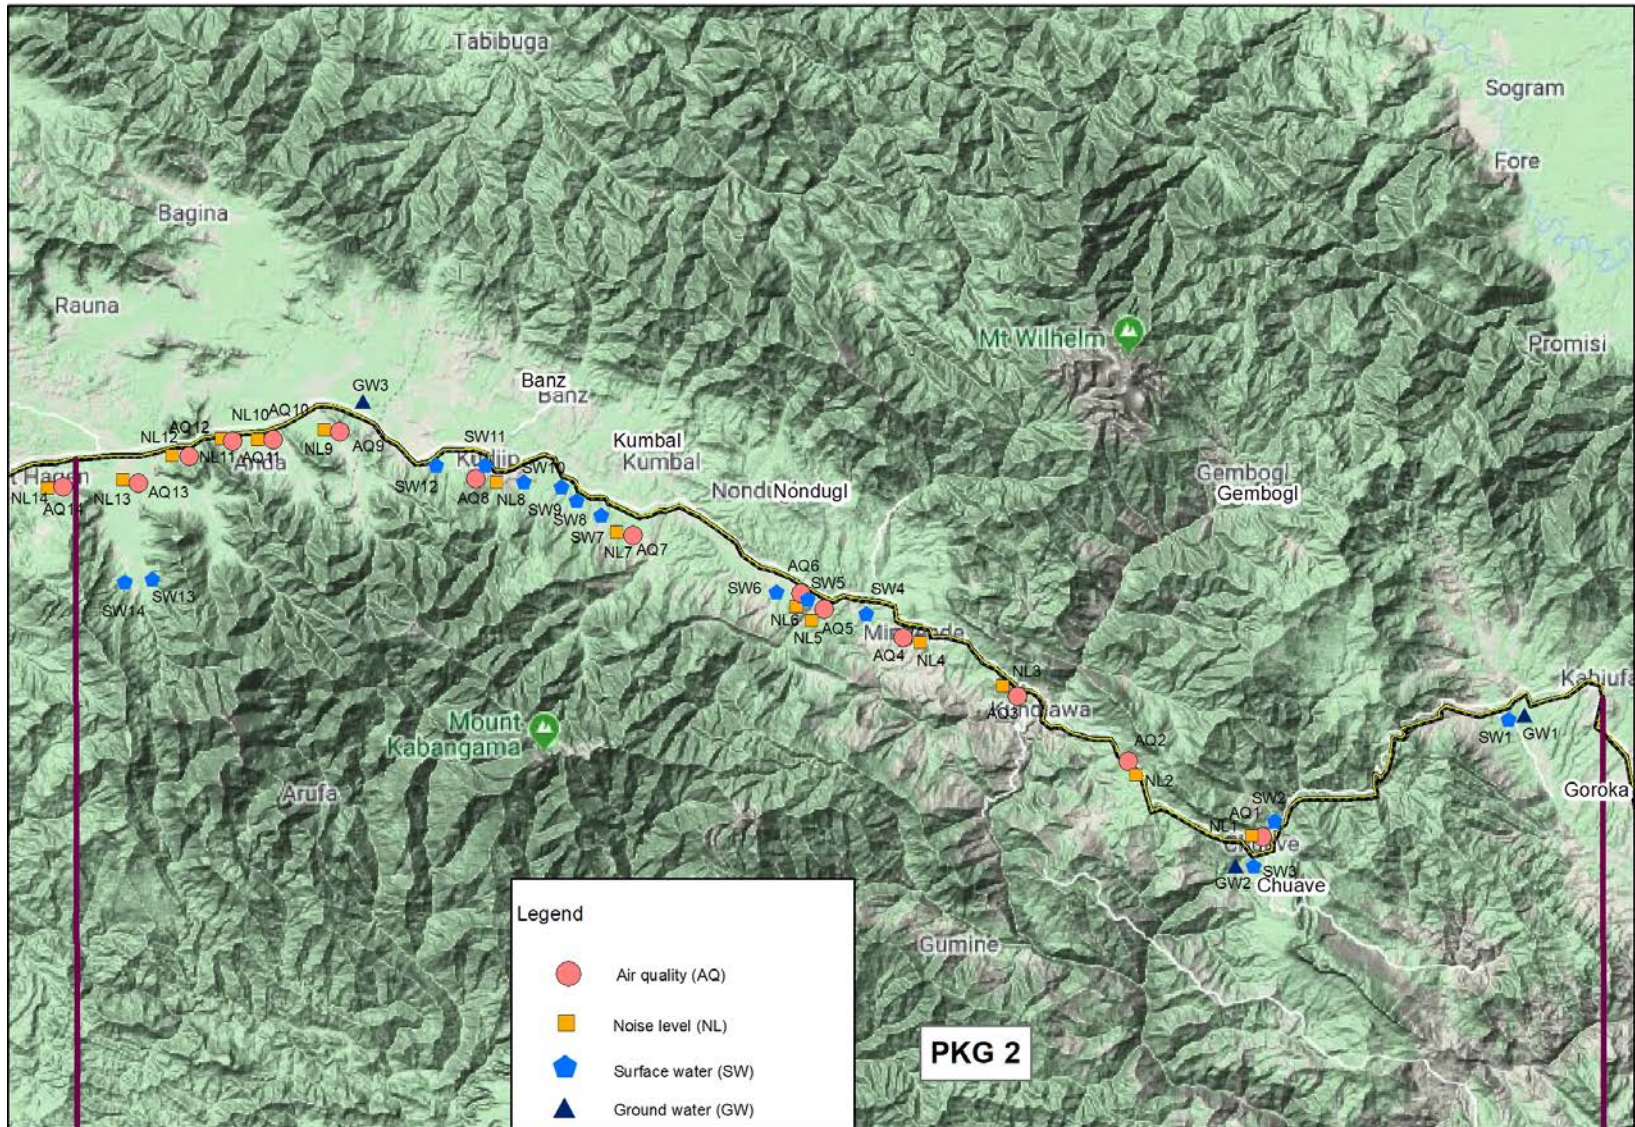

Sources: the IEE team

**Figure 4-3: Map of Baseline Monitoring Locations-Volume II**

## C. Biological Environment

### 1. Biological Environment in PNG and Highlands Region

89. Papua New Guinea (PNG) contains a wealth of biodiversity<sup>12</sup> and is one of eighteen mega diverse countries of the World, which has a high total number of species. PNG contains more than 7% of the World's biodiversity in less than 1% of the World's land area. It is home to more than 18,894 described plant species, 719 birds, 271 mammals, 227 reptiles, 266 amphibians, 341 freshwater fish species, 600 species of coral and 3000 species of reef fish. Many species remain to be discovered and documented scientifically.

90. Terrestrially<sup>13</sup>, PNG contains more than 5-7% of the world's terrestrial biodiversity in less than 1% of the land area (Ausaid 2010). PNG has more than 18,894 described plant species, 719 birds, 271 mammals, 227 reptiles, 266 amphibians, 341 freshwater fish and unknown number of invertebrate species (Vie et al. 2009). The current status of species in PNG includes: 1 extinct, 36 critically endangered, 49 endangered, 365 vulnerable, 288 near threatened, 1289 Least Concern. Moreover, 1 in 5 assessed species in PNG is endemic, with the highest number of endemic mammals globally (Vie et al 2009).

91. Species richness of PNG and World Higher Vertebrates<sup>14</sup>

**Table 4-14: Species richness of PNG**

Taxa	World	PNG (2015)	% World
Amphibians	7,360	352	4.6
Reptiles	10,119	335	3.3
Birds	10,560	813	7.7
Mammals	5,416	298	5.5
Total	33,455	1,798	5.3

92. Papua New Guinea also hosts up to 6%<sup>15</sup> of the world's flora and is considered one of the most species-rich areas in the world with high levels of species endemism of around 60%. The general consensus among authorities is that the true size of botanical inventory for Papua New Guinea as a whole is unknown and open to considerable speculation. Estimates of vascular plant biodiversity for Papuasias currently range from 11,000 species to 13,858 based on species area relationships, or 16,204 to 20,000-25,000 species calculated on the basis of orchid and fern flora of the region. It has been estimated that PNG hosts about 15% of the world's fern species with around 3,000 species, including hosting around 2,800 species of orchids accounting for about 11% of the world's total orchid species.

93. The Highlands region is quite spread in its ecology as it ranges from the highest peak at Mt Wilhelm in the Simbu province at 4509m above sea level to the lowlands of Kutubu Lake area in the Southern Highlands Province. The region is part of the Central Cordillera that outlines two ecoregions of interest, namely the Central Range Montane Rain Forests and the Central Range Sub-Alpine Grasslands (Morrison, n. d). It encompasses a variety of Australasian plant and animal communities (Wikipedia, 2020). Critical areas which are part of this region and are considered as areas of high biodiversity priority are shown on the map in Figure 4-4: Map of Biodiversity Priorities. These areas in the provinces that the proposed project will run through include Mt Gahavisuka (EHP), Crater Mountain (EHP/Simbu) and Baiyer River (WHP).

<sup>12</sup> Papua New Guinea POLICY ON PROTECTED AREAS

<sup>13</sup> Papua New Guinea's Fourth National Report to the Convention on Biological Diversity


<sup>14</sup> Papua New Guinea's Fifth National Report to the Convention on Biological Diversity, December 2017

<sup>15</sup> Papua New Guinea's Fifth National Report to the Convention on Biological Diversity, December 2017

94. In addition, most of these critical areas also form part of the Protected Area network or system as indicated on the map in Figure 4-5: Map of Protected areas. The list of Protected Areas or the proposed protected areas that are within the provinces the project will run through include Mt Gahavisuka (EHP), Crater Mountain (EHP/Simbu), Mt Wilhelm (Simbu) and Baiyer River (WHP). These protected areas do not exist near the Highlands Highway and hence, will not be directly impacted by the project.

95. The provinces of Eastern Highlands, Simbu, Jiwaka and Western Highlands where the proposed project will pass through, fall into the two ecoregions classified by Morrison (n.d). Most of the Eastern highlands, Simbu, Jiwaka and Western Highlands have sub-alpine grasslands as compared to three locations in Eastern Highlands where remnants of the Montane Forests are evident. These area Nurape River 342+850 (B#52), Kenangi River 345+200 (B#53) and Baikabai River 348+400 (B#54).




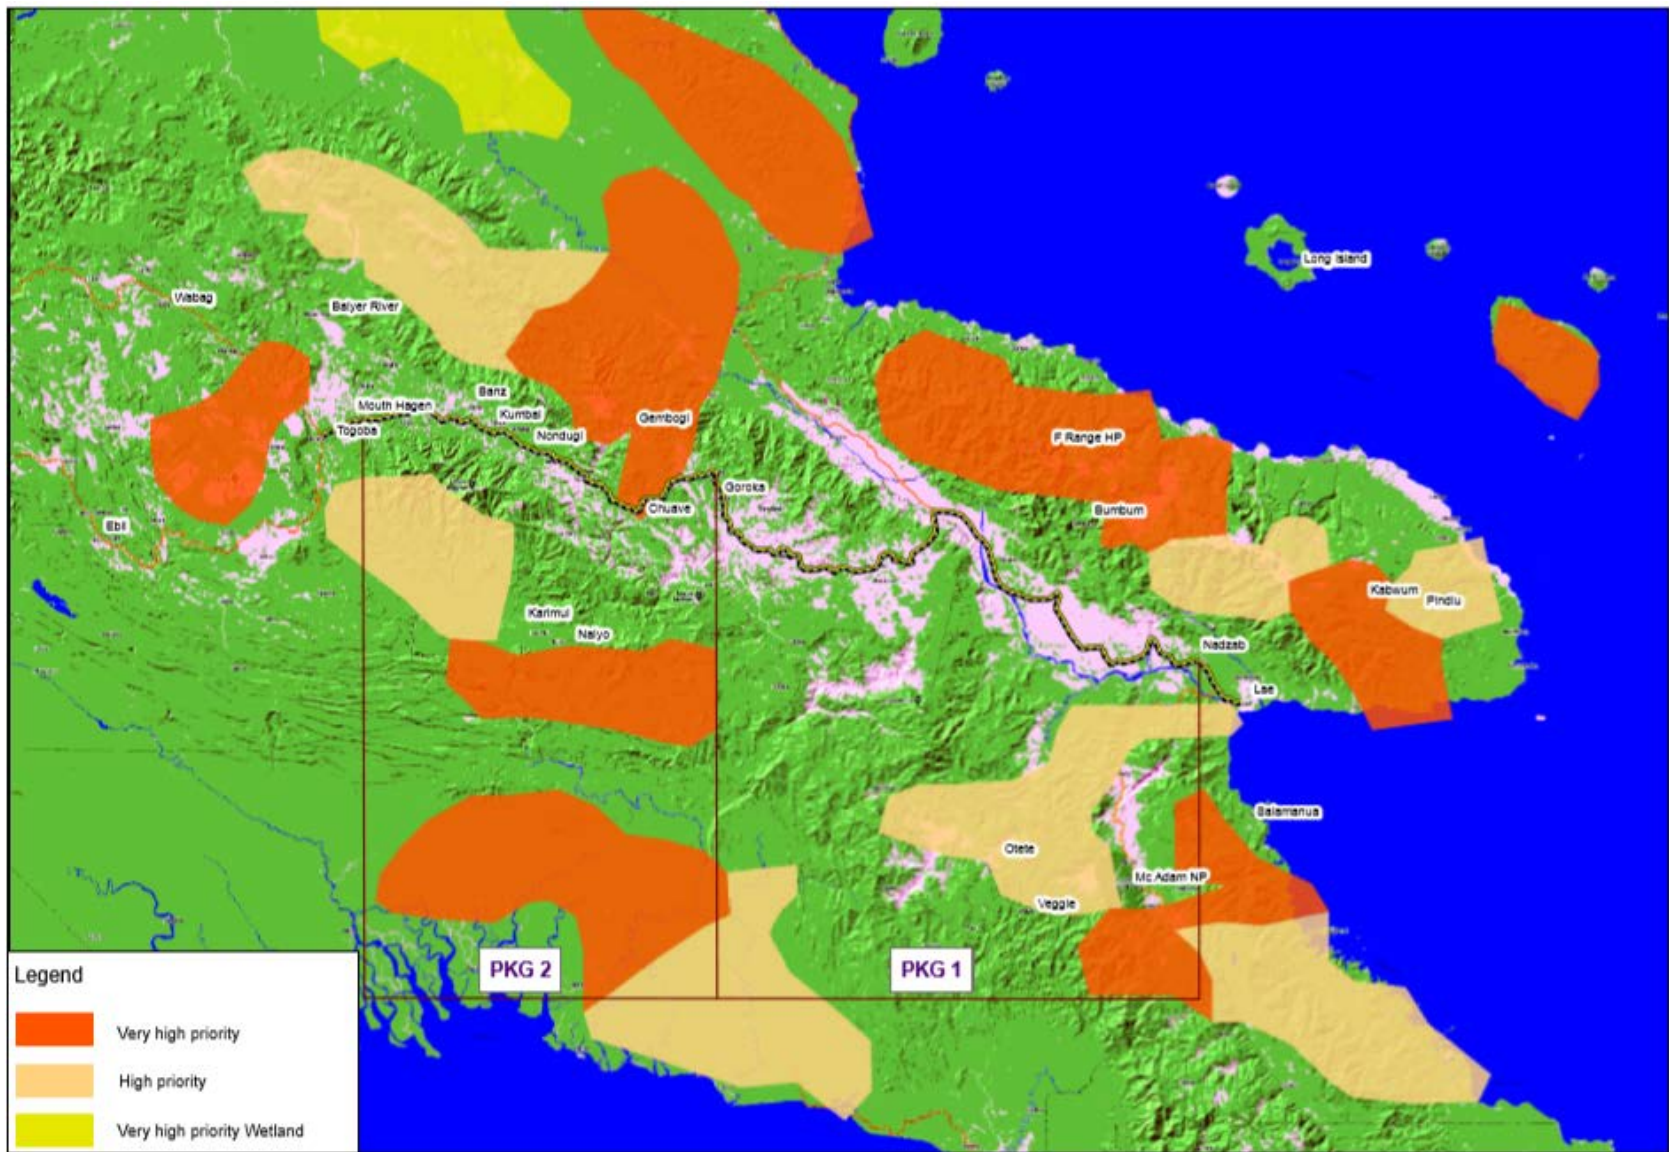

Sources: WWF/edited by the IEE team

Figure 4-4: Map of Biodiversity Priorities



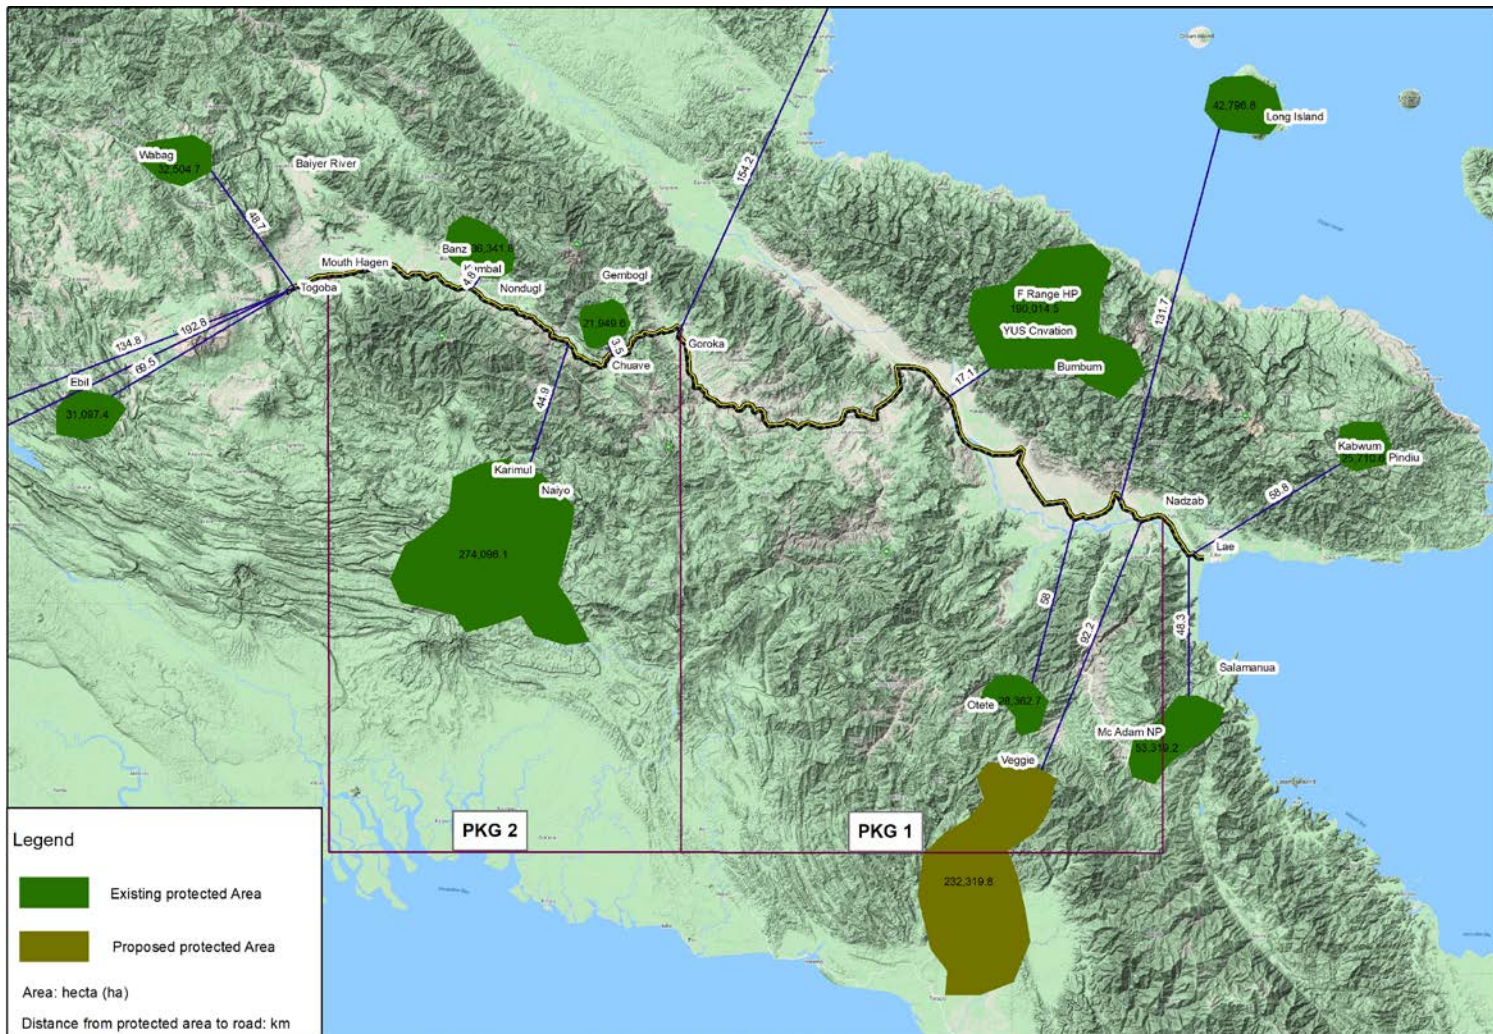

Sources: CEPA 2017/edited by the IEE team

**Figure 4-5: Map of Protected areas**

## Forest Resources

96. Papua New Guinea retains significant and intact areas of forest, with an estimated 34 million hectares of forest in the country in 2014 (Bryan and Shearman 2015; FAO 2015b). The actual estimation of the extent of forest within the country is contentious. According to Bryan and Shearman (2015), forests in PNG are declining at a rate of around 0.5% per year, although this figure is contradicted by FAO (2015) figures for PNG. While FAO (2015) report no major change in forest area, their data does indicate an annual decrease of 2.3% in the area of primary forest.

97. The Kassam Pass<sup>16</sup> is montane forest along the route of this Highlands Highway section. Based on a previous study, the forest in Kassam Pass had been described by Saunders (1993), as a medium crowned forest with canopy at 20-25m, generally uniform with 60-80% closure but height of emergent at about 40m. It is floristically very mixed but dominant Genera are Pometia, Canarium, Anisoptera, Terminalia, and Cryptocarya.

98. The forest is however highly disturbed, have low to negligible biological biodiversity and conservation values as a direct result of increasing population pressure on the forests' resource. These have been progressively cleared for agriculture over the past 9,000 years (see for example Golson and Hughes 1980) and today the landscape through which the highway passes consist of a mixture of cultivated land, coffee plantations, gardens, fallow grassland and shrub land with extensive areas of planted groves of trees (the local *Casuarina* species and exotic Eucalyptus trees) which the villagers use for building, timber, fencing and firewood. Village plantations have also been established to provide firewood and (to a lesser extent) building timber for sale to people living in the towns along the Highway.

99. **Trends in PNG Forests:** Papua New Guinea including its island provinces of the Bismarck Archipelago covers a total land area of about 46.3 million hectares. Approximately two-thirds of the country is covered in forest, the majority of which is classified as tropical rainforest. The extent of the country under forest has been contentious (Filer, 2011), but the two most recent estimates have stated Papua New Guinea contained between 28 million hectares of 'tropical rainforest' (Byran and Shearman 2015) to 33.6 million hectares of 'forest areas' (FAO 2015).

100. As a young developing country, PNG's forestry sector is one of the major foreign revenue contributors to the country's economy and thus becomes one of the major drivers of deforestation and forest degradation. While PNG still retains a large proportion of its natural forests, there is considerable loss of primary forests and forest degradation and widespread small-scale clearance for gardens and subsistence agriculture. Commercial logging is primarily focused in the lowlands and island forest areas while subsistence agriculture is prevalent throughout the country. However, the subsistence agriculture sector in the Highland provinces accounts for a major part of the industry and urban-driven economy.

101. Annual deforestation rates in PNG are reported as around 0.49% for most provinces within the country according to recent estimates of Byran & Shearman (2015) as shown in Table 4-15.

**Table 4-15: Change in rainforest area (km<sup>2</sup>) in project area (2002 – 202014)<sup>17</sup>**

---

<sup>16</sup> Initial Environmental Examination Report, SHHIP, February 2017

<sup>17</sup> Papua New Guinea's Fifth National Report to the Convention on Biological Diversity, December 2017

Province	Rainforest Area 2014			Rainforest Change 2002-2014				
	Total (Km2)	Unlogged (Km2)	Logged (Km2)	Deforested (Km2)	Logged (Km2)	Deforested (%)	Logged (%)	Total Change (%)
Morobe	20,783	19,644	1,140	182	38	0.9	0.2	
Western Highlands + Jiwaka	4,941	4,941	0	39	0	0.8	0	0.8
Chimbu	3,596	3,596	0	42	0	1.1	0	1.1
Eastern Highlands	5,687	5,617	70	39	0	0.7	0	0.7

## 2. Biological Environment in the Project Area

102. An Ecological survey for Volume II section between between Jogi Bridge in Eastern Highlands Province and Whagi Bridge, Kagamuga Airport, Western Highlands Province was undertaken at 27 bridge sites were in December 2019 to identify existing biological conditions in the project area, especially at every bridge site. Summary of sites and habitats observation is in Table 4-16.

**Table 4-16: Summary of Sites and Habitat Types**

No	Name	Drawing STA	Coordination	Description
45	Jogi River (Zokozoi)	298+900	6°3'853"S 145°23'222"E	Houses, buildings and gardens with lots of domestic wastes. Modified environment
46	Gauluka Culvert	299+700	6°3'499"S 145°23'150"E	Construction site, church, trade stores, and houses. Highly impacted with lots of domestic wastes. Modified environment
47	Kafamo River (Kitamu)	302+800	6°2'678"S 145°22'401"E	Human settlements, gardens and houses near the bridge. Modified environment
48	Mapemo River (Maniyata)	310+900	6°0'452"S 145°20'364"E	Gardens, church, brick factory and quarry on one side that has disturbed the riverbed. Clearly a modified environment
49	Asaro River 2 (Getayaga)	314+600	6°0'608"S 145°18'822"E	Presence of houses and gardens. Modified environment
50	Asaro River	315+100	6°0'543"S 145°18'545"E	Daulo District HQ with the District hospital, trade stores and district offices
51	Feonoku River	355+450	6°3'907"S 145°12'437"E	Very few houses and gardens near the bridge. Slightly modified environment
52	Nurape River	342+850	6°4'960"S 145°10'000"E	Lots of primary & secondary forest near the bridge. Slight modification to environment
53	Kenangi River	345+200	6°6'082"S 145°8'226"E	Primary & Secondary forests on mountain side with slightly modified environment near the bridge. Presence of some houses and LLG office
54	Baikabai River	348+400	6°6'091"S 145°8'230"E	Slightly modified environment with remnants of primary & secondary forest on mountain side. Few houses & gardens present

No	Name	Drawing STA	Coordination	Description
55	Chimbu River	376+700	6°1'957"S 144°58'432"E	Vegetation is modified with guesthouses, church, service station, and markets. There is also a quarry with lots of human activities
56	Koronigle River	397+300	5°56'579"S 144°51'144"E	Vegetation is modified due to human settlement. The site has lots of houses, trade store and market.
57	3@D2000 Culvert	398+450	5°56'573"S 144°50'516"E	Vegetation is modified due to human settlement. The site has guest house, trade store, family houses and is near the Barawagi Correctional Institution
58	Garniger River	401+500	5°56'566"S 144°48'961"E	Vegetation is modified due to human settlement and construction. Lots of houses, quarry on both sides of the river and a police barracks.
59	Miunde River	404+500	5°55'660"S 144°47'552"E	Vegetation is modified with houses, church and a quarry.
60	Ahl River	414+150	5°52'925"S 144°43'341"E	Vegetation is modified with houses, quarry, church and a school.
61	Whagi River	414+950	5°52'636"S 144°43'032"E	Vegetation is modified with houses, gardens, stores, club, market and a workshop/factory.
62	Bilu River	422+500	5°52'125"S 144°39'323"E	vegetation is modified with houses, store and coffee plots
63	Darmena River	423+530	5°51'773"S 144°38'338"E	vegetation is modified with houses, store and service station
64	Ambeke River	425+000	5°51'781"S 144°38'401"E	Modified vegetation with anthropogenic grass and domesticated trees including houses, trade store, coffee plots and guest house.
65	Mildip River	425+250	5°51'647"S 144°38'252"E	Modified vegetation with church, trade stores, and houses.
66	Kurumula River	427+800	5°50'599"S 144°37'291"E	vegetation comprises of aggravated land and houses
67	Waganil	432+300	5°50'632"S 144°35'117"E	Highly modified vegetation with market and Kudjip township nearby.
68	Tumam River	449+500	5°48'290"S 144°27'058"E	Vegetation has been modified as this is a quarry zone with lots of weeds and crawling plants such as mimosa grass
69	Piri River	455+400	5°49'384"S 144°24'022"E	Modified vegetation for agriculture especially coffee and processing site for drying coffee.
70	Komun River	462+100	5°50'053"S 144°20'594"E	modified vegetation with aggravated land and quarry
71	Whagi River	463+900	5°50'298"S 144°19'580"E	modified vegetation with aggravated land for market and dump site as well as coffee plantation

103. Table 4-16 indicates that most of the habitat of these locations from Bridges 45 to 71 have had some human modifications to the environment and its vegetation. Of these, three (3) bridges - Nurape River 342+850 (B#52), Kenangi River 345+200 (B#53) and Baikabai River 348+400 (B#54) - still have some primary and secondary forests near the mountains close to the bridges. One bridge - Feonoku River 355+450 (B#51) - has a high montane type vegetation with very short

shrubs and trees with a lesser human impact on the bridge environment. All four bridges are located within the Watabung LLG in the Daulo District of Eastern Highlands Province. This is an area where steep mountains rise from the sides of the road with the highway running through these narrow passages. Villages also appear on the roadsides along the highway.

104. **Data Collection Methods:** For each location, the description of the vegetation and the measure of human interactions on the environment were observed. Field guides on fauna and flora of Papua New Guinea as well as general information on invertebrates and insects were also used to assist the surveyors to identify the species. The details of each survey method used on site are described below.

#### **Methods for Terrestrial ecosystem**

- **Fauna.** The data and information on insects and other invertebrates were gathered through physical sighting of organisms. These were further observed through capturing of the organisms, closely observing and recoding their details and releasing them to their environment. The tally of these was recorded on the survey forms. Mostly butterflies, dragonflies, beetles and bees were recorded in this way. For water tolerant birds, fly over counts as well as by their calls were recorded. The fly over count involved closed observation of the bird that flew over, near or around the location observed. This enabled the observers to take note of the details of the bird like the colour, size and type. Birdcalls were also used to identify the bird type. Additional information about other birds and mammals that were not sighted at the time of the survey, were gathered through informant interviews. A total of 22 informant interviews were conducted out of the 27 bridges and surrounding environments surveyed.
- **Flora.** At each site, there was a physical observation of the vegetation in the surroundings. A physical count of common trees and plant species were carried out to determine their availability. Photographs of plant and tree species were also captured and a field guide on the Flora of Papua New Guinea was also used to identify the common species.

#### **Methods for Aquatic ecosystem**

- **Fauna.** The data and information on fish and other aquatic invertebrates were gathered through three main methods - physical sighting of organisms, capture release and informant interviewees. Physical sighting was used for invertebrates like pond skaters, mollusks and water beetles. Fish fingerlings and other invertebrates were also captured using a net and released back into the water. For zooplankton, a water sample was collected and a hand lens was used to look at this sample. This was then poured back into the water. Due to the timing of the surveys, informant interviews were also carried out to establish the kind of fish and other aquatic fauna present in each location. Again, a total of 22 interviews were conducted out of 27.
- **Flora.** Data for aquatic flora was gathered through physical sightings of water in each location. A water sample was also collected at each site and checked using a hand lens to identify any signs of phytoplankton.

105. The main findings of the survey are as follows:

- Almost bridge locations had some human modified made to the environments,

- Four bridges (Feonoku River 355+450 (B#51), Nurape River 342+850 (B#52), Kenangi River 345+200 (B#53) and Baikabai River 348+400 (B#54) recorded minimum or no human activities within their vicinity and also appeared to have remnants of primary and secondary montane forests existing on the sides or near the bridges. These sites were also noted to have variety of terrestrial fauna as well as native or local species present.

106. A summary of the discussions about the species and their presence or absence are discussed as bellows (detail survey results indicated in the Annex C).

#### 107. **Terrestrial ecosystem**

- **Fauna:** Informant interviews indicated that mountain cuscus (*Phalanger carmelitae*), exists in the mountains near Feonoku River 355+450 (B#51). These mountains are higher up and not very close to the bridge below so any work on the bridge may not harm the cuscus easily. This is because the *P. carmelitae* needs trees to move on and with lesser tall trees at the bottom of the mountains near Feonoku River, they will not be easily harmed.

On the other hand, Nurape River 342+850 (B#52), Kenangi River 345+200 (B#53) and Baikabai River 348+400 (B#54) were all reported by informant interviews as having some local mammal and bird species such as mountain cuscus (<sup>18</sup>*Phalanger carmelitae*), tree kangaroo (<sup>19</sup>*Dendrolagus goodfellowi*) and <sup>20</sup>Princess Stephanie's Astrapia (*Astrapia stephaniae*) in the mountains near these bridges. While both *P. carmelitae* and *A. stephaniae* are listed by IUCN as of least concern, *D. goodfellowi* is listed as endangered due to overhunting.

Apart from these, terrestrial invertebrates that were common in all locations from B#45 to B#71 included *E. hecabe* and *Anisoptera*. Other invertebrates included bees (*Apis cerena*), black ants (*Fomicidae*) and other butterflies of various colours and sizes including Monarch butterfly (*Daanaus plexippus*). Some birds commonly sighted between Jogi River Bridge (B# 45) to Whagi River Bridge (B#71) included Willy wagtail (*Rhipidura leucophrys*), eagle (*Hieraaetus weiskei*) and kingfisher (*Alcedinidae*). Generally, no mammals, frogs and reptiles were sighted in all these locations except the ones reported by the informant interviewees.

- **Flora:** While *casuarina oligodon* (she-oak), klinki pine trees, bamboos, *Piper adancum* and anthropogenic grasses were quite common in all bridges B#45 to B#71; terrestrial flora of interest identified in or near Nurape River 342+850 (B#52), Kenangi River 345+200 (B#53) and Baikabai River 348+400 (B#54), were <sup>21</sup>*Nothofagus grandis* and a couple of ficus species. Of these, *N. grandis* has been recorded on the IUCN Red list as least concern.

#### 108. **Aquatic ecosystem**

- **Fauna:** The aquatic fauna identified in these locations were also generally common and included organisms such as small brown mollusk, water beetle, pond skaters, rainbow

<sup>18</sup> *Phalanger carmelitae* is classified by IUCN as of least concern.

<sup>19</sup> *Dendrolagus goodfellowi* is classified by IUCN as endangered.

<sup>20</sup> *A. stephaniae* is listed by IUCN as least concern and is an endemic species.

<sup>21</sup> *Nothofagus grandis* is listed on the IUCN Red list as least concern.



trout (*Oncorhynchus mykiss*), and tilapia (*Oreochromis mossambica*). *O.mykiss* and *O.mossambica* are both introduced species and hence are common.

- **Flora:** There were no special or threatened aquatic flora recorded in all locations from B#45 to B#71. The most common was brown and green algae which were also depended on the quality of the river. That is, the higher the usage of the river water, the more the availability of the algae.

109. **Endanger and endemic species.** No new species have been identified in all locations. However, some local and endemic species were identified in four bridges where remnants of primary and secondary forests and vegetation are evident. These locations are Feonoku River 355+450 (B#51), Nurape River 342+850 (B#52), Kenangi River 345+200 (B#53) and Baikabai River 348+400 (B#54).

#### 110. Invasive Alien Species

- **Terrestrial Flora:** Piper Adancum as a terrestrial flora invasive species was found in the bridge sites (B#50); and Mimosa pudica in the the bridge sites (B#49 and B#68) of the Highlands Highway.
- **Aquatic fauna:** Tilapia (*Oreochromis mossambica*) as an aquatic fauna was recorded at the bridge sites (B# 50, B#55, B#56, B#61 and B#71).

### D. Socio-Economic Environment

#### 1. Population and Administrative units

111. The Volume II of SHHIP - Tranche 2 covers 4 provinces (viz., EHP, Simbu, Jiwaka and WHP) traversing 8 districts<sup>22</sup>. The Provincial Headquarters of each of these provinces including the total number of local level government units under each province are presented in the table below and depicted in Figure 4-6.

**Table 4-17: Administrative Units (for Provinces included in Package 2)**

Region/Province	Provincial Headquarters	No. of Districts	No. of LLGs	No. of Wards
Highlands Region				
Western Highlands	Mt. Hagen	3	7	244
Jiwaka	Kurumul	4	8	235
Simbu	Kundiawa	6	20	308
Eastern Highlands	Goroka	8	24	261

Source: District and Provincial Profiles - National Research Institute

112. The Highlands Region is home to more than 40% of the total population (approximately 8.776 million) of Papua New Guinea<sup>23</sup>. Based on final count for the 2011 Census, the population of the Highlands Region is 2,854,874 representing 39.2% of the total country's population of 7,275,324 while that of the MoMaSe Region is representing about 25.7% of the total country's population. The population growth rate (2000-2011) of the Highlands Region is 3.3% while that of the MoMaSe Region is only 2.4% compared to the country' 3.1%. The following table shows the population of the Highlands and Momase Regions.

<sup>22</sup> These are: WHP: Mt Hagen; Jiwaka: North Waghi, , Anglimp, South Waghi; Simbu: Gembogl, Kerowagi, EHP: Daulo, Goroka.

<sup>23</sup> Source: <https://population.un.org/wpp/Download/Standard/Population/>

**Table 4-18: Population Count and Growth Rate**

Area	Total Population		Growth Rate (%) 2000-2011
	Households	Persons	
Papua New Guinea	1,374,644	7,275,324	3.1
Highlands Region	1,121,258	2,854,874	3.3
Southern Highlands	88,041	510,245	3.2
Hela	65,271	249,449	2.7
Enga	76,421	432,045	3.5
Western Highlands	85,101	362,850	3.2
Jiwaka	65,155	343,987	5.6
Simbu	76,198	376,473	3.4
Eastern Highlands	136,992	579,825	2.6

Source: National Population and Housing Census (2011)

113. PNG has a population of 7.2 million, of whom 88% live in rural areas; 39% of the population lives in the Highlands region, (2,854,874), followed by Momase region with 26%. The annual population growth is high, currently estimated at 3.1%.<sup>24</sup> The ratio of men to women is 108:100, and the population is very young: 40% under the age of 15 years; 60% under the age of 24 years; and 68% is under the age of 30 years. Administratively the country has 22 provinces and 89 districts. The Highlands Highway section, which is being upgraded under the SHHIP, traverses five provinces and 14 districts. Table 4-19 below shows the population within the scope of the Investment Program:

**Table 4-19: Population by Districts and LLGs Served by Highlands Highway: 2011 Census**

Provinces and districts	Households	Persons	Males	Females	% of province	Average household
Western Highlands	85,101	362,850	183,791	179,059	100.0	4.3
Mt Hagen	25,822	123,299	62,787	60,512	34.0	4.8
Jiwaka	65,155	343,987	178,418	165,569	100.0	5.3
Anglimp / South Waghi	35,086	194,109	101,002	93,107	5.4	5.5
North Waghi Rural	15,892	78,499	40,035	38,464	22.8	4.9
Simbu/Chimbu	76,198	376,473	197,307	179,166	100.0	4.9
Kerowagi	16,616	93,107	48,728	44,379	24.7	5.6
Kundiawa / Gembogl	14,327	78,521	41,394	37,127	20.9	5.5
Sina Sina / Yonggomugl	11,790	56,805	29,539	27,266	15.1	4.8
Chuave	10,461	39,021	20,151	18,870	10.4	3.7

<sup>24</sup> National Statistics Office, 2011, *National Population and Housing Census of Papua New Guinea – Final Figures*




<b>Eastern Highlands</b>	<b>136,992</b>	<b>579,825</b>	<b>301,048</b>	<b>278,777</b>	<b>100.0</b>	<b>4.2</b>
Daulo	14,378	45,783	24,029	21,754	7.9	3.2
Goroka	23,565	103,396	53,292	50,104	17.8	4.4

114. All the communities along the Highlands Highway are indigenous, most living on their own customary land, (apart from those in urban areas or those who married into the local clans). Some of the settlements were developed as a direct result of the highway, with residents gravitating from more distant hinterland to the roadside so that they have better access to services and can conduct business with those travelling. Government services like health centers, aid posts and schools, as well as churches are also commonly located along the highway.

115. The Volume-II section under SHHIP tranche 2 has the following main linguistic and tribal groups (though there are many other smaller groups):

- WHP: Melpa (Mt Hagen), Kuman (Hagen and Wahgi); Nii (Wahgi)
- Jiwaka: Wahgi (Minj and Kerowagi),
- Simbu: Dom (Kundiawa), Gimi (border of EHP), Kuman (Kundiawa, Daulo & Unggai Bena), Kakondo (Kundiawa) Tabari (Gero to Duman), Siane (Magiro, Daulo, Watabung), Sinasina (Sinasina-Yonggamugl)
- EHP: Gahuku-Asaro (Goroka), Dano (Goroka), Yagaria (Goroka), Benabena (Goroka)

116. Following the ADB definition of Indigenous People “as those with a social or cultural identity distinct from the dominant or mainstream society which makes them vulnerable to being disadvantaged in the processes of development”, these local tribal and clan groups will not need special provisions for the SHHIP. They are all considered part of the mainstream society living in highland areas. PNG is made up of over 800 language and ethnic groups, all with a similar status. Assessment and field visits confirm that the people in the proposed Project sites experience the same social problems and opportunities as other tribes and linguistic groups in PNG. Social divides are more pronounced between those living in urban or rural areas, between those along the main highway and other groups in more remote locations, and in some cases between the two genders, rather than being particularly socially disadvantaged because of their tribal identity or linguistic group.

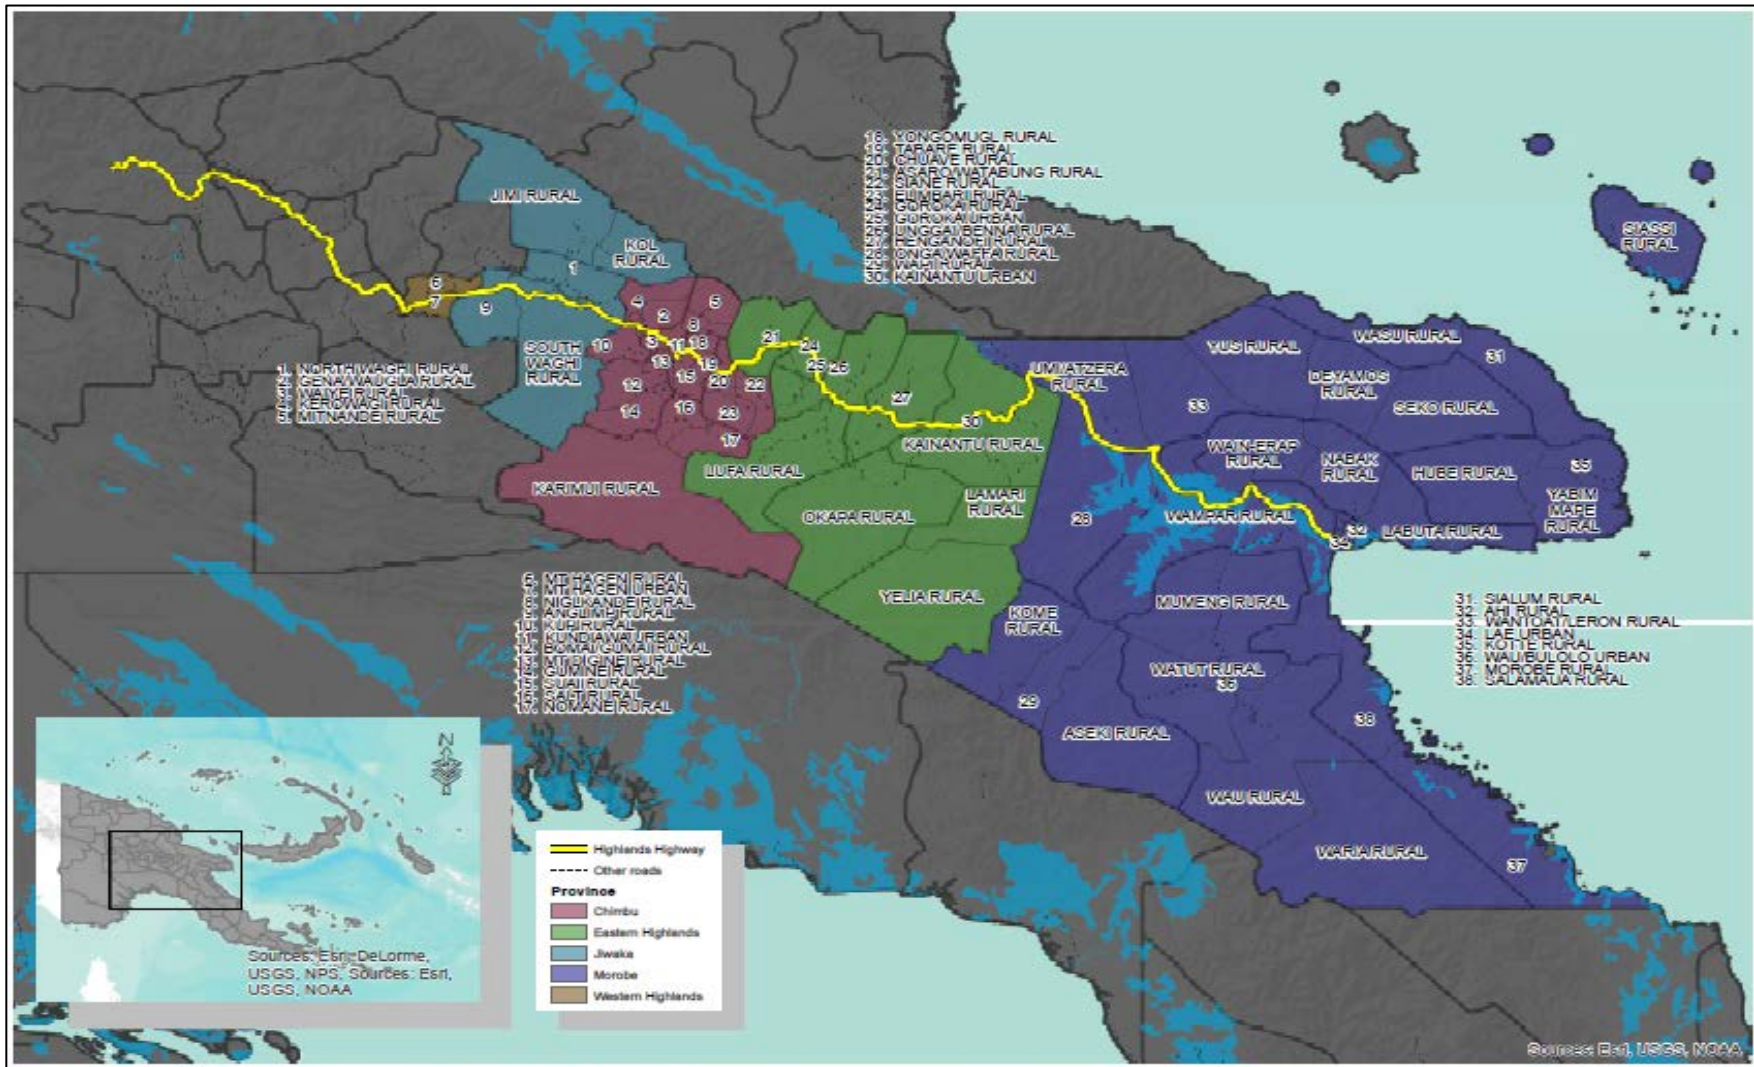

**Figure 4-6: Administrative Boundaries along the Highlands Highway**

Source: Administrative Boundaries- <http://www.diva-gis.org/gdata>; Indicative Highlands Highway alignment (reconstructed overlay), SHHIP PPTA 2016

## 2. Economic Situation

117. PNG has a small export-oriented economy heavily reliant on commodity products: minerals constitute 75% of total exports, agriculture products 20%, and forestry products 5%. The GDP economic forecast for PNG almost halved for 2016 because of cuts to public spending. The economy also suffered from the effects of El Niño weather in 2015, and the weakness in global prices for export commodities. The dramatic drop in global oil and LNG prices in 2015 has highlighted the need to buffer the economy against the volatility associated with exports of natural resources. Economic growth has not been inclusive and is skewed towards the urban population, leaving the majority of rural dwellers in poverty.<sup>25</sup>

118. The HH is the transport backbone of PNG's economy, linking core economic regions that produce much of the country's major exports (minerals, petroleum, coffee, sugar, tea and other commodities), to the country's major port at Lae. It also links major domestic markets along the way, particularly for fresh food produce, which is critical to rural livelihoods.

119. Agriculture accounts for approximately a third of GDP: approximately 85 percent of PNG population's lives in rural areas and works in agricultural and other rural industries. However, the distribution of natural resources is very unequal, and much of the land is of low quality. Population density is highest in areas with high quality land, which includes much of the large highlands valleys, such as the Wahgi and Asaro basins.<sup>26</sup> Many of the highlands areas adjacent to the HH are highly productive farming areas, with better access to markets than those more distant from main roads.

120. Most of the land through which the HH passes is customary land, which, in the Highlands, is inherited through patrilineal descent. Customary land, (also known as un-alienated land), makes up about 97% of the total land area in PNG, and most of it, is managed by male leaders (even in matrilineal societies). Planting annual food crops does not secure long-term use rights over land, unlike the planting of small plantations of perennial crops such as coffee and coconuts. Food gardens are generally transient, whereas plantation of tree crops are semi-permanent markers of property rights and confer status on the men who control them. When customary land is leased for plantations, logging or mining, women seldom take part in negotiations, nor are women usually considered to have the right to claim a direct share of leases, royalties or compensation payments. With high rates of population growth, land is increasingly scarce, exacerbating long-standing patterns of conflict over land. Women's access to land depends on male kin or spouse's kin, which makes women who live without male support, particularly vulnerable to exploitation or abuse of their rights.

121. The subsistence food production system, with smallholder farming dominated by root crops, small-scale animal husbandry, hunting, gathering and fishing, provides sufficient food supply on a year-round basis for most of the population, but people living in highly marginal environments suffer from periodic food shortages. Malnutrition resulting from inadequate diets is a serious problem in many parts of the country, and is associated with less developed areas, low monetary incomes, and poor delivery of health services. Malnutrition is less common along the HH communities, which have more reliable cash incomes because of their proximity to the road. Vegetables and fruits are grown both for home consumption and sale of the surplus. Many families also keep a few pigs, and a small number of households have two to six goats or sheep.

122. Many women market their produce at the main Highlands Highway town markets, or at small roadside informal markets, but others sell to 'collectors' who gather up produce from many growers and on-sell to larger companies, including the Goroka Fresh Produce Development

---

<sup>25</sup> ADB 2015, Country Partnership Strategy, 2016-2020

<sup>26</sup> Allen, B., R.M. Bourke and J. Gibson, 2005, *Poor Rural Places in Papua New Guinea*. Asia Pacific Viewpoint.

Agency (FPDA). FPDA provides extension services to seven Highlands provinces, to try to improve the supply chain through seed multiplication, consistency of supply, quality, and marketing services for farmers. They provide information, seeds, training and do a market survey on a weekly basis to inform growers of current prices, covering 60 different crops.

123. It is estimated that highway improvements could at least double the amount of produce transported from the highlands to Port Moresby.<sup>27</sup> Currently, the Bismarck Maritime Company sends 15-20 containers of highlands fresh produce from Lae to Port Moresby every week, while Consort Express Line Ltd ships a similar amount twice weekly. There are cool storage sheds at the Mt Hagen airport, and at Kainantu, (run by NKW Holdings Ltd formerly Waufresh), but these are insufficient and there is high wastage and damage to crops during transportation, partly because of poor grading, poor post-harvest processing, a lack of suitable packing materials, and because of the condition of the road. The Mapai Transport Company manager, who has 18-20 trucks travelling up the Highlands Highway daily, estimates that almost half of all fresh produce goes to waste and that cool storage, packing and logistic facilities and better road conditions are necessary to improve this situation. The main produce marketed is potatoes, bulb onions, spring onions, zucchini, English cabbage, purple cabbage, carrots, and broccoli.

124. Other economic activities dependent on the highway include the mining industry, particularly the Ramu Nickel and Cobalt Mine run by Chinese Metallurgical Construction Group in Madang Province, the LNG Exxon/Mobil and Oil Search gas and petroleum enclave in Hela Province, and Porgera gold and copper mine in Enga, (operated by Barrick Gold company), as well as large scale agricultural enterprises.

125. Business activities along the Highlands Highway include transport companies running passenger services (PMVs or mini-buses), gravel extraction in river beds, liquor retailing, workshops for mechanical repairs, fuel, battery and tire shops, contractors involved in infrastructure projects (such as Kaia in Simbu province), and roadside markets with sugar cane, kaukau, carrots, cabbages, strawberries, mandarins, cooked meat, scones and donuts, soft drinks, and non-food items such as bilums, hats, woven palm or bamboo building materials and matting, petrol, flowers, etc.

126. While women expect to be able to increase their production and marketing of fresh produce when the highway improves, the gender division of labour and women's traditional exclusion from the benefits derived from road rehabilitation and maintenance works have been identified as a problem during community discussions. Women want more access to jobs provided by the road improvement Program (not just in traditionally female domain such as catering for construction workers, but also in construction and maintenance tasks). They say that civil works contractors need incentives to increase the percentage of women workers in the labor force, and to ensure they are paid equally to men for equal work. Women's groups were keen to be involved in organizing work groups, in order to increase their income.

### **3. Household Incomes and Poverty**

127. The economic and social benefits of SHHIP in general including the tranche 2 bridge improvement works are crucial for poverty reduction. An average household in the Highlands Region consists of 6.8 persons which may have up to 5-7 hectares (ha) of productive land divided into five food gardens averaging 1.5 ha per garden, which are used to cultivate a range of food and cash crops, both for consumption and surplus for sale. In 2016, surveyed households in the Highlands Region suggested average income of 971 kina a month against average household expense of 652 kina a month. Non-income dimensions of poverty included a lack of access to (i)

---

<sup>27</sup> Bonney L, M Warinu, and P. Muscat, 2012, *Yu Tokim Mi Long Planim Kaikai Na Maket We? Feasibility Study for a New Wholesale Fresh Produce Market in Port Moresby*, NZAid, MFAT

cash paying jobs, (ii) education and health services, (iii) potable water, and (iv) transport services and roads. The most pressing demands from these households were for safe drinking water, electric power, and usable roads. While available data are limited, the risks of rapidly rising poverty levels in PNG are clear. Salient issues included the following: (i) poor economic performance and rapid population growth (2.8%) have led to a sharp increase in the incidence of poverty. In 2011, it was estimated that about 40% of the PNG population lived on less than \$1 per day, while 70% were below the level of \$2 per day; and (ii) the highest poverty levels occur among households with little or no cash income in remote areas away from roads. The national poverty rate is 37%. The proportion of population living below the national poverty line is 37.5%.<sup>28</sup> Farmers that grow and sell cash crops such as coffee and cocoa may also have high poverty levels due to the fluctuation in commodity prices. Overall, people involved in the agriculture sector account for 86% of the poor. Households headed by women are among the poorest in rural areas. With the Human Development Index (HDI) value as 0.544 (low human development category), PNG is rated 153rd of the 189 countries in the 2017 HDI.<sup>29</sup>

128. Women are concentrated in informal employment, unpaid domestic work, and low-paying less secure occupations. In the Highlands region most women are engaged in small-scale animal husbandry (mainly pigs, goats, and chickens), fresh food production and marketing, along with some export cash crops such as coffee and, in the Markham Valley, cocoa, sugar cane and coconuts. Women do most of the planting, weeding, harvesting, and make significant contributions to coffee gardens and other cash crops. Women's workloads are heavy: they walk long distances every day to gardens, markets, collecting firewood, fetching drinking water, and providing the cooking and childcare. Due to the absence of proper shoulders, women and children walk along the roads, carrying heavy loads, taking produce from gardens to home, or for sale at a market. Traditionally most women in the Highlands do not have land ownership rights, and many are economically dependent on their husband's clan group. As the majority market vendors and users of health services, women are disproportionately disadvantaged by poor transport networks. Recent studies show that markets, bus stops, and parking lots are spaces with high levels of violence against women, particularly by young men. Most women in the Project areas are engaged in agricultural activities. They will be the main beneficiaries of improvements in: roadside improvements, fresh vegetable marketing through logistical depots, safety provisions near schools and other. The highest incidences of poverty are among people with no income generating activities, the self-employed in the semi-subsistence agricultural sector, as well as market vendors and others working in the informal economy.<sup>30</sup>

129. The majority of people's dependence on subsistence rain-fed agriculture raises levels of vulnerability to natural disasters and changing environmental conditions. Insufficient income opportunities and high levels of crime and violence further exacerbate hardship and inequalities. In PNG, people's on-going connections to land and food production mask poverty, and many prefer to talk of 'hardship'. But income poverty, and poverty of opportunity are real challenges with almost 2.5 million people living in hardship. Income and poverty levels along the HH will be investigated through the socio-economic survey during tranche 2 detailed engineering design stage.

---

<sup>28</sup> ADB. 2019. *Basic 2019 Statistics*. Manila

<https://www.adb.org/sites/default/files/publication/499221/basic-statistics-2019.pdf>.

<sup>29</sup> UNDP. 2018. *Human Development Indices and Indicators: 2018 Statistical Update*. New York.

<sup>30</sup> UNDP, 2014, *National Human Development Report: Papua New Guinea, From Wealth to Wellbeing: Translating Resource Revenue into Sustainable Human Development*,



#### 4. Social Services

130. Physical isolation and poor transport networks pose major challenges to expanding access to basic social services, a situation compounded by underlying state fragility and weak bureaucracy. Rural health services and basic education facilities are often closed, are cut off from supplies, and lack access to reliable power, while teachers and health workers are forced to spend a lot of their time travelling to and from regional centers for salaries and supplies. Although the social services located on the HH are better off than many more isolated facilities, many are still suffering from the same problems. Of particular concern for the SHHIP are the large number of children walking long distances to school, using the HH who are often at risk from heavy traffic thundering by because of the lack of footpaths or other safety features.

131. Almost half of primary school-aged children are still out of school, with fewer girls going to school than boys. The country's net enrolment rate 63% is the lowest in the Asian Pacific region, and only one in three children complete basic education.<sup>31</sup> Many schools have poor facilities, with some schools having no toilets at all and no piped water system. There is little road safety or health education in the curriculum. A large number of schools are situated along the HH. Below is a preliminary list of educational facilities on the HH within the Investment Program scope:

**Table 4-20: Educational facilities along the Highlands Highway**

Jiwaka Province	Wesley Bible College	Tomba CHW Training School	
	PMF Centre	St Marys Hanepa Primary School	
	Good News Elementary School, Kindang	Ahl Primary School	
	Melanesia Nazarene Teachers' College	EBC Timol Wahgi Training Centre	
	Jiwaka Provincial High School	Urup Primary School	
	Kudjip Nursing College	Mundiu Primary School	
	Kudjip Training Institute	Bonong Lutheran Primary School	
	Munde Primary School	Kumbai Primary School	
	Simbu Province	Barawagi Community School	Prenorkwa Community School
		Don Bosco Secondary School	Ku Community School
Kumerau Primary School		Duman Community School	
Mingende Nursing School		Siri Koke Community School	
Numunma Primary School		Masul Community School	
Mingende Community School		Tidima Primary School	
Sumgau EBC High School		Keto Primary School	
Kodom Angaunde High School		Chuave Community School	
Wandi Community School		Chuave High School	
Gon Community School		Lutheran Day High School	
Eastern Highlands Province	Avanmofi Community School	Agribusiness Training Institute	
	Yagusa Community School	Ketarobo Primary School	
	Komperi Community School	New Tribes Mission School	
	Watabung Primary School	Kabiufa SDA Secondary School	
	Mando Primary School	Lufalufa Primary School	
	Ganarafo Primary School	Mt Sion Disabled School	
	Asaro Primary School	Kamaliki Vocational School	

132. There are also many health facilities situated along the HH, with varying levels of service. Provincial Hospitals act as the referral centers for district hospitals and health centers, while the

<sup>31</sup> UNICEF PNG, <https://www.unicef.org/png/activities.html>

health centers supervise and support smaller aid posts, which provide only preventative services and basic primary health care. While hospitals have the capability of dealing with road traffic accident victims, health centers located where there are many accidents, complain that their staff are not trained to deal with emergencies or trauma victims, and those suffering severe injuries often die before they reach larger hospitals. Many of the health facilities provide HIV/AIDS services. A partial list of health facilities along the HH is below:

**Table 4-21: Health Facilities along the SHHIP Highlands Highway Scope**

Western Highlands Province	Mt Hagen hospital
Jiwaka Province	Minj Health Centre Kudjip Nazarene Hospital
Simbu Province	Kaupena Health Centre Mingende District Hospital Kundiawa General Hospital Ku Aidpost Masul Aidpost Chuave District Hospital
Eastern Highlands Province	Goroka Base Hospital

## 5. Health Issues

133. PNG is characterized by a generalized HIV epidemic: the estimated prevalence rate of is 0.8% with 40,000 people living with HIV. Data also suggests that the PNG HIV epidemic is mostly concentrated in the Highlands region (with an overall prevalence of 1.07%, and Jiwaka 1.51%, WHP 1.30%, and EHP 1.0%). As of mid-2016, there were 22,548 people living with HIV receiving antiretroviral therapy, which they must remain on for life. Key at-risk groups include truck drivers that work on the HH; female sex workers, particularly at PMV stops along the HH; and men who migrate to towns and development enclaves for work. These are highly mobile groups. Wives and their new-born children are also at risk because the use of condoms is not widespread and there is a high degree of sexual violence within marriages. The Mutzing Health Centre in Markham Valley has 345 registered sex workers receiving regular preventative and treatment services, of whom six are children under 16 years. Twenty-five of the female sex workers are being treated with antiretroviral drugs, but because they are move frequently, it is difficult to ensure regular follow-up. The exposure of roadside communities to higher levels of road traffic means that special attention must be paid to the risk of sexually transmitted infections (STIs). In light of women's greater exposure to the risks and impacts of HIV, culturally sensitive and gender-responsive awareness and behavior change initiatives need to be provided in campsites and corridors of influence as part of broader health education programs

134. Alcohol: There are a huge number of liquor outlets along the HH, and a lack of proper licensing.<sup>32</sup> This has contributed to the number of vehicle accidents, as well as to violence (particularly against women), fights between groups, loss of income for family needs, obesity, and ill health. Enga and Southern Highlands have both introduced liquor bans along the HH sections within their provinces, which are strictly policed, but no such bans or policing exist for the Investment Program provinces.

135. Accidents: Road safety is a major issue in PNG, causing significant loss of life, injuries, and economic losses. Staff at Kundiawa Hospital and Mutzing Health Centre in the Markham

<sup>32</sup> The PPTA assessment team counted 58 beer shops between Kagamuga and Kundiawa; 54 SP beer outlets between Wara Simbu (outside Kundiawa) and Goroka), and 29 between Akamore market at Yongki and Nadzab.

Valley report that there are very frequent serious accidents (at least one per week), which at Mutzing, they are ill-equipped to deal with. Many of the injured die being transported to the Lae Hospital. The steeper sections and many unmarked corners are also traffic accident black spots. While no accurate figures exist for the number of accidents or fatalities, rates are thought to be some of the highest in the world. There is a danger that improving the HH will allow higher traffic speeds but may also cause an increase in traffic accidents. Therefore, mitigation measures are planned through the road safety component of the Investment Program: road safety surveys, the removal of black spots, improved signage, crash barriers and footpaths will be part of the engineering design; road safety awareness will be raised among road users and roadside communities; and efforts made to ensure traffic laws are enforced.

## 6. Gender

136. There are few countries in the world where men outnumber women, but PNG is one of them having 108 men for every 100 women. This phenomenon is only found in countries with profound gender inequalities. The country is ranked 133 out of 149 countries on the Gender Inequality Index. The PNG Country Gender Assessment, conducted in 2011, highlighted significant gender gaps limiting women's economic opportunities and access to health care, as well as educational attainment and literacy. Women in PNG are facing serious health issues: maternal mortality rates are high by world standards at 733 per thousand births. In 2009, there were only 92 girls for every 100 boys in primary school, and just 78 girls per hundred boys attending secondary school. In the Highlands, this disparity was worse, with only 85 girls in primary school to every 100 boys. Around 37% of females, compared with 26% of males have never attended school.<sup>33</sup> In the Momase region, over a quarter of girls between 15 and 17 never attended school, compared to only 5.6% of boys.<sup>34</sup> Factors influencing enrolment in schools are distance from school, lack of sanitation, sexual harassment and violence towards girls by other students or male teachers, the expenses of education, and cultural factors relating to gender discrimination and exploitation of girls who are kept home to do household chores, look after children, or help plant and harvest food crops.

137. As noted above, the HIV/AIDS prevalence rate is 0.8% nationally, but higher in the Highland provinces. Women and girls are more vulnerable to HIV/AIDS and sexually transmitted infections (STIs), as they are less able to protect themselves, partly because of the widespread gender-based violence. Many men feel they have the right to beat and sexually abuse wives, prostitutes, women from enemy groups, and strangers. Alcohol and drug use have accelerated the violence, which includes domestic violence, child abuse, rape, and gang rape. The high level of gender-based violence, not only increases vulnerability to HIV/AIDS but also constrains women's and girls' mobility and opportunities. A study in four provinces found that nearly half of the women had experienced physical and/or sexual violence in their relationships, and women with physically or sexually abusive husbands were much more likely to have HIV/AIDS. Women are twice as likely to report that crime stops them from using public transport, walking to work or shopping, fetching water, walking to the gardens, and allowing children to walk to school.

---

<sup>33</sup> World Bank, UN, AusAID, ADB, Government of Papua New Guinea, 2012, *Papua New Guinea Country Gender Assessment, 2011-2012*

<sup>34</sup> National Statistics Office, 2012



## 5. ANTICIPATED ENVIRONMENTAL IMPACT AND MITIGATION MEASURES

### A. Design Phase

138. **Design:** The bottlenecks of twelve (12) single-lane bridges and insufficient clearance of the double bridges for water flow during the rainy period are big challenges for the vehicles travelling on the HH, especially where the road section(s) are getting upgraded and improvements for double-lane traffic flows are in progress. The design will address on the following:

- i. Design of structures to allow for continued flow of water through or appropriate overtopping in flood.
- ii. Adjust alignment of access roads to minimize need for removing large trees,
- iii. Design road realignments to take into account value of land and to minimize area required,

139. **Climate change adaptation.** A complete climate risk and vulnerability assessment has been prepared and submitted separately<sup>35</sup>. Climate change adaptation measures are properly considered and incorporated into design as follows:

- Rainfall effect related to short-time intensive rainfall and prolonged rainfall significantly affects the bridge and approach road design. Meteorological & Hydrologic survey has been undertaken to collect the statistic and data on Highlands Highway regions for the application of new bridge design,
- Rational bridge design for this project considers enough drainage capacity to minimize sliding failure, flooding damage,
- Design bridges to be sufficient hydraulic capacity for the 1:100-year flow and taking into account expected climate changes,
- Design of flood discharges and flood elevation based on hydrological analysis.

### B. Pre-Construction Phase

140. **Land clearance:** Land acquisition for permanent may acquire for about 3 bridge locations where need to be realigned for road safety, social and environmental reasons and longevity of structures and abutments. Land acquisition for temporary will be required for purposes of traffic diversions, campsites, storage yards, etc. There is no physical displacement of people, either on an individual household basis or through the acquisition of public properties such as schools, churches or other community centres. Loss of land and asset will be compensated through measures outlined in Resettlement Plan (RP).

141. Based on Feasibility Study stage findings, no permanent or temporary land acquisition is required for the four repair/maintenance/reinforcement bridge works under IEE Volume II, of SHHIP tranche 2 activities.

142. **Temporary land acquisition:** There are temporary land acquisition requirements due to implementation of SHHIP tranche 2 Volume-II works in all 20 in-situ new construction bridges under the scope of this plan (that is, the section from Goroka to Kagamuga) based on implementation approach for tranche 2 works. Such temporary acquisition of land is for traffic diversions, Contractor's working areas including for movement of equipment, stockpiling of construction materials, batching plants, storage yards, etc. It is estimated that about one (1) hectare (ha) of land shall be required at each new bridge construction site for such purposes. The rentals shall be mutually agreed up on by the Contractor and the landowner, documented in the

---

<sup>35</sup> Climate Change Vulnerability Assessment, SHHIP, June 2017

form of Contract and paid directly by the Contractor. Such land shall be reinstated and returned to the owner(s) after completion of bridge works at each site. Table 5-1 below presents details on such new bridges to be constructed in-situ (without alienation changes).

**Table 5-1: List of in-situ New Bridge Constructions Requiring Temporary Acquisitions**

<b>Bridge Name</b>	<b>Estimated land loss (ha)</b>	<b>Current Land use</b>	<b>Name (s) of Clan Leader/Landowner</b>
Jogi River (Zokozoi)	1	Cultivation/ Trees	John Kotu, Michael Gotoha & AOG Church
Gouluka Culvert	1	Trees/shrubs	Joe Oropave, Awuto Solato & Peter Ponom (2)
Baikabai River Bridge	1	Cultivation/grass	Hapusi Moruma, John Nema, Kiana Waghi & Jack Nome (4)
Chimbu River Bridge	1	Mostly barren	Gedion John
Koronigle River Bridge	1	Cultivation/ trees/Natural Bushes/grass/ trees	Kua Denge
3@D2000 Culvert	1	Cultivation/trees	Kaiglo Wok
Garniger River Bridge	1	Mostly barren, sparse vegetation	John Molki
Miunde River	1	Mostly barren, sparse vegetation	Jas Peter
Ahl River	1	Cultivation/ Trees/shrubs	Kapal Wai,
Wahgi River	1	Cultivation/grass	Obai Kunangil
Bilu River	1	Cultivation/ Trees/ shrubs	Roger Palme
Darmena River	1	Natural Bushes/grass	Sinip Guri,
Ambeke River	1	Cultivation/Trees/ shrubs	Sammy, C Tumbo Mina
Mildip River	1	Cultivation/Trees/ shrubs	Sammy, Cr Tumbo Mina
Kurumula River	1	Cultivation/Trees/ shrubs	Henry Sek
Waganil	1	Mostly barren, distant houses	Karap Kumi,
Tumam River	1	Mostly barren, distant crushers	Cr Sent Koip,
Pin River	1	Sparse Cultivation/Trees	Jessy Kogna, (brother of sitting MP),
Komun River	1	Mostly barren, distant crushers on Western-end	Late Joe Koim
Whagi River	1	Mostly barren, sparse vegetation	Asen Kumbamong,
<b>Total</b>	<b>20</b>		

143. **Permanent land acquisition:** Based on Feasibility Study (FS) stage social impact assessment findings for IEE Volume-II under SHHIP Tranche 2 works, physical displacement of 85 people will be triggered due to permanent and temporary land and other asset acquisitions for the bridges to be relocated (re-aligned) and newly constructed. The permanent acquisition at the average rate of 6 hectares per new bridge construction at new location (re-alienation) site is required in three (3) sites – including area required for approach road re-alienations. Likewise, 20 sites will have temporary land acquisition impacts at the rate of one hectare (i.e., 10,000 square meters) under Contract Package 2 of the bridge works for working area, vehicle movement, etc.

**Table 5-2: Impacts Due to Volume II Bridge Works Requiring Permanent Acquisitions**

Bridge Name	Estimated land loss (road access) (ha)	Current Land use	Clan Leader/ Landowner
Feonoku River	6	Cultivations/Trees	Gip Bamo, Isdol Owa, Kono Morofa & Philip Norifane
Nurape River	6	Cultivations and natural vegetation	Gore Jonathan, Mondu Robert & Kiboro Oto
Kenangi River	6	Trees/shrubs	David Nondo, Beckson Teine, Vincent Yambi, Ruimba Sike, Kimbamo Damu & Kifo Kiaira
<b>Total</b>	<b>18</b>		

144. **Mobilization of the contractor, establishment of compound and construction camp:** Prior to contractor(s)' mobilization to the sites, PMO and CSC(s) will work with the Contractors to establish the communications protocol between the contractor and the communities as per their communications plan(s) and assist the contractor(s) to obtain necessary licenses for quarrying and gravel extraction. The Contractor(s) will identify one member of their staff to perform community relations work and to be the liaison between the ward councillors, village leaders and elders and contractor(s), as well as between the contractor(s) and CSC(s).

145. The construction camp(s) accommodation, maintenance yard and other associated facilities such as quarry(ies), crushers, batching plant(s), asphalt mixing plant-base(s) shall be located outside any areas identified by the authorities to be protected for biodiversity or landscape values and shall be outside of any designated protected areas and/or wildlife management areas.

146. **Mitigation measures:** The contractor will adopt good management practices to ensure that fuels and chemicals, raw sewage, wastewater effluent, and construction debris/scarified material is disposed of in controlled conditions to reduce the risk of contamination as well as community grievance. Measures to minimize disturbance by construction workers and others' presence at the works site/area include:

- i. As much as possible, labour shall come from the communities traversed by the Highlands Highway. But where this cannot be avoided due to the absence of skills appropriate to the requirements, workers hired from off-site shall be provided briefing of village protocols as part of awareness and mobilization training;
- ii. The contractor is to ensure that workers' actions outside work site are controlled and village codes and rules of conduct are observed at all times;
- iii. The contractor will identify one member of their staff to be the liaison between the ward councillor, village leaders and elders and contractor, as well as between the contractor and PMO;
- iv. Worker camp location and facilities will be located at least 500m from settlements and agreed with local communities and facilities approved by CSC(s) and

- managed to minimize impacts; signage and security will be adequately provided at the site office and works yard and unauthorized people (especially children) entering the area will be prevented;
- v. Adequate signage and security provided at the site office and works yard and prevention of unauthorized people (especially children) entering the area;
  - vi. As many local workers as possible will be hired and trained for the construction activities. In order to avoid clan conflicts over access to employment, it is important that local workers are sourced from each of the customary land areas along the highway. There is a risk of conflict if workers are expected to work outside their own customary boundaries.
  - vii. Adequate housing shall be provided for all workers hired off-site when living at the construction camps and provided with clean canteen/eating, exercise/recreation, and cooking areas;
  - viii. Construction camp(s) will be established in areas with adequate drainage in order to prevent water logging at the camp and formation of breeding sites for mosquitoes and to facilitate flow of the treated effluents;
  - ix. Potable water, clean water for showers, hygienic sanitation facilities/toilets with sufficient water supply, worker canteen/rest area and first aid facilities will be provided. Separate toilets and shower areas shall be provided for male and female workers;
  - x. Portable lavatories (or at least pit latrines in remote areas) shall be installed and open defecation shall be prohibited; use of lavatories encouraged by cleaning these facilities daily and cleanliness maintained at all times;
  - xi. Wastewater effluent from contractors' workshops and equipment washing-yards will be passed through gravel/sand beds and all oil/grease contaminants will be removed before discharging it into natural streams. Oil and grease residues shall be stored in drums awaiting disposal in line with the agreed waste management section of the EMP;
  - xii. Workers shall respect village and land owner's boundaries and recognize and follow village rules and terms of conduct (especially addressing women and elders);
  - xiii. Wastewater effluent discharges from construction works shall have the necessary permits from CEPA and local authorities before the works commence;
  - xiv. As much as possible, food shall be provided from nearby gardens or from businesses within the community. Poaching of animals or birds for 'bush meat' or fishing will not be allowed;
  - xv. Provision of safe access across the works site to people whose village and access are temporarily affected during construction works;
  - xvi. Solid and liquid wastes will be managed in line with the provisions of the waste management section of the EMP;
  - xvii. Use of guns and hunting equipment by workers will be banned and workers taking or hunting or in possession of wildlife will be dismissed;
  - xviii. Entry to the protected and wildlife management areas and/or sensitive areas (forested areas and rivers) by workers will be banned; Provision of adequate protection to the general public in the vicinity of the work site, including advance notice of commencement of works, installing safety barriers as required by villagers, and signage or marking of the work areas;
  - xix. Safe access shall be provided across the works site (particularly during construction of drains) to people whose village and access are temporarily affected during construction works;

- xx. At all times workers should respect village and land owner's boundaries and be recognize and follow village rules and terms of conduct (especially addressing women and elders); children and young people should not be allowed within the camp areas or living quarters of construction staff.
- xxi. Avoid or minimize damage to productive trees such as coffee, and gardens, water resources and springs (prior approval from landowners and community will be required);
- xxii. The contractor will engage an accredited third party service provider to deliver HIV/AIDS/STIs awareness and prevention for the contractor's workers and adjacent communities in accordance with provisions of the gender action plan (GAP). The service provider must be an existing organization actively providing such services in the vicinity of the highway, to ensure on-going activities and follow-up of at risk groups.
- xxiii. Workers should respect village and land owner's boundaries at all times and follow village rules and terms of conduct (especially addressing women and elders);
- xxiv. Land used for campsites shall be cleaned and turned over to the landowner free from all debris and junk materials including unserviceable equipment. Upon landowner's advice, the area shall be planted with the same vegetation as soon as possible before it is vacated;
- xxv. Work and camp sites will be cleaned up to the satisfaction of the landowner and/or local community after use; and
- xxvi. Licenses and EPs for materials extraction and spoil disposal will be obtained in advance and before work commences from landowners, and appropriate authorities including CEPA.

147. **Material extraction.** Materials extraction would be an important activity of the program that shall be managed accordingly to minimize associated environmental impacts. Sources of materials (sand and gravel, borrow materials etc.) and quarry sites shall be agreed with the CSC and PMO prior to any extractions. Permits and licenses shall be obtained prior to commencement of works and quarry sites must not be occupied, prepared or operated by the contractor before the issuance of the necessary land occupation permit and EPs from the CEPA and all other authorities as required.

148. The contractor will be required to identify sources during the preconstruction phase and prepare an extraction plan for all sources of materials that will be used in the road works. The aggregate extraction plan shall be submitted to PMO through the CSC, which will approve and monitor implementation of the extraction plan. No quarries and borrow sites shall be located in areas for protecting biodiversity and/or wildlife management areas. The suitability of quarry and borrow pit sites will be assessed in consultation with the CSC together with landowners and village chiefs that shall provide written permissions or consent.

149. Only permitted/licensed facilities and operations may provide materials for the program. Establishment of quarries, crushers and asphalt mixing plants shall be disclosed to the CEPA following the requirements of the Environment Act and EPAR and obtain an EP in accordance with DOW's Code of Practice.

150. The BCD will specifically require contractors to: (i) balance cut and fill requirements to minimize impacts from extraction of aggregates; (ii) prioritize use of existing quarry sites with suitable materials and update the list of quarries and borrow pits monthly and report to PMO; (iii) procure materials only from quarries and borrow sites acceptable to CEPA or licensed and authorized by CEPA; (iv) if the contractors shall operate the quarry site, required environmental licenses and permits shall be secured prior to operation of quarry/borrow areas (including preparation, approval and implementation by PMO and CEPA as required of aggregate extraction

plan and/or quarry management plan); and (v) borrow/quarry sites shall not be located in productive land or forested areas or land subject to instabilities and landslides.

151. **Mitigation measures.** Mitigation measures identified to minimize impacts from material extraction at quarries and borrow pits include but not necessarily limited to the following:

- i. As part of the CEMP and EP (or similar) application, the contractor will prepare and submit to PMO through CSC and CEPA for approval the aggregate extraction plan and/or quarry management plan;
- ii. Topsoil, overburden and low-quality materials shall be properly excavated and stockpiled near the site to be used for re-use and/or site rehabilitation after completion of the construction works;
- iii. Quarry sites close to where the road works will be done and highly accessible with low hill gradients will be used;
- iv. Adequate drainage shall be provided to avoid accumulation of stagnant water during quarry/borrow site operation;
- v. Access roads affected by the transport of quarry/borrow materials shall be rehabilitated. Agricultural lands and other privately- or communally-owned properties shall be likewise compensated if similarly affected by the same or any other project-related activities;
- vi. Choose alluvial materials from at least 10m from the banks of the river to maintain the integrity of the flowing stream;
- vii. Gravel and alluvial materials shall not be taken from within 200m upstream or downstream of any bridge or river protection structures;
- viii. Alluvial terraces or alluvial deposits which lie on the river beds but not covered by water in normal hydrological conditions shall be preferred;
- ix. Berms and terraces shall be cut during and after extraction in quarries in the mountainous or hilly areas to stabilize slopes; and provide drainage works to properly channel runoff, and vegetative cover or bio-engineering for rehabilitation;
- x. Quarries and borrow pits shall be dewatered and fenced off as appropriate, upon completion of extraction activities to minimize community safety risks most especially to children;
- xi. If borrow pits cannot be immediately dewatered, the contractor shall provide fencing and flotation devices to warn communities of impending danger and risks;
- xii. Borrow pits shall be provided with stable side slopes and proper drainage to avoid creation of water bodies favouring mosquito breeding;
- xiii. Borrow pits shall be backfilled and marked as maybe required by CEPA using surplus inert materials and excavated unsuitable soils.
- xiv. Restoration of quarry sites and borrow areas, as well as their immediate surroundings, will be undertaken in an environmentally sound manner to the satisfaction of the PMO which will sign-off before final acceptance and payment under the terms of the contract;
- xv. Additional extraction sites and/or borrow pits shall not be opened until ESSU is satisfied with the restoration of previously utilized areas.

152. **Spoil disposal.** Along the Highlands highway, the use of readily available excavated materials or what would otherwise be classified as construction spoils when not immediately utilized will reduce the need for additional extraction of quarry-based materials. These materials shall be graded and suitable materials reused as much as possible. The surplus can then be stockpiled at locations agreed with local authorities for use on the other sections of the highway reducing the need to extract other rock and gravel resources from off-site vulnerable hillsides and riverbeds. Areas for temporary storage if not immediately utilized on the worked sections shall be identified with local land owners and agreed with village leaders and local authorities. The CSC

will advise PMO before these materials shall be used for stockpiling or eventual disposal to a suitable location.

153. Surplus rock and soil-based materials for re-utilization along the highlands highway or eventual disposal shall be managed to avoid or minimize potential impacts. Spoil disposal management shall form part of the CEMP to be submitted by the contractor. This CEMP shall update the EMP prepared under this IEE and shall include a section ensuring construction wastes are properly managed. Government land is preferred to be used for stockpiling and dumping of material where these are available along the highway. Otherwise, if private lands are to be used for the purpose, storage or dumping shall commence only after written permission from the land owner is confirmed by the PMO and likewise agreeable to the community leaders and CEPA.

154. **Mitigation measures.** The CSC will be responsible for reporting to PMO the monthly update of the contractor's cut and fill estimates in conjunction with asphalt and aggregate materials planning between the different areas and advise on overall balancing for cut and fill materials to minimize impacts on local resources.

155. The spoil disposal section of the CEMP will include; (i) locations and quantities of spoil anticipated from the works; (ii) agreed locations for disposal/endorsement from CEPA and local groups; (iii) method of transportation to minimize interference with normal traffic; (iv) establishment of acceptable working hours and constraints; (v) agreement on time scale and programme for disposal and chain of custody; (vi) rehabilitation and bioengineering of spoil dump slopes after works completion, (vii) programming issues including the time of year and available resources; (viii) discussion of the PMO inspection/monitoring role; and (viii) links to the grievance redress mechanism and complaints management system for the duration of the works.

156. The PMO assisted by the CSC will be responsible for the monitoring of the progress of slope cutting and the implementation of mitigation measures to minimize impacts. The mitigation measures in the CEMP will include but not necessarily be limited to:

- i. Spoil will be reused as much as possible for backfilling;
- ii. Spoil will not be disposed in any waterways along the highlands highway;
- iii. Spoil disposal shall not cause sedimentation and obstruction of flow of watercourses, damage to agricultural land and densely vegetated areas;
- iv. Surplus materials shall not be stockpiled on the roadside or dumped over crash barriers;
- v. Construction spoils shall not be disposed on fragile slopes, flood ways, wetland, farmland, forest, religious or other culturally sensitive areas or areas where livelihood is derived;
- vi. Surplus spoils shall be used as much as possible for local repair works along the highway; backfill eroded gullies, low-lying areas, and degraded lands in consultation with the local communities;
- vii. Spoils shall be disposed only in areas approved by local authorities and land owners after approval by the PMO through the endorsement of the CSC;
- viii. Spoil disposal shall be monitored by PMO through the CSC and recorded using a written chain of custody (trip-ticket) system to the designated disposal sites;
- ix. Random and uncontrolled tipping of spoil, or any materials will not be permitted;
- x. Before dumping commences, designated spoils dumping areas shall be marked on a plan and in the field with marker poles/flags to identify the agreed areas and limits for disposal. Spoils may be disposed in disused quarries and abandoned borrow pits if these are practicable; and
- xi. The spoil disposal site shall be located at least 50m from surface water courses and shall be protected from erosion by avoiding formation of steep slopes and provided grassing.

## C. Construction Phase

### 1. Impacts on the Physical Environment

157. **Air quality and particulates:** The spoil coming from unsuitable materials' removal and soil excavation during the bridge construction, will be transported away and dumped at the sites authorized by the local authority(ies). However, the excavated soil might cause PM emissions in the form of dust on sunny and windy days if there are no proper mitigation measures taken. The spoil and/or construction materials may affect the environment and deteriorate the scenery of the project area if they are not disposed properly. The following table shows PM emission factors from some equipment, machinery and vehicles during construction.

**Table 5-3: Emission factors of some diesel equipment**

Construction equipment	Hours of operation per day	Emissions (g/horse-power/hr)	
		PM <sub>10</sub>	PM <sub>2.5</sub>
Water truck	8	0.410	0.400
Dump truck	8	0.410	0.400
Excavator	8	0.320	0.310
Graders	8	0.330	0.320
Backhoes	8	1.370	1.330
Bull dozers	8	0.330	0.320
Front end loaders	8	0.350	0.340

158. Emission factors of exhaust fumes are much dependent upon the types of the used equipment, machinery and vehicles and their operation time. Obviously, old equipment, machinery and vehicles will produce more exhaust compared to the new ones. Moreover, equipment, machinery and vehicles lacking maintenance will also generate much more exhaust compared to the fully maintained.

159. Pollution of PM and exhaust fumes will significantly impact on human health, especially on the workers and local people living near the construction site(s). Respiratory diseases are typical of the ambient air environment polluted by PM and exhaust. However, it is difficult estimate the exact concentration of PM and exhaust fumes in the ambient air environment at the construction site(s).

160. **Mitigation measures:** To mitigate impacts of PM emission the spoil and sand should be covered or wetted as transported or piled to reduce PM emissions into the surroundings. The spoil will be disposed of to the allocated sites. The following table shows some indicative mitigation measures for PM emissions.

**Table 5-4: Mitigation measures for PM emission from construction**

Source activity	Mitigation measure	PM10 control efficiency
Demolition and debris removal	Apply water every 4 hours to the area within 30 meters of a structure being demolished, to reduce vehicle track out	36% - 98%
Construction activities	Apply water every 3 hours to disturbed areas within the construction site	61%
Scraping	Minimum soil moisture of 12% for earth moving by use of a moveable sprinkler system of a water truck. Moisture content can be verified by lab sample or moisture probe	69%



Source activity	Mitigation measure	PM10 control efficiency
Construction traffic	Limit on-site vehicle speeds (on unpaved roads) to 15 miles per hour	57%
Grading	All trucks hauling dirt, sand, soil, or other loose materials to be trapped with a fabric cover and maintain a freeboard height of 12 inches	91%

161. Based on the data in Table 5-3, an emission of exhaust fumes into the ambient air may be estimated. In this respect, the application of effective mitigation measures will eliminate unexpected impacts arising from problems of PM and exhaust fumes emissions. That is to say Contractors will be obliged to use construction equipment, machinery and vehicles which must conform to the emission regulations of PNG.

162. The Contractor shall prepare and implement a plan for dust management to minimize and/or suppress dust generation and resuspension created by construction activities in the affected work areas. This plan will address dust issues created by the civil works activities along the highway, as well as by off-site hauling and disposal of construction wastes. It will include regular watering services during dry construction days in settlement areas such as markets, schools and other sensitive entities such as hospitals, and on dust generators such as excavation/open cut areas, and stockpiles. Spillage during transport shall be minimized by covering dump trucks when transporting excavated soils to approved disposal sites. The Contractor shall also ensure that dump trucks will not be overloaded.

163. **Vibration:** Vibration propagates from a piece of construction equipment through the ground to a distant vibration-sensitive receiver predominantly by means of surface waves and secondarily by body waves. The amplitude of these waves diminishes with distance from the source. The general equation modelling propagation of ground vibration from point "a" (a location at distance  $r_a$  from the source) to point "b" (a location at distance  $r_b$  from the source) may be stated in the form of Equation:

$$v_b = v_a \left( \frac{r_a}{r_b} \right)^\gamma e^{\alpha(r_a - r_b)}$$

Where  $\gamma$  is a coefficient dependent of propagation mechanism and  $\alpha$  is a material damping coefficient.

164. Depending upon propagation mechanism of wave types and types of soil, vibration diminishing will vary. As per Wiss (1967), if the soil type is sands the geometric attenuation ( $\gamma$ ) is 1.0 and if the soil type is clays the geometric attenuation ( $\gamma$ ) is 1.5. The most common generic model of construction vibrations as a function of distance was developed by Wiss (1981), the damage threshold for residential area is approximately 80 mm/s. Construction of the network will require small equipment and machinery so the vibrations emitted from them will not be large and are predicted to be less than 10 mm/s at distance of 1 meter.

165. **Mitigation measures:** In order to avoid unnecessary claim for damages caused by construction activities from local residents, especially when use vibration rollers to compact materials, prior starting construction work at the part of road crossing resident's houses, the Contractor(s) and the PMO will invite commune authorities, related local residents and the Engineers' Representatives to participate in a house investigation to record existing conditions of their facilities. This data will serve as a basisto estimate cost for repairing these damages after

completion of the construction work. The Contractor(s) shall also confirm that they will pay compensation for repairing these damages after the completion of the construction works.

166. **Water quality and pollutants:** Short-term impacts to the water quality of runoff draining from project construction areas may result, predominantly from sediment loading related to erosion of exposed soil surfaces. Long-term impacts to the water quality of runoff may result from increased pollutant loading to storm water due to additional impervious roadway surfaces. Storm water runoff may, possibly, wash pollutants, including hydrocarbons, metals, and sediments, from impervious surfaces.

167. Impacts on water quality can occur during construction through an increase in a suspended particular matter attributed to earthmoving works, and removal of vegetation for slope protection works. Impacts may also include: (i) contamination of water bodies and the aquifer resulting from generation of solid and domestic wastes from construction camps and offices; (ii) contamination of nearby water courses resulting from accidental spills and improper storage of fuel and lubricants and construction materials; (iv) turbidity of river water from eroded materials; (v) blockage of streams and changes in water courses affecting community access to water, including existing roadside drains and water sources used for washing; (vi) impairment of water quality from uncontrolled runoff from quarry and borrow areas; (vii) disruption in the hydrology of the water courses resulting from excavation of river beds; (viii) increased turbidity as a result of the disturbance of the channels or creeks; and (ix) disruption of the hydrology and hydraulic characteristics of creeks as a result of laying of gabions and other water course protection works and river training works.

168. **Mitigation measures:** Mitigating measures for long-term impacts to water quality related to the potential increase in pollutant loading of storm water will include the construction of water quality basins to receive and treat storm water runoff from the proposed roadway. Work for the bridge abutments and piers will be performed with the use of coffer dams and sealing off of sediments which will then be appropriately disposed of offsite. Measures will be taken during construction of the piers (i.e., cofferdams, turbidity barriers, etc.) to minimize disturbance of bottom sediments thereby not affecting turbidity.

169. **Waste management:** Construction wastes such as steel and timber off-cuts, sand and gravel, cement bags are anticipated to be generated. These materials may cause nuisance to the surrounding environment if not properly collected and disposed of. Anticipated impacts may include but not necessarily limited to the following: (i) contamination of the land where the solid waste is deposited; (ii) decrease in water quality of nearby water courses; (iii) the stockpile of solid wastes may create habitation for rodents, pest and vermin which may present a health risk to workers and residents of nearby communities; (iv) health and safety impacts on local communities and reduced aesthetics as the heaps of solid waste in the area will be an eyesore.

170. **Mitigation measures:** Contractor(s) shall practice waste segregation, provide the necessary receptacles and organise awareness campaigns to their staff and workers. Organic (biodegradables) shall be collected and disposed on-site by composting, and recyclable materials shall be recovered and collected for sale to third party collectors/integrators and/or recyclers.

171. **Hazardous materials:** Hazardous substances such as oils and lubricants are anticipated to be used and can cause significant environmental impacts if improperly managed or disposed.

172. Improper storage and handling of hazardous materials may result in the **pollution** of the surrounding areas and may lead to the loss of aesthetics in the surrounding landscape environment.

173. **Mitigation measures:** The contractor(s) shall segregate hazardous wastes (oily wastes, used batteries, fuel drums, etc.) and ensures that storage, transport and disposal of these wastes

shall be undertaken consistent with national and local regulations and shall not cause pollution. The contractor(s) shall be required to display safety information in all work areas and to train workers in the safe use of hazardous materials, including the provision of protective equipment.

174. **Soil quality and erosion.** Clearing and grubbing activities for setting up the temporary facilities that will be used by the Contractor(s) including contractors' facilities, offices, worker camps, storage of equipment and materials, service areas, quarries and batching plant areas may affect the landscape and soil quality of adjacent lands as there may be accidental spillage of solid wastes, construction debris, petroleum products and many other construction wastes. The natural landscape maybe also damaged from unnecessary clearing and removal of vegetation as well as grading of rolling terrains of the natural surroundings. These are, however, anticipated to be minimal, manageable and avoidable with siting criteria, and for the most part short term in nature.

175. **Mitigation measures:** Soil erosion is anticipated during civil works when vegetation will be removed to make way for slope and drainage works that will expose soil to rainfall. During heavy rains, these loose soil materials will be carried away by run-off from the construction areas to the waterways. The impacts during this phase will be of short duration and will be moderate. Cutting of elevated slopes during construction is expected to cause erosion and landslides and the landscape of the project site along the highway will be physically altered on a permanent basis.

## 2. Impacts on the Biological Environment

176. Survey result indicates that most of the habitat of these locations from Bridges 45 to 71 have had some human modifications to the environment and its vegetation. However 4 bridges - Feonoku River 335+450 (B#51), Nurape River 342+850 (B#52), Kenangi River 345+200 (B#53), and Baikabai River 348+400 (B#54) are located within the Watabung LLG in the Daulo District of Eastern Highlands Province still have some primary and secondary forests near the mountains close to the bridges. Of these, Feonoku bridge (B#51) is to be be relocated (re-aligned) and newly constructed and Baikabai bridge (B#54) is to be in-situ new (replacement) bridge.

177. **Impacts on terrestrial flora:** Undertaken civil works activities at 19 in-situ new bridges and repair/reinforcement of 4 existing bridges shall be confined within the existing bridge corridor or acquired bridge right of way that had already experienced past disturbances. While the 3 relocation bridges require permanent land acquisition at per new bridge construction for approach road re-alienations.

178. Construction activities are anticipated to result in the loss of vegetation including trees in the area. For most of the sections, the vegetation comprises grasses and shrubs interspersed with growths of small to medium trees.

179. There are some gardens, coffee plantations and occasional individual trees that may require removal. However, these are common species and have no special characteristics to merit protection. Consistent with DOW's Code of Practice, trees shall be avoided as much as possible by adjustments in the design. Table 5-5 indicates the terrestrial flora affected by the construction activities.

**Table 5-5: Terrestrial Fauna Impacts**

Name	Impacts
Jogi River (Zokozoi)	crops affected
Gouluka Culvert	Approx. 14 trees and two bamboo grooves
Baikabai River Bridge	Temporary land uses
Chimbu River Bridge	Vegetable cultivation (Jerry Maya family)

Koronigle River Bridge	Approx. 40 banana trees affected
3@D2000 Culvert	15 trees
Ahl River	Crops near downstream abutment
Wahgi River	50 garden plants/ crops on both sides;
Bilu River	Approx. 10 trees upstream; banana plantation downstream
Ambeke River	Approx. 5 trees, 50 coffee trees and flowers; 4 bamboo grooves
Mildip River	Approx. five trees affected: 25 coffee trees
Kurumula River	One tree and crops affected: 25 coffee trees
Pin River	25 coffee trees

180. **Mitigation measures:** Measures to be included in the project to ensure minimization of impacts from vegetation removal include but not necessarily limited to the following:

- i. The contractor shall conduct a tree inventory (species and size) during the staking of the alignment in the pre-construction stage, and trees that may be removed will be agreed with PMO and landowners prior to cutting and carefully marked on a site drawing. Trees to be maintained will be protected;
- ii. Vegetation clearing shall be kept to a minimum and occur only within the designated construction limits. Trees shall not be indiscriminately cut, but instead given root protection for replanting elsewhere if at all possible;
- iii. Vegetation clearance during staking and demarcation activities, especially of trees along the road-side shall be minimized. Trees that may be felled shall be clearly marked and only these marked trees shall be removed;
- iv. The contractor shall be responsible for providing adequate knowledge to construction workers in relation to existing laws and regulations regarding illegal tree cutting.
- v. Contract documents and technical specifications shall include clauses expressly prohibiting the indiscriminate felling of trees by construction workers;
- vi. The contractor shall not utilize cut timber as fuelwood but return it to the landowner.

181. **Impacts on terrestrial fauna:** The construction activities are anticipated to have only minimal impacts on mammals, birds, and reptiles that may still be found in the already disturbed condition of the surrounding environment of the traversed areas. For the most part, these are highly mobile and would easily move away from sources of noise disturbance and dust generation during construction. The potential for construction workers to poach edible animals and birds of the locality whenever they may be found in spite of prohibition on poaching exists and this could be an impact to be managed.

182. **Mitigation measures:** The contractor(s) will be responsible for providing awareness to construction workers regarding fauna in the area. Contract documents and technical specifications will include clauses expressly prohibiting the poaching of fauna by construction workers and making the contractor responsible for imposing sanctions on any workers who are caught trapping, killing, poaching, being in possession of or having poached fauna. The mitigation measures include but not necessarily limited to the following:

- i. Labor employment agreement between the contractor and workers shall include a provision for prohibiting the hunting, poaching and/or catching wildlife (including birds and fish) for trade or any other reason;
- ii. Contractor shall provide adequate food supplies and rations at the construction camp for camp-based workers;
- iii. Workers shall be prohibited from hunting or catching wildlife including fish; and

- iv. The contractor will be responsible for providing awareness to construction workers in regard to fauna in the area. Contract documents and technical specifications will include clauses expressly prohibiting the poaching of fauna by construction workers and making the contractor responsible for imposing sanctions on any workers who are caught trapping, killing, poaching, being in possession of or having poached fauna.

183. **Impacts on aquatic fauna and flora:** The excavation work to construct piers and abutments and other construction activities will induce sedimentation and turbidity near the work site and impact to the aquatic life. Generally, free swimming aquatic fauna like fishes are able to swim away from highly turbid waters. But for those that follow or linger in turbid water, feeding rates of certain species are reduced at a high turbidity level (120 NTU). This is presumably due to a decrease in the reactive distance of the fish to their planktonic prey (Hecht and van der Lingen 1992 in DOER 2000). Clogging of gills is also known to affect fish in waters with high concentration of suspended sediments.

184. Survey results shown that the aquatic fauna are common small brown mollusk, water beetle, pond skaters, rainbow trout (*Oncorhynchus mykiss*), and tilapia (*Oreochromis mossambica*). *O.mykiss* and *O.mossambica*. While There were no special or threatened aquatic flora recorded in all locations from B#45 to B#71. The most common was brown and green algae which were also depended on the quality of the river.

185. All the bridge construction sites do not in or go through Nature Reserves for Biodiversity and the impacts to aquatic flora caused by construction activities are temporary and short term in the construction phase.

186. **Mitigation measures:** Pollutant loading of stormwater will include the construction of water quality basins to receive and treat stormwater runoff from the proposed roadway. Strict adherence to the Soil Erosion and Sediment Control Plan should eliminate negative water quality impacts due to sediment loading.

187. Work for the bridge abutments and piers will be performed with the use of coffer dams and sealing off of sediments which will then be appropriately disposed of offsite.

188. Given the immense size of the river, and the degraded nature of these aquatic environments, it is anticipated that the project will not result in any significant impact to aquatic habitats. Additionally, the project will not create a physical barrier to fish movement and will not adversely affect migrating fish.

189. **Invasive alien species:** Biological impacts from introduced species and invasive species can cause a great deal of damage to naturally adapted systems. Invasive or introduced species are species that are non-indigenous and can colonise and out compete local species. Most of these species are a major threat to freshwater ecosystems of Papua New Guinea. Aquatic plants such as *Piper Adancum* has been reported to cause major problems in the bridge location. Introduced aquatic fauna such as tilapia (*Oreochromis mossambica*) is an examples that threaten natural freshwater fauna in the country. Tilapia is the only invasive noted in the area being purposefully introduced about 40-50 years ago. As it provides an ample source of protein it has been particularly well adopted by the local community

190. **Mitigation measures:** invasive species have the ability to out compete local vegetation and the introduction of these into new areas is to be avoided. The measures are to control invasive alien species but not necessarily limited to the following

- i. Prior to commence works, the contractor will arrange to review the site and determine whether there is or is not any infestations of invasive species in the area.
- ii. The contractor is to determine where the contractor's machinery was last used and whether the area is infested with any invasive species. Depending on the state of any

infestation at the project construction site then the CSC will advise the contractor whether or not machinery must be cleaned before moving to the site. This includes the removal of any potential seed sources such as earth and organic material that may be attached to the machinery.

- iii. The contractor will be required to observe for any infestations.
- iv. Should infestations occur on construction sites that are due or are not due to the contractor's activities the contractor will be required to control the infestation.
- v. Invasive species shall not be used to revegetate cut slopes and replanting or compensatory tree planting that maybe required shall have full agreement of the local forest authorities.
- vi. Control and avoidance of the introduction of invasive species is the contractor's responsibility and this also extends to any sub-contractors that are working under his control.

191. **Endangered species:** The implication of the ecological survey is that less or no endangered species will be affected by the proposed project as the locations have already been greatly modified through human impact. However rare and endangered species known may occur in the zone of the construction and can be affected.

192. **Mitigation measures:** Regularly monitoring and maintain a database of the occurrence of rare and endangered species of plant or animal and take actions to avoid their disturbance during construction works through isolation of their habitats or adjustment of timing of works.

### 3. Impacts on the Socio-economic Environment

193. **Noise:** During construction, noise pollution is inevitable due to operation of construction equipment, machinery and heavy vehicles. Most construction equipment operates with a noise level between 75 and 90 dBA as measured at a distance of 50 feet (US EPA, 1971). Noise levels from a point source such as a piece of construction equipment will attenuate 6 dBA per doubling of distance over hard surface. Over a "soft" or vegetated surface noise levels will attenuate 9 dBA per doubling of distance. Thus if a piece of construction equipment generates 87 dBA at 50 feet, the noise level at 100 feet would be 78 dBA. In some cases, when lots of construction equipment are operating at the same time, a total equivalent noise level is computed based on the following formula:

$$L_{Aeq, total} = 10 \times \log_{10} \left[ \sum_{i=1}^k 10^{(L_{Aeq, i} / 10)} \right]$$

Where:

$L_{Aeq, total}$  is the total equivalent noise level for a typical work day during a particular construction period;

k is the number of different types of equipment; and

$L_{Aeq, i}$  is the equivalent sound level for equipment type i.

194. Temporary noise impacts in vicinity of the project site may occur due to the construction and transportation activities. The magnitude of impact will depend upon the specific types of works, types of equipment used and their associated range of noise level, as well as the traffic volume.

195. **Mitigation measures:** Among the impacts identified are the following: (i) operation of heavy equipment and various construction machinery are primary noise generators during construction. It is projected that noise levels could reach from 65 - 80 dB (A) at peak times; (ii) poor equipment maintenance may cause very high noise levels; faulty or damaged mufflers, loose engine parts, rattling screws, bolts, or metal plates all contribute to increasing the noise level of a

machine including careless or improper handling and operation of equipment; and (iii) poor loading, unloading, excavation and hauling techniques may also lead to increased noise levels.

196. The Contractor(s) will manage noise in the work areas to ensure these will not affect the adjacent communities. Noise will not likely be an issue due to the dispersed nature of and low-density levels of settlements along the highway, and the distance between the activities and the communities. However, the contractor(s) shall be prepared to limit work only to daylight hours mostly for security reasons and where the community finds that any night-time operations cause any nuisance.

197. **Access and traffic safety.** Project activities will cause temporary negative impacts due to the presence of vehicles and equipment on the worked portions of the highway, including inconvenience, minor disruptions to traffic flow, and on local access to and from the villages along the highway during the construction period.

198. **Mitigation measures:** To reduce the risk of accidents in the workplace, access to construction camps by others than authorized workers and people will be prohibited. Security personnel are expected to implement rules and procedures in securing access to work areas.

199. The contractor(s) will provide information boards near the work sites to inform and instruct the public on how to conduct themselves if they approach the work zones. Information boards shall show the name and contact details in the CSC, PMO and contractors' offices for complaints about the works.

200. The contractor(s) shall provide warning signs at the periphery of the site(s) to warn the public of imminent danger. The contractor(s) shall coordinate with local level authorities regarding limiting speed in these areas; restricting speed of its project vehicles; and also control traffic by providing flag-men and warning signs at either end of the work zones.

201. Public safety, particularly of pedestrians and children can be threatened by the excavations for the preparation of sub-base(s) and base(s), trenches for drainage works and slope stabilization construction. Fencing shall be installed on densely populated settlements prior to excavation work commencing on all sides of temporary excavations. This shall also include provisions for site security and watchmen (preferably coming from the community), trench barriers and coverings, and any other applicable safety measures necessary to ensure community safety.

202. **Occupational health and safety.** Construction activities pose a range of health and safety risks. The ADB SPS 2009 requires that health and safety impacts on workers and the community are identified and mitigation measures are proposed meeting World Bank's Environmental Health and Safety Guidelines (EHSG).

203. The excavation will utilize land based heavy equipment. The workers will be exposed to ergonomic stress, hazards of operating heavy equipment and hazards of heavy lifting, exposed to possibly prolonged elevated noise levels and dusty condition. In addition, they will be working around water, hence they will also be exposed to water hazards such as drowning. This impact is rated negative, minor, short term duration.

204. **Mitigation measures:** Workers' occupational health and safety is generally governed by the Employment Act. The CEMP shall address this concern and routine safety measures as required by EHSG and Employment Act and by good engineering practice, shall be established. Contractor(s)' construction camp(s) shall be equipped with first aid and health-post which shall include basic medical supplies. To protect and keep workers safe, the following shall be implemented:

- Workers shall be given orientation on safety procedures on job site;

- They shall be provided with personal protection equipment such as hard hat, safety shoes, ear plugs, masks when necessary, gloves and goggles;
- A first aid station with a trained emergency first responder shall be provided in the construction site;
- A safety officer shall be designated to enforce safety regulations in the construction site;
- Sanitary facilities shall be available in the construction site;
- An emergency warning system shall be instituted to protect workers from site emergencies and natural hazards.
- Evacuation plan for extreme emergency conditions shall be formulated.

205. **HIV/AIDS/STIs:** This critical issue requires a two-pronged approach for its management. One relates to its control during the construction process. This is manageable through the efforts of both PMO and the Contractor(s). The second approach relates to education of truck drivers in the transport industry. It is suggested that the management of the spread of HIV/AIDS at this level is required as part of a broader programme to address this issue on a regional or national basis and is beyond the scope of this project alone. Workers from many places in the world may carry and transmit certain diseases to the local people

206. The management of the spread of HIV/AIDS within the construction workforce can be addressed by the construction contractor(s) through the preparation and implementation of a comprehensive screening and awareness program, for which assistance can be provided by agencies specifically focussed on the management of this disease.

207. The management of this issue should be three-fold – control of the introduction of HIV/AIDS through the workforce, development of awareness within the workforce about the disease, its spread and its consequences, and introducing preventative measures, available whilst controlling external vectors that may introduce the disease.

208. **Mitigation measures:** The contractor(s) should be required to implement a HIV/AIDS awareness program as part of the occupational health and safety training provided to personnel on the project; provide visual stimuli in the workplace (offices, canteens, construction camps) to ensure the need to take care and control this disease is continuously presented and reinforced.

209. **Physical cultural resources:** Due to the disturbed nature of the highway, it is unlikely that physical cultural resources (PCR) may be discovered. However as a precautionary measure, the contractor shall prepare as part of the CEMP a plan to address such concerns. Generally, in the event PCRs are uncovered, work shall cease immediately and the PMO through the DSC shall be informed. The PMO will then inform relevant authorities to conduct the necessary assessments. Construction activities shall not re-commence until the authorities have signed-off that the site/resources have been dealt with appropriately and that work may continue. The contractor shall be responsible for complying with the requirements of authorities and the PMO shall monitor compliance. The contractor will include a section on “chance finds” in the CEMP.

210. **Mitigation measures:** As a precautionary measure, the Contractor(s) shall prepare a plan to address such concerns. Generally, in the event PCRs are uncovered, work shall cease immediately and the PMO through the CSC shall be informed. The PMO will then inform relevant authorities to conduct the necessary assessments. Construction activities shall not re-commence until the authorities have signed-off that the site/resources have been dealt with appropriately and that work may continue. The Contractor(s) shall be responsible for complying with the requirements of authorities and the PMO shall monitor compliance. Mitigation measures for potential impacts on PCR include but not necessarily be limited to the following:

- i. Contract personnel shall be instructed to keep watch for relics that may be uncovered during excavations, and local communities will be consulted to identify potential sites of concern, such as graveyards or tabu areas;



- ii. Should any potential items be located, the PMO through the CSC shall be immediately informed and work stoppage be immediately implemented.
- iii. The PMO with the assistance of the CSC, and in cooperation with local leaders, will determine if the item is of potential significance and contact DOW to pass the information to the relevant department in the government who will be invited to inspect the site;
- iv. Work shall stop to allow time for inspection, removal or in-situ preservation of the PCR and until the relevant government agency indicates works can re-commence; and
- v. Until the government has responded to this invitation, work will not re-commence in this location until agreement has been reached with the government and PMO as to any required mitigation measures.

211. **Social conflicts:** Presence of construction workers may affect community structure and patterns and conflict with local people.

212. **Mitigation measures:** The contractor shall take the following mitigation measurements:
- i. Undertake training of construction works to minimize conflicts with local communities, particularly in relation to safety, hygiene and transmission of diseases,
  - ii. Consider the location of construction camps away from communities in order to avoid social conflict in using resources and basic amenities such as water supply,
  - iii. Maximize number of local people employed in construction works,
  - iv. Maximize goods and services sourced from local commercial enterprises.

213. **Impacts on sources of livelihood and Modified market patterns:** Changes resulting from the induced demands of the construction project may create a false market economy for the duration of the project which affects those least able to pay for commodities in the community.

214. The construction of the project will disrupt normal patterns of trade due to increased inputs into the project area to meet project demands and changes to normal patterns of traffic and access resulting from construction staging. The following bridge sites may affect to the livelihood and market patterns of local people.

**Table 5-6: Potential areas affect to the livelihood and market patterns of local people**

No	Name	Chainage	Description
1	Asaro River	315+100	Market, trade stores and district offices nearby
2	Feonoku River	355+450	Very few houses and small business nearby
3	Whagi River	414+950	Houses, stores, club, market and a workshop/factory nearby
4	Whagi River	463+900	Aggravated land for market and dump site nearby

215. **Mitigation measures:** An income restoration program to help the severely affected and vulnerable households rebuild their sources of livelihood will be prepared and implemented. This item is specifically addressed in the Social Assessment.

#### **D. Operation Phase**

216. After the completion of the construction phase, the Contractor(s) will maintain and/or make correction on all defects in the implementation of the project for one year prior to hand-over to the DOW. Maintenance works will be properly implemented in the operation which includes: strengthening of the inspection and monitoring system, periodic inspection and assessment of road condition, timely implementation of repair works, asphalt removal, replacement and re-sealing, vegetation control, clearing of side ditches, repair of erosion protection works, and periodic replacement/repainting of traffic safety signages.

## 1. Operation Impacts on the Physical Environment

217. **Greenhouse gas emissions:** Increase road capacity will lead to higher speeds and use of the road section by heavier vehicles. Both these items will increase per km emissions on the road.

218. The maintenance of free traffic flow will reduce the volume of greenhouse gas emitted. Traffic management mechanisms should be used to ensure speed differentiation between classes of vehicles does not reduce freedom of movement for vehicles.

219. **Air quality - particulate emissions:** Vehicle emissions will be the main air pollution sources during operation. This concern shall be addressed by local level and national government authorities to implement anti-pollution laws after project completion.

220. Particulate contamination from dust will be expected to be significantly reduced due to the sealed surface. However, toxic residues from vehicle emissions are likely to accumulate or create significant impacts if anti-pollution laws are not implemented. This concern shall be addressed by local level and national government authorities to implement anti-pollution laws after project completion.

221. No significant air quality impacts are anticipated if anti-pollution laws are implemented. However, sustained highway maintenance activities are required to ensure vehicles continue to efficiently run the highway without being bothered by potholes and other obstructions that may result in congestion creating highly localized vehicle emission pollution.

222. **Water quality:** Major potential impacts on water quality are not expected to occur during operations unless accidental spills of hazardous materials happen.

223. There is however, anticipated minor impacts on sedimentation and water quality during improper management of removed silt from lined drainage canals or during close ground clearing of roadside vegetation, and vegetation removal on unlined canals.

224. The maintenance contractor will be responsible for regular clearing of drainage structures to keep them effective. Vegetation on unlined canals shall not be removed but only cut just above ground to maintain vegetative cover. Vegetation growing on silt in lined drainage will however be removed together with desilting activities. Additional plantings of deep-rooted vegetation in sloping areas adjacent to drains in combination with engineered structures will also be done to further prevent soil erosion that may eventually accumulate as silt in drainage canals.

225. Dilapidated or damaged culverts will be replaced during the maintenance program to ensure that passage of high runoff and overland flows from the carriageways are unimpeded, ensuring the integrity of the surface of the road pavement; and removing the potential risk from scouring.

## 2. Operation Impacts on the Biological Environment

226. **Effects on terrestrial flora and fauna.** The operation of the subproject is not likely to have impacts on flora with the exception of vegetative cover on the roadsides that needs to be regularly cut as part of the regular maintenance activities.

227. There are no rare or endangered fauna that may be impacted by the operation of the highway. The traversed area of the highlands highway currently as in the past have already disturbed highly mobile fauna in the area due to sustained noise disturbances from passing vehicles. Besides, the areas adjacent to the highway are also already heavily disturbed from agricultural activities, gardens and coffee plantations that would have denied habitation of endangered or rare fauna.

228. **Effect on aquatic flora and fauna:** Storm water runoff which has the potential to wash pollutants, including hydrocarbons, metals, and sediments, from impervious surfaces will impact to the water quality and lead to impact on the aquatic life. In addition, spillage of hazardous materials in transport along the road and crossing the bridge could lead to rapid loss of aquatic life as well. Develop emergency plan and train and equip commune emergency teams to manage such events.

### 3. Operation Impacts on the Social Environment

229. **Noise:** Noise associated with road and bridge development has main sources: (i) vehicles, (ii) friction between vehicles and the road surface and (iii) driver behaviour.

- Vehicles: Vehicle noise comes from the engine, transmission, exhaust, and suspension, and is greatest during acceleration, on upgrades, during engine braking, on rough roads, and in stop-and-go traffic condition. Poor vehicle maintenance is a contributing factor to this noise source
- Road noise: frictional noise from the contact between tires and pavement contributes significantly to over and condition of tires and pavement. Frictional noise is generally greatest at high speed and during quick braking.
- Driver behavior: driver contributes to road noise by using their vehicles' horn, by shouting at each other, and by causing their tires to squeal as a result of sudden braking or acceleration.

230. Even when it is not perceived consciously, chronic exposure to road noise can affect human welfare in varying degrees, both physiologically and psychologically. Chronic noise exposure can be a source of annoyance creating communication problems and leading to elevated stress levels as well as associated behavioral and health effects. It can cause auditory fatigue, temporary and permanent, and can even contribute to learning problems in children.

231. To mitigate transportation noise, motor vehicle noise can be reduced at source, for example through vehicle construction, selection of tires and exhaust systems, as well as vehicle maintenance. Control of vehicle noise emissions can be attempted using vehicle design rules and in-use noise regulations and enforcement.

232. Maintenance of vehicles to maintain an acceptable level or to reduce noise emissions is beyond the scope of the project but is more to do with policy implementation (i.e. implementation of anti-pollution laws).

233. **Risk of spread communicable disease.** Bridges and roads have the potential to pose a risk as a pathway for disease transmission particularly if they carry a large volume of traffic; routes that connect cities, towns or large numbers of villages, (especially roads with international borders where improved access to major markets can facilitate international trade); and there is a commercial industry established that is geared towards large numbers of truck drivers and a mobile population.

234. The highlands highway has some of these characteristics although traffic volume is still considered low, and it does not connect directly to the international border with Indonesia in West Papua. However, In PNG, the Highlands Highway has become known colloquially as "the HIV/AIDS Highway" because this is where the epidemic is focused, largely as a result of truck drivers picking up sex workers along the route. There are many truck stops that cater for sexual services and although the extent has not been assessed thoroughly at this time, there is a risk of transmission of communicable diseases and this is anticipated to increase during operation. This risk will be mitigated with the implementation of STIs/HIV/AIDS awareness and prevention campaign, in cooperation with local government and NGO health service providers.

235. **Safety and access.** During operation, safety and access between the capital centers in the Highlands and Momase regions as well as local access of the rural transport network connecting to the highlands highway, is anticipated to significantly improve. This will result in the smoother flow of traffic, exchange of goods and services, and passenger comfort when travelling between the capital centers, towns and villages along the highlands highway. Access to social services and key community facilities will be likewise anticipated to improve as a result of the investment program. The implementation of the maintenance plan to be implemented by DOW will ensure the sustainability of the road rehabilitation.

236. In general, road safety will be also improved with road safety infrastructure and improvements put in place. Overgrown vegetation poses a traffic hazard, especially when it reduces sight-lines around corners. Vehicles are known to cross to the other side of the road to avoid heavily vegetated areas or potholes, posing accident risks to oncoming vehicles. Regular cutting and clearance of road-side vegetation will be included as part of the road maintenance program.

237. An improved highlands highway is likely to encourage vehicle drivers to increase speed, necessitating the review, regulation and enforcement of speed restrictions in built-up areas. Overall the condition of the road facilities will be enhanced and driving conditions will also improve. Routine safety measures, signage and road markings will be introduced to reduce driving risks between capital centers, villages and accident prone areas.

238. **River-bank and scour protection:** Rip-rap, gabion baskets will be used appropriately to protect abutments and river-banks up and downstream. These structures may be damaged due to storm water or human activities

239. The frequency of preventive maintenance inspections and implementation of sustained maintenance on designed structures will be increased. A system of monitoring, reporting and maintenance shall be developed consistent with the concept of this investment subproject.

240. **Impacts on morphology and hydrologic regime:** The change in the longitudinal profile by bridge construction, bank improvement and training works will result to change the hydrodynamics and may also change current direction and may cause erosion downstream and river morphology. The River Management Stations will regularly monitor and keep track of erosion status of rivers and report to DOW for maintenance and on time actions.

## **E. Cumulative Impacts**

241. **Approach:** Based on the nature of the project-environmental linkages, the baseline conditions within the receiving environment and the amounts of change expected in each case, the environmental impacts of the proposed project have been identified and quantified to the extent possible. The following conceptual model has been used as the underlying basis for assessment.

- i. Examining the role of the Valuable Environmental Components (VEC) in the environment:
  - Key links in the social, economic or ecological integrity of the area;
  - Components directly linked to human health and welfare;
  - Local key resources;
  - Important cultural resources;
  - Variability in abundance or quality over time (i.e. periods of critical availability).
  - Absolute change in numbers, densities, frequencies and/or duration; and
  - Proportional increase or decrease in volumes, flow and composition.
- ii. *Determining the severity of negative impacts:*

- Very high - major losses or ecosystem disruption, system unable to function without substantial mitigation, usually irreversible impacts.
  - High - substantial losses or disruption but system could still function albeit at a lower level, usually irreversible impacts;
  - Moderate - measurable losses or disruption, but system could continue to work without mitigation;
  - Low - small changes, possibly measurable, reversible;
- iii. *Examining the scale of the effect:*
- *Site (local)* - within close range of a specified component or activity;
  - *Catchment* - within the drainage area of the River and its linked catchments;
  - *Regional* - within a specified and well-defined area within PNG;
  - *National* - country wide.
- iv. *Examining the likely duration of impacts:*
- *Short-term* - occurring during construction phase only (2-3 years);
  - *Medium term* - approximately 1-2 decades; or
  - *Long-term* - persisting during the project's existence.
- v. *Other considerations:*
- Synergistic effects on the VECs by non-project related actions;
  - Project-on-environment and environment-on-project impacts.

242. Significance is defined as the perceived level of importance of an impact and is dependent on many factors, including duration, severity, scale, and reversibility. The amount of subjectivity in impact significance assignment can be reduced by formulating a definite set of criteria based on the above assessment parameters. The links have been subjectively but consistently determined and provide a basis for comparing and prioritizing impacts of the overall project.

243. Total impacts to environment within the project will be presented by marking points and calculated by the following formula:

$$Total\ impact = \sum (Criteria\ of\ impacts) \times Significance\ of\ impacts$$

244. The Environmental Impact Matrix overleaf presents an assessment of Impact Severity of each activity for all sensitive issues using the following coding:

**Table 5-7: Types of Activities, Environmental Impact Assessment Coding**

Activity	Scale of impact	Severity of impact
A Preparation of site clearance	4 National	3 High
B Excavation and filling activities	3 Province	2 Moderate
C Transporting and storing of materials and wastes	2 District	1 Low
D Production of materials	1 Commune	
E Construction superstructure of bridges	<b>Duration</b>	<b>Significance</b>
F Construction substructure of bridges	3 Long-term	5 Very high
G Strengthening of the existing bridges	2 Medium-term	4 High

H	Operation of Bridges	1	Short-term	3	Moderate
	<b>Others</b>			2	Low
		N/A	Not assessed-0	1	Nil

245. The following environmental impact matrix has been developed using the methodology described above. It identifies those issues of greatest significance and enables the development of mitigation strategies and management plans to limit the adverse effects of those issues whilst building on potential environmental benefits that may arise.

**Table 5-8: Environment Impacts Matrix**

Item	Issue	Activity	Scale	Duration	Severity	Significance	Total impact	General impact assessment
<b>A</b>	<b>Physical Environment</b>							
1	Air quality and particulates	A	1	1	2	2	8	L
		B	2	2	3	4	28	H
		C	2	2	3	2	14	M
		D	2	2	3	3	21	H
		E	2	2	2	2	12	M
		F	3	2	3	3	24	H
		G	1	1	1	3	9	L
		H	2	3	2	2	14	M
2	Vibration	A	1	1	2	2	8	L
		B	2	2	2	3	18	M
		C	1	1	2	2	8	L
		D	2	2	2	3	18	M
		E	1	1	2	2	8	L
		F	2	2	2	3	18	M
		G	1	2	2	2	10	M
		H	2	3	2	2	14	M
3	Water quality and pollutants	A	1	1	1	1	3	L
		B	3	2	2	3	21	H
		C	3	2	2	2	14	M
		D	2	2	2	2	12	M
		E	2	2	2	2	12	M
		F	3	2	3	3	24	H
		G	1	1	2	2	8	L
		H	1	3	2	2	12	M
4	Waste management	A	1	1	2	2	8	L
		B	3	2	3	3	24	H
		C	2	2	2	2	12	M
		D	2	2	2	3	18	M

Item	Issue	Activity	Scale	Duration	Severity	Significance	Total impact	General impact assessment
		E	2	2	2	2	12	M
		F	3	2	3	3	24	H
		G	1	1	2	2	8	L
		H	1	3	1	2	10	M
5	Hazardous materials	A	1	1	1	1	3	L
		B	2	2	2	2	12	M
		C	3	2	2	3	21	H
		D	2	2	2	2	12	M
		E	2	2	2	2	12	M
		F	3	2	2	2	14	M
		G	1	1	1	2	6	L
		H	1	1	1	1	3	L
6	Soil quality and erosion	A	2	2	2	1	6	L
		B	2	2	2	3	18	M
		C	1	1	1	1	3	L
		D	1	1	1	1	3	L
		E	1	1	1	1	3	L
		F	2	2	2	3	18	M
		G	1	2	1	2	8	L
		H	1	3	1	1	5	L
<b>B</b>	<b>Biological Environment</b>							
1	Terrestrial flora	A	2	2	2	3	18	M
		B	1	1	2	2	8	L
		C	1	1	1	2	6	L
		D	1	1	1	2	6	L
		E	1	1	1	2	6	L
		F	1	1	1	2	6	L
		G	1	1	1	2	6	L
		H	1	3	1	1	5	L
2	Terrestrial fauna	A	2	2	2	2	12	M
		B	1	1	2	2	8	L
		C	1	1	1	2	6	L
		D	1	1	1	2	6	L
		E	1	1	1	2	6	L
		F	1	1	1	2	6	L
		G	1	1	1	2	6	L
		H	1	3	1	1	5	L
3		A	1	1	1	1	3	L

Item	Issue	Activity	Scale	Duration	Severity	Significance	Total impact	General impact assessment
	Aquatic flora and fauna	B	3	2	2	2	14	M
		C	1	1	2	2	8	L
		D	1	1	2	2	8	L
		E	1	1	2	2	8	L
		F	1	1	2	2	8	L
		G	1	1	2	2	8	L
		H	1	3	1	2	10	M
		4	Invasive alien species	A	2	2	2	2
B	1			2	2	3	15	L
C	1			1	2	2	8	L
D	1			1	2	2	8	L
E	1			1	2	2	8	L
F	1			1	2	2	8	L
G	1			1	2	2	8	L
H	1			3	1	1	5	L
5	Rare and endangered species	A	1	1	2	2	8	L
		B	1	1	2	2	8	L
		C	1	1	2	2	8	L
		D	1	1	2	2	8	L
		E	1	1	2	2	8	L
		F	1	1	2	2	8	L
		G	1	1	2	2	8	L
		H	1	3	2	2	12	M
<b>C</b>	<b>Socio-Economic Environment</b>							
1	Noise	A	1	1	2	2	8	L
		B	2	2	2	3	18	M
		C	1	1	2	2	8	L
		D	2	2	3	2	14	M
		E	1	2	3	2	12	M
		F	2	2	3	3	21	H
		G	1	1	2	2	8	L
		H	2	2	3	2	14	M
2	Access and traffic safety	A	1	1	2	3	12	M
		B	1	1	2	3	12	M
		C	2	2	3	3	21	H
		D	1	1	2	2	8	L
		E	1	1	2	2	8	L
		F	1	1	2	2	8	L



Item	Issue	Activity	Scale	Duration	Severity	Significance	Total impact	General impact assessment
		G	2	2	2	2	12	M
		H	3	3	2	2	16	M
3	Occupation health and safety	A	2	1	1	2	8	L
		B	3	2	2	2	14	M
		C	2	1	1	2	8	L
		D	2	2	2	2	12	M
		E	1	2	3	3	18	M
		F	1	2	3	3	18	M
		G	1	1	1	2	6	L
		H	1	1	2	2	8	L
4	HIV/AIDS/STIs	All	3	2	2	2	14	M
5	Permanent land acquisition	A	3	3	2	3	24	H
6	Temporary land acquisition	A, D	2	2	2	2	12	M
7	Social conflicts	All	3	3	1	2	14	M
8	Sources of livelihood and Modified market patterns	A	2	1	1	2	8	L
		B	2	2	2	3	18	M
		C	2	2	2	2	12	M
		D	1	1	2	2	8	L
		E	1	1	2	2	8	L
		F	2	2	2	3	18	M
		G	1	1	3	3	15	M
		H	1	2	1	2	8	L
9	Physical cultural resources	A-G	3	2	2	2	14	M
10	River-bank and scour protection	H	2	3	3	2	16	M
11	Morphology and hydrologic regime	H	3	3	2	2	16	M

Legend:

Colour Code	Impact	Point
-------------	--------	-------

H	High	Greater than 20
M	Medium	Greater than 10 and Less than 20
L	Low	Less than 10

## 6. ANALYSIS OF ALTERNATIVES

### A. Alternative No.1 -"No Bridge Improvement"

246. "No new action" is always an alternative and often it compares favourably in a purely economic analysis. However, there can also be significant non-economic impacts from such an approach which makes a straightforward evaluation more difficult. The "No Improvement" alternative will mainly involve continuity of the current activities.

247. The bridges can still be used without improvement. However, the limitations to transportation in terms of capacity will continue to prevail. One major concern with the "No Project Option" is how well can the present situation enhance safety of the bridges, mitigate environmental impacts and enhance transport in support of the economic development of the Highlands Region.

248. Environmental Impacts: "No new action" preserves the existing status quo of environmental impact versus benefit, whatever that balance might be. Noise and air pollution will continue and unsafe conditions of the bridges is a challenge for pedestrians and vehicles.

249. "No New Action" will mean foregoing the economic and environmental benefits that are expected to be derived from improved bridges.

### B. Alternatives for Bridges Improvement

250. Major bottlenecks and safety hazards of Volume II, of SHHIP Tranche 2 along the Highlands Highway corridor under consideration consist of 18 single-lane bridges with 4.0m to 5.0m width, blackspot at Km 133+000 and insufficient hydraulic capacity of Maralumi River Bridge at Km 55+600. Other constraints are bank erosion and sedimentation. Bank erosion, which is often triggered upstream and downstream nearby the bridges, is sometimes destabilizing the bridge's abutments and piers. Sedimentation is a problem at specific locations, often in areas with brackish water or areas with a sudden decrease in flow velocity.

251. The basic options for repair, rehabilitation, upgrading and maintenance of the bridges for meeting bi-directional traffic, physical capable of passing all vehicles expected, seismic resistant as required sufficient hydraulic capacity and pedestrian lanes on both sides, consist in general of measures aiming at:

- i. Replacement of twelve (12) single-lane bridges by new double lane ones,
- ii. Replacement of ten (10) double-lane bridges with Bridge Evaluation of "C and D" based on the "Health Rating Scale",
- iii. Replacement of one (1) culverts without sufficient hydraulic capacity by double-lane bridges,
- iv. Repair and reinforcement of other four (4) double-lane bridges,
- v. Other measures.

## **7. INFORMATION DISCLOSURE, CONSULTATION, AND PARTICIPATION**

### **A. Results of Consultations**

252. Meaningful multiple consultations have been conducted with relevant stakeholders during July 2019 to September 2019 as a key component of the Sustainable Highlands Highway Investment Program (SHHIP) tranche 2 preparation adhering to applicable GoPNG and ADB policies, principles and procedures (see the Annex F).

253. The principal stakeholders of the SHHIP are the people who live along the Highlands Highway (HH). This includes the communities as a whole, and groups within them. People who cultivate and market food cash crops, vendors at informal markets in villages and at public motor vehicle (PMV) stops, as well as at larger formal markets, and those producing and transporting cash crops to the ports or airports for export elsewhere. These stakeholders will benefit directly from the tranche 2 works, which will make travel faster and more convenient, improve accessibility to Social centres, health centres, schools and markets, and ensure their produce reaches its destination timely and undamaged by poor roads/crossing structures. They will also benefit from the opportunities for employment in bridge construction and maintenance works, and ability to pay for enhanced public transport services.

254. The road transport sector constitutes another category of principal stakeholders. This includes the people and companies involved in the movement of passengers and freight along the HH, such as: public motor vehicle (PMV) and mini-bus drivers, their passengers, transport companies, commercial truckers, including independent truckers, and the businesses and development enclaves in the Highlands region that rely on these transport services. The transporters are interested in lowering their vehicle operating costs, as well as increasing the services they can provide. In the case of development enclaves (such as LNG ExxonMobil extraction in Tari, and Porgera mine in Enga), they may contribute to the costs of maintenance through tax credit schemes. Civil works contractors also benefit directly from their involvement in the upgrading, rehabilitation, and maintenance of bridges.

255. A third category of core stakeholders are the local, provincial and national government agencies that both benefit from and are instrumental in the implementation of the road improvements. Their interests stem, from their mandates to provide services to people, businesses and communities in the Program areas, and from their direct contributions of funds and/or technical expertise for the road maintenance. The DOW in particular will gain from both the funding, and the capacity building provided through the Program. The Program will assist the GoPNG to achieve its objectives for Development Strategic Plan (2010-2030) and National Transport Development Plan (2011-2020), which identifies the HH as the number one priority road for the country.

256. The approach for tranche 2 consultations includes: indoor core group consultations (seven), public meetings (21) involving both women and men from communities, specific facilitated meetings with clan leaders (four), separate meetings with women groups (14), key informant interviews (seven), and informal conversations with residents and passers-by (numerous) near the subproject sites. Consultations have been undertaken in local vernacular languages and in Tok Pisin. An especially prepared leaflet, SHHIP pamphlet and Protection of Transport Infrastructure Act pamphlet were also distributed to the participants during the consultations.

257. Detailed dissemination of information on the Sustainable Highlands Highway Investment Program (SHHIP) in general, and for Tranche 2 works in particular has been completed.

258. Likewise, the collection of the stakeholders' feedback has been undertaken, aiming in their integration into the project design and implementation ensuring continued participation and support of the stakeholders. Separate consultations have been conducted with female groups. The consultations have been inclusive also in terms of participation of the representations from economically weaker and/or marginalized households, civil society organizations, customary landowners, church groups, students, transport entrepreneurs, drivers, teachers, shopkeepers, security agencies, tranche 1 contractors and supervision consultants' representatives and other segments of the societies. Explanation was made also on the scope of Tranche 2 components (upgrading, repair and/or maintenance of all bridges along the SHHIP Highway from Lae Nadzab to Mount Hagen Kagamuga), the funding sources and the environmental and social impacts and their indicative mitigating measures to be followed during the implementation of the project. Issues and concerns of the stakeholders were solicited, discussed and noted for further consideration in the Investment Program design. All LLGs, Districts and Provinces touching the Highway have been encompassed during Tranche 2 preparation consultations. The major venues for the stakeholder consultation and awareness include the following:

- Nadzab, Mutsing and Watarais in Morobe Province
- Kainantu, Avani (Kompri Valley), Henganofi, Goroka, Asaro Market, Daulo Middle Market, Daulo Peak, Tulait Market, Watabung Station, Kenegi Village Market, and Snake Village in Eastern Highlands
- Ku, Chuave, Dumun, Kundiawa and Mingende in Simbu Province
- Kurumul, Miunde, Minj, Kudjip and Anglip in Jiwaka and Western Highland Provinces

259. It is estimated that a total of 15600 participants attended the conducted consultation meetings, as part of Tranche 2 preparations - including consultations with indoor core groups and outdoor communities and the general public. Feedback, queries and responses received during the consultations are primarily related to resettlement and legacy issues, compensation for affected structures or other improvements, employment opportunities, use of local resources (sand, gravel, quarry areas, etc.), timely completion of bridge and road works, etc. While the participants heartily appreciated and thanked the government and other supporting agencies (ADB and DFAT) for designing the mega Program for their region, emphasis was also made on completion of the works within the allocated time-period with proper quality and standard. Responses were made to the queries of the participants by the PMO teams.

260. Also highly appreciated by the consultation participants are the social infrastructures (pedestrian paths, safety railings, wash areas, market stalls, bus bays, etc.), awareness activities on health and safety, employment opportunities (mainly as construction and maintenance workers) and sanitation facilities under the Program.

261. Consultations with stakeholders along the HH confirm that attitudes to the SHHIP plans are very positive, especially from the local communities, PMV operators, freight and transport companies, drivers, and the general travelling public. Currently costs of wear and tear on machinery, breakdowns, and delays from landslides, floods, and loss of cargo from highway robbery are high. People are fed up with bone-shaking dusty journeys and unpredictable services: all were relieved to hear of the upgrading Program, and want it started as soon as possible.

262. Consultations with and encouraging participation of the stakeholders from Tranche 2 inception stage have been helpful in gaining insights into the expectations of the stakeholders and documenting their valuable feedback supportive to informed decision making while preparing Tranche 2 of the Program.

## **B. Further Consultations during Design and Implementation Stages**

263. Further consultations with affected households, clans/tribes and other stakeholders shall be conducted throughout the project cycle - including during Tranche 2 detailed engineering design and implementation stages. Consultation will be ongoing and managed by the PMO safeguards staff. As part of the development of SHHIP works to ensure safeguards compliance, the PMO will implement a stakeholder consultation and participation plan (SCPP) with communities located along subproject sites. The SCPP will be organized with the collaboration of provincial, district and local-level government (LLG) authorities; and, following detailed engineering design by the Design Consultant (DC) for a subproject, the PMO will involve affected persons' (APs) participation in further investigating each subproject, undertaking the detailed measurement survey (DMS), collecting data for the socio-economic survey (SES) and in other activities related to enhancing benefits for communities and mitigating adverse environmental and social impacts.

264. Support also of the clan/customary leaders, ward councillors and LLG presidents shall be sought for enhanced participation of wider segments of the societies including that of the women, deprived groups, elderly people and young people. Because women are often reluctant or unable to speak in general community meetings, separate meetings shall be held with them to understand and discuss their preferences and concerns. The PMO staff shall be also joined by the Provincial and/or district lands officers or surveyors/valuers of the office of the Valuer-General when their services are necessary to produce the Land Investigation Report (LIR) and valuations.

## 8. GRIEVANCE REDRESS MECHANISM

265. A functional Grievance Redress Mechanism (GRM) has been envisaged to be one of the effective strategies for stakeholder engagement supportive to SHHIP implementation.

266. For each SHHIP Province, a Grievance Redress Committee at Province level, headed by the Provincial Administrator, shall be established. It is expected to be an efficient platform for receiving, recording, conducting possible processing and/or streamlining of any grievances, suggestions, feedback, etc. Such Committees may be formed at community levels too if deemed to be further supportive for the purpose.

267. The GRCs are envisaged to perform, inter alia, four major functions: acceptance, investigation, mediation, and advisory.

268. People who feel are adversely affected due to SHHIP Tranche 2 works can register their grievances in any form (verbal, written, over the phone, etc.).

269. As SHHIP Tranche 2 works are mostly confined to construction limits on existing Highway, no major adverse impacts/grievances are expected. However, some minor ones may be triggered - damages to accesses or private properties; damage to crops; disputes related to ownership rights/legacy issues; pollution caused by dust, noise, and mock disposal, etc.

270. GRCs shall use common procedures in dealing with grievances to assure that objective and fair decisions are taken, and agreements made. The procedures include verifying documents; conducting field inspections to verify the authenticity and eligibility of the grievance reported; listening to different parties involved; and referring cases to other GRMs or, if necessary, to the courts.

271. For each grievance received, initial response shall be made to the grievance raiser within one week for minor grievances and within two weeks for the major ones.

272. Verification of the grievance shall be done by sector/issue-specific sub-committee as may be formed if required under the GRC. A verification report shall be submitted to the PMO and/or GRC.

273. The GRC shall try to resolve the grievance at its level. The GRC shall make its decision on the resolution of the issue/grievance within one month for minor grievances and within five months for the major ones.

274. Any grievance cases unresolved by the GRC or those the GRC feels are beyond SHHIP GRC jurisdiction shall be directed to the concerned relevant authority for appropriate resolution of the grievance - providing guidance to the concerned person/entity on other legal avenues s/he may approach to resolve the grievance.

275. GRCs shall be provided with appropriate orientation by the PMO focusing on the overall approach, modality, procedures and processes aimed at ensuring effective GRM for SHHIP.

276. SHHIP teams (PMO and contractor) shall support the GRCs in their smooth functioning, including support with stationeries and other relevant logistics wherever deemed necessary.

277. Each periodic report originating from the contractor shall include a GRM section and be submitted to the PMO – which will be further submitted by the PMO to the government and ADB.

278. The SHHIP grievance process is similar to and will also take account of the PNG procedure for addressing environmental issues outlined in Section 87 of the Environment Act 2000. Any unsolved grievances related to land and compensation issues received by the PMO, also involves discussions with the DOW teams as appropriate.

279. If the AP is not satisfied with any environmental decision of the GRC, the complainant may take the complaint further to the CEPA and follow the grievance process in accordance with Section 87 of the Environment Act 2000 (which deals with compensation claims for environmental impacts.) This procedure is set out as follows:

- i. The complainant meets with the contractor and/or EP holder to formally register concern over impact and seek redress. A copy of the alleged impact is submitted to CEPA.
  - EP holder has to determine whether the impact has occurred due to its activities.
  - If EP holder accepts responsibility for the impact, it can negotiate a mutually acceptable settlement with AP within 90 days.
  - If EP holder rejects responsibility for the impact, the complainant can request CEPA to carry out a verification investigation.
  - If CEPA confirms that the impact has occurred, he/she will advise the EP holder and complainant to negotiate a settlement within 90 days.
  - If a negotiated settlement is not reached, the EP holder or complainant can request CEPA to formulate a determination. Once this request is made, CEPA will have 90 days to reach a determination. If either party is dissatisfied with the determination, they can appeal to the National Court.
- ii. Should the complainant not be satisfied with the ruling of the CEPA, the AP may at their discretion take the grievance to the PNG judicial system. This will be at the AP's cost but if the court shows that the CEPA or the administration have been negligent in making their determination the AP will be able to seek costs.

280. All of the foregoing steps are being recorded in an inventory/register and included in the PMO Quarterly and Semi-annual social and/or environmental safeguards monitoring reports (based on the nature of the grievances), and such reports are being submitted to DOW and ADB.

281. During both construction and operation, the same procedures and conditions apply: i.e. there are no fees attached to the AP for making a complaint, the complainant is free to make the complaint which will be treated in a transparent manner, and the AP will not be subject to retribution for making any complaint.

## **9. ENVIRONMENTAL MANAGEMENT PLAN**

282. An important objective of IEE is to develop procedures and plans to ensure that the mitigation measures and monitoring requirements approved during the environmental compliance review, will actually be carried out in subsequent stages of the project. Environmental




management involves the implementation of environmental protection and mitigation measures and monitoring of environmental impacts. Environmental protection measures are taken to (i) mitigate environmental impacts, (ii) provide in-kind compensation for lost environmental resources, or (iii) enhance environmental resources. These measures are usually set out in the EMPs, which covers all phases of the project from pre-construction through decommissioning, and outlines mitigation and other measures that will be undertaken to ensure compliance with environmental regulations and reduce or eliminate adverse impacts.

283. The EMPs preparation is suitable for ADB Safeguard Policy Statement and GoPNG Law and Regulations on Environmental Protection. Main content of the program includes:

- i. Undertake measurement to reduce environmental pollution in executing, and operation phases;
- ii. Supervise construction progress of treatment works and their quality such as waste water treatment system, sewage and rainy water drainage systems;
- iii. Regularly inspect the labour safety regulations, undertaking measures to prevent fire and explosion in the construction phase and operation process;
- iv. Supervise and require of construction vehicle owner complying the mentioned mitigation measure of dust, noise and labour safety;
- v. Prepare the environmental monitoring plan including air, noise, water quality and solid waste;
- vi. Co-ordinate to undertake environmental quality monitoring in case of requirements from functional agencies.

#### **A. Institutional Arrangements and Responsibilities**

284. Overall implementation of environmental safeguards including environmental management requirements is a joint responsibility between the DOW/PMO, CSC, Contractor(s) and ADB. The overall organizational structure for environmental management for the project is shown in Figure 9-1.

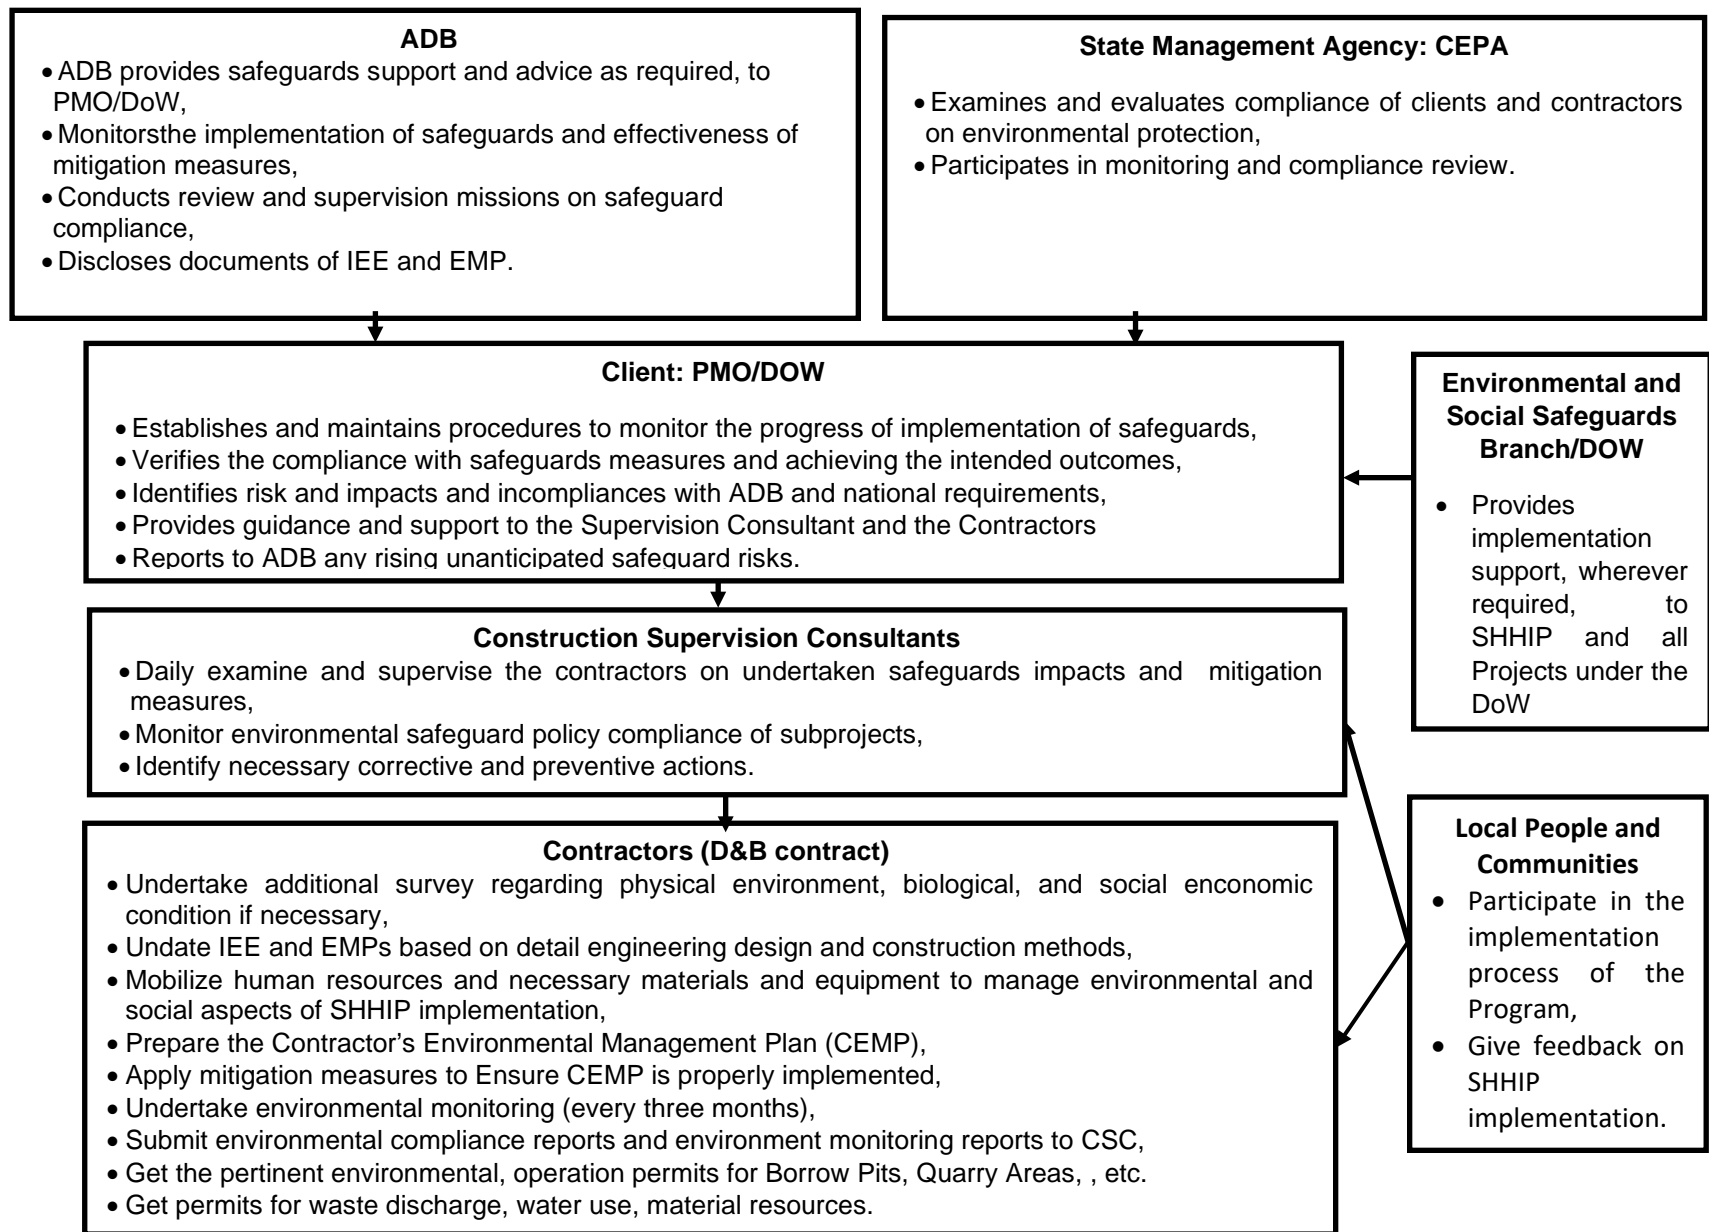

**Figure 9-1: Institutional Arrangement for SHHIP, Safeguards Management**

285. **Department of Works.** The DOW, as executing agency for the Investment Program, has overall responsibility to manage the planning, implementation and monitoring of the performance of the Program. The DOW will be responsible for ensuring that adequate funding will be provided under the Program to enable the PMO and ESSB to fulfil their responsibilities. DOW will be responsible for ensuring that environmental assessments are prepared and submitted to ADB together with the Periodic Financing Request (PFR) for review and approval prior to commencement of any work proposed under the Program. DOW--through the PMO based in Goroka and ESSB--will monitor the progress of the environmental work stream to ensure that environmental safeguards as set out in the EARF are implemented and comply with country safeguards requirements and the SPS. The PMO will be responsible for daily management and implementation of the subprojects under the Program and the ESSB will support the PMO in ensuring the Program's environmental safeguard requirements are adequately and properly implemented.

286. **Environmental and Social Safeguards Branch (ESSB).** The ESSB is primarily responsible for DOW's compliance with the National safeguards' requirements. They interact between DOW and the PMOs and Works Managers. The ESSB is responsible for implementing safeguards on behalf of DOW for all programs and projects (development partner financed and internally financed) throughout the country.

287. **Project Management Office (PMO).** For each tranche of this Program, the DOW, through the PMO and ESSB, will be responsible for the implementation of the entire environmental assessment and review procedures. Given that EP applications and assessments are not required for road maintenance and rehabilitation activities, the assessments will be prepared following ADB prescribed format. For other activities (waste discharge, water use, materials sources and quarry activities) that trigger need for permits, these will follow national requirements as well as SPS. As discussed above, all of the subprojects have been identified but will be executed over time in three subsequent tranches. The safeguards due diligence and assessments for T2 and T3 have yet to be undertaken. Safeguards activities for tranche 1 have been completed and undertaken by DOW represented by ESSB and by the PPTA team.

288. **Construction Supervision Consultants.** The CSC will support DOW, PMO and ESSB during implementation of the program, assisting the international and national safeguards specialists in complying with country systems and SPS. The CSC will include international and national safeguards specialists to actively ensure that contractors' operations comply with the CEMP, country systems and SPS. The safeguards expert with the CSC supervises the compliance of contractor's operations with the safeguards requirements in the contract, and more specifically the Environmental Management Plan (prepared by the contractor, reviewed and validated by the safeguards expert of the CSC and vetted by the PMO).

289. **PMO and ESSB Collaboration.** With support from the CSC, the ESSB and the PMO will be jointly responsible for implementation of the EARF. This will include, but not be limited to ensuring that: (i) the EARF procedures are strictly adhered to and that screening and preparation of environmental assessments will be carried out in a timely and adequate manner, (ii) environmental monitoring and institutional requirements will be fully met, and (iii) meaningful public consultations are carried out satisfactorily. DOW will submit the categorization, environmental assessments, and monitoring reports to ADB for review in a timely manner. These same requirements apply for the subsequent investment in tranches 3 while the categorization and environmental assessments has been done for tranche 2 (monitoring for tranche 2 projects will follow during implementation).

290. Both will be tasked to (i) strengthen the environmental management of subprojects during contract process, construction, and implementation; (ii) provide induction training to contractors

prior to preparation and submission of the CEMP for each subproject; (iii) provide assistance for review and clearance of the CEMPs; (iv) monitor compliance with the approved CEMP of each subproject; (v) prepare reports on environmental safeguards activities as required; and (vi) supervise and guide the environmental assessment and review process for implementation of subsequent tranches.

**291. Environmental specialists in the PMO.** The PMO's safeguards experts are responsible for the compliance of SHHIP's operations with national and ADB's safeguards requirements. They interact with the Safeguards Expert of each CSC, with ESSB, and with ADB. For the implementation of Tranche 2 and the preparation of Tranche 3, the environmental specialists will work with and support the DOW ESSB in carrying out environmental management steps such as the following:

- i. Build capacity of the ESSB staff, providing on-the-job and specialist support, advice and training as required;
- ii. Undertake the screening of each subproject of Tranche 2 and then of Tranche 3 (based on design information and baseline conditions) and plan resources for preparing due diligence, depending on the category, required per subproject.
- iii. Undertake assessment (including baseline, surveys as required, consultations etc) and prepare the due diligence for each subproject (IEE for category B subprojects and guidelines for category C subprojects).
- iv. Ensure that the due diligence is undertaken in compliance with the requirements of the government and ADB (as set out in this EARF), and that adequate consultation with affected people is undertaken in accordance with ADB requirements;
- v. Following ADB clearance of the assessments/due diligence, apply for and obtain necessary permits and/or clearance, as required, from CEPA and other relevant government agencies (DOM), ensuring that all necessary regulatory clearances are obtained before awarding contracts for civil works;
- vi. Based on detailed design, update the EMP from the approved/cleared assessment and integrate the updated EMP and any permit conditions into the civil works bid and contract documents;
- vii. Provide induction training to the contractor(s) on the EMP requirements and ensure that the contractor(s) understand their responsibilities to mitigate environmental problems associated with construction activities;
- viii. Review and clear the contractor(s)' CEMP and ensure and monitor that the approved CEMP, including an environmental monitoring plan, will be properly implemented;
- ix. Working with the resident engineer or site supervisor, undertake regular checks of contractor(s) compliance with the approved CEMP, and report on the same;
- x. Note and document corrective actions required to be implemented by the contractor(s);
- xi. Based on findings from above and review of contractor(s) monthly reports, prepare inputs to the quarterly progress reports; and
- xii. Submit semi-annual safeguards monitoring reports to PMO for onward submission to DOW and ADB and forwarded to CEPA for information.

**292. Contractors (D&B modality)** The Contractor shall undertake additional survey regarding physical environment, biological, and social economic condition if necessary, to update IEE and EMPs based on detail engineering design. The contractor shall take all necessary measures and precautions and otherwise ensure that the execution of the Works and all associated operations on the Work Sites or off-site are carried out in conformity with statutory and regulatory environmental requirements of the Government of Papua Nui Guine.

293. Based on the approved EMP, the Contractor will be responsible for establishing a site-specific EMP for each construction site area, submit the plan to CSC for review and approval before commencement of construction. In addition, it is required that the Contractor get all permissions for construction (traffic control and diversion, excavation, labor safety, etc before civil works) following current regulations. The contractor shall be required to appoint a competent individual as the contractor's on-site Safety and Environment Officer (SEO) who will be responsible for monitoring the contractor's compliance with the EMP requirements and the environmental specifications.

294. **Conservation and Environmental Protection Authority.** The CEPA will be required to review applications and issue permits (with or without conditions) for associated activities (waste discharge, water use, materials sources and quarry activities), and where possible, participate in monitoring and compliance review.

295. **Asian Development Bank.** The ADB will provide safeguards support and advice as required to the ESSB and PMO. The ADB will responsible for the: (i) concurrence with the screening (and resulting due diligence requirements) of each subproject; (ii) review and clear the due diligence prepared for each subproject; (iii) participate in missions to review implementation of the EARF and subprojects; (iv) arrange disclosure on the ADB website of cleared due diligence reports and monitoring reports; and, (v) as required, provide advice to DOW in carrying out its responsibilities to implement the EARF for the Program.

296. The responsibilities of the agencies and institutions involved, are summarized in the following table.

**Table 9-1: Institutional Responsibilities for Environmental Safeguards**

<b>Responsible Agency</b>	<b>Responsibilities</b>
DOW	<ul style="list-style-type: none"> <li>• Support PMO and ESSB for the preparation of and the submission of PFR (and supporting documentation) for all Program Tranches</li> <li>• Ensure budget and funding availability for ESSB.</li> <li>• Provide counterpart support and contribution to the Program as agreed.</li> <li>• Disclose safeguard documents on behalf of government</li> </ul>
ADB	<ul style="list-style-type: none"> <li>• Review and clearance of due diligence (IEE and EMP)</li> <li>• Review all feasibility study documentation</li> <li>• Board approval of project (incl. preparing documents package for Board review – requirements in FAM and covenants in loan agreement)</li> <li>• Assist government to recruit CSC</li> <li>• Review contractors' reports and monitoring reports</li> <li>• Disclose documents on website</li> </ul>
ESSB	<ul style="list-style-type: none"> <li>• Prior to works commencing ensure the requirements under EPAR and CSS (including permits for associated activities) are met;</li> <li>• Audit construction phase through environmental inspections and review monitoring data</li> </ul>

<b>Responsible Agency</b>	<b>Responsibilities</b>
PMO Environmental Specialists	<ul style="list-style-type: none"> <li>• Together with ESSB, undertake the screening of each subproject of Tranche 2 and then of Tranche 3 (based on design information and baseline conditions) and plan resources for preparing due diligence, depending on the category, required per subproject</li> <li>• Together with ESSB, undertake assessment (including baseline, surveys as maybe required, consultations etc.) and prepare the due diligence for each subproject (IEE for category B subprojects and guidelines for category C subprojects)</li> <li>• Ensure that the due diligence is undertaken in compliance with the requirements of the government and ADB (as set out in this EARF), and that adequate consultation with affected people is undertaken in accordance with ADB requirements</li> <li>• With the support of CSC, provide induction training to the contractor prior to the preparation and submission of the contractor's CEMP and as required work with the contractor's environmental specialist to identify appropriate construction methodologies and detailed site-specific mitigations;</li> <li>• Work with contractors' environmental specialists for the provision of awareness/training to workers and technology transfer to contractor(s) as required</li> <li>• Supervise, monitor and report on contractors' implementation of CEMP and all other contractual obligations and enforce contractual requirements</li> <li>• Submission of quarterly progress reports and semi-annual monitoring reports</li> </ul>
CSC	<ul style="list-style-type: none"> <li>• Provide support to, and coordinate with, PMO and ESSB for safeguards implementation</li> <li>• Undertake preliminary design and detailed design</li> <li>• Prepare IEE including overall EMP</li> <li>• Update IEE (including EMP) filling information gaps and elaborating baseline as required based on surveys and detailed design</li> <li>• Incorporate IEE mitigation measures into bidding documents and technical specifications</li> <li>• Incl. in above TOR for environmental specialist as part of contractor's team</li> <li>• Provide inputs to the bid evaluation in respect of contractor's response to the EMP requirements including the suitability of the environmental specialist proposed as part of the contractor's team;</li> <li>• Supervise, monitor and report on contractor's implementation of CEMP and all other contractual obligations Audit construction phase through environmental inspections and review monitoring data</li> <li>• Submission of QPR and semi-annual monitoring reports</li> </ul>

Responsible Agency	Responsibilities
Contractor(B&D)	<ul style="list-style-type: none"> <li>• Undertake additional survey regarding physical environment, biological, and social economic condition if necessary,</li> <li>• Update IEE and EMPs based on detail engineering design and construction methods,</li> <li>• Provide suitably qualified environmental specialist</li> <li>• Prepare CEMP including the site-specific plans and drawings at river crossings, construction camps and yards showing layouts and mitigation, and construction methodologies (working methods, and spoil disposal locations and methods etc) and GRM,</li> <li>• Submit CEMP to CSC for review and approval</li> <li>• Identify materials and equipment sources and arrange necessary permits and compliance certificates</li> <li>• Pre-mobilization provide induction on CEMP to employees</li> <li>• Implementation and monitoring of CEMP</li> <li>• Implementation of GRM</li> <li>• Reporting of CEMP and GRM implementation in monthly reports</li> <li>• Implement corrective actions as required by CSC</li> </ul>
CEPA	<ul style="list-style-type: none"> <li>• Ensure compliance with government requirements</li> <li>• Review applications and issue permits (with or without conditions) for associated activities (waste discharge, water use, materials sources and quarry activities)</li> <li>• Review complicated issues arising from the project</li> <li>• Participate in monitoring and compliance review where possible</li> </ul>

## B. Monitoring and Reporting

297. Throughout implementation of the subproject, DOW and ADB will monitor the progress and impact of the subproject. This includes monitoring the implementation of safeguards and effectiveness of mitigation measures. DOW is required to implement safeguard measures and relevant safeguard plans, as provided in the legal agreements, and to submit periodically monitoring reports on their implementation performance.

298. Overall, the EMP implementation will be monitored by the PMO through the CSC. In consultation with DOW and ADB, the PMO will establish a system for preparing quarterly progress reports (QPR) which will include safeguards (environmental performance i.e. compliance with EMP and approved CEMP, GRM implementation and issues resolution, audits/compliance checks and corrective action plans, and training and capacity building). The safeguards sections from the QPR can be aggregated to provide information for the semi-annual safeguards monitoring reports. The semi-annual safeguards monitoring reports will be submitted by the PMO to DOW and ADB. ADB will disclose these on the website. The EMP for each subproject will include the outline plan for monitoring and supervision, and will be implemented by the PMO and CSC with oversight from the ESSB. Progress on the preparation and implementation of the CEMP

will be included in the QPR. Specific monitoring activities defined in the CEMP shall be carried out by the contractor and monitored by the PMO and CSC.

299. In general, the overall extent of monitoring activities, including their scope and periodicity, will be commensurate with the subproject's impacts identified by during assessment to be undertaken by the Contractor during preparation of the CEMP.

300. In respect of monitoring and reporting, DOW through the PMO shall:

- i. Establish and maintain procedures to monitor the progress of implementation of environmental safeguards;
- ii. Verify the compliance with environmental measures and whether they are achieving the intended outcomes (mitigated level of impact);
- iii. Identify necessary corrective and preventive actions including actions required when the GRM has been triggered i.e. the report will outline where work has not complied with the EMP and what steps (and timeline) were taken to rectify it;
- iv. Document and disclose the monitoring results;
- v. Follow up on these actions to ensure progress toward the required outcomes;
- vi. Where required (for complex subprojects or subprojects in locations with particularly sensitive receptors) retain qualified and experienced external experts or qualified NGOs to verify monitoring results; and
- vii. Submit periodic monitoring reports on safeguard measures as agreed with ADB.

301. ADB will carry out the following monitoring actions to supervise safeguards implementation:

- i. Conduct review and supervision missions (including conducting site visits) with detailed review by ADB's safeguard specialists/officers or consultants;
- ii. Review the QPR and semi-annual monitoring reports submitted by DOW to ensure that adverse impacts and risks are mitigated as planned and as agreed with ADB;
- iii. Disclose the reports in compliance with the Public Communications Policy;
- iv. Work with DOW to rectify to the extent possible any failures to comply with their safeguard commitments, as covenanted in the legal agreements, and exercise remedies to re-establish compliance as appropriate; and
- v. Prepare project completion reports that assess whether the objective and desired outcomes of the EMPs have been achieved, taking into account the baseline conditions and the results of monitoring.

302. The PMO through the CSC, will review the IEE and corresponding EMP for each subproject to ensure that mitigation measures and monitoring plans proposed in that document are proportional/commensurate with the identified risks and impacts, and in compliance with ADB's and national requirements. According to the reports and reviews during its missions, ADB, in consultation with the government, will confirm compliance. For this purpose, the PMO will provide ADB with access to information on any projects. The information on implementation of an EMP, as well as that on environmental and social safeguard compliance, will be systematically documented and reported to ADB as part of the regular progress reports.

303. Monitoring plans have been prepared and are included as part of the EMP in the IEE prepared for the Tranche 2. Following loan effectiveness, the following monitoring actions will be taken: (i) the PMO and CSC will be responsible for reviewing and updating the monitoring program to ensure that it meets the intention of the EMP and that it identifies resources and arrangements suitable for carrying it out; (ii) the CSC will provide inputs to the QPR and the PMO will use the QPR to prepare the semi-annual safeguards monitoring reports, (iii) the semi-annual safeguards monitoring reports will be reviewed and cleared, and cleared reports disclosed on ADB's website; and (iv) after one year the ESSB will arrange to review the monitoring program and make any



adjustments to it as required. The PMO will inform the ESSB who will inform ADB and DOW of any changes that are recommended to be made prior to implementing any changes.

304. Table 9-2 provides the key tasks for environmental monitoring that will be incorporated into the EMP, and as necessary, elaborated by the contractor in the CEMP. The reporting will be as per the following schedule:

- i. A monthly report prepared during construction by the Contractor reporting on progress of CEMP activities, issues and corrective actions. This will be based on the site diary maintained by the EHSO and compiled notes of daily and weekly inspections.
- ii. QPR prepared by PMO every three months. The QPR will include a section on safeguards activities and CEMP compliance for the subproject and will summarize the monthly reports submitted by the contractor and any actions or citations made by the CSC.
- iii. A semi-annual safeguard monitoring report (prepared every six months) by the PMO submitted to DOW and ADB and disclosed; and
- iv. The project completion report will include a section on safeguards implementation and make recommendations as required for modifications to the processes set out in the EARF and EMP procedures based on the review undertaken at the end of the project.

305. During operation monitoring will be carried out by the DOW, in coordination with the CEPA.

**Table 9-2: Key Tasks for Environmental Monitoring**

<b>Environmental monitoring tasks</b>	<b>Responsibility</b>	<b>Timing</b>
<b>Design Phase</b>		
For information, or as required, submit EMPs (including monitoring plans) to CEPA	PMO	Prior to construction
Ensure updated EMP is integrated into tender and bidding documents to ensure IEE and EMP included in bids and environmental provisions are included	PMO and ADB	Prior to issue of bidding documents
<b>Construction Phase</b>		
Training and briefing of contractor's management, site agents with regards to all EMP requirements in respect of monitoring	PMO and Contractor	First training prior to preparation of CEMP and commencement of each contract and refresher courses at yearly intervals throughout construction period
Monthly monitoring and reporting by contractor on implementation of approved CEMP and statutory environmental requirements	Contractor,	Continuous throughout the construction period
Regular monitoring and reporting of contractor's compliance with CEMP and statutory environmental requirements	CSC	Continuous throughout the construction period

<b>Environmental monitoring tasks</b>	<b>Responsibility</b>	<b>Timing</b>
Monitor the performance of environmental training by contractor and briefings and of the environmental awareness of contractor staff, toolbox talks and refresher courses.	PMO and Contractor	Ongoing, prior to and during implementation of works and operation
Regular monitoring and reporting of complaints and responses (GRM)	PMO and Contractor	Continuous throughout construction period
Monitor adjustments to the CEMP for unexpected impacts and the thorough implementation of detailed CEMP	PMO and Contractor	Continuous throughout construction period
<b>Operation and Maintenance Phase</b>		
Observations during routine maintenance inspections of facilities. Inspections will include monitoring implementation of operational mitigation measures versus environmental criteria specified in EMP for operational impacts	DOW-ESSB, Maint. Contractor	As per PMO inspection schedules
Post-construction monitoring of water quality at any sites where complaints about air/noise/water quality from works were justified in construction phase	DOW-ESSB	Monthly up to three months after completion of construction or until air/noise, water quality meets baseline conditions
Monitoring survival of trees / shrubs and grass in bioengineered slopes (e.g. at landslides, also transplanted / compensatory planted trees)	DOW-ESSB	During the first three years after installation or rehabilitation

### **C. Environmental Management Plan (EMP) and Monitoring Matrix**

306. Each environmental impact will have a relevant mitigation action, to be mitigated and/or eliminated impact, in order to ensure that the construction of the project will not pose any threats to the environment and human health. The type of works identified in the Feasibility Study stage of the Volume II of SHHIP-Tranche 2, as described earlier, include (i) in-situ replacement bridge construction at existing location (19 bridges), (ii) relocated bridge construction to new locations (3 bridges), (iii) replacement one culvert by a double-lane bridge, and (iv) repair and reinforcement of existing bridges (4 bridges). The mitigation measures and monitoring are depicted in Table 9-3: Environmental Management Plan and Monitoring Matrix for In-situ Replacement Bridge Construction at Existing Locations (19 Bridges), Table 9-4: Environmental Management Plan and Monitoring Matrix for Relocated Bridge Construction to New Locations (3 Bridges), and Table 9-5: Environmental Management Plan and Monitoring Matrix for one Culvert Replacement by a Double-lane Bridge.

**Table 9-3: Environmental Management Plan and Monitoring Matrix for In-situ Replacement Bridge Construction at Existing Locations (19 Bridges)**

Activity/Environmental Issue	Mitigation and/or Enhancement Measures				Monitoring Plan			
	Mitigation measures and actions	Responsible to implement	Timing to implement	Cost	Parameters	Frequency & means of verification	Responsible to monitor	Cost
<b>PRE-CONSTRUCTION STAGE</b>								
Land clearance – temporary and permanent land acquisition	<ol style="list-style-type: none"> <li>1. DOW has prepared a land acquisition and resettlement plan for detailed compensation and supporting policies,</li> <li>2. The Contractor(s) will accordingly coordinate with related authority(ies) and locals to undertake inventory for the loss of land and assets;</li> <li>3. The Contractor(s) will negotiate with local people for compensation of temporary land acquisition based on the loss and time of occupation.</li> </ol>	DOW/PMO  Contractor	<p>Before construction phase</p> <p>During construction works</p>	<p>State budget (counterpart fund)</p> <p>Included in contract price</p>	<p>1 RPs are prepared and clearance,</p> <p>2 and 3 Compensation progress and satisfaction of affected persons</p> <p>An assistance program prepared and implemented</p>	<p>(1) review project documents, (2 - 3) Survey by questionnaires and direct interview</p>	DOW/PMO  CSC/PMO	<p>State budget (counterpart fund)</p> <p>Included in contract price</p>
Preparation and approval Contractor's Environmental Management Plan (CEMP)	<ol style="list-style-type: none"> <li>1. The Contractor is required to prepare and submit a Contractor's Environmental Management Plan (CEMP) based on the Contractor's actual detailed construction methodologies, work program, management of construction activities and management of workforce for review and approval by CSC,</li> <li>2. The Contractor(s) commencement works only the CEMP approved by CSC,</li> </ol>	Contractor	No later than 28 days after the Commencement Date	Included in contract price	<p>1 -2 CEMPs prepare and approved,</p> <p>3 compliance with CEMP</p>	(1-3) Review contractor's documents and reports	CSC/PMO	Included in contract price

Activity/Environmental Issue	Mitigation and/or Enhancement Measures				Monitoring Plan			
	Mitigation measures and actions	Responsible to implement	Timing to implement	Cost	Parameters	Frequency & means of verification	Responsible to monitor	Cost
	3. The CSC may withhold payments and/or stop construction due to CEMP non-compliance and/or in the event of serious or repeated violations of the conditions stipulated herein.							
Preparation and clearance associated plans: Health and Safety Management Plan, Traffic Management Plan, Site Security Management Plan, Quarry Management Plan, HIV/AIDS/STI Awareness plan	1. The Contractor requires to submit the plans to CSC for review and approval. 2. The Contractor(s) commencement works only the Plans approved by CSC,	Contractor	Before commence works on sites  During construction works	Included in contract price	1 Plans prepared and approved, 2 compliance with the Plans	(1-2) review contractor and CSC's documents and reports	CSC/PMO	Included in contract price
Getting Environment Permit (PEs) and agreements of associated activities such as Borrow Pits, Quarry Areas and disposal areas	1. <b>Licenses and Eps:</b> for materials extraction and spoil disposal will be obtained in advance and before work commences from the appropriate authorities including CEPA. 2. The Contractor shall identify and prepare a Spoils Disposal Agreement with the local landowners for its waste deposition, and meet requirements of GoPNG, 3. Before beginning works the contractor should be Pes and agreement to CSC and PMO	Contractor	Before commence works on sites  During construction works	Included in contract price	1-3 EPs and agreements obtained and displayed at the construction site offices	Review contractor's document,  Inspection by checklist	CSC/PMO	Included in contract price
Workforce Mobilization	1. As far as possible, labor shall come from the communities traversed by the Highlands Highway. But where this is	Contractor	After issuance of Notice to Proceed	Included in contract price	1 -3 agreements reached with village	(1-4) Daily progress as required;	CSC/PMO to verify; Community members to	Included in contract price

Activity/Environmental Issue	Mitigation and/or Enhancement Measures				Monitoring Plan			
	Mitigation measures and actions	Responsible to implement	Timing to implement	Cost	Parameters	Frequency & means of verification	Responsible to monitor	Cost
	<p>not possible due to the absence of skills appropriate to the requirements, workers hired from off-site shall be provided briefing of village protocols as part of awareness training;</p> <p>2. As many local workers as possible will be hired and trained for the construction activities. In order to avoid clan conflicts over access to employment, it is important that local workers are sourced from each of the customary land areas along the highway;</p> <p>3. The contractor shall ensure that workers' actions outside work site are controlled and village customs and traditions are observed at all times;</p> <p>4. The contractor will identify one member of their staff to be the liaison between the ward councilor, village leaders and elders and contractor, as well as between the contractor and PMO;</p> <p>5. Adequate housing shall be provided for all workers at the construction camps and establish clean canteen/eating and cooking areas;</p> <p>6. Poaching of animals (incl. fish and birds) for food, trade</p>		<p>(NTP) and prior to commencement of construction activities</p> <p>During construction works</p>		<p>leaders; number hired; checklist of mobilization requirements prepared and signed off when completed; 4 contractor contact person identified; 5 adequate housing, cooking and dining areas, potable water, and sanitation and drainage facilities provided as per agreed specifications;</p> <p>6-8 report of poaching and/or access to protected areas with administrative sanctions imposed;</p>	<p>Once unless there is personnel turnover; Site inspections; (5) Once during mobilization, daily for hygiene and housekeeping; Once for (6-10) during mobilization; periodic spot checking during operation</p>	<p>monitor Contractor activities</p>	

Activity/Environmental Issue	Mitigation and/or Enhancement Measures				Monitoring Plan			
	Mitigation measures and actions	Responsible to implement	Timing to implement	Cost	Parameters	Frequency & means of verification	Responsible to monitor	Cost
	<p>or other will be prohibited with sanctions imposed for non-compliance;</p> <p>7. Use of guns and hunting equipment by workers will be banned and workers taking or in possession of wildlife shall be dismissed from employment;</p> <p>8. Entry to protected and wildlife management areas and/or sensitive areas (forested areas and rivers) by workers will not be allowed;</p> <p>9. Provide education classes on HIV and sexually transmitted diseases.</p> <p>10. Establish a Code of Conduct to outline the importance of appropriate behavior, drug and alcohol abuse, respect for local communities, and compliance with relevant laws and regulations. Ensure adequate use of resources and proper waste management</p>				<p>9 approved HIV/AIDS/STI service provider engaged; number of awareness activities; reported incidence of infections; number of workers hired locally and trained for the construction activities;</p> <p>10 established and implemented code of conduct</p>			
<p>Mobilization of the contractor/ construction camp and works/materials sites prepared - presence of construction workers hired off-site may affect community protocols ignored and</p>	<p>1. <b>Worker camp area:</b> Worker camp location and facilities will be located at least 500m from settlements and agreed with local communities and facilities approved by PMO and managed to minimize impacts;</p> <p>2. each room of worker should not more than 10 person with</p>	Contractor	<p>After issuance of Notice to Proceed (NTP) and prior to commencement of construction activities</p>	Included in contract price	<p>1-3 compliance with work camp locational requirement;</p> <p>4-7 adequate</p>	<p>Daily progress as required; Site inspections; (1 to 3) Once during mobilization , daily for</p>	<p>CSC/PMO to verify; Community members to monitor Contractor activities</p>	Included in contract price

Activity/Environmental Issue	Mitigation and/or Enhancement Measures				Monitoring Plan			
	Mitigation measures and actions	Responsible to implement	Timing to implement	Cost	Parameters	Frequency & means of verification	Responsible to monitor	Cost
relations; village potential for conflict and unrest; access to materials sites and any new operation not permitted or agreed creating local conflicts and environmental impacts	<p>a minimum of 4m<sup>2</sup> per person included bed, locker and any other personal furniture provided and space area</p> <p>3. Work and camp sites will be cleaned up to the satisfaction of the landowner and/or local community after use;</p> <p>4. <b>Water supply:</b> The Contractor shall provide safe potable water for food preparation, drinking and bathing compliant with the relevant national technical regulations issued by the Department of Health, and other applicable Laws,</p> <p>5. <b>Sanitary Facilities:</b> In every camp site, separate and adequate lavatory facilities (toilets and washing areas) shall be provided for the use of male and female workers. Toilet facilities should also be provided with adequate clean water, soap, and toilet paper. Such facilities shall be conveniently accessible and shall be kept in clean and hygienic conditions;</p> <p>6. Where workers of both sexes are employed, there shall be displayed outside each block of latrine and urinal, a notice in the language understood by the majority of the workers</p>				<p>housing, cooking and dining areas, potable water, 8-12 sanitation and drainage facilities provided as per agreed specifications;</p> <p>13 waste bins provided to every campsite;</p> <p>14 signs and security requirements provided; safe access provided;</p> <p>15 established first-aid base necessary facilities and person in charge</p>	<p>hygiene and housekeeping; (4 to 15) during mobilization; periodic spot checking during operation</p>		

Activity/Environmental Issue	Mitigation and/or Enhancement Measures				Monitoring Plan			
	Mitigation measures and actions	Responsible to implement	Timing to implement	Cost	Parameters	Frequency & means of verification	Responsible to monitor	Cost
	<p>“For Men Only” or “For Women Only” as the case may be;</p> <p>7. Sanitary arrangements, latrines and urinals shall be provided in every work place on the following scale: Where female workers are employed, there shall be at least one latrine for every 25 females or part thereof; Where males are employed, there shall be at least one latrine for every 25 males or part thereof;</p> <p>8. <b>Wastewater Management:</b> Water from kitchens, showers etc. shall be discharged into a conservancy tank for removal from the Site or pass through an oil screener before discharge;</p> <p>9. Wastewater from construction camps, even after the settling and oil/water separator treatment shall still not be allowed to be discharged into river systems directly. They can be discharged into ditches, smaller creeks before being disposed into the rivers;</p> <p>10. At every construction camp there must be at least one septic tank or holding tank. The wastewater from the holding tank shall not be</p>							



Activity/Environmental Issue	Mitigation and/or Enhancement Measures				Monitoring Plan			
	Mitigation measures and actions	Responsible to implement	Timing to implement	Cost	Parameters	Frequency & means of verification	Responsible to monitor	Cost
	<p>discharged into any watercourses. The wastewater shall be periodically transported away by a water tank to the nearest treatment plant or treated by the site wastewater treatment system ;</p> <p>11. Sewage tanks shall be designed and installed by the Contractor(s) in accordance with the National Design Code for construction of camps.</p> <p>12. Discharge of treated wastewater must comply with the discharge limit according to the PNG's regulation and standards</p> <p>13. <b>Solid Waste Management:</b> The Contractor shall provide refuse bins with lids for all Worker 'camp; refuse shall be collected and removed from the camp at least twice per week; and domestic waste shall be transported to the approved refuse disposal site in covered containers or trucks; and collection and disposal of domestic waste shall be coordinated with Local Authorities;</p> <p>14. <b>Fire control :</b> The contractor shall ensure that basic firefighting</p>							

Activity/Environmental Issue	Mitigation and/or Enhancement Measures				Monitoring Plan			
	Mitigation measures and actions	Responsible to implement	Timing to implement	Cost	Parameters	Frequency & means of verification	Responsible to monitor	Cost
	<p>equipment is available at all camp areas;</p> <p>15. <b>Medical Facilities:</b> to equip medical cabinets and facilities for first-aid and under the charge of a responsible person who shall always be readily available during working hours of the work place. He/she shall be adequately trained in administering first aid treatment.</p>							
<b>CONSTRUCTION STAGE</b>								
Air quality and particulates: Dust and air emissions from vehicles, equipment and machines (batching plants and screening plants, etc.), material storage areas and along all transport routes	<ol style="list-style-type: none"> <li>1. Heights from which excavated materials are dropped shall be controlled to the minimum practical to limit the fugitive dust generation from unloading;</li> <li>2. Water sprinkling will be carried out in dust prone locations, unpaved haulage roads, earthworks, and stockpiles;</li> <li>3. Use of dust control methods (such as covers, water suppression on paved or unpaved road surfaces, or increase moisture content for open materials storage piles) will be practiced;</li> <li>4. A regular vehicle preventive maintenance and repair program shall be</li> </ol>	Contractor	Before and during construction activities	Included in contract price	1-3 dust generation and re-suspension; watering activities conducted especially in sensitive locations; 2 number of vehicles used in spraying and volume of water used; 6 waiting time; vehicle congestion; number and type of	<p>Daily visual monitoring as determined by wind and site conditions;</p> <p>Daily during dry construction days; site inspection; visual observation ;</p> <p>Spot checks; site inspection; visual</p>	CSC/PMO to verify; community members to monitor	Included in contract price

Activity/Environmental Issue	Mitigation and/or Enhancement Measures				Monitoring Plan			
	Mitigation measures and actions	Responsible to implement	Timing to implement	Cost	Parameters	Frequency & means of verification	Responsible to monitor	Cost
	<p>implemented to reduce emission of fumes from exhaust pipes;</p> <p>5. Diesel generating sets will be fitted with adequate stack height; and</p> <p>6. Low-sulphur diesel will be used in generator sets as well as other machinery</p> <p>7. Open burning of solid wastes (plastic, paper, organic matters) will be prohibited;</p> <p>8. Monitoring air quality parameters: Temperature, PM10, PM2.5</p>				<p>vehicles parked;</p> <p>4-6 compliance with locational requirements and anti-pollution devices installed;</p> <p>7 any smoke observed from burning;</p> <p>8 regularly air sampling</p>	<p>observation ;</p> <p>(8) Every 3 months in construction phase</p>		
<p>Noise: Noise from excavation and delivery of fill, spreading and compacting of materials.</p> <p>Noise from pile driving will disturb surrounding residents and businesses and traffic management will add to additional traffic noise around bridge sites.</p> <p>Noise from equipment delivering, spreading, laying and compacting pavement</p>	<p>1. Temporary construction facilities such as labour camps, vehicle maintenance workshop and earth moving equipment will be located at least 500 meters away from settlements and other sensitive receptors;</p> <p>2. Noise sources such as stone crushers, vehicle movements and quarries shall be re-located to less sensitive areas and at least 1 km away to take advantage of distance and shielding;</p> <p>3. Opportunities will be explored to take advantage of the natural topography as</p>	Contractor	During construction activities	Included in contract price	<p>1 permission to be sought from community; complaints from communities (GRM and records);</p> <p>2 and 3 distance from settlements and sensitive areas;</p>	<p>1 as determined by village protocols and site conditions;</p> <p>2 Once; Site inspection to verify locational requirements compliance ; checklist of items to be monitored is prepared</p>	CSC/PMO to verify; Community members to monitor ambient noise	Included in contract price

Activity/Environmental Issue	Mitigation and/or Enhancement Measures				Monitoring Plan			
	Mitigation measures and actions	Responsible to implement	Timing to implement	Cost	Parameters	Frequency & means of verification	Responsible to monitor	Cost
The production of materials for road and bridge construction will include a requirement for aggregates to be produced and concrete manufactured.	<p>a noise buffer such as behind the ridge that break the line of sight between the source of noise and the receptors;</p> <p>4. Silencers will be installed in construction equipment and machinery and maintained properly at all times;</p> <p>5. Equipment and machinery with lower sound levels will be selected for the construction activities;</p> <p>6. Protection devices such as ear plugs or ear muffs will be provided to the workers during period of operating high noise generating machines;</p> <p>7. Noise levels will be regularly measured during the peak of construction period in particular using portable noise meters to ensure the effectiveness of mitigation measures;</p> <p>8. Noise generation activities may be carried out between 7 am to 7 pm only to avoid disturbance to nearby communities at night and ideally should not exceed 45 dBA measured at the outside of any residence. Only in extreme instances will work beyond these hours be allowed after the</p>				<p>4 presence of natural breaks;</p> <p>5 muffled equipment;</p> <p>6 PPE provided;</p> <p>7 and 8 peak construction activities identified; noise meters made available; complaints received from community if work activities carried out beyond prescribed period;</p> <p>9 type of barriers installed in sensitive receptors and effectiveness (noise levels through readings</p>	<p>and used to check off items of concern;</p> <p>(11) Every 3 months in construction phase</p>		

Activity/Environmental Issue	Mitigation and/or Enhancement Measures				Monitoring Plan			
	Mitigation measures and actions	Responsible to implement	Timing to implement	Cost	Parameters	Frequency & means of verification	Responsible to monitor	Cost
	<p>Community Relations Officer (CRO) of the contractor has informed the community about change in work program well in advance;</p> <p>9. Noise barriers such as earth mounds or walls of wood, metal that form a solid obstacle between the road and roadside community will be used, especially in the schools and hospitals; and</p> <p>10. Proper information and notification of the concerned local level governments will be done to assist in the dissemination of impending disturbance and nuisance to nearby settlement areas.</p> <p>11. Undertake noise monitoring to identify noise level in residential area near the construction sites</p>				<p>and/or complaints)</p> <p>10 information disseminated;</p> <p>11 regularly noise monitoring</p>			
<p>Construction Vibration: Site preparation often requires use of vibrating equipment to break up concrete foundations and slabs.</p> <p>Vibration from pile driving will disturb local businesses and residents.</p> <p>Transport of construction</p>	<p>1. The operation of rock breaking equipment and pile driving operations should be limited and restricted to the hours of 0700 to 1700 to minimize disruption of local residents.</p> <p>2. All houses in the vicinity of these works should be subject to a dilapidation survey before and after construction to assess the impact of construction. Any complaints regarding</p>	Contractor	During construction activities	Included in contract price	<p>1 control plan included in the CEMP;</p> <p>2 inventory and monitoring houses and building vicinity of construction sites</p>	<p>compliance with plan and locational requirements;</p> <p>checklist of items to be monitored;</p> <p>as required; site inspections</p>	DSC/PMO to verify; Community members to monitor vibration	Included in contract price

Activity/Environmental Issue	Mitigation and/or Enhancement Measures				Monitoring Plan			
	Mitigation measures and actions	Responsible to implement	Timing to implement	Cost	Parameters	Frequency & means of verification	Responsible to monitor	Cost
materials will also generate periodic vibration associated with loaded trucks.	vibration along transport routes should be assessed on a case by-case basis. 3. Monitor complaints of illness from roadside residences with local health authorities that may be vibration related, such as nausea, dizziness.				1 and 3 local people and village chiefs consulted, compensated for any damaged	or spot checks		
Water quality and pollutants: Ground disturbance will result in highly turbid runoff being generated which will add to existing high levels of turbidity in local waterways, Runoff from materials storage areas and materials production areas generates turbid runoff unless contained, Bridge construction, adjacent to and over waterways, has a high risk of spillage of materials into watercourses during construction. These may liquid or solid and have the potential to pollute before any controls can be implemented	1. Petroleum, oils and lubricants will be stored in containers/dedicated enclosures with sealed floors and located away from water bodies; 2. Stockpile areas and storage areas for hazardous substances shall be located away from water bodies; 3. Diversion ditches will be dug around material stockpiles; 4. Interference with natural water flow in rivers, watercourses or streams within or adjacent to work sites shall be avoided or minimized. Abstraction from rivers will only be allowed after permission from PMO and shall not be done immediately near the vicinity of bridges. 5. Solid wastes, debris, spent oil or fuel from construction machinery or plant, construction material, or waste vegetation removed from work sites will not be	Contractor	During construction activities	Included in contract price	1 secured storage away from water-bodies; 2 obstructions; stockpiles verified for locational requirements compliance; 3-4 diversion ditches provided; permission granted by PMO;  5-6 cleanliness of work areas; settling ponds provided; availability of approved	As maybe required; site inspection; checklist of items for compliance prepared;  During each work and location; checklist of items for compliance prepared; site inspection;  (9) Every 3 months in construction phase	DSC/PMO, Community members to monitor water quality	Included in contract price

Activity/Environmental Issue	Mitigation and/or Enhancement Measures				Monitoring Plan			
	Mitigation measures and actions	Responsible to implement	Timing to implement	Cost	Parameters	Frequency & means of verification	Responsible to monitor	Cost
	<p>dumped in or near streams, rivers or waterways;</p> <p>6. Spoil and material stock piles will not be located near waterways, streams or rivers, or on the edge of slopes or hills above rivers or stream and shall be protected by perimeter diversion drains;</p> <p>7. Used oils and waste hydrocarbons will be disposed in approved sites approved by SCS and shall not be indiscriminately discharged into the soil or any waterbody;</p> <p>8. Temporary sediment controls such as silt fences or other sediment reducing devices (rock dams or silt barriers) shall be provided to prevent both siltation and silt migration during works being undertaken in the vicinity of streams and rivers;</p> <p>9. Regularly sampling and analysis water parameters (Temperature, pH, turbidity, Biochemical Oxygen Demand (BOD), Chemical Oxygen Demand (COD), Total Nitrogen, Total Phosphorus, Total Suspended Solids (TSS), Oil</p>				<p>disposal sites; 7-8 approved plan and timeliness of response; available approved sites for disposal; 9 regularly sampling and monitoring water quality</p>			

Activity/Environmental Issue	Mitigation and/or Enhancement Measures				Monitoring Plan			
	Mitigation measures and actions	Responsible to implement	Timing to implement	Cost	Parameters	Frequency & means of verification	Responsible to monitor	Cost
	and Grease, and Total Coliform Bacteria)							
<p>Construction waste: Large quantities of solid waste generated by removal of structures.</p> <p>Wastes generated by materials production have a high potential for soil and water contamination.</p> <p>Wastes generated by construction camps, machinery workshops, laydown areas and casting areas need continuous</p>	<ol style="list-style-type: none"> <li>Contractor(s) shall practice waste segregation, provide the necessary receptacles and institute awareness campaign to its staff and workers. Organic (biodegradables) shall be collected and disposed on-site by composting, and recyclable materials shall be recovered and collected for sale to third party collectors/integrators or recyclers;</li> <li>The contractor(s) will maximize the recycling of used materials to minimize waste generation;</li> <li>Non-recyclable solid wastes will be collected and disposed only in approved disposal sites;</li> <li>Used wood and timber shall be reused for formworks and other associated works.</li> </ol>	Contractor	During construction activities	Included in contract price	<p>1 -2 Type of facility equipped, solid waste separated; no waste illegal dumped</p> <p>2-4 Number bin provided</p>	<p>Checklist of items for compliance prepared; verify compliance ;</p> <p>Site inspections;</p>	DSC/PMO, Community members to monitor	Included in contract price
<p>Hazardous materials: Hazardous materials have the potential to contaminate the environment if spilled or cause a fire or explosion if handled incorrectly.</p>	<ol style="list-style-type: none"> <li>An emergency response and contingency plan will be prepared to address accidental spills and the occurrence of fire in the contractor construction camp and facilities;</li> <li>Staff and workers involved in the management and utilization of oils, fuel and lubricants are shall be</li> </ol>	Contractor PMO-DSC	During construction activities	Included in contract price	<p>1 emergency respond plan prepared;</p> <p>2 Personnel having knowledge on this issue</p> <p>3-5 Fuel and</p>	<p>Checklist of items for compliance prepared; site inspections;</p> <p>Visual assessment</p>	CSC/PMO Community members to monitor	Included in contract price



Activity/Environmental Issue	Mitigation and/or Enhancement Measures				Monitoring Plan			
	Mitigation measures and actions	Responsible to implement	Timing to implement	Cost	Parameters	Frequency & means of verification	Responsible to monitor	Cost
	<p>properly trained in the handling, storage and dispensing of such materials;</p> <p>3. Petroleum, oil and lubricants shall be stored in securely locked, fenced and properly designated areas away from water courses/bodies;</p> <p>4. All storage containers shall be in good condition at all times with clear and proper labelling, regularly checked for leakage, and repaired or replaced as necessary;</p> <p>5. The Contractor(s) shall be required to display safety information in all work areas and to train workers in the safe use of hazardous materials, including the provision of protective equipment;</p> <p>6. Hazardous materials shall be stored in areas free from floods at all times; and discharge of oil-contaminated water to nearby waterways shall be prohibited;</p> <p>7. Spill clean-up materials (e.g., specifically designed for petroleum products and others) shall be available at all times in adequate quantities in the same storage areas;</p>				<p>hazardous substances located in paved areas, containers in good condition and proper labelling;</p> <p>6 No hazardous waste discharged to around;</p> <p>7-8 necessary material and equipment provided</p>			

Activity/Environmental Issue	Mitigation and/or Enhancement Measures				Monitoring Plan			
	Mitigation measures and actions	Responsible to implement	Timing to implement	Cost	Parameters	Frequency & means of verification	Responsible to monitor	Cost
	8. When spillage occurs, the Contractor(s) shall immediately report to the CSC and cleaned with utmost caution by properly trained personnel							
<p>Soil quality and erosion: The disturbance of ground surface without any flow controls can lead to rapid development of water erosion during high intensity rainfall events and lead to sheet erosion of all loose materials off a disturbed surface,</p> <p>The removal of unsuitable materials can provide surfaces on the excavation which store water then release large volumes when the capacity of excavation is exceeded or the retaining banks fail,</p> <p>The unconsolidated surfaces of embankments can erode rapidly when concentrated runoff, from the pavement or from the slopes,</p>	<p>1. Excavated soils shall be prevented from being washed from the work area into nearby water bodies or gardens (especially during inclement weather) by immediately hauling these materials away and disposed in approved disposal sites. Work scheduling shall take into account potential weather disturbances and rainy days historically recorded in the area. This will allow worked areas to be properly managed and avoiding large disturbed areas being exposed longer than necessary. Stockpiling of base and sub-base materials shall be also kept to a minimum to avoid being exposed longer than necessary;</p> <p>2. Removed topsoil shall be stored in separate heaps and located in stable areas for later re-use for site rehabilitation. Spoils shall be prohibited from being dumped over the side of slopes and hills;</p>	Contractor	During construction activities	Included in contract price	<p>1-2 erosion and sedimentation control plan as part of approved CEMP; proper scheduling;</p> <p>3 sorted materials; record of consented accommodated requests;</p> <p>4 bunds provided;</p> <p>5 volume recorded;</p> <p>6 drainage provided;</p> <p>7 QMP prepared and approved, consents/permit obtained</p>	<p>During each work and location; Checklist of items for compliance prepared; verify compliance ; site inspection;</p> <p>Checklist of items for compliance prepared; verify compliance</p>	PMO-CSC	Included in contract price

Activity/Environmental Issue	Mitigation and/or Enhancement Measures				Monitoring Plan			
	Mitigation measures and actions	Responsible to implement	Timing to implement	Cost	Parameters	Frequency & means of verification	Responsible to monitor	Cost
occurs during a rainfall event, Runoff around borrow areas and from runoff around quarries has the potential to cause off-site soil erosion away from the excavation or quarry face	<p>3. Excavated materials shall be sorted as either suitable (able to be reused) and unsuitable (to be disposed of) materials. The Contractor(s) shall accommodate requests of local people to utilize such materials for levelling their property with the consent of the CSC(s) and PMO for proper documentation;</p> <p>4. Materials are not to be disposed/stockpiled near water courses;</p> <p>5. Balance cut and fill requirements to minimize impacts from extraction of aggregates;</p> <p>6. Adequate drainage shall be provided in the material source/quarry areas to prevent the accumulation of stagnant water during the operation;</p> <p>7. Material sources and quarry areas located near the alignment shall be preferred to minimize hauling distance and travel time, and disturbance to settlement areas along the haul roads.</p>							

Activity/Environmental Issue	Mitigation and/or Enhancement Measures				Monitoring Plan			
	Mitigation measures and actions	Responsible to implement	Timing to implement	Cost	Parameters	Frequency & means of verification	Responsible to monitor	Cost
Terrestrial flora: Vegetation removal, tree clearing; re-vegetation - Impacts on flora	<ol style="list-style-type: none"> <li>1. The contractor shall conduct a tree inventory (species and size) during the staking of the alignment in the pre-construction stage, and trees that may be removed will be agreed with PMO and landowners prior to cutting. Trees to be removed will be clearly marked on site drawing/plan;</li> <li>2. Vegetation clearing shall be kept to a minimum, and occur only within the designated construction limits;</li> <li>3. Vegetation clearance during staking and demarcation activities, especially of trees along the road-side shall be minimized. Trees that may be felled shall be clearly marked and only these marked trees shall be removed;</li> <li>4. The contractor shall be responsible for providing adequate knowledge to construction workers in relation to existing laws and regulations regarding illegal tree cutting.</li> <li>5. Contract documents and technical specifications shall include clauses expressly prohibiting the indiscriminate felling of trees by construction workers; and</li> </ol>	Contractor	During construction activities	Included in contract price	<p>1 Tree species and size identified and marked;</p> <p>2 and 3 area affected and trees removed checked against plan;</p> <p>4 awareness provided; employee induction training conducted; number of induction trainings done</p> <p>5 tender provision, sanctions imposed on workers;</p> <p>6 proof of return; approved tree species replanted</p>	<p>At start of clearing work; Site inspection</p> <p>Prior to start of work; documentation of induction training including attendance sheets</p>	CSC/PMO to verify	Included in contract price

Activity/Environmental Issue	Mitigation and/or Enhancement Measures				Monitoring Plan			
	Mitigation measures and actions	Responsible to implement	Timing to implement	Cost	Parameters	Frequency & means of verification	Responsible to monitor	Cost
	6. The contractor shall not utilize cut timber as fuel wood but return it to the landowner							
Terrestrial fauna: habitats from works or presence of workers - Impacts on flora and fauna; loss of indigenous vegetation	<ol style="list-style-type: none"> <li>1. Labor employment agreement shall be enforced by contractor banning the hunting and trading in wildlife by workers;</li> <li>2. Contractor shall provide adequate food supplies and rations for workers staying in its construction camp;</li> <li>3. Workers shall be prohibited from hunting or catching wildlife including fish and birds. Sanctions will be imposed on any workers not complying with the provision and all sanctions to be recorded;</li> <li>4. The contractor will be responsible for providing awareness to construction workers in regard to fauna in the area. Contract documents and technical specifications will include clauses expressly prohibiting the poaching of fauna by construction workers and making the contractor responsible for</li> </ol>	Contractor	During construction activities	Included in contract price	<p>1 and 4 employee induction training conducted; number of induction training sessions; 2 and 3 adequate food provided in camp; administrative order issued to all contractor workforce, number of sanctions imposed;</p> <p>5 vehicles and equipment properly washed;</p>	<p>Prior to start of work; records of site inspections; records of sanctions imposed</p>	CSC/PMO to verify; Community members may monitor	Included in contract price

Activity/Environmental Issue	Mitigation and/or Enhancement Measures				Monitoring Plan			
	Mitigation measures and actions	Responsible to implement	Timing to implement	Cost	Parameters	Frequency & means of verification	Responsible to monitor	Cost
	<p>imposing sanctions on any workers who are caught trapping, killing, poaching, being in possession of or having poached fauna;</p> <p>5. Any potential seed source such as earth and organic materials that may be attached to machinery shall be removed by washing prior to deployment to the work areas; and</p> <p>6. Non-indigenous plant species shall not be used during replanting/re-vegetation works.</p>				6 indigenous plant species used and re-established in project area			
Aquatic fauna and flora	<p>1. Pollutant loading of storm water will include the construction of water quality basins to receive and treat storm water runoff from the proposed roadway. Strict adherence to the Soil Erosion and Sediment Control Plan should eliminate negative water quality impacts due to sediment loading.</p> <p>2. Work for the bridge abutments and piers will be performed with the use of coffer dams and sealing off of sediments which will then be appropriately disposed of offsite.</p> <p>3. Given the immense size of the river, and the degraded nature of these aquatic</p>	Contractor	During construction activities	Included in contract price	1. Soil Erosion and Sediment Control Plan prepared and implemented ; 2 and 3 turbidity in river/stream water limited and controlled	During each work and location; Checklist of items for compliance prepared; verify compliance ; site inspection;	CSC/PMO to verify; Community members may monitor	Included in contract price

Activity/Environmental Issue	Mitigation and/or Enhancement Measures				Monitoring Plan			
	Mitigation measures and actions	Responsible to implement	Timing to implement	Cost	Parameters	Frequency & means of verification	Responsible to monitor	Cost
	environments, it is anticipated that the project will not result in any significant impact to aquatic habitats. Additionally, the project will not create a physical barrier to fish movement and will not adversely affect migrating fish.							
Invasive alien species: Biological impacts from introduced species and invasive species can cause a great deal of damage to naturally adapted systems	<ol style="list-style-type: none"> <li>1. Prior to commence works, the contractor will arrange to review the site and determine whether there is or is not any infestations of invasive species in the area.</li> <li>2. The contractor is to determine where the contractor's machinery was last used and whether the area is infested with any invasive species. Depending on the state of any infestation at the project construction site then the CSC will advise the contractor whether or not machinery must be cleaned before moving to the site. This includes the removal of any potential seed sources such as earth and organic material that may be attached to the machinery.</li> </ol>	Contractor	During construction activities	Included in contract price	<p>1-2 survey and inventory if the area is infested with any invasive species;</p> <p>3 and 4 monitoring and controlling invasive species</p> <p>5 and 6 awareness provided invasive species to employee, not to be replanting</p>	<p>At start of clearing work; Site inspection</p> <p>Prior to start of work; documentation of induction training including attendance sheets</p>	CSC/PMO to verify; Community members may monitor	Included in contract price

Activity/Environmental Issue	Mitigation and/or Enhancement Measures				Monitoring Plan			
	Mitigation measures and actions	Responsible to implement	Timing to implement	Cost	Parameters	Frequency & means of verification	Responsible to monitor	Cost
	<p>3. The contractor will be required to observe for any infestations.</p> <p>4. Should infestations occur on construction sites that are due or are not due to the contractor's activities the contractor will be required to control the infestation.</p> <p>5. Invasive species shall not be used to revegetate cut slopes and replanting or compensatory tree planting that maybe required shall have full agreement of the local forest authorities.</p> <p>6. Control and avoidance of the introduction of invasive species is the contractor's responsibility and this also extends to any sub-contractors that are working under his control.</p>							
Endangered species: rare and endangered species known may occur in the zone of the construction and can be affected	1. Regularly monitoring and maintain a database of the occurrence of rare and endangered species of plant or animal and take actions to avoid their disturbance during construction works through isolation of their habitats or adjustment of timing of works	Contractor	During construction activities	Included in contract price	awareness and training provided o employee; monitoring undertaken	Prior to start of work; records of site inspections; records of sanctions imposed	CSC/PMO to verify; Community members may monitor	Included in contract price



Activity/Environmental Issue	Mitigation and/or Enhancement Measures				Monitoring Plan			
	Mitigation measures and actions	Responsible to implement	Timing to implement	Cost	Parameters	Frequency & means of verification	Responsible to monitor	Cost
Access and traffic safety: Movement of traffic and pedestrians through construction zones is hazardous due to irregular traffic patterns, disturbed ground surfaces and excavations, Road safety during construction is reduced due to rapidly changing road conditions, loss of roadside furniture, warning systems and lighting.	<ol style="list-style-type: none"> <li>1. The Contractor(s) shall prepare a traffic management plan detailing temporary diversions where necessary and the associated management measures (reference can be made from DOW's "Safe Traffic Control at Road Works Field Guide");</li> <li>2. Signs and other appropriate safety measures shall be provided on site to indicate construction works are being undertaken;</li> <li>3. Local administration and village officials shall be consulted in the event that access to a village may be disrupted any time and temporary access arrangements provided accordingly;</li> <li>4. Construction vehicles will use local access roads, or negotiate access with land owners to obtain access to material extraction sites; where local roads are used, these will be rehabilitated to their original condition after the completion of work;</li> <li>5. Road safety protection shall be provided in the vicinity of the work site to protect the general public. This shall include advance</li> </ol>	Contractor	During construction activities	Included in contract price	<p>1 traffic management plan prepared and approved;</p> <p>2 to 5 any complaints received; action taken in response; approvals from local/village administration and officials; cleanliness maintained; road safety protection devices provided and visible at all times;</p>	<p>Once for traffic management plan; daily visual observations;</p> <p>Compliance verification to be done to ensure activities meet mitigation requirements</p>	CSC/PMO to verify; Community members may monitor	Included in contract price

Activity/Environmental Issue	Mitigation and/or Enhancement Measures				Monitoring Plan			
	Mitigation measures and actions	Responsible to implement	Timing to implement	Cost	Parameters	Frequency & means of verification	Responsible to monitor	Cost
	notifications of commencement of works, installing safety barriers as necessary, and providing signages or markings on the work areas.							
Occupation health and safety: The risk of spread of communicable disease is dealt with in the next section Public safety, particularly of pedestrians and children can be threatened	<ol style="list-style-type: none"> <li>1. Safety measures as required by law and by good engineering practice shall be established and first aid facilities at work sites and in vehicles are likewise provided;</li> <li>2. The Contractor(s) will instruct and induct all workers in health and safety matters (induction course) including construction camp rules and EHSO shall follow up with toolbox talks on a weekly basis. Workforce training for all workers starting on site will include safety and environmental hygiene;</li> <li>3. In addition, workers shall receive a daily safety and work briefing (tool box talk) from the Contractor(s);</li> <li>4. Workers shall be provided with appropriate personnel protection equipment (PPE) such as safety boots, helmets, reflector vest, gloves, protective clothes, dust mask, goggles, and ear protection at no cost to the</li> </ol>	Contractor	During construction activities	Included in contract price	<ol style="list-style-type: none"> <li>1 requirements included in the tender documents, HSP as part of CEMP;</li> <li>2 qualified EHSO provided;</li> <li>3 and 4 induction training and daily toolbox provided and documented;</li> <li>5 set of PPE provided to each worker;</li> <li>6 fencing provided in deep excavations;</li> <li>7 reversing signal provided in all vehicles;</li> </ol>	Verify once during tendering and before start of site works; and throughout the project duration as required until site has been established ; compliance to be checked; verify that EHSG measures meet requirements; site inspection	CSC/PMO to verify; Community members may monitor	Included in contract price

Activity/Environmental Issue	Mitigation and/or Enhancement Measures				Monitoring Plan			
	Mitigation measures and actions	Responsible to implement	Timing to implement	Cost	Parameters	Frequency & means of verification	Responsible to monitor	Cost
	<p>workers. The Contractor will issue PPE on a daily basis to workers after the tool box talk;</p> <p>5. Fencing will be installed on all areas of excavation greater than 1m deep, and on all sides of temporary works;</p> <p>6. Reversing signals (visual and audible) shall be installed on all construction vehicles and equipment;</p> <p>7. Potable water supply shall be provided and maintained at all times in the contractor' camp and all its work locations;</p> <p>8. Where worker exposure to traffic cannot be completely eliminated, protective barriers and warning signs shall be provided to shield workers from passing vehicles. Another measure is to install channelling devices (e.g., traffic cones and barrels) to delineate the work zone, and trained flag men at each end of the current working zone shall be provided to direct traffic movement in and around work areas; and</p> <p>9. Construction camps shall be provided with toilets/sanitation facilities in</p>				<p>8 potable water supply provided and maintained;</p> <p>9 barriers and warning signs provided;</p> <p>10 camps provided with toilets/sanitation facilities and treatment facilities;</p> <p>11 sanitation and hygiene training provided and observed;</p> <p>12 and 14 training conducted; toolbox talks conducted weekly; records of toolbox talks maintained and documented in monthly reports</p>			

Activity/Environmental Issue	Mitigation and/or Enhancement Measures				Monitoring Plan			
	Mitigation measures and actions	Responsible to implement	Timing to implement	Cost	Parameters	Frequency & means of verification	Responsible to monitor	Cost
	<p>accordance with local regulations to prevent any hazard to public health or contamination of land, surface or groundwater. These facilities shall be well maintained and cleaned regularly to encourage use and emptied regularly to prevent overflows.</p> <p>10. First aid facilities shall be provided at the work sites, in vehicles;</p> <p>11. The contractor(s) shall conduct training for all workers on safety and environmental hygiene at no cost to the employees;</p> <p>12. Instruction and induction of all workers shall be carried out for all workers before they start work in health and safety matters, including road safety; construction camp rules;</p> <p>13. Assigned safety monitors will follow up with toolbox talks on a weekly basis;</p> <p>14. Workers shall receive daily safety and work briefing from contractor called the toolbox talk.</p>							
HIV/AIDS/STIs Quantity people having HIV/AIDS by un-control relationships	1. Screen all persons to be engaged on the project for HIV/AIDS/STIs as part of the induction of personnel to be engaged;	Contractor	During construction activities	Included in contract price	1 Screen for staff and workers conducted;	Site inspection;  Checklist of items for	CSC/PMO to verify;	Included in contract price

Activity/Environmental Issue	Mitigation and/or Enhancement Measures				Monitoring Plan			
	Mitigation measures and actions	Responsible to implement	Timing to implement	Cost	Parameters	Frequency & means of verification	Responsible to monitor	Cost
between indigenous peoples and worker may be increasing	<p>2. Implement a HIV/AIDS awareness program as part of the occupational health and safety training provided to personnel on the project;</p> <p>3. Provide visual stimuli in the workplace (offices, canteens, construction camps) to ensure the need to take care and control this disease is continuously presented and reinforced. These stimuli should be changed on a fortnightly basis to eliminate the potential for boredom and disregard for the messages they contain.</p> <p>4. The management of this issue should be three-fold – control of the introduction of HIV/AIDS through the workforce, development of awareness within the workforce about the disease, its spread and its consequences, and making preventative measure available whilst controlling external vectors that may introduce the disease.</p>				2 awareness program prepared and implemented ; 3 and 4 necessary materials and equipment provided	compliance prepared; verify compliance		
Physical cultural resources: PCRs may uncovered during construction activities	1. Instructed to keep watch for relics that may be uncovered during excavations, and local communities will be consulted to identify potential sites of concern,	Contractor and approved service provider (sub-contractor)	During construction activities	Included in contract price	1 chance finds procedure established in CEMP;	1 once during CEMP review to ensure chance finds	CSC/PMO to verify	Included in contract price

Activity/Environmental Issue	Mitigation and/or Enhancement Measures				Monitoring Plan			
	Mitigation measures and actions	Responsible to implement	Timing to implement	Cost	Parameters	Frequency & means of verification	Responsible to monitor	Cost
	<p>such as graveyards or taboo areas;</p> <p>2. Should any potential items be located, the PMO through the CSC shall be immediately informed and work stoppage be immediately implemented;</p> <p>3. The PMO with the assistance of the CSC, and in cooperation with local leaders, will determine if the item is of potential significance and contact DOW to pass the information to the relevant department in the government who will be invited to inspect the site;</p> <p>4. Work shall stop to allow time for inspection, removal or in-situ preservation of the PCR and until the relevant government agency indicates works can recommence; and</p> <p>5. Until the government has responded to this invitation, work will not re-commence in this location until agreement has been reached with the government and PMO as to any required mitigation measures.</p>				2 to 5 artifacts, sites or other PCR discovered, proper authorities informed; documented and secured; site secured; communities informed	<p>procedures included;</p> <p>2 to 7 site inspections and assessment; as triggered number of days of work suspension</p>		
Social conflicts: Presence of construction workers may affect	1. Consider the location of construction camps away from communities in order to	Contract	During construction activities	As per agreements	1 Construction camps far from 2	Visual assessment,	CSC/PMO to verify; Community	Included in contract price

Activity/Environmental Issue	Mitigation and/or Enhancement Measures				Monitoring Plan			
	Mitigation measures and actions	Responsible to implement	Timing to implement	Cost	Parameters	Frequency & means of verification	Responsible to monitor	Cost
community structure and patterns and conflict with local people	<p>avoid social conflict in using resources and basic amenities such as water supply,</p> <p>2. Maximize number of local people employed in construction works,</p> <p>3. Maximize goods and services sourced from local commercial enterprises.</p>				communities ; Number local people working in the subproject; 3 Using goods and services sourced	Review documents	members to monitor	
Impacts on sources of livelihood and Modified market patterns: Changes resulting from the induced demands of the construction project may create a false market economy for the duration of the project which affects those least able to pay for commodities in the community	1. An income restoration program to help the severely affected and vulnerable households rebuild their sources of livelihood will be prepared and implemented.	DOW/PMO, Contractor	During excavation works	Included in contract price	1 an assistance program prepared and implemented	Review project document	CSC/PMO to verify	Included in contract price
<b>Operation Stage</b>								
Greenhouse gas emissions: Increase road capacity will lead to higher speeds and use of the road section by heavier vehicles	1. The maintenance of free traffic flow will reduce the volume of greenhouse gas emitted. Traffic management mechanisms should be used to ensure speed differentiation between classes of vehicles does not	DOW	Bridge operation	DOW operating cost	Volume of vehicles operation; increased speed of vehicles	Regular inspections, and spot checks	DOW-ESSB	DOW operating cost

Activity/Environmental Issue	Mitigation and/or Enhancement Measures				Monitoring Plan			
	Mitigation measures and actions	Responsible to implement	Timing to implement	Cost	Parameters	Frequency & means of verification	Responsible to monitor	Cost
	reduce freedom of movement for vehicles							
Air quality - particulate emissions: Particulate generation resulting from exhaust emissions and dust created by poorly covered and badly fitting bodies depositing materials on the road. Air emissions will occur as a result of exhaust emissions.	2. Regular checks on vehicles using the road shall be undertaken and those vehicles with poorly fitted bodies, load spillage and excessive exhaust emissions shall be removed from service until repaired.	DOW	During specific maintenance works and vegetation control; emergency repairs of landslide prone areas; routine maintenance works	DOW operating cost	Volume of materials handled and hauled out; cleanliness of surrounding	During conduct of maintenance works; regular inspections, and spot checks	DOW-ESSU	DOW operating cost
Water quality and pollutants: The use of the bridges by vehicles transporting and hazardous material spills if crashes on bridges potentially contaminating materials produces a potential risk of pollution of watercourses and drain structures along the road. General runoff from the road also adds to the deterioration of the water quality	1. The use of the bridges by vehicles transporting and hazardous material spills if crashes on bridges potentially contaminating materials produces a potential risk of pollution of watercourses and drain structures along the road. General runoff from the road also adds to the deterioration of the water quality	DOW/CEPA	As the Government may require	DOW operating cost	Written and verbal complaints from community	Duration of operation; Spot checks; complaints from the community	DOW - ESSU	DOW operating cost
Road noise: Increased traffic volumes, vehicle	1. Reduce speed limits, regularly check the competence of vehicle	DOW/CEPA	During routine	DOW operating cost	Written and verbal complaints	Duration of operation; Spot	DOW-ESSB	DOW operating cost



Activity/Environmental Issue	Mitigation and/or Enhancement Measures				Monitoring Plan			
	Mitigation measures and actions	Responsible to implement	Timing to implement	Cost	Parameters	Frequency & means of verification	Responsible to monitor	Cost
sizes and operating speed will increase traffic noise on the highway	exhausts and enforce restrictions on use of horns and vehicle noise standards in areas sensitive to road noise, such as schools and hospitals.		maintenance works		from community; accident/incident registry maintained by authorities	checks; compiled data		
River-bank and scour protection: Rip-rap, gabion baskets will be used appropriately to protect abutments and river-banks up and downstream. These structures may be damaged due to storm water or human activities	2. The frequency of preventive maintenance inspections and implementation of sustained maintenance on designed structures will be increased. A system of monitoring, reporting and maintenance shall be developed consistent with the concept of this investment subproject	DOW/CEPA	During routine maintenance works	DOW operating cost	Written and verbal complaints from community; accident/incident registry maintained by authorities	Duration of operation; Spot checks; compiled data	DOW	DOW operating cost
Morphology and Hydrologic Regime: The change in the longitudinal profile by bridge construction, bank improvement and training works will result to change the hydrodynamics and may also change current direction and may cause erosion downstream and river morphology	3. The River Management Stations will regularly monitor and keep track of erosion status of rivers and report to DOW for maintenance and on time actions	DOW/CEPA	During routine maintenance works	DOW operating cost	Written and verbal complaints from community; accident/incident registry maintained by authorities	Duration of operation; Spot checks; compiled data	DOW	DOW operating cost

**Table 9-4: Environmental Management Plan and Monitoring Matrix for Relocated Bridge Construction to New Locations (3 Bridges)**

Activity/Environmental Issue	Mitigation and/or Enhancement Measures				Monitoring Plan			
	Mitigation measures and actions	Responsible to implement	Timing to implement	Cost	Parameters	Frequency & means of verification	Responsible to monitor	Cost
<b>PRE-CONSTRUCTION STAGE</b>								
Land clearance – temporary and permanent land acquisition	<ol style="list-style-type: none"> <li>1. DOW has prepared a land acquisition and resettlement plan for detailed compensation and supporting policies,</li> <li>2. The Contractor(s) will accordingly coordinate with related authority(ies) and locals to undertake inventory for the loss of land and assets;</li> <li>3. The Contractor(s) will negotiate with local people for compensation of temporary land acquisition based on the loss and time of occupation.</li> </ol>	DOW/PMO  Contractor	Before construction phase  During construction works	State budget (counterpart fund)  Included in contract price	1 RPs are prepared and clearance, 2 and 3 Compensation progress and satisfaction of affected persons An assistance program prepared and implemented	(1) review project documents, (2 - 3) Survey by questionnaires and direct interview	DOW/PMO  CSC/PMO	State budget (counterpart fund)  Included in contract price
Preparation and approval Contractor's Environmental Management Plan (CEMP)	<ol style="list-style-type: none"> <li>1. The Contractor is required to prepare and submit a Contractor's Environmental Management Plan (CEMP) based on the Contractor's actual detailed construction methodologies, work program, management of construction activities and management of workforce for review and approval by CSC,</li> <li>2. The Contractor(s) commencement works only the CEMP approved by CSC,</li> <li>3. The CSC may withhold payments and/or stop construction due to CEMP non-compliance and/or in the event of serious or repeated violations of the conditions stipulated herein.</li> </ol>	Contractor	No later than 28 days after the Commencement Date	Included in contract price	1 -2 CEMPs prepare and approved,  3 compliance with CEMP	(1-3) Review contractor's documents and reports	CSC/PMO	Included in contract price
Preparation and clearance associated plans: Health and Safety Management Plan, Traffic	<ol style="list-style-type: none"> <li>1. The Contractor requires to submit the plans to CSC for review and approval.</li> </ol>	Contractor	Before commence works on sites	Included in contract price	1 Plans prepared and approved, 2 compliance with the Plans	(1-2) review contractor and CSC's documents and reports	CSC/PMO	Included in contract price

Activity/Environmental Issue	Mitigation and/or Enhancement Measures				Monitoring Plan			
	Mitigation measures and actions	Responsible to implement	Timing to implement	Cost	Parameters	Frequency & means of verification	Responsible to monitor	Cost
Management Plan, Site Security Management Plan, Quarry Management Plan, HIV/AIDS/STI Awareness plan	2. The Contractor(s) commencement works only the Plans approved by CSC,		During construction works					
Getting Environment Permit (PEs) and agreements of associated activities such as Borrow Pits, Quarry Areas and disposal areas	<p>1. <b>Licenses and Eps:</b> for materials extraction and spoil disposal will be obtained in advance and before work commences from the appropriate authorities including CEPA.</p> <p>2. The Contractor shall identify and prepare a Spoils Disposal Agreement with the local landowners for its waste deposition, and meet requirements of GoPNG,</p> <p>3. Before beginning works the contractor should be Pes and agreement to CSC and PMO</p>	Contractor	<p>Before commence works on sites</p> <p>During construction works</p>	Included in contract price	1-3 EPs and agreements obtained and displayed at the construction site offices	<p>Review contractor's document,</p> <p>Inspection by checklist</p>	CSC/PMO	Included in contract price
Workforce Mobilization	<p>1. As far as possible, labor shall come from the communities traversed by the Highlands Highway. But where this is not possible due to the absence of skills appropriate to the requirements, workers hired from off-site shall be provided briefing of village protocols as part of awareness training;</p> <p>2. As many local workers as possible will be hired and trained for the construction activities. In order to avoid clan conflicts over access to employment, it is important that local workers are sourced from each of the customary land areas along the highway;</p> <p>3. The contractor shall ensure that workers' actions outside work site are controlled and village customs and traditions are observed at all times;</p>	Contractor	<p>After issuance of Notice to Proceed (NTP) and prior to commencement of construction activities</p> <p>During construction works</p>	Included in contract price	1 -3 agreements reached with village leaders; number hired; checklist of mobilization requirements prepared and signed off when completed; 4 contractor contact person identified; 5 adequate housing, cooking and dining areas, potable water, and sanitation and drainage	(1-4) Daily progress as required; Once unless there is personnel turnover; Site inspections; (5) Once during mobilization, daily for hygiene and housekeeping; Once for (6-10) during mobilization; periodic spot checking during operation	CSC/PMO to verify; Community members to monitor Contractor activities	Included in contract price

Activity/Environmental Issue	Mitigation and/or Enhancement Measures				Monitoring Plan			
	Mitigation measures and actions	Responsible to implement	Timing to implement	Cost	Parameters	Frequency & means of verification	Responsible to monitor	Cost
	<p>4. The contractor will identify one member of their staff to be the liaison between the ward councilor, village leaders and elders and contractor, as well as between the contractor and PMO;</p> <p>5. Adequate housing shall be provided for all workers at the construction camps and establish clean canteen/eating and cooking areas;</p> <p>6. Poaching of animals (incl. fish and birds) for food, trade or other will be prohibited with sanctions imposed for non-compliance;</p> <p>7. Use of guns and hunting equipment by workers will be banned and workers taking or in possession of wildlife shall be dismissed from employment;</p> <p>8. Entry to protected and wildlife management areas and/or sensitive areas (forested areas and rivers) by workers will not be allowed;</p> <p>9. Provide education classes on HIV and sexually transmitted diseases.</p> <p>10. Establish a Code of Conduct to outline the importance of appropriate behavior, drug and alcohol abuse, respect for local communities, and compliance with relevant laws and regulations. Ensure adequate use of resources and proper waste management</p>				<p>facilities provided as per agreed specifications;</p> <p>6-8 report of poaching and/or access to protected areas with administrative sanctions imposed;</p> <p>9 approved HIV/AIDS/STI service provider engaged;</p> <p>number of awareness activities;</p> <p>reported incidence of infections;</p> <p>number of workers hired locally and trained for the construction activities;</p> <p>10 established and implemented code of conduct</p>			
Mobilization of the contractor/ construction camp and works/materials sites prepared - presence of construction workers hired off-site may affect community protocols	<p>1. Worker camp area: Worker camp location and facilities will be located at least 500m from settlements and agreed with local communities and facilities approved by PMO and managed to minimize impacts;</p>	Contractor	After issuance of Notice to Proceed (NTP) and prior to commencement of	Included in contract price	1-3 compliance with work camp locational requirement;	Daily progress as required; Site inspections; (1 to 3) Once during mobilization,	CSC/PMO to verify; Community members to monitor Contractor activities	Included in contract price

Activity/Environmental Issue	Mitigation and/or Enhancement Measures				Monitoring Plan			
	Mitigation measures and actions	Responsible to implement	Timing to implement	Cost	Parameters	Frequency & means of verification	Responsible to monitor	Cost
ignored and relations; village potential for conflict and unrest; access to materials sites and any new operation not permitted or agreed creating local conflicts and environmental impacts	<p>2. each room of worker should not more than 10 person with a minimum of 4m<sup>2</sup> per person included bed, locker and any other personal furniture provided and space area</p> <p>3. Work and camp sites will be cleaned up to the satisfaction of the landowner and/or local community after use;</p> <p>4. Water supply: The Contractor shall provide safe potable water for food preparation, drinking and bathing compliant with the relevant national technical regulations issued by the Department of Health, and other applicable Laws,</p> <p>5. Sanitary Facilities: In every camp site, separate and adequate lavatory facilities (toilets and washing areas) shall be provided for the use of male and female workers. Toilet facilities should also be provided with adequate clean water, soap, and toilet paper. Such facilities shall be conveniently accessible and shall be kept in clean and hygienic conditions;</p> <p>6. Where workers of both sexes are employed, there shall be displayed outside each block of latrine and urinal, a notice in the language understood by the majority of the workers "For Men Only" or "For Women Only" as the case may be;</p> <p>7. Sanitary arrangements, latrines and urinals shall be provided in every work place on the following scale: Where female workers are employed, there</p>		construction activities		<p>4-7 adequate housing, cooking and dining areas, potable water, 8-12 sanitation and drainage facilities provided as per agreed specifications;</p> <p>13 waste bins provided to every campsite;</p> <p>14 signs and security requirements provided; safe access provided;</p> <p>15 established first-aid base necessary facilities and person in charge</p>	daily for hygiene and housekeeping; (4 to 15) during mobilization; periodic spot checking during operation		

Activity/Environmental Issue	Mitigation and/or Enhancement Measures				Monitoring Plan			
	Mitigation measures and actions	Responsible to implement	Timing to implement	Cost	Parameters	Frequency & means of verification	Responsible to monitor	Cost
	<p>shall be at least one latrine for every 25 females or part thereof; Where males are employed, there shall be at least one latrine for every 25 males or part thereof;</p> <p>8. Wastewater Management: Water from kitchens, showers etc. shall be discharged into a conservancy tank for removal from the Site or pass through an oil screener before discharge;</p> <p>9. Wastewater from construction camps, even after the settling and oil/water separator treatment shall still not be allowed to be discharged into river systems directly. They can be discharged into ditches, smaller creeks before being disposed into the rivers;</p> <p>10. At every construction camp there must be at least one septic tank or holding tank. The wastewater from the holding tank shall not be discharged into any watercourses. The wastewater shall be periodically transported away by a water tank to the nearest treatment plant or treated by the site wastewater treatment system ;</p> <p>11. Sewage tanks shall be designed and installed by the Contractor(s) in accordance with the National Design Code for construction of camps.</p> <p>12. Discharge of treated wastewater must comply with the discharge limit according to the PNG's regulation and standards</p>							

Activity/Environmental Issue	Mitigation and/or Enhancement Measures				Monitoring Plan			
	Mitigation measures and actions	Responsible to implement	Timing to implement	Cost	Parameters	Frequency & means of verification	Responsible to monitor	Cost
	<p>13. Solid Waste Management: The Contractor shall provide refuse bins with lids for all Worker 'camp; refuse shall be collected and removed from the camp at least twice per week; and domestic waste shall be transported to the approved refuse disposal site in covered containers or trucks; and collection and disposal of domestic waste shall be coordinated with Local Authorities;</p> <p>14. Fire control : The contractor shall ensure that basic firefighting equipment is available at all camp areas;</p> <p>15. Medical Facilities: to equip medical cabinets and facilities for first-aid and under the charge of a responsible person who shall always be readily available during working hours of the work place. He/she shall be adequately trained in administering first aid treatment.</p>							
<b>CONSTRUCTION STAGE</b>								
Air quality and particulates: Dust and air emissions from vehicles, equipment and machines (batching plants and screening plants, etc.), material storage areas and along all transport routes	<p>1. Heights from which excavated materials are dropped shall be controlled to the minimum practical to limit the fugitive dust generation from unloading;</p> <p>2. Water sprinkling will be carried out in dust prone locations, unpaved haulage roads, earthworks, and stockpiles;</p> <p>3. Use of dust control methods (such as covers, water suppression on paved or unpaved road surfaces, or increase moisture content for</p>	Contractor	Before and during construction activities	Included in contract price	1-3 dust generation and re-suspension; watering activities conducted especially in sensitive locations; 2 number of vehicles used in spraying and volume of water used;	Daily visual monitoring as determined by wind and site conditions;  Daily during dry construction days; site inspection; visual observation;	CSC/PMO to verify; community members to monitor	Included in contract price

Activity/Environmental Issue	Mitigation and/or Enhancement Measures				Monitoring Plan			
	Mitigation measures and actions	Responsible to implement	Timing to implement	Cost	Parameters	Frequency & means of verification	Responsible to monitor	Cost
	<p>open materials storage piles) will be practiced;</p> <p>4. A regular vehicle preventive maintenance and repair program shall be implemented to reduce emission of fumes from exhaust pipes;</p> <p>5. Diesel generating sets will be fitted with adequate stack height; and</p> <p>6. Low-sulphur diesel will be used in generator sets as well as other machinery</p> <p>7. Open burning of solid wastes (plastic, paper, organic matters) will be prohibited;</p> <p>8. Monitoring air quality parameters: Temperature, PM10, PM2.5</p>				<p>6 waiting time; vehicle congestion; number and type of vehicles parked; 4-6 compliance with locational requirements and anti-pollution devices installed;</p> <p>7 any smoke observed from burning;</p> <p>8 regularly air sampling</p>	<p>Spot checks; site inspection; visual observation;</p> <p>(8) Every 3 months in construction phase</p>		
<p>Noise: Noise from excavation and delivery of fill, spreading and compacting of materials. Noise from pile driving will disturb surrounding residents and businesses and traffic management will add to additional traffic noise around bridge sites. Noise from equipment delivering, spreading, laying and compacting pavement. The production of materials for road and bridge construction will include a requirement for aggregates to be produced and concrete manufactured.</p>	<p>1. Temporary construction facilities such as labour camps, vehicle maintenance workshop and earth moving equipment will be located at least 500 meters away from settlements and other sensitive receptors;</p> <p>2. Noise sources such as stone crushers, vehicle movements and quarries shall be re-located to less sensitive areas and at least 1 km away to take advantage of distance and shielding;</p> <p>3. Opportunities will be explored to take advantage of the natural topography as a noise buffer such as behind the ridge that break the line of sight between the source of noise and the receptors;</p> <p>4. Silencers will be installed in construction equipment and</p>	Contractor	During construction activities	Included in contract price	<p>1 permission to be sought from community; complaints from communities (GRM and records);</p> <p>2 and 3 distance from settlements and sensitive areas;</p> <p>4 presence of natural breaks;</p> <p>5 muffled equipment;</p>	<p>1 as determined by village protocols and site conditions;</p> <p>2 Once; Site inspection to verify locational requirements compliance; checklist of items to be monitored is prepared and used to check off items of concern;</p> <p>(11) Every 3 months in</p>	CSC/PMO to verify; Community members to monitor ambient noise	Included in contract price



Activity/Environmental Issue	Mitigation and/or Enhancement Measures				Monitoring Plan			
	Mitigation measures and actions	Responsible to implement	Timing to implement	Cost	Parameters	Frequency & means of verification	Responsible to monitor	Cost
	<p>machinery and maintained properly at all times;</p> <p>5. Equipment and machinery with lower sound levels will be selected for the construction activities;</p> <p>6. Protection devices such as ear plugs or ear muffs will be provided to the workers during period of operating high noise generating machines;</p> <p>7. Noise levels will be regularly measured during the peak of construction period in particular using portable noise meters to ensure the effectiveness of mitigation measures;</p> <p>8. Noise generation activities may be carried out between 7 am to 7 pm only to avoid disturbance to nearby communities at night and ideally should not exceed 45 dBA measured at the outside of any residence. Only in extreme instances will work beyond these hours be allowed after the Community Relations Officer (CRO) of the contractor has informed the community about change in work program well in advance;</p> <p>9. Noise barriers such as earth mounds or walls of wood, metal that form a solid obstacle between the road and roadside community will be used, especially in the schools and hospitals; and</p> <p>10. Proper information and notification of the concerned local level governments will be done to assist in the dissemination of impending disturbance and nuisance to nearby settlement areas.</p>				<p>6 PPE provided;</p> <p>7 and 8 peak construction activities identified; noise meters made available; complaints received from community if work activities carried out beyond prescribed period;</p> <p>9 type of barriers installed in sensitive receptors and effectiveness (noise levels through readings and/or complaints)</p> <p>10 information disseminated;</p> <p>11 regularly noise monitoring</p>	construction phase		

Activity/Environmental Issue	Mitigation and/or Enhancement Measures				Monitoring Plan			
	Mitigation measures and actions	Responsible to implement	Timing to implement	Cost	Parameters	Frequency & means of verification	Responsible to monitor	Cost
	11. Undertake noise monitoring to identify noise level in residential area near the construction sites							
<p>Construction Vibration: Site preparation often requires use of vibrating equipment to break up concrete foundations and slabs.</p> <p>Vibration from pile driving will disturb local businesses and residents.</p> <p>Transport of construction materials will also generate periodic vibration associated with loaded trucks.</p>	<ol style="list-style-type: none"> <li>The operation of rock breaking equipment and pile driving operations should be limited and restricted to the hours of 0700 to 1700 to minimize disruption of local residents.</li> <li>All houses in the vicinity of these works should be subject to a dilapidation survey before and after construction to assess the impact of construction. Any complaints regarding vibration along transport routes should be assessed on a case by-case basis.</li> <li>Monitor complaints of illness from roadside residences with local health authorities that may be vibration related, such as nausea, dizziness.</li> </ol>	Contractor	During construction activities	Included in contract price	<p>1 control plan included in the CEMP;</p> <p>2 inventory and monitoring houses and building vicinity of construction sites</p> <p>1 and 3 local people and village chiefs consulted, compensated for any damaged</p>	<p>compliance with plan and locational requirements ; checklist of items to be monitored;</p> <p>as required; site inspections or spot checks</p>	DSC/PMO to verify; Community members to monitor vibration	Included in contract price
<p>Water quality and pollutants: Ground disturbance will result in highly turbid runoff being generated which will add to existing high levels of turbidity in local waterways,</p> <p>Runoff from materials storage areas and materials production areas generates turbid runoff unless contained, Bridge construction, adjacent to and over waterways, has a high risk of spillage of materials into watercourses during construction. These may liquid or solid and have the potential to</p>	<ol style="list-style-type: none"> <li>Petroleum, oils and lubricants will be stored in containers/dedicated enclosures with sealed floors and located away from water bodies;</li> <li>Stockpile areas and storage areas for hazardous substances shall be located away from water bodies;</li> <li>Diversion ditches will be dug around material stockpiles;</li> <li>Interference with natural water flow in rivers, watercourses or streams within or adjacent to work sites shall be avoided or minimized. Abstraction from rivers will only be allowed after permission from PMO and shall not be done immediately near the vicinity of bridges.</li> </ol>	Contractor	During construction activities	Included in contract price	<p>1 secured storage away from water-bodies;</p> <p>2 obstructions; stockpiles verified for locational requirements compliance;</p> <p>3-4 diversion ditches provided; permission granted by PMO;</p> <p>5-6 cleanliness of work areas; settling ponds provided;</p>	<p>As maybe required; site inspection; checklist of items for compliance prepared;</p> <p>During each work and location; checklist of items for compliance prepared; site inspection;</p> <p>(9) Every 3 months in construction phase</p>	DSC/PMO, Community members to monitor water quality	Included in contract price

Activity/Environmental Issue	Mitigation and/or Enhancement Measures				Monitoring Plan			
	Mitigation measures and actions	Responsible to implement	Timing to implement	Cost	Parameters	Frequency & means of verification	Responsible to monitor	Cost
pollute before any controls can be implemented	<p>5. Solid wastes, debris, spent oil or fuel from construction machinery or plant, construction material, or waste vegetation removed from work sites will not be dumped in or near streams, rivers or waterways;</p> <p>6. Spoil and material stock piles will not be located near waterways, streams or rivers, or on the edge of slopes or hills above rivers or stream and shall be protected by perimeter diversion drains;</p> <p>7. Used oils and waste hydrocarbons will be disposed in approved sites approved by SCS and shall not be indiscriminately discharged into the soil or any waterbody;</p> <p>8. Temporary sediment controls such as silt fences or other sediment reducing devices (rock dams or silt barriers) shall be provided to prevent both siltation and silt migration during works being undertaken in the vicinity of streams and rivers;</p> <p>9. Regularly sampling and analysis water parameters (Temperature, pH, turbidity, Biochemical Oxygen Demand (BOD), Chemical Oxygen Demand (COD), Total Nitrogen, Total Phosphorus, Total Suspended Solids (TSS), Oil and Grease, and Total Coliform Bacteria)</p>				availability of approved disposal sites; 7-8 approved plan and timeliness of response; available approved sites for disposal; 9 regularly sampling and monitoring water quality			
Construction waste: Large quantities of solid waste generated by removal of structures. Wastes generated by materials production	1. Contractor(s) shall practice waste segregation, provide the necessary receptacles and institute awareness campaign to its staff and workers. Organic (biodegradables) shall be	Contractor	During construction activities	Included in contract price	1 -2 Type of facility equipped, solid waste separated;	Checklist of items for compliance prepared; verify compliance;	DSC/PMO, Community members to monitor	Included in contract price

Activity/Environmental Issue	Mitigation and/or Enhancement Measures				Monitoring Plan			
	Mitigation measures and actions	Responsible to implement	Timing to implement	Cost	Parameters	Frequency & means of verification	Responsible to monitor	Cost
have a high potential for soil and water contamination. Wastes generated by construction camps, machinery workshops, laydown areas and casting areas need continuous	<ol style="list-style-type: none"> <li>collected and disposed on-site by composting, and recyclable materials shall be recovered and collected for sale to third party collectors/integrators or recyclers;</li> <li>The contractor(s) will maximize the recycling of used materials to minimize waste generation;</li> <li>Non-recyclable solid wastes will be collected and disposed only in approved disposal sites;</li> <li>Used wood and timber shall be reused for formworks and other associated works.</li> </ol>				no waste illegal dumped 2-4 Number bin provided	Site inspections;		
Hazardous materials: Hazardous materials have the potential to contaminate the environment if spilled or cause a fire or explosion if handled incorrectly.	<ol style="list-style-type: none"> <li>An emergency response and contingency plan will be prepared to address accidental spills and the occurrence of fire in the contractor construction camp and facilities;</li> <li>Staff and workers involved in the management and utilization of oils, fuel and lubricants are shall be properly trained in the handling, storage and dispensing of such materials;</li> <li>Petroleum, oil and lubricants shall be stored in securely locked, fenced and properly designated areas away from water courses/bodies;</li> <li>All storage containers shall be in good condition at all times with clear and proper labelling, regularly checked for leakage, and repaired or replaced as necessary;</li> <li>The Contractor(s) shall be required to display safety information in all work areas and to train workers in the safe use of hazardous materials,</li> </ol>	Contractor PMO-DSC	During construction activities	Included in contract price	<ol style="list-style-type: none"> <li>1 emergency respond plan prepared;</li> <li>2 Personnel having knowledge on this issue</li> <li>3-5 Fuel and hazardous substances located in paved areas, containers in good condition and proper labelling;</li> <li>6 No hazardous waste discharged to around;</li> <li>7-8 necessary material and equipment provided</li> </ol>	<p>Checklist of items for compliance prepared; site inspections;</p> <p>Visual assessment</p>	CSC/PMO Community members to monitor	Included in contract price

Activity/Environmental Issue	Mitigation and/or Enhancement Measures				Monitoring Plan			
	Mitigation measures and actions	Responsible to implement	Timing to implement	Cost	Parameters	Frequency & means of verification	Responsible to monitor	Cost
	<p>including the provision of protective equipment;</p> <p>6. Hazardous materials shall be stored in areas free from floods at all times; and discharge of oil-contaminated water to nearby waterways shall be prohibited;</p> <p>7. Spill clean-up materials (e.g., specifically designed for petroleum products and others) shall be available at all times in adequate quantities in the same storage areas;</p> <p>8. When spillage occurs, the Contractor(s) shall immediately report to the CSC and cleaned with utmost caution by properly trained personnel</p>							
<p>Soil quality and erosion: The disturbance of ground surface without any flow controls can lead to rapid development of water erosion during high intensity rainfall events and lead to sheet erosion of all loose materials off a disturbed surface,</p> <p>The removal of unsuitable materials can provide surfaces on the excavation which store water then release large volumes when the capacity of excavation is exceeded or the retaining banks fail,</p> <p>The unconsolidated surfaces of embankments can erode rapidly when concentrated runoff,</p>	<p>1. Excavated soils shall be prevented from being washed from the work area into nearby water bodies or gardens (especially during inclement weather) by immediately hauling these materials away and disposed in approved disposal sites. Work scheduling shall take into account potential weather disturbances and rainy days historically recorded in the area. This will allow worked areas to be properly managed and avoiding large disturbed areas being exposed longer than necessary. Stockpiling of base and sub-base materials shall be also kept to a minimum to avoid being exposed longer than necessary;</p> <p>2. Removed topsoil shall be stored in separate heaps and located in stable areas for later re-use for site rehabilitation. Spoils shall be prohibited from being dumped over the side of slopes and hills;</p>	Contractor	During construction activities	Included in contract price	<p>1-2 erosion and sedimentation control plan as part of approved CEMP; proper scheduling;</p> <p>3 sorted materials; record of consented accommodate d requests;</p> <p>4 bunds provided;</p> <p>5 volume recorded;</p> <p>6 drainage provided;</p>	<p>During each work and location; Checklist of items for compliance prepared; verify compliance; site inspection;</p> <p>Checklist of items for compliance prepared; verify compliance</p>	PMO-CSC	Included in contract price

Activity/Environmental Issue	Mitigation and/or Enhancement Measures				Monitoring Plan			
	Mitigation measures and actions	Responsible to implement	Timing to implement	Cost	Parameters	Frequency & means of verification	Responsible to monitor	Cost
from the pavement or from the slopes, occurs during a rainfall event, Runoff around borrow areas and from runoff around quarries has the potential to cause off-site soil erosion away from the excavation or quarry face	<ol style="list-style-type: none"> <li>3. Excavated materials shall be sorted as either suitable (able to be reused) and unsuitable (to be disposed of) materials. The Contractor(s) shall accommodate requests of local people to utilize such materials for levelling their property with the consent of the CSC(s) and PMO for proper documentation;</li> <li>4. Materials are not to be disposed/stockpiled near water courses;</li> <li>5. Balance cut and fill requirements to minimize impacts from extraction of aggregates;</li> <li>6. Adequate drainage shall be provided in the material source/quarry areas to prevent the accumulation of stagnant water during the operation;</li> <li>7. Material sources and quarry areas located near the alignment shall be preferred to minimize hauling distance and travel time, and disturbance to settlement areas along the haul roads.</li> </ol>				7 QMP prepared and approved, consents/per mit obtained			
Terrestrial flora: Vegetation removal, tree clearing; re-vegetation - Impacts on flora	<ol style="list-style-type: none"> <li>1. The contractor shall conduct a tree inventory (species and size) during the staking of the alignment in the pre-construction stage, and trees that may be removed will be agreed with PMO and landowners prior to cutting. Trees to be removed will be clearly marked on site drawing/plan;</li> <li>2. Vegetation clearing shall be kept to a minimum, and occur only within the designated construction limits;</li> <li>3. Vegetation clearance during staking and demarcation activities, especially of trees along the road-side shall be</li> </ol>	Contractor	During construction activities	Included in contract price	<p>1 Tree species and size identified and marked;</p> <p>2 and 3 area affected and trees removed checked against plan;</p> <p>4 awareness provided; employee induction training conducted; number of</p>	<p>At start of clearing work; Site inspection</p> <p>Prior to start of work; documentation of induction training including attendance sheets</p>	CSC/PMO to verify	Included in contract price

Activity/Environmental Issue	Mitigation and/or Enhancement Measures				Monitoring Plan			
	Mitigation measures and actions	Responsible to implement	Timing to implement	Cost	Parameters	Frequency & means of verification	Responsible to monitor	Cost
	<p>minimized. Trees that may be felled shall be clearly marked and only these marked trees shall be removed;</p> <p>4. The contractor shall be responsible for providing adequate knowledge to construction workers in relation to existing laws and regulations regarding illegal tree cutting.</p> <p>5. Contract documents and technical specifications shall include clauses expressly prohibiting the indiscriminate felling of trees by construction workers; and</p> <p>6. The contractor shall not utilize cut timber as fuel wood but return it to the landowner</p>				<p>induction trainings done</p> <p>5 tender provision, sanctions imposed on workers;</p> <p>6 proof of return; approved tree species replanted</p>			
<p>Terrestrial fauna: habitats from works or presence of workers - Impacts on flora and fauna; loss of indigenous vegetation</p>	<p>1. Labor employment agreement shall be enforced by contractor banning the hunting and trading in wildlife by workers;</p> <p>2. Contractor shall provide adequate food supplies and rations for workers staying in its construction camp;</p> <p>3. Workers shall be prohibited from hunting or catching wildlife including fish and birds. Sanctions will be imposed on any workers not complying with the provision and all sanctions to be recorded;</p> <p>4. The contractor will be responsible for providing awareness to construction workers in regard to fauna in the area. Contract documents and technical specifications will include clauses expressly prohibiting the poaching of fauna by construction workers and making the contractor responsible for imposing sanctions on any workers who</p>	Contractor	During construction activities	Included in contract price	<p>1 and 4 employee induction training conducted; number of induction training sessions;</p> <p>2 and 3 adequate food provided in camp; administrative order issued to all contractor workforce, number of sanctions imposed;</p> <p>5 vehicles and equipment properly washed;</p>	<p>Prior to start of work; records of site inspections; records of sanctions imposed</p>	CSC/PMO to verify; Community members may monitor	Included in contract price

Activity/Environmental Issue	Mitigation and/or Enhancement Measures				Monitoring Plan			
	Mitigation measures and actions	Responsible to implement	Timing to implement	Cost	Parameters	Frequency & means of verification	Responsible to monitor	Cost
	<p>are caught trapping, killing, poaching, being in possession of or having poached fauna;</p> <p>5. Any potential seed source such as earth and organic materials that may be attached to machinery shall be removed by washing prior to deployment to the work areas; and</p> <p>6. Non-indigenous plant species shall not be used during replanting/re-vegetation works.</p>				6 indigenous plant species used and re-established in project area			
Aquatic fauna and flora	<p>1. Pollutant loading of storm water will include the construction of water quality basins to receive and treat storm water runoff from the proposed roadway. Strict adherence to the Soil Erosion and Sediment Control Plan should eliminate negative water quality impacts due to sediment loading.</p> <p>2. Work for the bridge abutments and piers will be performed with the use of coffer dams and sealing off of sediments which will then be appropriately disposed of offsite.</p> <p>3. Given the immense size of the river, and the degraded nature of these aquatic environments, it is anticipated that the project will not result in any significant impact to aquatic habitats. Additionally, the project will not create a physical barrier to fish movement and will not adversely affect migrating fish.</p>	Contractor	During construction activities	Included in contract price	1. Soil Erosion and Sediment Control Plan prepared and implemented; 2 and 3 turbidity in river/stream water limited and controlled	During each work and location; Checklist of items for compliance prepared; verify compliance; site inspection;	CSC/PMO to verify; Community members may monitor	Included in contract price
Invasive alien species: Biological impacts from introduced species and invasive species can cause a great deal of	<p>1. Prior to commence works, the contractor will arrange to review the site and determine whether there is or is not any infestations of invasive species in the area.</p>	Contractor	During construction activities	Included in contract price	1-2 survey and inventory if the area is infested with any invasive species;	At start of clearing work; Site inspection	CSC/PMO to verify; Community members may monitor	Included in contract price



Activity/Environmental Issue	Mitigation and/or Enhancement Measures				Monitoring Plan			
	Mitigation measures and actions	Responsible to implement	Timing to implement	Cost	Parameters	Frequency & means of verification	Responsible to monitor	Cost
damage to naturally adapted systems	<p>2. The contractor is to determine where the contractor's machinery was last used and whether the area is infested with any invasive species. Depending on the state of any infestation at the project construction site then the CSC will advise the contractor whether or not machinery must be cleaned before moving to the site. This includes the removal of any potential seed sources such as earth and organic material that may be attached to the machinery.</p> <p>3. The contractor will be required to observe for any infestations.</p> <p>4. Should infestations occur on construction sites that are due or are not due to the contractor's activities the contractor will be required to control the infestation.</p> <p>5. Invasive species shall not be used to revegetate cut slopes and replanting or compensatory tree planting that maybe required shall have full agreement of the local forest authorities.</p> <p>6. Control and avoidance of the introduction of invasive species is the contractor's responsibility and this also extends to any sub-contractors that are working under his control.</p>				<p>3 and 4 monitoring and controlling invasive species</p> <p>5 and 6 awareness provided invasive species to employee, not to be replanting</p>	Prior to start of work; documentation of induction training including attendance sheets		
Endangered species: rare and endangered species known may occur in the zone of the construction and can be affected	1. Regularly monitoring and maintain a database of the occurrence of rare and endangered species of plant or animal and take actions to avoid their disturbance during construction works through	Contractor	During construction activities	Included in contract price	awareness and training provided o employee; monitoring undertaken	Prior to start of work; records of site inspections; records of	CSC/PMO to verify; Community members may monitor	Included in contract price

Activity/Environmental Issue	Mitigation and/or Enhancement Measures				Monitoring Plan			
	Mitigation measures and actions	Responsible to implement	Timing to implement	Cost	Parameters	Frequency & means of verification	Responsible to monitor	Cost
	isolation of their habitats or adjustment of timing of works					sanctions imposed		
Access and traffic safety: Movement of traffic and pedestrians through construction zones is hazardous due to irregular traffic patterns, disturbed ground surfaces and excavations, Road safety during construction is reduced due to rapidly changing road conditions, loss of roadside furniture, warning systems and lighting.	<ol style="list-style-type: none"> <li>The Contractor(s) shall prepare a traffic management plan detailing temporary diversions where necessary and the associated management measures (reference can be made from DOW's "Safe Traffic Control at Road Works Field Guide");</li> <li>Signs and other appropriate safety measures shall be provided on site to indicate construction works are being undertaken;</li> <li>Local administration and village officials shall be consulted in the event that access to a village may be disrupted any time and temporary access arrangements provided accordingly;</li> <li>Construction vehicles will use local access roads, or negotiate access with land owners to obtain access to material extraction sites; where local roads are used, these will be rehabilitated to their original condition after the completion of work;</li> <li>Road safety protection shall be provided in the vicinity of the work site to protect the general public. This shall include advance notifications of commencement of works, installing safety barriers as necessary, and providing signages or markings on the work areas.</li> </ol>	Contractor	During construction activities	Included in contract price	<p>1 traffic management plan prepared and approved;</p> <p>2 to 5 any complaints received; action taken in response; approvals from local/village administration and officials; cleanliness maintained; road safety protection devices provided and visible at all times;</p>	<p>Once for traffic management plan; daily visual observations;</p> <p>Compliance verification to be done to ensure activities meet mitigation requirements</p>	CSC/PMO to verify; Community members may monitor	Included in contract price

Activity/Environmental Issue	Mitigation and/or Enhancement Measures				Monitoring Plan			
	Mitigation measures and actions	Responsible to implement	Timing to implement	Cost	Parameters	Frequency & means of verification	Responsible to monitor	Cost
Occupation health and safety: The risk of spread of communicable disease is dealt with in the next section Public safety, particularly of pedestrians and children can be threatened	<ol style="list-style-type: none"> <li>1. Safety measures as required by law and by good engineering practice shall be established and first aid facilities at work sites and in vehicles are likewise provided;</li> <li>2. The Contractor(s) will instruct and induct all workers in health and safety matters (induction course) including construction camp rules and EHSO shall follow up with toolbox talks on a weekly basis. Workforce training for all workers starting on site will include safety and environmental hygiene;</li> <li>3. In addition, workers shall receive a daily safety and work briefing (tool box talk) from the Contractor(s);</li> <li>4. Workers shall be provided with appropriate personnel protection equipment (PPE) such as safety boots, helmets, reflector vest, gloves, protective clothes, dust mask, goggles, and ear protection at no cost to the workers. The Contractor will issue PPE on a daily basis to workers after the tool box talk;</li> <li>5. Fencing will be installed on all areas of excavation greater than 1m deep, and on all sides of temporary works;</li> <li>6. Reversing signals (visual and audible) shall be installed on all construction vehicles and equipment;</li> <li>7. Potable water supply shall be provided and maintained at all times in the contractor' camp and all its work locations;</li> <li>8. Where worker exposure to traffic cannot be completely</li> </ol>	Contractor	During construction activities	Included in contract price	<ol style="list-style-type: none"> <li>1 requirements included in the tender documents, HSP as part of CEMP;</li> <li>2 qualified EHSO provided;</li> <li>3 and 4 induction training and daily toolbox provided and documented;</li> <li>5 set of PPE provided to each worker;</li> <li>6 fencing provided in deep excavations;</li> <li>7 reversing signal provided in all vehicles;</li> <li>8 potable water supply provided and maintained;</li> <li>9 barriers and warning signs provided;</li> <li>10 camps provided with toilets/sanitation facilities</li> </ol>	Verify once during tendering and before start of site works; and throughout the project duration as required until site has been established; compliance to be checked; verify that EHSG measures meet requirements ; site inspection	CSC/PMO to verify; Community members may monitor	Included in contract price

Activity/Environmental Issue	Mitigation and/or Enhancement Measures				Monitoring Plan			
	Mitigation measures and actions	Responsible to implement	Timing to implement	Cost	Parameters	Frequency & means of verification	Responsible to monitor	Cost
	<p>eliminated, protective barriers and warning signs shall be provided to shield workers from passing vehicles. Another measure is to install channelling devices (e.g., traffic cones and barrels) to delineate the work zone, and trained flag men at each end of the current working zone shall be provided to direct traffic movement in and around work areas; and</p> <p>9. Construction camps shall be provided with toilets/sanitation facilities in accordance with local regulations to prevent any hazard to public health or contamination of land, surface or groundwater. These facilities shall be well maintained and cleaned regularly to encourage use and emptied regularly to prevent overflows.</p> <p>10. First aid facilities shall be provided at the work sites, in vehicles;</p> <p>11. The contractor(s) shall conduct training for all workers on safety and environmental hygiene at no cost to the employees;</p> <p>12. Instruction and induction of all workers shall be carried out for all workers before they start work in health and safety matters, including road safety; construction camp rules;</p> <p>13. Assigned safety monitors will follow up with toolbox talks on a weekly basis;</p> <p>14. Workers shall receive daily safety and work briefing from contractor called the toolbox talk.</p>				<p>and treatment facilities;</p> <p>11 sanitation and hygiene training provided and observed;</p> <p>12 and 14 training conducted; toolbox talks conducted weekly; records of toolbox talks maintained and documented in monthly reports</p>			

Activity/Environmental Issue	Mitigation and/or Enhancement Measures				Monitoring Plan			
	Mitigation measures and actions	Responsible to implement	Timing to implement	Cost	Parameters	Frequency & means of verification	Responsible to monitor	Cost
HIV/AIDS/STIs Quantity people having HIV/AIDS by un-control relationships between indigenous peoples and worker may be increasing	<ol style="list-style-type: none"> <li>1. Screen all persons to be engaged on the project for HIV/AIDS/STIs as part of the induction of personnel to be engaged;</li> <li>2. Implement a HIV/AIDS awareness program as part of the occupational health and safety training provided to personnel on the project;</li> <li>3. Provide visual stimuli in the workplace (offices, canteens, construction camps) to ensure the need to take care and control this disease is continuously presented and reinforced. These stimuli should be changed on a fortnightly basis to eliminate the potential for boredom and disregard for the messages they contain.</li> <li>4. The management of this issue should be three-fold – control of the introduction of HIV/AIDS through the workforce, development of awareness within the workforce about the disease, its spread and its consequences, and making preventative measure available whilst controlling external vectors that may introduce the disease.</li> </ol>	Contractor	During construction activities	Included in contract price	<ol style="list-style-type: none"> <li>1 Screen for staff and workers conducted;</li> <li>2 awareness program prepared and implemented;</li> <li>3 and 4 necessary materials and equipment provided</li> </ol>	<p>Site inspection;</p> <p>Checklist of items for compliance prepared; verify compliance</p>	CSC/PMO to verify;	Included in contract price
Physical cultural resources: PCRs may uncovered during construction activities	<ol style="list-style-type: none"> <li>1. Instructed to keep watch for relics that may be uncovered during excavations, and local communities will be consulted to identify potential sites of concern, such as graveyards or taboo areas;</li> <li>2. Should any potential items be located, the PMO through the CSC shall be immediately</li> </ol>	Contractor and approved service provider (sub-contractor)	During construction activities	Included in contract price	<ol style="list-style-type: none"> <li>1 chance finds procedure established in CEMP;</li> <li>2 to 5 artifacts, sites or other PCR discovered, proper authorities informed;</li> </ol>	<ol style="list-style-type: none"> <li>1 once during CEMP review to ensure chance finds procedures included;</li> <li>2 to 7 site inspections and assessment;</li> </ol>	CSC/PMO to verify	Included in contract price

Activity/Environmental Issue	Mitigation and/or Enhancement Measures				Monitoring Plan			
	Mitigation measures and actions	Responsible to implement	Timing to implement	Cost	Parameters	Frequency & means of verification	Responsible to monitor	Cost
	<p>informed and work stoppage be immediately implemented;</p> <p>3. The PMO with the assistance of the CSC, and in cooperation with local leaders, will determine if the item is of potential significance and contact DOW to pass the information to the relevant department in the government who will be invited to inspect the site;</p> <p>4. Work shall stop to allow time for inspection, removal or in-situ preservation of the PCR and until the relevant government agency indicates works can re-commence; and</p> <p>5. Until the government has responded to this invitation, work will not re-commence in this location until agreement has been reached with the government and PMO as to any required mitigation measures.</p>				documented and secured; site secured; communities informed	as triggered number of days of work suspension		
<p>Social conflicts: Presence of construction workers may affect community structure and patterns and conflict with local people</p>	<p>1. Consider the location of construction camps away from communities in order to avoid social conflict in using resources and basic amenities such as water supply,</p> <p>2. Maximize number of local people employed in construction works,</p> <p>3. Maximize goods and services sourced from local commercial enterprises.</p>	Contract	During construction activities	As per agreements	1 Construction camps far from 2 communities; Number local people working in the subproject; 3 Using goods and services sourced	Visual assessment, Review documents	CSC/PMO to verify; Community members to monitor	Included in contract price
<p>Impacts on sources of livelihood and Modified market patterns: Changes resulting from the induced demands of the construction project may create a false market economy for the</p>	<p>1. An income restoration program to help the severely affected and vulnerable households rebuild their sources of livelihood will be prepared and implemented.</p>	DOW/PMO, Contractor	During excavation works	Included in contract price	1 an assistance program prepared and implemented	Review project document	CSC/PMO to verify	Included in contract price

Activity/Environmental Issue	Mitigation and/or Enhancement Measures				Monitoring Plan			
	Mitigation measures and actions	Responsible to implement	Timing to implement	Cost	Parameters	Frequency & means of verification	Responsible to monitor	Cost
duration of the project which affects those least able to pay for commodities in the community								
<b>OPERATION STAGE</b>								
Greenhouse gas emissions: Increase road capacity will lead to higher speeds and use of the road section by heavier vehicles	The maintenance of free traffic flow will reduce the volume of greenhouse gas emitted. Traffic management mechanisms should be used to ensure speed differentiation between classes of vehicles does not reduce freedom of movement for vehicles	DOW	Bridge operation	DOW operating cost	Volume of vehicles operation; increased speed of vehicles	Regular inspections, and spot checks	DOW-ESSB	DOW operating cost
Air quality - particulate emissions: Particulate generation resulting from exhaust emissions and dust created by poorly covered and badly fitting bodies depositing materials on the road. Air emissions will occur as a result of exhaust emissions.	Regular checks on vehicles using the road shall be undertaken and those vehicles with poorly fitted bodies, load spillage and excessive exhaust emissions shall be removed from service until repaired.	DOW	During specific maintenance works and vegetation control; emergency repairs of landslide prone areas; routine maintenance works	DOW operating cost	Volume of materials handled and hauled out; cleanliness of surrounding	During conduct of maintenance works; regular inspections, and spot checks	DOW-ESSU	DOW operating cost
Water quality and pollutants: The use of the bridges by vehicles transporting and hazardous material spills if crashes on bridges potentially contaminating materials produces a potential risk of pollution of watercourses and drain structures along the road. General runoff from the road also adds	The use of the bridges by vehicles transporting and hazardous material spills if crashes on bridges potentially contaminating materials produces a potential risk of pollution of watercourses and drain structures along the road. General runoff from the road also adds to the deterioration of the water quality	DOW/CEPA	As the Government may require	DOW operating cost	Written and verbal complaints from community	Duration of operation; Spot checks; complaints from the community	DOW - ESSU	DOW operating cost

Activity/Environmental Issue	Mitigation and/or Enhancement Measures				Monitoring Plan			
	Mitigation measures and actions	Responsible to implement	Timing to implement	Cost	Parameters	Frequency & means of verification	Responsible to monitor	Cost
to the deterioration of the water quality								
Road noise: Increased traffic volumes, vehicle sizes and operating speed will increase traffic noise on the highway	Reduce speed limits, regularly check the competence of vehicle exhausts and enforce restrictions on use of horns and vehicle noise standards in areas sensitive to road noise, such as schools and hospitals.	DOW/CEPA	During routine maintenance works	DOW operating cost	Written and verbal complaints from community; accident/incident registry maintained by authorities	Duration of operation; Spot checks; compiled data	DOW-ESSB	DOW operating cost
River-bank and scour protection: Rip-rap, gabion baskets will be used appropriately to protect abutments and river-banks up and downstream. These structures may be damaged due to storm water or human activities	The frequency of preventive maintenance inspections and implementation of sustained maintenance on designed structures will be increased. A system of monitoring, reporting and maintenance shall be developed consistent with the concept of this investment subproject	DOW/CEPA	During routine maintenance works	DOW operating cost	Written and verbal complaints from community; accident/incident registry maintained by authorities	Duration of operation; Spot checks; compiled data	DOW	DOW operating cost
Morphology and Hydrologic Regime: The change in the longitudinal profile by bridge construction, bank improvement and training works will result to change the hydrodynamics and may also change current direction and may cause erosion downstream and river morphology	The River Management Stations will regularly monitor and keep track of erosion status of rivers and report to DOW for maintenance and on time actions	DOW/CEPA	During routine maintenance works	DOW operating cost	Written and verbal complaints from community; accident/incident registry maintained by authorities	Duration of operation; Spot checks; compiled data	DOW	DOW operating cost



**Table 9-5: Environmental Management Plan and Monitoring Matrix for one Culvert Replacement by a Double-lane Bridge**

Activity/Environmental Issue	Mitigation and/or Enhancement Measures				Monitoring Plan			
	Mitigation measures and actions	Responsible to implement	Timing to implement	Cost	Parameters	Frequency & means of verification	Responsible to monitor	Cost
<b>PRE-CONSTRUCTION STAGE</b>								
Land clearance – temporary and permanent land acquisition	<ol style="list-style-type: none"> <li>DOW has prepared a land acquisition and resettlement plan for detailed compensation and supporting policies,</li> <li>The Contractor(s) will accordingly coordinate with related authority(ies) and locals to undertake inventory for the loss of land and assets;</li> <li>The Contractor(s) will negotiate with local people for compensation of temporary land acquisition based on the loss and time of occupation.</li> </ol>	DOW/PMO  Contractor	<p>Before construction phase</p> <p>During construction works</p>	<p>State budget (counterpart fund)</p> <p>Included in contract price</p>	<p>1 RPs are prepared and clearance,</p> <p>2 and 3 Compensation progress and satisfaction of affected persons</p> <p>An assistance program prepared and implemented</p>	<p>(1) review project documents, (2 - 3) Survey by questionnaires and direct interview</p>	DOW/PMO  CSC/PMO	<p>State budget (counterpart fund)</p> <p>Included in contract price</p>
Preparation and approval Contractor's Environmental Management Plan (CEMP)	<ol style="list-style-type: none"> <li>The Contractor is required to prepare and submit a Contractor's Environmental Management Plan (CEMP) based on the Contractor's actual detailed construction methodologies, work program, management of construction activities and management of workforce for review and approval by CSC,</li> <li>The Contractor(s) commencement works only the CEMP approved by CSC,</li> <li>The CSC may withhold payments and/or stop construction due to CEMP non-compliance and/or in the event of serious or repeated violations of the conditions stipulated herein.</li> </ol>	Contractor	No later than 28 days after the Commencement Date	Included in contract price	<p>1 -2 CEMPs prepare and approved,</p> <p>3 compliance with CEMP</p>	(1-3) Review contractor's documents and reports	CSC/PMO	Included in contract price
Preparation and clearance associated plans: Health and Safety Management Plan, Traffic Management Plan, Site Security Management Plan, Quarry	<ol style="list-style-type: none"> <li>The Contractor requires to submit the plans to CSC for review and approval.</li> <li>The Contractor(s) commencement works only the Plans approved by CSC,</li> </ol>	Contractor	<p>Before commence works on sites</p> <p>During construction works</p>	Included in contract price	<p>1 Plans prepared and approved,</p> <p>2 compliance with the Plans</p>	(1-2) review contractor and CSC's documents and reports	CSC/PMO	Included in contract price

Activity/Environmental Issue	Mitigation and/or Enhancement Measures				Monitoring Plan			
	Mitigation measures and actions	Responsible to implement	Timing to implement	Cost	Parameters	Frequency & means of verification	Responsible to monitor	Cost
Management Plan, HIV/AIDS/STI Awareness plan								
Getting Environment Permit (PEs) and agreements of associated activities such as Borrow Pits, Quarry Areas and disposal areas	<ol style="list-style-type: none"> <li><b>Licenses and Eps:</b> for materials extraction and spoil disposal will be obtained in advance and before work commences from the appropriate authorities including CEPA.</li> <li>The Contractor shall identify and prepare a Spoils Disposal Agreement with the local landowners for its waste deposition, and meet requirements of GoPNG,</li> <li>Before beginning works the contractor should be Pes and agreement to CSC and PMO</li> </ol>	Contractor	<p>Before commence works on sites</p> <p>During construction works</p>	Included in contract price	1-3 EPs and agreements obtained and displayed at the construction site offices	<p>Review contractor's document,</p> <p>Inspection by checklist</p>	CSC/PMO	Included in contract price
Workforce Mobilization	<ol style="list-style-type: none"> <li>As far as possible, labor shall come from the communities traversed by the Highlands Highway. But where this is not possible due to the absence of skills appropriate to the requirements, workers hired from off-site shall be provided briefing of village protocols as part of awareness training;</li> <li>As many local workers as possible will be hired and trained for the construction activities. In order to avoid clan conflicts over access to employment, it is important that local workers are sourced from each of the customary land areas along the highway;</li> <li>The contractor shall ensure that workers' actions outside work site are controlled and village customs and traditions are observed at all times;</li> <li>The contractor will identify one member of their staff to be the liaison between the ward</li> </ol>	Contractor	<p>After issuance of Notice to Proceed (NTP) and prior to commencement of construction activities</p> <p>During construction works</p>	Included in contract price	1 -3 agreements reached with village leaders; number hired; checklist of mobilization requirements prepared and signed off when completed; 4 contractor contact person identified; 5 adequate housing, cooking and dining areas, potable water, and sanitation and drainage facilities provided as	(1-4) Daily progress as required; Once unless there is personnel turnover; Site inspections; (5) Once during mobilization, daily for hygiene and housekeeping; Once for (6-10) during mobilization; periodic spot checking during operation	CSC/PMO to verify; Community members to monitor Contractor activities	Included in contract price

Activity/Environmental Issue	Mitigation and/or Enhancement Measures				Monitoring Plan			
	Mitigation measures and actions	Responsible to implement	Timing to implement	Cost	Parameters	Frequency & means of verification	Responsible to monitor	Cost
	<p>councilor, village leaders and elders and contractor, as well as between the contractor and PMO;</p> <p>5. Adequate housing shall be provided for all workers at the construction camps and establish clean canteen/eating and cooking areas;</p> <p>6. Poaching of animals (incl. fish and birds) for food, trade or other will be prohibited with sanctions imposed for non-compliance;</p> <p>7. Use of guns and hunting equipment by workers will be banned and workers taking or in possession of wildlife shall be dismissed from employment;</p> <p>8. Entry to protected and wildlife management areas and/or sensitive areas (forested areas and rivers) by workers will not be allowed;</p> <p>9. Provide education classes on HIV and sexually transmitted diseases.</p> <p>10. Establish a Code of Conduct to outline the importance of appropriate behavior, drug and alcohol abuse, respect for local communities, and compliance with relevant laws and regulations. Ensure adequate use of resources and proper waste management</p>				<p>per agreed specifications;</p> <p>6-8 report of poaching and/or access to protected areas with administrative sanctions imposed;</p> <p>9 approved HIV/AIDS/STI service provider engaged;</p> <p>number of awareness activities;</p> <p>reported incidence of infections;</p> <p>number of workers hired locally and trained for the construction activities;</p> <p>10 established and implemented code of conduct</p>			
<p>Mobilization of the contractor/ construction camp and works/materials sites prepared - presence of construction workers hired off-site may affect community protocols ignored and relations; village potential for</p>	<p>1. <b>Worker camp area:</b> Worker camp location and facilities will be located at least 500m from settlements and agreed with local communities and facilities approved by PMO and managed to minimize impacts;</p> <p>2. each room of worker should not more than 10 person with a minimum of 4m<sup>2</sup> per person</p>	Contractor	After issuance of Notice to Proceed (NTP) and prior to commencement of construction activities	Included in contract price	<p>1-3 compliance with work camp locational requirement;</p> <p>4-7 adequate housing,</p>	<p>Daily progress as required;</p> <p>Site inspections; (1 to 3)</p> <p>Once during mobilization, daily for hygiene and</p>	CSC/PMO to verify; Community members to monitor Contractor activities	Included in contract price

Activity/Environmental Issue	Mitigation and/or Enhancement Measures				Monitoring Plan			
	Mitigation measures and actions	Responsible to implement	Timing to implement	Cost	Parameters	Frequency & means of verification	Responsible to monitor	Cost
<p>conflict and unrest; access to materials sites and any new operation not permitted or agreed creating local conflicts and environmental impacts</p>	<p>included bed, locker and any other personal furniture provided and space area</p> <p>3. Work and camp sites will be cleaned up to the satisfaction of the landowner and/or local community after use;</p> <p>4. <b>Water supply:</b> The Contractor shall provide safe potable water for food preparation, drinking and bathing compliant with the relevant national technical regulations issued by the Department of Health, and other applicable Laws,</p> <p>5. <b>Sanitary Facilities:</b> In every camp site, separate and adequate lavatory facilities (toilets and washing areas) shall be provided for the use of male and female workers. Toilet facilities should also be provided with adequate clean water, soap, and toilet paper. Such facilities shall be conveniently accessible and shall be kept in clean and hygienic conditions;</p> <p>6. Where workers of both sexes are employed, there shall be displayed outside each block of latrine and urinal, a notice in the language understood by the majority of the workers "For Men Only" or "For Women Only" as the case may be;</p> <p>7. Sanitary arrangements, latrines and urinals shall be provided in every work place on the following scale: Where female workers are employed, there shall be at least one latrine for every 25 females or part thereof; Where males are employed, there shall be at least one latrine for every 25 males or part thereof;</p>				<p>cooking and dining areas, potable water, 8-12 sanitation and drainage facilities provided as per agreed specifications;</p> <p>13 waste bins provided to every campsite;</p> <p>14 signs and security requirements provided; safe access provided;</p> <p>15 established first-aid base necessary facilities and person in charge</p>	<p>housekeeping; (4 to 15) during mobilization; periodic spot checking during operation</p>		

Activity/Environmental Issue	Mitigation and/or Enhancement Measures				Monitoring Plan			
	Mitigation measures and actions	Responsible to implement	Timing to implement	Cost	Parameters	Frequency & means of verification	Responsible to monitor	Cost
	<p>8. <b>Wastewater Management:</b> Water from kitchens, showers etc. shall be discharged into a conservancy tank for removal from the Site or pass through an oil screener before discharge;</p> <p>9. Wastewater from construction camps, even after the settling and oil/water separator treatment shall still not be allowed to be discharged into river systems directly. They can be discharged into ditches, smaller creeks before being disposed into the rivers;</p> <p>10. At every construction camp there must be at least one septic tank or holding tank. The wastewater from the holding tank shall not be discharged into any watercourses. The wastewater shall be periodically transported away by a water tank to the nearest treatment plant or treated by the site wastewater treatment system ;</p> <p>11. Sewage tanks shall be designed and installed by the Contractor(s) in accordance with the National Design Code for construction of camps.</p> <p>12. Discharge of treated wastewater must comply with the discharge limit according to the PNG's regulation and standards</p> <p>13. Solid Waste Management: The Contractor shall provide refuse bins with lids for all Worker 'camp; refuse shall be collected and removed from the camp at least twice per week; and domestic waste shall be transported to the approved refuse disposal site in covered containers or trucks; and collection and disposal of</p>							

Activity/Environmental Issue	Mitigation and/or Enhancement Measures				Monitoring Plan			
	Mitigation measures and actions	Responsible to implement	Timing to implement	Cost	Parameters	Frequency & means of verification	Responsible to monitor	Cost
	<p>domestic waste shall be coordinated with Local Authorities;</p> <p>14. <b>Fire control</b> : The contractor shall ensure that basic firefighting equipment is available at all camp areas;</p> <p>15. Medical Facilities: to equip medical cabinets and facilities for first-aid and under the charge of a responsible person who shall always be readily available during working hours of the work place. He/she shall be adequately trained in administering first aid treatment.</p>							
<b>CONSTRUCTION STAGE</b>								
<p>Air quality and particulates: Dust and air emissions from vehicles, equipment and machines (batching plants and screening plants, etc.), material storage areas and along all transport routes</p>	<ol style="list-style-type: none"> <li>Heights from which excavated materials are dropped shall be controlled to the minimum practical to limit the fugitive dust generation from unloading;</li> <li>Water sprinkling will be carried out in dust prone locations, unpaved haulage roads, earthworks, and stockpiles;</li> <li>Use of dust control methods (such as covers, water suppression on paved or unpaved road surfaces, or increase moisture content for open materials storage piles) will be practiced;</li> <li>A regular vehicle preventive maintenance and repair program shall be implemented to reduce emission of fumes from exhaust pipes;</li> <li>Diesel generating sets will be fitted with adequate stack height; and</li> </ol>	Contractor	Before and during construction activities	Included in contract price	<p>1-3 dust generation and re-suspension; watering activities conducted especially in sensitive locations;</p> <p>2 number of vehicles used in spraying and volume of water used;</p> <p>6 waiting time; vehicle congestion; number and type of vehicles parked;</p> <p>4-6 compliance with locational requirements and anti-pollution</p>	<p>Daily visual monitoring as determined by wind and site conditions;</p> <p>Daily during dry construction days; site inspection; visual observation;</p> <p>Spot checks; site inspection; visual observation;</p> <p>(8) Every 3 months in construction phase</p>	CSC/PMO to verify; community members to monitor	Included in contract price

Activity/Environmental Issue	Mitigation and/or Enhancement Measures				Monitoring Plan			
	Mitigation measures and actions	Responsible to implement	Timing to implement	Cost	Parameters	Frequency & means of verification	Responsible to monitor	Cost
	<p>6. Low-sulphur diesel will be used in generator sets as well as other machinery</p> <p>7. Open burning of solid wastes (plastic, paper, organic matters) will be prohibited;</p> <p>8. Monitoring air quality parameters: Temperature, PM10, PM2.5</p>				<p>devices installed;</p> <p>7 any smoke observed from burning;</p> <p>8 regularly air sampling</p>			
<p>Noise: Noise from excavation and delivery of fill, spreading and compacting of materials. Noise from pile driving will disturb surrounding residents and businesses and traffic management will add to additional traffic noise around bridge sites. Noise from equipment delivering, spreading, laying and compacting pavement. The production of materials for road and bridge construction will include a requirement for aggregates to be produced and concrete manufactured.</p>	<p>1. Temporary construction facilities such as labour camps, vehicle maintenance workshop and earth moving equipment will be located at least 500 meters away from settlements and other sensitive receptors;</p> <p>2. Noise sources such as stone crushers, vehicle movements and quarries shall be re-located to less sensitive areas and at least 1 km away to take advantage of distance and shielding;</p> <p>3. Opportunities will be explored to take advantage of the natural topography as a noise buffer such as behind the ridge that break the line of sight between the source of noise and the receptors;</p> <p>4. Silencers will be installed in construction equipment and machinery and maintained properly at all times;</p> <p>5. Equipment and machinery with lower sound levels will be selected for the construction activities;</p> <p>6. Protection devices such as ear plugs or ear muffs will be provided to the workers during period of operating high noise generating machines;</p>	Contractor	During construction activities	Included in contract price	<p>1 permission to be sought from community; complaints from communities (GRM and records);</p> <p>2 and 3 distance from settlements and sensitive areas;</p> <p>4 presence of natural breaks;</p> <p>5 muffled equipment;</p> <p>6 PPE provided;</p> <p>7 and 8 peak construction activities identified; noise meters made available; complaints received from community if</p>	<p>1 as determined by village protocols and site conditions;</p> <p>2 Once; Site inspection to verify locational requirements compliance; checklist of items to be monitored is prepared and used to check off items of concern;</p> <p>(11) Every 3 months in construction phase</p>	CSC/PMO to verify; Community members to monitor ambient noise	Included in contract price

Activity/Environmental Issue	Mitigation and/or Enhancement Measures				Monitoring Plan			
	Mitigation measures and actions	Responsible to implement	Timing to implement	Cost	Parameters	Frequency & means of verification	Responsible to monitor	Cost
	<p>7. Noise levels will be regularly measured during the peak of construction period in particular using portable noise meters to ensure the effectiveness of mitigation measures;</p> <p>8. Noise generation activities may be carried out between 7 am to 7 pm only to avoid disturbance to nearby communities at night and ideally should not exceed 45 dBA measured at the outside of any residence. Only in extreme instances will work beyond these hours be allowed after the Community Relations Officer (CRO) of the contractor has informed the community about change in work program well in advance;</p> <p>9. Noise barriers such as earth mounds or walls of wood, metal that form a solid obstacle between the road and roadside community will be used, especially in the schools and hospitals; and</p> <p>10. Proper information and notification of the concerned local level governments will be done to assist in the dissemination of impending disturbance and nuisance to nearby settlement areas.</p> <p>11. Undertake noise monitoring to identify noise level in residential area near the construction sites</p>				<p>work activities carried out beyond prescribed period;</p> <p>9 type of barriers installed in sensitive receptors and effectiveness (noise levels through readings and/or complaints)</p> <p>10 information disseminated;</p> <p>11 regularly noise monitoring</p>			
Construction Vibration: Site preparation often requires use of vibrating equipment to break up concrete foundations and slabs.	1. The operation of rock breaking equipment and pile driving operations should be limited and restricted to the hours of 0700 to 1700 to minimize disruption of local residents.	Contractor	During construction activities	Included in contract price	1 control plan included in the CEMP; 2 inventory and monitoring houses and building	compliance with plan and locational requirements ; checklist of items to be monitored;	DSC/PMO to verify; Community members to monitor vibration	Included in contract price



Activity/Environmental Issue	Mitigation and/or Enhancement Measures				Monitoring Plan			
	Mitigation measures and actions	Responsible to implement	Timing to implement	Cost	Parameters	Frequency & means of verification	Responsible to monitor	Cost
Vibration from pile driving will disturb local businesses and residents. Transport of construction materials will also generate periodic vibration associated with loaded trucks.	<ol style="list-style-type: none"> <li>All houses in the vicinity of these works should be subject to a dilapidation survey before and after construction to assess the impact of construction. Any complaints regarding vibration along transport routes should be assessed on a case by-case basis.</li> <li>Monitor complaints of illness from roadside residences with local health authorities that may be vibration related, such as nausea, dizziness.</li> </ol>				<p>vicinity of construction sites</p> <p>1 and 3 local people and village chiefs consulted, compensated for any damaged</p>	as required; site inspections or spot checks		
Water quality and pollutants: Ground disturbance will result in highly turbid runoff being generated which will add to existing high levels of turbidity in local waterways, Runoff from materials storage areas and materials production areas generates turbid runoff unless contained, Bridge construction, adjacent to and over waterways, has a high risk of spillage of materials into watercourses during construction. These may liquid or solid and have the potential to pollute before any controls can be implemented	<ol style="list-style-type: none"> <li>Petroleum, oils and lubricants will be stored in containers/dedicated enclosures with sealed floors and located away from water bodies;</li> <li>Stockpile areas and storage areas for hazardous substances shall be located away from water bodies;</li> <li>Diversion ditches will be dug around material stockpiles;</li> <li>Interference with natural water flow in rivers, watercourses or streams within or adjacent to work sites shall be avoided or minimized. Abstraction from rivers will only be allowed after permission from PMO and shall not be done immediately near the vicinity of bridges.</li> <li>Solid wastes, debris, spent oil or fuel from construction machinery or plant, construction material, or waste vegetation removed from work sites will not be dumped in or near streams, rivers or waterways;</li> <li>Spoil and material stock piles will not be located near</li> </ol>	Contractor	During construction activities	Included in contract price	<ol style="list-style-type: none"> <li>1 secured storage away from water-bodies;</li> <li>2 obstructions; stockpiles verified for locational requirements compliance;</li> <li>3-4 diversion ditches provided; permission granted by PMO;</li> <li>5-6 cleanliness of work areas; settling ponds provided; availability of approved disposal sites;</li> <li>7-8 approved plan and timeliness of response; available approved sites for disposal;</li> </ol>	<p>As maybe required; site inspection; checklist of items for compliance prepared;</p> <p>During each work and location; checklist of items for compliance prepared; site inspection;</p> <p>(9) Every 3 months in construction phase</p>	DSC/PMO, Community members to monitor water quality	Included in contract price

Activity/Environmental Issue	Mitigation and/or Enhancement Measures				Monitoring Plan			
	Mitigation measures and actions	Responsible to implement	Timing to implement	Cost	Parameters	Frequency & means of verification	Responsible to monitor	Cost
	<p>waterways, streams or rivers, or on the edge of slopes or hills above rivers or stream and shall be protected by perimeter diversion drains;</p> <p>7. Used oils and waste hydrocarbons will be disposed in approved sites approved by SCS and shall not be indiscriminately discharged into the soil or any waterbody;</p> <p>8. Temporary sediment controls such as silt fences or other sediment reducing devices (rock dams or silt barriers) shall be provided to prevent both siltation and silt migration during works being undertaken in the vicinity of streams and rivers;</p> <p>9. Regularly sampling and analysis water parameters (Temperature, pH, turbidity, Biochemical Oxygen Demand (BOD), Chemical Oxygen Demand (COD), Total Nitrogen, Total Phosphorus, Total Suspended Solids (TSS), Oil and Grease, and Total Coliform Bacteria)</p>				9 regularly sampling and monitoring water quality			
<p>Construction waste: Large quantities of solid waste generated by removal of structures. Wastes generated by materials production have a high potential for soil and water contamination. Wastes generated by construction camps, machinery workshops, laydown areas and casting areas need continuous</p>	<p>1. Contractor(s) shall practice waste segregation, provide the necessary receptacles and institute awareness campaign to its staff and workers. Organic (biodegradables) shall be collected and disposed on-site by composting, and recyclable materials shall be recovered and collected for sale to third party collectors/integrators or recyclers;</p> <p>2. The contractor(s) will maximize the recycling of used materials to minimize waste generation;</p>	Contractor	During construction activities	Included in contract price	<p>1 -2 Type of facility equipped, solid waste separated; no waste illegal dumped</p> <p>2-4 Number bin provided</p>	<p>Checklist of items for compliance prepared; verify compliance;</p> <p>Site inspections;</p>	DSC/PMO, Community members to monitor	Included in contract price

Activity/Environmental Issue	Mitigation and/or Enhancement Measures				Monitoring Plan			
	Mitigation measures and actions	Responsible to implement	Timing to implement	Cost	Parameters	Frequency & means of verification	Responsible to monitor	Cost
	<p>3. Non-recyclable solid wastes will be collected and disposed only in approved disposal sites;</p> <p>4. Used wood and timber shall be reused for formworks and other associated works.</p>							
<p>Hazardous materials: Hazardous materials have the potential to contaminate the environment if spilled or cause a fire or explosion if handled incorrectly.</p>	<p>1. An emergency response and contingency plan will be prepared to address accidental spills and the occurrence of fire in the contractor construction camp and facilities;</p> <p>2. Staff and workers involved in the management and utilization of oils, fuel and lubricants shall be properly trained in the handling, storage and dispensing of such materials;</p> <p>3. Petroleum, oil and lubricants shall be stored in securely locked, fenced and properly designated areas away from water courses/bodies;</p> <p>4. All storage containers shall be in good condition at all times with clear and proper labelling, regularly checked for leakage, and repaired or replaced as necessary;</p> <p>5. The Contractor(s) shall be required to display safety information in all work areas and to train workers in the safe use of hazardous materials, including the provision of protective equipment;</p> <p>6. Hazardous materials shall be stored in areas free from floods at all times; and discharge of oil-contaminated water to nearby waterways shall be prohibited;</p> <p>7. Spill clean-up materials (e.g., specifically designed for</p>	Contractor PMO-DSC	During construction activities	Included in contract price	<p>1 emergency respond plan prepared;</p> <p>2 Personnel having knowledge on this issue</p> <p>3-5 Fuel and hazardous substances located in paved areas, containers in good condition and proper labelling;</p> <p>6 No hazardous waste discharged to around;</p> <p>7-8 necessary material and equipment provided</p>	<p>Checklist of items for compliance prepared;</p> <p>site inspections;</p> <p>Visual assessment</p>	CSC/PMO Community members to monitor	Included in contract price

Activity/Environmental Issue	Mitigation and/or Enhancement Measures				Monitoring Plan			
	Mitigation measures and actions	Responsible to implement	Timing to implement	Cost	Parameters	Frequency & means of verification	Responsible to monitor	Cost
	<p>petroleum products and others) shall be available at all times in adequate quantities in the same storage areas;</p> <p>8. When spillage occurs, the Contractor(s) shall immediately report to the CSC and cleaned with utmost caution by properly trained personnel</p>							
<p>Soil quality and erosion: The disturbance of ground surface without any flow controls can lead to rapid development of water erosion during high intensity rainfall events and lead to sheet erosion of all loose materials off a disturbed surface,</p> <p>The removal of unsuitable materials can provide surfaces on the excavation which store water then release large volumes when the capacity of excavation is exceeded or the retaining banks fail,</p> <p>The unconsolidated surfaces of embankments can erode rapidly when concentrated runoff, from the pavement or from the slopes, occurs during a rainfall event, Runoff around borrow areas and from runoff around quarries has the potential to cause off-site soil erosion away from the excavation or quarry face</p>	<p>1. Excavated soils shall be prevented from being washed from the work area into nearby water bodies or gardens (especially during inclement weather) by immediately hauling these materials away and disposed in approved disposal sites. Work scheduling shall take into account potential weather disturbances and rainy days historically recorded in the area. This will allow worked areas to be properly managed and avoiding large disturbed areas being exposed longer than necessary. Stockpiling of base and sub-base materials shall be also kept to a minimum to avoid being exposed longer than necessary;</p> <p>2. Removed topsoil shall be stored in separate heaps and located in stable areas for later re-use for site rehabilitation. Spoils shall be prohibited from being dumped over the side of slopes and hills;</p> <p>3. Excavated materials shall be sorted as either suitable (able to be reused) and unsuitable (to be disposed of) materials. The Contractor(s) shall accommodate requests of local people to utilize such materials for levelling their property with the consent of the CSC(s) and PMO for proper documentation;</p>	Contractor	During construction activities	Included in contract price	<p>1-2 erosion and sedimentation control plan as part of approved CEMP; proper scheduling;</p> <p>3 sorted materials; record of consented accommodate d requests;</p> <p>4 bunds provided;</p> <p>5 volume recorded;</p> <p>6 drainage provided;</p> <p>7 QMP prepared and approved, consents/per mit obtained</p>	<p>During each work and location; Checklist of items for compliance prepared; verify compliance; site inspection;</p> <p>Checklist of items for compliance prepared; verify compliance</p>	PMO-CSC	Included in contract price

Activity/Environmental Issue	Mitigation and/or Enhancement Measures				Monitoring Plan			
	Mitigation measures and actions	Responsible to implement	Timing to implement	Cost	Parameters	Frequency & means of verification	Responsible to monitor	Cost
	<p>4. Materials are not to be disposed/stockpiled near water courses;</p> <p>5. Balance cut and fill requirements to minimize impacts from extraction of aggregates;</p> <p>6. Adequate drainage shall be provided in the material source/quarry areas to prevent the accumulation of stagnant water during the operation;</p> <p>7. Material sources and quarry areas located near the alignment shall be preferred to minimize hauling distance and travel time, and disturbance to settlement areas along the haul roads.</p>							
Terrestrial flora: Vegetation removal, tree clearing; re-vegetation - Impacts on flora	<p>1. The contractor shall conduct a tree inventory (species and size) during the staking of the alignment in the pre-construction stage, and trees that may be removed will be agreed with PMO and landowners prior to cutting. Trees to be removed will be clearly marked on site drawing/plan;</p> <p>2. Vegetation clearing shall be kept to a minimum, and occur only within the designated construction limits;</p> <p>3. Vegetation clearance during staking and demarcation activities, especially of trees along the road-side shall be minimized. Trees that may be felled shall be clearly marked and only these marked trees shall be removed;</p> <p>4. The contractor shall be responsible for providing adequate knowledge to construction workers in relation to existing laws and regulations regarding illegal tree cutting.</p>	Contractor	During construction activities	Included in contract price	<p>1 Tree species and size identified and marked;</p> <p>2 and 3 area affected and trees removed checked against plan;</p> <p>4 awareness provided; employee induction training conducted; number of induction trainings done</p> <p>5 tender provision, sanctions imposed on workers;</p>	<p>At start of clearing work; Site inspection</p> <p>Prior to start of work; documentation of induction training including attendance sheets</p>	CSC/PMO to verify	Included in contract price

Activity/Environmental Issue	Mitigation and/or Enhancement Measures				Monitoring Plan			
	Mitigation measures and actions	Responsible to implement	Timing to implement	Cost	Parameters	Frequency & means of verification	Responsible to monitor	Cost
	<p>5. Contract documents and technical specifications shall include clauses expressly prohibiting the indiscriminate felling of trees by construction workers; and</p> <p>6. The contractor shall not utilize cut timber as fuel wood but return it to the landowner</p>				6 proof of return; approved tree species replanted			
<p>Terrestrial fauna: habitats from works or presence of workers - Impacts on flora and fauna; loss of indigenous vegetation</p>	<p>1. Labor employment agreement shall be enforced by contractor banning the hunting and trading in wildlife by workers;</p> <p>2. Contractor shall provide adequate food supplies and rations for workers staying in its construction camp;</p> <p>3. Workers shall be prohibited from hunting or catching wildlife including fish and birds. Sanctions will be imposed on any workers not complying with the provision and all sanctions to be recorded;</p> <p>4. The contractor will be responsible for providing awareness to construction workers in regard to fauna in the area. Contract documents and technical specifications will include clauses expressly prohibiting the poaching of fauna by construction workers and making the contractor responsible for imposing sanctions on any workers who are caught trapping, killing, poaching, being in possession of or having poached fauna;</p> <p>5. Any potential seed source such as earth and organic materials that may be attached to machinery shall be removed by washing prior to deployment to the work areas; and</p>	Contractor	During construction activities	Included in contract price	<p>1 and 4 employee induction training conducted; number of induction training sessions;</p> <p>2 and 3 adequate food provided in camp; administrative order issued to all contractor workforce, number of sanctions imposed;</p> <p>5 vehicles and equipment properly washed;</p> <p>6 indigenous plant species used and re-established in project area</p>	<p>Prior to start of work; records of site inspections; records of sanctions imposed</p>	CSC/PMO to verify; Community members may monitor	Included in contract price

Activity/Environmental Issue	Mitigation and/or Enhancement Measures				Monitoring Plan			
	Mitigation measures and actions	Responsible to implement	Timing to implement	Cost	Parameters	Frequency & means of verification	Responsible to monitor	Cost
	6. Non-indigenous plant species shall not be used during replanting/re-vegetation works.							
Aquatic fauna and flora	<p>1. Pollutant loading of storm water will include the construction of water quality basins to receive and treat storm water runoff from the proposed roadway. Strict adherence to the Soil Erosion and Sediment Control Plan should eliminate negative water quality impacts due to sediment loading.</p> <p>2. Work for the bridge abutments and piers will be performed with the use of coffer dams and sealing off of sediments which will then be appropriately disposed of offsite.</p> <p>3. Given the immense size of the river, and the degraded nature of these aquatic environments, it is anticipated that the project will not result in any significant impact to aquatic habitats. Additionally, the project will not create a physical barrier to fish movement and will not adversely affect migrating fish.</p>	Contractor	During construction activities	Included in contract price	1. Soil Erosion and Sediment Control Plan prepared and implemented; 2 and 3 turbidity in river/stream water limited and controlled	During each work and location; Checklist of items for compliance prepared; verify compliance; site inspection;	CSC/PMO to verify; Community members may monitor	Included in contract price
Invasive alien species: Biological impacts from introduced species and invasive species can cause a great deal of	1. Prior to commence works, the contractor will arrange to review the site and determine whether there is or is not any infestations of invasive species in the area.	Contractor	During construction activities	Included in contract price	1-2 survey and inventory if the area is infested with any invasive species;	At start of clearing work; Site inspection	CSC/PMO to verify; Community members may monitor	Included in contract price

Activity/Environmental Issue	Mitigation and/or Enhancement Measures				Monitoring Plan			
	Mitigation measures and actions	Responsible to implement	Timing to implement	Cost	Parameters	Frequency & means of verification	Responsible to monitor	Cost
damage to naturally adapted systems	<ol style="list-style-type: none"> <li>1. The contractor is to determine where the contractor's machinery was last used and whether the area is infested with any invasive species. Depending on the state of any infestation at the project construction site then the CSC will advise the contractor whether or not machinery must be cleaned before moving to the site. This includes the removal of any potential seed sources such as earth and organic material that may be attached to the machinery.</li> <li>2. The contractor will be required to observe for any infestations.</li> <li>3. Should infestations occur on construction sites that are due or are not due to the contractor's activities the contractor will be required to control the infestation.</li> <li>4. Invasive species shall not be used to revegetate cut slopes and replanting or compensatory tree planting that maybe required shall have full agreement of the local forest authorities.</li> <li>5. Control and avoidance of the introduction of invasive species is the contractor's responsibility and this also extends to any sub-contractors that are working under his control.</li> </ol>				<p>3 and 4 monitoring and controlling invasive species</p> <p>5 and 6 awareness provided invasive species to employee, not to be replanting</p>	Prior to start of work; documentation of induction training including attendance sheets		
Endangered species: rare and endangered species known may occur in the zone of the construction and can be affected	<ol style="list-style-type: none"> <li>6. Regularly monitoring and maintain a database of the occurrence of rare and endangered species of plant or animal and take actions to avoid their disturbance during construction works through isolation of their habitats or adjustment of timing of works</li> </ol>	Contractor	During construction activities	Included in contract price	awareness and training provided o employee; monitoring undertaken	Prior to start of work; records of site inspections; records of sanctions imposed	CSC/PMO to verify; Community members may monitor	Included in contract price



Activity/Environmental Issue	Mitigation and/or Enhancement Measures				Monitoring Plan			
	Mitigation measures and actions	Responsible to implement	Timing to implement	Cost	Parameters	Frequency & means of verification	Responsible to monitor	Cost
<p>Access and traffic safety: Movement of traffic and pedestrians through construction zones is hazardous due to irregular traffic patterns, disturbed ground surfaces and excavations, Road safety during construction is reduced due to rapidly changing road conditions, loss of roadside furniture, warning systems and lighting.</p>	<p>6. The Contractor(s) shall prepare a traffic management plan detailing temporary diversions where necessary and the associated management measures (reference can be made from DOW's "Safe Traffic Control at Road Works Field Guide");</p> <p>7. Signs and other appropriate safety measures shall be provided on site to indicate construction works are being undertaken;</p> <p>8. Local administration and village officials shall be consulted in the event that access to a village may be disrupted any time and temporary access arrangements provided accordingly;</p> <p>9. Construction vehicles will use local access roads, or negotiate access with land owners to obtain access to material extraction sites; where local roads are used, these will be rehabilitated to their original condition after the completion of work;</p> <p>10. Road safety protection shall be provided in the vicinity of the work site to protect the general public. This shall include advance notifications of commencement of works, installing safety barriers as necessary, and providing signages or markings on the work areas.</p>	Contractor	During construction activities	Included in contract price	<p>1 traffic management plan prepared and approved;</p> <p>2 to 5 any complaints received; action taken in response; approvals from local/village administration and officials; cleanliness maintained; road safety protection devices provided and visible at all times;</p>	<p>Once for traffic management plan; daily visual observations;</p> <p>Compliance verification to be done to ensure activities meet mitigation requirements</p>	CSC/PMO to verify; Community members may monitor	Included in contract price
Occupation health and safety: The risk of spread of	5. Safety measures as required by law and by good engineering practice shall be established and first aid facilities at work	Contractor	During construction activities	Included in contract price	1 requirements included in the tender documents,	Verify once during tendering and before start of site	CSC/PMO to verify; Community members may monitor	Included in contract price

Activity/Environmental Issue	Mitigation and/or Enhancement Measures				Monitoring Plan			
	Mitigation measures and actions	Responsible to implement	Timing to implement	Cost	Parameters	Frequency & means of verification	Responsible to monitor	Cost
<p>communicable disease is dealt with in the next section</p> <p>Public safety, particularly of pedestrians and children can be threatened</p>	<p>sites and in vehicles are likewise provided;</p> <p>6. The Contractor(s) will instruct and induct all workers in health and safety matters (induction course) including construction camp rules and EHSO shall follow up with toolbox talks on a weekly basis. Workforce training for all workers starting on site will include safety and environmental hygiene;</p> <p>7. In addition, workers shall receive a daily safety and work briefing (tool box talk) from the Contractor(s);</p> <p>8. Workers shall be provided with appropriate personnel protection equipment (PPE) such as safety boots, helmets, reflector vest, gloves, protective clothes, dust mask, goggles, and ear protection at no cost to the workers. The Contractor will issue PPE on a daily basis to workers after the tool box talk;</p> <p>9. Fencing will be installed on all areas of excavation greater than 1m deep, and on all sides of temporary works;</p> <p>10. Reversing signals (visual and audible) shall be installed on all construction vehicles and equipment;</p> <p>11. Potable water supply shall be provided and maintained at all times in the contractor' camp and all its work locations;</p> <p>12. Where worker exposure to traffic cannot be completely eliminated, protective barriers and warning signs shall be provided to shield workers from passing vehicles. Another</p>				<p>HSP as part of CEMP;</p> <p>2 qualified EHSO provided;</p> <p>3 and 4 induction training and daily toolbox provided and documented;</p> <p>5 set of PPE provided to each worker;</p> <p>6 fencing provided in deep excavations;</p> <p>7 reversing signal provided in all vehicles;</p> <p>8 potable water supply provided and maintained;</p> <p>9 barriers and warning signs provided;</p> <p>10 camps provided with toilets/sanitation facilities and treatment facilities;</p> <p>11 sanitation and hygiene</p>	<p>works; and throughout the project duration as required until site has been established; compliance to be checked; verify that EHSG measures meet requirements ; site inspection</p>		

Activity/Environmental Issue	Mitigation and/or Enhancement Measures				Monitoring Plan			
	Mitigation measures and actions	Responsible to implement	Timing to implement	Cost	Parameters	Frequency & means of verification	Responsible to monitor	Cost
	<p>measure is to install channelling devices (e.g., traffic cones and barrels) to delineate the work zone, and trained flag men at each end of the current working zone shall be provided to direct traffic movement in and around work areas; and</p> <p>13. Construction camps shall be provided with toilets/sanitation facilities in accordance with local regulations to prevent any hazard to public health or contamination of land, surface or groundwater. These facilities shall be well maintained and cleaned regularly to encourage use and emptied regularly to prevent overflows.</p> <p>14. First aid facilities shall be provided at the work sites, in vehicles;</p> <p>15. The contractor(s) shall conduct training for all workers on safety and environmental hygiene at no cost to the employees;</p> <p>16. Instruction and induction of all workers shall be carried out for all workers before they start work in health and safety matters, including road safety; construction camp rules;</p> <p>17. Assigned safety monitors will follow up with toolbox talks on a weekly basis;</p> <p>18. Workers shall receive daily safety and work briefing from contractor called the toolbox talk.</p>				<p>training provided and observed;</p> <p>12 and 14 training conducted; toolbox talks conducted weekly; records of toolbox talks maintained and documented in monthly reports</p>			
HIV/AIDS/STIs Quantity people having HIV/AIDS by un-control relationships between indigenous peoples and	1. Screen all persons to be engaged on the project for HIV/AIDS/STIs as part of the induction of personnel to be engaged;	Contractor	During construction activities	Included in contract price	1 Screen for staff and workers conducted;	Site inspection; Checklist of items for	CSC/PMO to verify;	Included in contract price

Activity/Environmental Issue	Mitigation and/or Enhancement Measures				Monitoring Plan			
	Mitigation measures and actions	Responsible to implement	Timing to implement	Cost	Parameters	Frequency & means of verification	Responsible to monitor	Cost
worker may be increasing	<ol style="list-style-type: none"> <li>2. Implement a HIV/AIDS awareness program as part of the occupational health and safety training provided to personnel on the project;</li> <li>3. Provide visual stimuli in the workplace (offices, canteens, construction camps) to ensure the need to take care and control this disease is continuously presented and reinforced. These stimuli should be changed on a fortnightly basis to eliminate the potential for boredom and disregard for the messages they contain.</li> <li>4. The management of this issue should be three-fold – control of the introduction of HIV/AIDS through the workforce, development of awareness within the workforce about the disease, its spread and its consequences, and making preventative measure available whilst controlling external vectors that may introduce the disease.</li> </ol>				2 awareness program prepared and implemented; 3 and 4 necessary materials and equipment provided	compliance prepared; verify compliance		
Physical cultural resources: PCRs may uncovered during construction activities	<ol style="list-style-type: none"> <li>1. Instructed to keep watch for relics that may be uncovered during excavations, and local communities will be consulted to identify potential sites of concern, such as graveyards or taboo areas;</li> <li>2. Should any potential items be located, the PMO through the CSC shall be immediately informed and work stoppage be immediately implemented;</li> <li>3. The PMO with the assistance of the CSC, and in cooperation with local leaders, will determine if the item is of potential</li> </ol>	Contractor and approved service provider (sub-contractor)	During construction activities	Included in contract price	1 chance finds procedure established in CEMP;  2 to 5 artifacts, sites or other PCR discovered, proper authorities informed; documented and secured; site secured; communities informed	1 once during CEMP review to ensure chance finds procedures included;  2 to 7 site inspections and assessment; as triggered number of days of work suspension	CSC/PMO to verify	Included in contract price

Activity/Environmental Issue	Mitigation and/or Enhancement Measures				Monitoring Plan			
	Mitigation measures and actions	Responsible to implement	Timing to implement	Cost	Parameters	Frequency & means of verification	Responsible to monitor	Cost
	<p>significance and contact DOW to pass the information to the relevant department in the government who will be invited to inspect the site;</p> <p>4. Work shall stop to allow time for inspection, removal or in-situ preservation of the PCR and until the relevant government agency indicates works can re-commence; and</p> <p>5. Until the government has responded to this invitation, work will not re-commence in this location until agreement has been reached with the government and PMO as to any required mitigation measures.</p>							
<p>Social conflicts: Presence of construction workers may affect community structure and patterns and conflict with local people</p>	<p>4. Consider the location of construction camps away from communities in order to avoid social conflict in using resources and basic amenities such as water supply,</p> <p>5. Maximize number of local people employed in construction works,</p> <p>6. Maximize goods and services sourced from local commercial enterprises.</p>	Contract	During construction activities	As per agreements	1 Construction camps far from 2 communities; Number local people working in the subproject; 3 Using goods and services sourced	Visual assessment, Review documents	CSC/PMO to verify; Community members to monitor	Included in contract price
<p>Impacts on sources of livelihood and Modified market patterns: Changes resulting from the induced demands of the construction project may create a false market economy for the duration of the project which affects those least able to pay for commodities in the community</p>	<p>An income restoration program to help the severely affected and vulnerable households rebuild their sources of livelihood will be prepared and implemented.</p>	DOW/PMO, Contractor	During excavation works	Included in contract price	1 an assistance program prepared and implemented	Review project document	CSC/PMO to verify	Included in contract price
Operation Stage								

Activity/Environmental Issue	Mitigation and/or Enhancement Measures				Monitoring Plan			
	Mitigation measures and actions	Responsible to implement	Timing to implement	Cost	Parameters	Frequency & means of verification	Responsible to monitor	Cost
Greenhouse gas emissions: Increase road capacity will lead to higher speeds and use of the road section by heavier vehicles	The maintenance of free traffic flow will reduce the volume of greenhouse gas emitted. Traffic management mechanisms should be used to ensure speed differentiation between classes of vehicles does not reduce freedom of movement for vehicles	DOW	Bridge operation	DOW operating cost	Volume of vehicles operation; increased speed of vehicles	Regular inspections, and spot checks	DOW-ESSB	DOW operating cost
Air quality - particulate emissions: Particulate generation resulting from exhaust emissions and dust created by poorly covered and badly fitting bodies depositing materials on the road. Air emissions will occur as a result of exhaust emissions.	Regular checks on vehicles using the road shall be undertaken and those vehicles with poorly fitted bodies, load spillage and excessive exhaust emissions shall be removed from service until repaired.	DOW	During specific maintenance works and vegetation control; emergency repairs of landslide prone areas; routine maintenance works	DOW operating cost	Volume of materials handled and hauled out; cleanliness of surrounding	During conduct of maintenance works; regular inspections, and spot checks	DOW-ESSU	DOW operating cost
Water quality and pollutants: The use of the bridges by vehicles transporting and hazardous material spills if crashes on bridges potentially contaminating materials produces a potential risk of pollution of watercourses and drain structures along the road. General runoff from the road also adds to the deterioration of the water quality	The use of the bridges by vehicles transporting and hazardous material spills if crashes on bridges potentially contaminating materials produces a potential risk of pollution of watercourses and drain structures along the road. General runoff from the road also adds to the deterioration of the water quality	DOW/CEPA	As the Government may require	DOW operating cost	Written and verbal complaints from community	Duration of operation; Spot checks; complaints from the community	DOW - ESSU	DOW operating cost
Road noise: Increased traffic volumes, vehicle sizes and	Reduce speed limits, regularly check the competence of vehicle exhausts and enforce	DOW/CEPA	During routine maintenance works	DOW operating cost	Written and verbal complaints from	Duration of operation; Spot checks; compiled	DOW-ESSB	DOW operating cost

Activity/Environmental Issue	Mitigation and/or Enhancement Measures				Monitoring Plan			
	Mitigation measures and actions	Responsible to implement	Timing to implement	Cost	Parameters	Frequency & means of verification	Responsible to monitor	Cost
operating speed will increase traffic noise on the highway	restrictions on use of horns and vehicle noise standards in areas sensitive to road noise, such as schools and hospitals.				community; accident/incident registry maintained by authorities	data		
River-bank and scour protection: Rip-rap, gabion baskets will be used appropriately to protect abutments and river-banks up and downstream. These structures may be damaged due to storm water or human activities	The frequency of preventive maintenance inspections and implementation of sustained maintenance on designed structures will be increased. A system of monitoring, reporting and maintenance shall be developed consistent with the concept of this investment subproject	DOW/CEPA	During routine maintenance works	DOW operating cost	Written and verbal complaints from community; accident/incident registry maintained by authorities	Duration of operation; Spot checks; compiled data	DOW	DOW operating cost
Morphology and Hydrologic Regime: The change in the longitudinal profile by bridge construction, bank improvement and training works will result to change the hydrodynamics and may also change current direction and may cause erosion downstream and river morphology	The River Management Stations will regularly monitor and keep track of erosion status of rivers and report to DOW for maintenance and on time actions	DOW/CEPA	During routine maintenance works	DOW operating cost	Written and verbal complaints from community; accident/incident registry maintained by authorities	Duration of operation; Spot checks; compiled data	DOW	DOW operating cost

**Table 9-6: Environmental Management Plan and Monitoring Matrix for Repair/Reinforcement of Existing Bridges (4 bridges)**

Activity/Environmental Issue	Mitigation and/or Enhancement Measures				Monitoring Plan			
	Mitigation measures and actions	Responsible to implement	Timing to implement	Cost	Parameters	Frequency & means of verification	Responsible to monitor	Cost
<b>REPAIR/REINFORCEMENT STAGE</b>								
Air quality and particulates: Dust and air emissions from vehicles, equipment and machines	<ol style="list-style-type: none"> <li>1. A regular vehicle preventive maintenance and repair program shall be implemented to reduce emission of fumes from exhaust pipes;</li> <li>2. Diesel generating sets will be fitted with adequate stack height; and</li> <li>3. Low-sulphur diesel will be used in generator sets as well as other machinery</li> <li>4. Open burning of solid wastes (plastic, paper, organic matters) will be prohibited;</li> </ol>	Contractor	Before and during construction activities	Included in contract price	1-3 compliance with locational requirements and anti-pollution devices installed; 4 any smoke observed from burning;	Daily visual monitoring as determined by wind and site conditions;	CSC/PMO to verify; community members to monitor	Included in contract price
Noise: Noise from equipment delivering, spreading, laying	<ol style="list-style-type: none"> <li>1. Silencers will be installed in construction equipment and machinery and maintained properly at all times;</li> <li>2. Equipment and machinery with lower sound levels will be selected for the construction activities;</li> <li>3. Protection devices such as ear plugs or ear muffs will be provided to the workers during period of operating high noise generating machines;</li> </ol>	Contractor	During construction activities	Included in contract price	<ol style="list-style-type: none"> <li>1 presence of natural breaks;</li> <li>2 muffled equipment;</li> <li>3 PPE provided;</li> <li>4 and 5 peak construction activities identified; noise meters made</li> </ol>	Site inspection to verify locational requirements compliance ; checklist of items to be monitored is prepared and used to check off items of concern;	CSC/PMO to verify; Community members to monitor ambient noise	Included in contract price



Activity/Environmental Issue	Mitigation and/or Enhancement Measures				Monitoring Plan			
	Mitigation measures and actions	Responsible to implement	Timing to implement	Cost	Parameters	Frequency & means of verification	Responsible to monitor	Cost
	<p>4. Noise levels will be regularly measured during the peak of construction period in particular using portable noise meters to ensure the effectiveness of mitigation measures;</p> <p>5. Noise generation activities may be carried out between 7 am to 7 pm only to avoid disturbance to nearby communities at night and ideally should not exceed 45 dBA measured at the outside of any residence. Only in extreme instances will work beyond these hours be allowed after the Community Relations Officer (CRO) of the contractor has informed the community about change in work program well in advance;</p> <p>6. Noise barriers such as earth mounds or walls of wood, metal that form a solid obstacle between the road and roadside community will be used, especially in the schools and hospitals; and</p> <p>7. Proper information and notification of the concerned local level governments will be done to assist in the dissemination of impending disturbance and nuisance to nearby settlement areas.</p>				<p>available; complaints received from community if work activities carried out beyond prescribed period;</p> <p>6 type of barriers installed in sensitive receptors and effectiveness (noise levels through readings and/or complaints)</p> <p>7 information disseminated;</p>			

Activity/Environmental Issue	Mitigation and/or Enhancement Measures				Monitoring Plan			
	Mitigation measures and actions	Responsible to implement	Timing to implement	Cost	Parameters	Frequency & means of verification	Responsible to monitor	Cost
Water quality and pollutants: Runoff from materials storage areas and materials production areas generates turbid runoff unless contained, a high risk of spillage of materials into watercourses during construction.	<ol style="list-style-type: none"> <li>1. Petroleum, oils and lubricants will be stored in containers/dedicated enclosures with sealed floors and located away from water bodies;</li> <li>2. Stockpile areas and storage areas for hazardous substances shall be located away from water bodies;</li> <li>3. Solid wastes, debris, spent oil or fuel from construction machinery or plant, construction material, or waste vegetation removed from work sites will not be dumped in or near streams, rivers or waterways;</li> <li>4. Spoil and material stock piles will not be located near waterways, streams or rivers, or on the edge of slopes or hills above rivers or stream and shall be protected by perimeter diversion drains;</li> </ol>	Contractor	During construction activities	Included in contract price	1 secured storage away from water-bodies; 2 obstructions; stockpiles verified for locational requirements compliance;	As maybe required; site inspection; checklist of items for compliance prepared;  During each work and location; checklist of items for compliance prepared; site inspection;	DSC/PMO, Community members to monitor water quality	Included in contract price
Construction waste: Large quantities of solid waste generated by construction activities	<ol style="list-style-type: none"> <li>1. Contractor(s) shall practice waste segregation, provide the necessary receptacles and institute awareness campaign to its staff and workers. Organic (biodegradables) shall be collected and disposed on-site by composting, and recyclable materials shall be recovered and collected for sale to third party</li> </ol>	Contractor	During construction activities	Included in contract price	1 -2 Type of facility equipped, solid waste separated; No waste illegal dumped 2-4 Number bin provided	Checklist of items for compliance prepared; verify compliance ;  Site inspections;	DSC/PMO, Community members to monitor	Included in contract price

Activity/Environmental Issue	Mitigation and/or Enhancement Measures				Monitoring Plan			
	Mitigation measures and actions	Responsible to implement	Timing to implement	Cost	Parameters	Frequency & means of verification	Responsible to monitor	Cost
	collectors/integrators or recyclers; 2. The contractor(s) will maximize the recycling of used materials to minimize waste generation; 3. Non-recyclable solid wastes will be collected and disposed only in approved disposal sites; 4. Used wood and timber shall be reused for formworks and other associated works.							
Hazardous materials: Hazardous materials have the potential to contaminate the environment if spilled or cause a fire or explosion if handled incorrectly.	1. An emergency response and contingency plan will be prepared to address accidental spills and the occurrence of fire in the contractor construction camp and facilities; 2. Staff and workers involved in the management and utilization of oils, fuel and lubricants shall be properly trained in the handling, storage and dispensing of such materials; 3. Petroleum, oil and lubricants shall be stored in securely locked, fenced and properly designated areas away from water courses/bodies; 4. All storage containers shall be in good condition at all times with clear and proper labelling, regularly checked	Contractor PMO-DSC	During construction activities	Included in contract price	1 emergency respond plan prepared; 2 Personnel having knowledge on this issue  3-5 Fuel and hazardous substances located in paved areas, containers in good condition and proper labelling;  6 No hazardous waste	Checklist of items for compliance prepared; site inspections;  Visual assessment	CSC/PMO Community members to monitor	Included in contract price

Activity/Environmental Issue	Mitigation and/or Enhancement Measures				Monitoring Plan			
	Mitigation measures and actions	Responsible to implement	Timing to implement	Cost	Parameters	Frequency & means of verification	Responsible to monitor	Cost
	<p>for leakage, and repaired or replaced as necessary;</p> <p>5. The Contractor(s) shall be required to display safety information in all work areas and to train workers in the safe use of hazardous materials, including the provision of protective equipment;</p> <p>6. Hazardous materials shall be stored in areas free from floods at all times; and discharge of oil-contaminated water to nearby waterways shall be prohibited;</p> <p>7. Spill clean-up materials (e.g., specifically designed for petroleum products and others) shall be available at all times in adequate quantities in the same storage areas;</p> <p>8. When spillage occurs, the Contractor(s) shall immediately report to the CSC and cleaned with utmost caution by properly trained personnel</p>				<p>discharged to around;</p> <p>7-8 necessary material and equipment provided</p>			
Aquatic fauna and flora	Pollutant loading of storm water will include the construction of water quality basins to receive and treat storm water runoff from the proposed roadway. Strict adherence to the Soil Erosion	Contractor	During construction activities	Included in contract price	1. Soil Erosion and Sediment Control Plan prepared and	During each work and location; Checklist of items for compliance	CSC/PMO to verify; Community members may monitor	Included in contract price

Activity/Environmental Issue	Mitigation and/or Enhancement Measures				Monitoring Plan			
	Mitigation measures and actions	Responsible to implement	Timing to implement	Cost	Parameters	Frequency & means of verification	Responsible to monitor	Cost
	and Sediment Control Plan should eliminate negative water quality impacts due to sediment loading.				implemented ;	prepared; verify compliance ; site inspection;		
Access and traffic safety: Movement of traffic and pedestrians through construction zones is hazardous due to irregular traffic patterns, disturbed ground surfaces and excavations, Road safety during construction is reduced due to rapidly changing road conditions, loss of roadside furniture, warning systems and lighting.	<ol style="list-style-type: none"> <li>1. The Contractor(s) shall prepare a traffic management plan detailing temporary diversions where necessary and the associated management measures (reference can be made from DOW's "Safe Traffic Control at Road Works Field Guide");</li> <li>2. Signs and other appropriate safety measures shall be provided on site to indicate construction works are being undertaken;</li> <li>3. Local administration and village officials shall be consulted in the event that access to a village may be disrupted any time and temporary access arrangements provided accordingly;</li> <li>4. Construction vehicles will use local access roads, or negotiate access with land owners to obtain access to material extraction sites; where local roads are used, these will be rehabilitated to</li> </ol>	Contractor	During construction activities	Included in contract price	<p>1 traffic management plan prepared and approved;</p> <p>2 to 5 any complaints received; action taken in response; approvals from local/village administration and officials; cleanliness maintained; road safety protection devices provided and visible at all times;</p>	<p>Once for traffic management plan; daily visual observations;</p> <p>Compliance verification to be done to ensure activities meet mitigation requirements</p>	CSC/PMO to verify; Community members may monitor	Included in contract price

Activity/Environmental Issue	Mitigation and/or Enhancement Measures				Monitoring Plan			
	Mitigation measures and actions	Responsible to implement	Timing to implement	Cost	Parameters	Frequency & means of verification	Responsible to monitor	Cost
	<p>their original condition after the completion of work;</p> <p>5. Road safety protection shall be provided in the vicinity of the work site to protect the general public. This shall include advance notifications of commencement of works, installing safety barriers as necessary, and providing signages or markings on the work areas.</p>							
<p>Occupation health and safety: The risk of spread of communicable disease is dealt with in the next section</p> <p>Public safety, particularly of pedestrians and children can be threatened</p>	<p>1. Safety measures as required by law and by good engineering practice shall be established and first aid facilities at work sites and in vehicles are likewise provided;</p> <p>2. The Contractor(s) will instruct and induct all workers in health and safety matters (induction course) including construction camp rules and EHSO shall follow up with toolbox talks on a weekly basis. Workforce training for all workers starting on site will include safety and environmental hygiene;</p> <p>3. In addition, workers shall receive a daily safety and work briefing (tool box talk) from the Contractor(s);</p>	Contractor	During construction activities	Included in contract price	<p>1 requirements included in the tender documents, HSP as part of CEMP;</p> <p>2 qualified EHSO provided;</p> <p>3 and 4 induction training and daily toolbox provided and documented;</p> <p>5 set of PPE provided to each worker;</p> <p>6 fencing provided in</p>	<p>Verify once during tendering and before start of site works; and throughout the project duration as required until site has been established ;</p> <p>compliance to be checked; verify that EHSG measures meet requirements; site inspection</p>	CSC/PMO to verify; Community members may monitor	Included in contract price

Activity/Environmental Issue	Mitigation and/or Enhancement Measures				Monitoring Plan			
	Mitigation measures and actions	Responsible to implement	Timing to implement	Cost	Parameters	Frequency & means of verification	Responsible to monitor	Cost
	<p>4. Workers shall be provided with appropriate personnel protection equipment (PPE) such as safety boots, helmets, reflector vest, gloves, protective clothes, dust mask, goggles, and ear protection at no cost to the workers. The Contractor will issue PPE on a daily basis to workers after the tool box talk;</p> <p>5. Fencing will be installed on all areas of excavation greater than 1m deep, and on all sides of temporary works;</p> <p>6. Reversing signals (visual and audible) shall be installed on all construction vehicles and equipment;</p> <p>7. Potable water supply shall be provided and maintained at all times in the contractor' camp and all its work locations;</p> <p>8. Where worker exposure to traffic cannot be completely eliminated, protective barriers and warning signs shall be provided to shield workers from passing vehicles. Another measure is to install channelling devices (e.g., traffic cones and barrels) to delineate the work zone, and trained flag</p>				<p>deep excavations;</p> <p>7 reversing signal provided in all vehicles;</p> <p>8 potable water supply provided and maintained;</p> <p>9 barriers and warning signs provided;</p> <p>10 camps provided with toilets/sanitation facilities and treatment facilities;</p> <p>11 sanitation and hygiene training provided and observed;</p> <p>12 and 14 training conducted; toolbox talks conducted weekly;</p>			

Activity/Environmental Issue	Mitigation and/or Enhancement Measures				Monitoring Plan			
	Mitigation measures and actions	Responsible to implement	Timing to implement	Cost	Parameters	Frequency & means of verification	Responsible to monitor	Cost
	<p>men at each end of the current working zone shall be provided to direct traffic movement in and around work areas; and</p> <p>9. Construction camps shall be provided with toilets/sanitation facilities in accordance with local regulations to prevent any hazard to public health or contamination of land, surface or groundwater. These facilities shall be well maintained and cleaned regularly to encourage use and emptied regularly to prevent overflows.</p> <p>10. First aid facilities shall be provided at the work sites, in vehicles;</p> <p>11. The contractor(s) shall conduct training for all workers on safety and environmental hygiene at no cost to the employees;</p> <p>12. Instruction and induction of all workers shall be carried out for all workers before they start work in health and safety matters, including road safety; construction camp rules;</p> <p>13. Assigned safety monitors will follow up with toolbox talks on a weekly basis;</p>				records of toolbox talks maintained and documented in monthly reports			



Activity/Environmental Issue	Mitigation and/or Enhancement Measures				Monitoring Plan			
	Mitigation measures and actions	Responsible to implement	Timing to implement	Cost	Parameters	Frequency & means of verification	Responsible to monitor	Cost
	14. Workers shall receive daily safety and work briefing from contractor called the toolbox talk.							
HIV/AIDS/STIs Quantity people having HIV/AIDS by un-control relationships between indigenous peoples and worker may be increasing	<ol style="list-style-type: none"> <li>1. Screen all persons to be engaged on the project for HIV/AIDS/STIs as part of the induction of personnel to be engaged;</li> <li>2. Implement a HIV/AIDS awareness program as part of the occupational health and safety training provided to personnel on the project;</li> <li>3. Provide visual stimuli in the workplace (offices, canteens, construction camps) to ensure the need to take care and control this disease is continuously presented and reinforced. These stimuli should be changed on a fortnightly basis to eliminate the potential for boredom and disregard for the messages they contain.</li> <li>4. The management of this issue should be three-fold – control of the introduction of HIV/AIDS through the workforce, development of awareness within the workforce about the disease, its spread and its consequences, and making preventative measure available whilst controlling</li> </ol>	Contractor	During construction activities	Included in contract price	1 Screen for staff and workers conducted; 2 awareness program prepared and implemented ; 3 and 4 necessary materials and equipment provided	Site inspection;  Checklist of items for compliance prepared; verify compliance	CSC/PMO to verify;	Included in contract price

Activity/Environmental Issue	Mitigation and/or Enhancement Measures				Monitoring Plan			
	Mitigation measures and actions	Responsible to implement	Timing to implement	Cost	Parameters	Frequency & means of verification	Responsible to monitor	Cost
	external vectors that may introduce the disease.							
Social conflicts: Presence of construction workers may affect community structure and patterns and conflict with local people	<ol style="list-style-type: none"> <li>1. Consider the location of construction camps away from communities in order to avoid social conflict in using resources and basic amenities such as water supply,</li> <li>2. Maximize number of local people employed in construction works,</li> <li>3. Maximize goods and services sourced from local commercial enterprises.</li> </ol>	Contract	During construction activities	As per agreements	1 Construction camps far from 2 communities ; Number local people working in the subproject; 3 Using goods and services sourced	Visual assessment, Review documents	CSC/PMO to verify; Community members to monitor	Included in contract price
<b>OPERATION STAGE</b>								
Greenhouse gas emissions: Increase road capacity will lead to higher speeds and use of the road section by heavier vehicles	The maintenance of free traffic flow will reduce the volume of greenhouse gas emitted. Traffic management mechanisms should be used to ensure speed differentiation between classes of vehicles does not reduce freedom of movement for vehicles	DOW	Bridge operation	DOW operating cost	Volume of vehicles operation; increased speed of vehicles	Regular inspections, and spot checks	DOW-ESSB	DOW operating cost
Air quality - particulate emissions: Particulate generation resulting from exhaust emissions and dust created by poorly covered and badly fitting bodies depositing materials on the road. Air	Regular checks on vehicles using the road shall be undertaken and those vehicles with poorly fitted bodies, load spillage and excessive exhaust emissions shall be removed from service until repaired.	DOW	During specific maintenance works and vegetation control; emergency repairs of landslide prone areas; routine	DOW operating cost	Volume of materials handled and hauled out; cleanliness of surrounding	During conduct of maintenance works; regular inspections, and spot checks	DOW-ESSU	DOW operating cost

Activity/Environmental Issue	Mitigation and/or Enhancement Measures				Monitoring Plan			
	Mitigation measures and actions	Responsible to implement	Timing to implement	Cost	Parameters	Frequency & means of verification	Responsible to monitor	Cost
emissions will occur as a result of exhaust emissions.			maintenance works					
Water quality and pollutants: The use of the bridges by vehicles transporting and hazardous material spills if crashes on bridges potentially contaminating materials produces a potential risk of pollution of watercourses and drain structures along the road. General runoff from the road also adds to the deterioration of the water quality	The use of the bridges by vehicles transporting and hazardous material spills if crashes on bridges potentially contaminating materials produces a potential risk of pollution of watercourses and drain structures along the road. General runoff from the road also adds to the deterioration of the water quality	DOW/CEPA	As the Government may require	DOW operating cost	Written and verbal complaints from community	Duration of operation; Spot checks; complaints from the community	DOW - ESSU	DOW operating cost
Road noise: Increased traffic volumes, vehicle sizes and operating speed will increase traffic noise on the highway	Reduce speed limits, regularly check the competence of vehicle exhausts and enforce restrictions on use of horns and vehicle noise standards in areas sensitive to road noise, such as schools and hospitals.	DOW/CEPA	During routine maintenance works	DOW operating cost	Written and verbal complaints from community; accident/incident registry maintained by authorities	Duration of operation; Spot checks; compiled data	DOW-ESSB	DOW operating cost

Activity/Environmental Issue	Mitigation and/or Enhancement Measures				Monitoring Plan			
	Mitigation measures and actions	Responsible to implement	Timing to implement	Cost	Parameters	Frequency & means of verification	Responsible to monitor	Cost
River-bank and scour protection: Rip-rap, gabion baskets will be used appropriately to protect abutments and river-banks up and downstream. These structures may be damaged due to storm water or human activities	The frequency of preventive maintenance inspections and implementation of sustained maintenance on designed structures will be increased. A system of monitoring, reporting and maintenance shall be developed consistent with the concept of this investment subproject	DOW/CEPA	During routine maintenance works	DOW operating cost	Written and verbal complaints from community; accident/incident registry maintained by authorities	Duration of operation; Spot checks; compiled data	DOW	DOW operating cost
Morphology and Hydrologic Regime: The change in the longitudinal profile by bridge construction, bank improvement and training works will result to change the hydrodynamics and may also change current direction and may cause erosion downstream and river morphology	The River Management Stations will regularly monitor and keep track of erosion status of rivers and report to DOW for maintenance and on time actions	DOW/CEPA	During routine maintenance works	DOW operating cost	Written and verbal complaints from community; accident/incident registry maintained by authorities	Duration of operation; Spot checks; compiled data	DOW	DOW operating cost

## **D. Environmental Claims and Penalty System**

309. As part of the compliance framework, if non-compliance with environmental safeguards regulations are discovered by CSC during the site supervision, 2% values of interim payment of the Contractor of this month will be held back. The Contractor will be given a grace period (determined by CSC) to repair the violation. If the Contractor performs the repairs within the grace period (confirmed by CSC), no penalty is incurred and keeping money will be pay for the next month. However, if the Contractor fails to successfully make the necessary repairs within the grace period, the Contractor will pay the cost for a third party to repair the damages (deduction from keeping money).

310. In case of SCS not detected of non-compliance with environmental safeguards regulations of the Contractor, they will be responsibility payment to repair the violation.

## **E. Budget for EMP Implementation**

### **1. Supervision of EMP Implementation by CSC**

311. The cost for CSC to supervise EMP implementation in accordance with the EMP and the project bidding and contractual documents is integrated in the contract package with the CSC. Potential bidder for this package will be responsible to study environmental management requirements of the EIA and EMP to prepare and offer cost estimation for EMP supervision during the construction. It is considered as one of the criteria for assessing the capability of the potential CSC in supervising EMP implementation.

### **2. Implementation of EMP by Contractor**

312. The cost for organization, training, dissemination, procurement, operation of equipment, and labour for implementation of mitigation measures in and out of the site in accordance with the EMP and project bidding and contractual document requirements is integrated in the construction package. Contractor(s) will be responsible to study, prepare alternatives and offer cost estimation for these activities. The Contractor can refer the cost estimation for the environmental quality monitoring program as Annex D.

313. It is considered as one of the criteria for assessing the capacity of the Contractor in the future and compliance level of the Contractor. In case of violations, the Client can impose penalties or hire other unit to participate in solving arising problems.

## 10. CONCLUSIONS AND RECOMMENDATION

314. The IEE was conducted at during the feasibility study using a screening process to determine the extent and type of environmental impact during each phase of the project--preconstruction, construction and operation.

315. Based on the information and data collected at this stage, this report has outlined and identified potential direct, indirect, cumulative and induced impacts and risks of the project, the sources of new nuisances, analyses and clearly indicates negative impacts in each phase of this project:

- i. Pre-construction phase: main impacts are removal of some vegetation and negligible run-off, noise, vibration and emissions from machinery and vehicles during establishment of the contractors' camp, concrete plants, quarrying, stockpiling and storage of material.
- ii. Construction phase: based on the analysis and forecast on impacts and risk of potential pollution, this report has indicated that main impacts are air quality and particulates, construction waste, water quality and pollutants, soil erosion, safety, removal of unsuitable materials, construction of bridges, and production and storage of materials.
- iii. Operation phase: main impacts are road safety and noise from the road traffic. The new bridges are expected to reduce traffic accidents due to better signing and other safety features, and refuse noise due to new bridge decks and replacement of steel bridges.

316. By using the conceptual model, as described in section V, to assess cumulative environmental impacts, the IEE revealed that the project has 11 activities that will have a "high impact", 50 activities will have a "medium impact" and 66 activities will have a "low impact" on the physical environment, biological environment and socio-economic environment. The scale of these impacts will be assessed in further during the Detailed Design phase. At present, the IEE reveals that there are no significant and irreversible environmental impacts. Most bridges (40 bridges) are located in remote areas. Homes, businesses, vegetable plots, etc. at other bridge sites are located more than 100m from each end of the bridge. Therefore, construction impacts such as noise, air pollution, and vibration on the communities will be minimal, yet the contractor is required to implement measures to ensure these impacts are kept to a minimum. The highest impact will be from runoff of material from embankment construction, removal and constructing bridge piers. The communities downstream that use the rivers for washing and drinking water may be affected by the runoff. Special measures and procedures are proposed in the EMP for addressing this impact.

317. The type of works identified in the Feasibility Study stage of the Package 2 of SHHIP-Tranche 2 include (i) in-situ replacement bridge construction at existing locations, (ii) relocation bridge construction at new locations, (iii) in-situ replacement of culvert with new double-lane bridge construction, and (iv) repair and reinforce of existing bridges. The Environmental Management Plans (EMPs) are prepared for four (4) major activities, as depicted in Table 9-3, Table 9-4, Table 9-5, and Table 9-6. Following stages of Detailed Engineering Design, these EMPs will be developed to be specific at each bridge location.

318. The IEE specifies the institutional responsibilities required for the environmental management of the Package 2 of SHHIP-Tranche 2. The DOW/PMO will be responsible for implementing the EMP with the assistance of the Construction Supervision Consultant(s).

319. CEPA, local authority and local community should regularly inspect and monitor the environmental commitment of the project owner and the contractor(s) as well as coordinate to solve environmental problems arising during Package 2 of SHHIP-Tranche 2 implementation.

## **ANNEXES**

Annex A: List of Bridges for SHHIP-Tranche 2

Annex B: List of International Treaties and Agreements to which PNG is a signatory

Annex C: Results of Ecological Survey Undertaken by SHHIP Team and Research & Conservation Foundation (Goroka, EHP) in December 2019

Annex D: Cost Estimated for Environment Quality Monitoring,

Annex E: Location Map of Package 2 for Environmental Quality Monitoring

Annex F: Public Consultation Meetings

Annex G: References



### Annex A: List of Bridges for SHHIP-Tranche 2

No.	BR. Name	Drawing STA	Length (m)	Width (m)	Lane	Grade Evaluation	Engineer' Final Recommendation
1	Erap River Bridge	46+500	76 (25.5+25+25.5)	10.0	2	D	New Bridge
2	Maralumi River Bridge	55+600	29.0	10.0	2	B	New Bridge
3	Ramu River Bridge	64+400	30.5 (1span)	9.5	2	C	New Bridge
4	Clean Water River Bridge	77+800	29.0 (2@14.5m)	10.0	2	B	Repair, Reinforcement
5	Leron River Bridge	100+300	143.9 (55.6+46.3+42)	9.0	2	B	Repair, Reinforcement
6	GorambamPam River Bridge	113+000	61.2 (20.6+20+20.6)	10.0	2	B	Repair, Reinforcement
7	Ngaraburam River Bridge	116+350	21.1 (1 span)	10.0	2	B	Repair, Reinforcement
8	Little Maniang River Bridge	120+450	21.0 (1 Span)	10.0	2	B	Repair, Reinforcement
9	Mutsing River Bridge	122+600	61.2 (20.6+20+20.6)	10.0	2	C	Repair, Reinforcement
10	Zumin River Bridge	133+000	68 (2@34)	10.0	2	D (Baily bridge)	New Bridge
11	Yafatz River Bridge	137+100	21.0 (1 span)	9.9	2	B	Repair, Reinforcement
12	Umi River Bridge	140+500	160 (3@53.3)	9.9	2	B	Repair, Reinforcement
13	Bintia River Bridge	151+000	29.0 (2@14.5m)	10.0	2	C	Repair, Reinforcement
14	Ohman River Bridge	153+000	21.0 (1 span)	10.0	2	C	Repair, Reinforcement
15	Utwin River Bridge	157+150	21.0 (1 span)	10.0	2	B	Repair, Reinforcement
16	Bitjia River Bridge -1 (New)	157+450	50.0(2@25.0)	4.9	1	C	Repair, Reinforcement
	Bitjia River Bridge -2 (Old)	157+450	49.2 (2@24.6)	2@4.9	1	D	New Bridge
17	Watarais River Bridge	160+900	21.0 (1span)	9.9	2	B	Repair, Reinforcement
18	Singsing River Bridge	164+850	41.1 (20.6+20.5)	9.9	2	C	Repair, Reinforcement

No.	BR. Name	Drawing STA	Length (m)	Width (m)	Lane	Grade Evaluation	Engineer' Final Recommendation
19	Yung Creek Bridge	167+100	30.0 (1 span)	9.5	2	C	Repair, Reinforcement
20	Undono Creek Bridge	178+000	21.6 (1span)	4.1	1	C	New Bridge
21	Tapiruna River Bridge	180+000	27.7 (1span)	4.1	1	C	New Bridge
22	Darasimpi River Bridge	198+900	27.6 (1span)	4.1	1	C	New Bridge
23	Luwin River Bridge	200+350	10.0 (1 span)	4.0	1	C	New Bridge
24	Namupimpa River Bridge	206+100	18.7 (1 span)	4.1	1	C	New Bridge
25	Benapa River Bridge	211+000	37 (12.4+24.6)	4.1	1	C	New Bridge
26	Iyunopa River Bridge	215+700	36.1 (1span)	10.0	2	B	Repair, Reinforcement
27	Orompanka River Bridge	221+100	21.3 (1 span)	9.6	2	B	Repair, Reinforcement
28	Nonompinka River Bridge	221+400	15.2 (1 span)	9.6	2	B	Repair, Reinforcement
29	Honerangka River Bridge	223+400	18.3 (1span)	9.6	2	B	Repair, Reinforcement
30	Ofiga River Bridge	223+900	24.4	9.6	2	B	Repair, Reinforcement
31	Umbaka River Bridge	224+800	12.5 (1 span)	9.4	2	B	Repair, Reinforcement
32	Kingkio River Bridge	234+800	15.5 (1 span)	4.2	1	D	New Bridge
33	Avani River Bridge	237+500	18.5 (1span)	4.2	1	D	New Bridge
34	Kafetina River Bridge	240+350	36.0 (1 span)	9.9	2	C	Repair, Reinforcement
35	Kamanotina River Bridge	249+250	24.5 (1 Span)	5.0	1	D	New Bridge
36	Kuronka River (Hebganofi)	249+450	18.0	4.1	1	D	New Bridge
37	Berefi River	250+650	24.0	4.1	1	D	New Bridge
38	Dirty Wara River	258+000	49.0 (1 Span)	4.1	1	D	New Bridge
39	Siguya River	266+250	18.0	4.1	1	C	New Bridge
40	Yasifo River	271+450	18.0 (1 span)	4.1	1	D	New Bridge

No.	BR. Name	Drawing STA	Length (m)	Width (m)	Lane	Grade Evaluation	Engineer' Final Recommendation
41	Parirosay River	272+400	24.0	4.1	1	C	New Bridge
42	Bena Bena River	280+650	96 (4@24)	4.1	1	C	New Bridge
43	Taraboro River (Sunufamu)	285+400	12.0 (1 span)	4.1	1	C	New Bridge
44	Kanalipi River (Hatigu)	288+100	25.0 (1 span)	10.0	2	C	Repair, Reinforcement
45	Jogi River (Zokozei)	298+900	30.0 (1 span)	10.0	2	C	New Bridge
46	Gouluka Bailey Bridge	299+700	37.0	4.1	1	(Baily Br)	New Bridge
47	Kafamo River (Kitamu)	302+800	35.0	10.0	2	C	Repair, Reinforcement
48	Mapemo River (Maniyata)	310+900	41 (2@20.5)	10.0	2	C	Repair, Reinforcement
49	Asaro River 2 (Getayaga)	314+600	22.0	10.0	2	C	Repair, Reinforcement
50	Asaro River	315+100	35.0	10.0	2	C	Repair, Reinforcement
51	Feonoku River	335+450	18.0	4.1	1	C	New Bridge
52	Nurape River	342+850	40.0	10.0	2	C	New Bridge
53	Kenangi River	345+200	55 (15+40)	10.0	2	D	New Bridge
54	Baikabai River	348+400	27.0	10.0	2	D	New Bridge
55	Chimbu River	376+700	68 (20.5+27+20.5)	10.0	2	D	New Bridge
56	Koronigle River	397+300	78 (3@26)	4.1	1	D	New Bridge
57	3@D2000 Culvert	398+450	20.0	4.1	2	-	New Bridge
58	Garniger River	401+500	78 (3@26)	4.1	1	C	New Bridge
59	Miunde River	404+500	27.0	10.0	2	D	New Bridge
60	Ahl River	414+150	67 (2@33.5)	4.1	1	C	New Bridge
61	Wahgi River	414+950	109 (27+55+27)	4.1	1	D	New Bridge
62	Bilu River	422+500	18.0	4.1	1	D	New Bridge
63	Darmena River	423+530	18.0	4.1	1	D	New Bridge

No.	BR. Name	Drawing STA	Length (m)	Width (m)	Lane	Grade Evaluation	Engineer' Final Recommendation
64	Ambeke River	425+000	18.0	4.1	1	D	New Bridge
65	Mildip River	425+250	16.5	4.1	1	D	New Bridge
66	Kurumula River	427+800	18.0	4.1	1	D	New Bridge
67	Waganil	432+300	22.6	4.1	1	D	New Bridge
68	Tumam River	449+500	74 (24.5+24+24.5)	10.0	2	D	New Bridge
69	Pin River	455+400	19.0	10.0	2	C	New Bridge
70	Komun River	462+100	74 (24.5+24+24.5)	10.0	2	D	New Bridge
71	Whagi River	463+900	27.0	10.0	2	D	New Bridge

## Annex B: List of International Treaties and Agreements to which PNG is a Signatory

Year	Treaty/Convention/Agreement
1951	International Plant Protection Convention, Rome
1954	International Convention for the Prevention of Pollution of the Sea by Oil, London
1956	Plant Protection Agreement for the South East Asia and Pacific Region, Rome
1969	International Convention on Civil Liability for Oil Pollution Damage, Brussels
1971	RAMSAR Convention on Wetlands of International Importance, especially waterfowl habitat
1972	International Convention on the Prevention of Marine Pollution by Dumping of Wastes and other Matter, London, Mexico City, Moscow
1972	Convention on the World Cultural Heritage and Natural Heritage
1973	International Convention on International Trade in Endangered Species of Wild Fauna and Flora, Washington (CITES Treaty)
1973	International Convention on the Conservation of Migratory Species of Wild fauna and Flora
1976	International Convention on the Conservation of Nature in the South Pacific, Apia
1976	International Convention on the Prohibition of Military or any other Hostile Use of Environmental Modification Techniques, New York
1982	United Nations Convention on the Law of the Sea, Montego Bay 1982
1986	International Convention for the Protection of the Natural Resources and Environment of the South Pacific (SPREP Convention)
1992	International Convention on Biological Diversity, Rio de Janeiro

**Annex C: Results of Ecological Survey Undertaken by SHHIP Team and Research & Conservation Foundation (Goroka, EHP) in December 2019**

No	BR. Name	Drawing STA	Coordination	Description	Survey results
45	Jogi River (Zokozoi)	298+900	6°3'853"S 145°23'222"E	Houses, buildings and gardens with lots of domestic wastes. Modified environment	1) Terrestrial ecosystem: Fauna: small yellow butterflies (Eurema hecabe) dragonfly (Anisoptera) Flora: soft pitpit, elephant grass, bamboos and domesticated casuarina oligodon (she-oak) 2) Aquatic ecosystem: Fauna: Rainbow trout, tilapia (Oreochromis mossambica) Flora: brown algae
46	Gauluka Culvert	299+700	6°3'499"S 145°23'150"E	Construction site, church, trade stores, and houses. Highly impacted with lots of domestic wastes. Modified environment	1) Terrestrial ecosystem: Fauna: small yellow butterflies (E. hecabe) dragonfly (Anisoptera) Flora: soft pitpit, elephant grass, bamboos and domesticated casuarina oligodon (she-oak) 2) Aquatic ecosystem: Fauna: stonefish Flora: green algae
47	Kafamo River (Kitamu)	302+800	6°2'678"S 145°22'401"E	Human settlements, gardens and houses near the bridge. Modified environment	1) Terrestrial ecosystem: Fauna: small yellow butterflies (Eurema hecabe), mosquitoes Flora: grasses like sedges, soft pitpit, elephant grass, bamboos and few casuarina oligodon (she-oak) 2) Aquatic ecosystem: Fauna: stonefish, trout, tilapia, pond skaters Flora: green algae
48	Mapemo River (Maniyata)	310+900	6°0'452"S 145°20'364"E	Gardens, church, brick factory and quarry on one side that has disturbed the riverbed. Clearly a modified environment	1) Terrestrial ecosystem: Fauna: small yellow butterflies (Eurema hecabe) dragonfly (Anisoptera) Flora: Leucaena, casuarina oligodon (she-oak) and klinki pine, 2) Aquatic ecosystem: Fauna: pond skaters, freshwater eel, trout, tilapia Flora: brown algae
49	Asaro River 2 (Getayaga)	314+600	6°0'608"S 145°18'822"E	Presence of houses and gardens. Modified environment	1) Terrestrial ecosystem: Fauna: Willy wagtail, small yellow butterflies (Eurema hecabe), Flora: Elephant grass, mimosa, sedges, sunflower, soft pitpit, bamboo and casuarina trees 2) Aquatic ecosystem: Fauna: Pond skaters, trout,

					Flora: Nil
50	Asaro River	315+100	6°0'543"S 145°18'545"E	Daulo District HQ with the District hospital, trade stores and district offices	1) Terrestrial ecosystem: Fauna: black ants, Flora: Elephant grass, sunflower, and few bamboo stalks. Pine, casuarina trees and coastal mustard tree (piper adancum) 2) Aquatic ecosystem: Fauna: Pond skaters, trout, tilapia Flora: brown algae
51	Feonoku River	355+450	6°3'907"S 145°12'437"E	Very few houses and gardens near the bridge. Slightly modified environment	1) Terrestrial ecosystem: Fauna: black & white and small yellow butterfly (Eurema hecabe), black water flies, eagle. Mammals like mountain cuscus & bandicoot on mountain top Flora: few planted casuarina trees 2) Aquatic ecosystem: Fauna: pond skaters, trout fingerlings, Flora: Nil
52	Nurape River	342+850	6°4'960"S 145°10'000"E	Lots of primary & secondary forest near the bridge. Slight modification to environment	1) Terrestrial ecosystem: Fauna: small yellow butterfly (Eurema hecabe), eagle. Mountain cuscus, tree kangaroo and Stephanie Austrapia BOP (A. stephaniae) Flora: Soft pitpit (Giganteous), native species like yomba (Nothofagus grandis) and ficus. 2) Aquatic ecosystem: Fauna: pond skaters, small brown mollusk, rainbow trout Flora: Nil
53	Kenangi River	345+200	6°6'082"S 145°8'226"E	Primary & Secondary forests on mountain side with slightly modified environment near the bridge. Presence of some houses and LLG office	1) Terrestrial ecosystem: Fauna: Black & orange butterfly, black & yellow, small yellow (Eurema hecabe) and small blue butterflies and waterfly. Mammals like mountain cuscus, tree kangaroos and Stephanie Austrapia BOP (A. stephaniae) Flora: yomba (Nothofagus grandis), ficus 2) Aquatic ecosystem: Fauna: pond skaters, rainbow trout, water beetle Flora: Nil
54	Baikabai River	348+400	6°6'091"S 145°8'230"E	Slightly modified environment with remnants of primary & secondary forest on mountain side. Few houses & gardens present	1) Terrestrial ecosystem: Fauna: Willy wagtail, mountain cuscus Flora: yomba (Nothofagus grandis), ficus spp, klinki pine and P. adancum 2) Aquatic ecosystem: Fauna: pond skaters, rainbow trout Flora: Nil

55	Chimbu River	376+700	6°1'957"S 144°58'432"E	Vegetation is modified with guesthouses, church, service station, and markets. There is also a quarry with lots of human activities	1) Terrestrial ecosystem: Fauna: Willy wagtail, Flora: casuarina trees, bamboos, 2) Aquatic ecosystem: Fauna: rainbow trout, tilapia, guppies Flora: brown algae
56	Koronigle River	397+300	5°56'579"S 144°51'144"E	Vegetation is modified due to human settlement. The site has lots of houses, trade store and market.	1) Terrestrial ecosystem: Fauna: small yellow butterfly (Eurema hecabe), dragonfly (Anisoptera) Flora: casuarina trees, P. adancum 2) Aquatic ecosystem: Fauna: rainbow trout, tilapia, bage (local blackfish) Flora: Nil
57	<u>3@D2000</u> <u>Culvert</u>	398+450	5°56'573"S 144°50'516"E	Vegetation is modified due to human settlement. The site has guest house, trade store, family houses and is near the Barawagi Correctional Institution	1) Terrestrial ecosystem: Fauna: small blue butterfly, dragonfly (Anisoptera), green grasshopper, Flora: casuarina & klinki pine trees 2) Aquatic ecosystem: Fauna: small shell, stonefish Flora: brown algae
58	Garniger River	401+500	5°56'566"S 144°48'961"E	Vegetation is modified due to human settlement and construction. Lots of houses, quarry on both sides of the river and a police barracks.	1) Terrestrial ecosystem: Fauna: small yellow butterfly (Eurema hecabe), dragonfly (Anisoptera), tiny flies Flora: casuarina & klinki pine 2) Aquatic ecosystem: Fauna: rainbow trout, Flora: nil
59	Miunde River	404+500	5°55'660"S 144°47'552"E	Vegetation is modified with houses, church and a quarry.	1) Terrestrial ecosystem: Fauna: small yellow butterfly (Eurema hecabe), small blue butterfly, dragonfly (Anisoptera), black ants Flora: P. adancum, klinki pine trees, 2) Aquatic ecosystem: Fauna: rainbow trout, black water beetle, Flora: green algae
60	Ahl River	414+150	5°52'925"S 144°43'341"E	Vegetation is modified with houses, quarry, church and a school.	1) Terrestrial ecosystem: Fauna: black & yellow butterfly, small black butterfly, dragonfly (Anisoptera), small parrots Flora: P. adancum, klinki pine trees, 2) Aquatic ecosystem:



					Fauna: pond skaters, black water beetle, rainbow trout Flora: Nil
61	Whagi River	414+950	5°52'636"S 144°43'032"E	Vegetation is modified with houses, gardens, stores, club, market and a workshop/factory.	1) Terrestrial ecosystem: Fauna: black & purple butterfly, dragonfly (Anisoptera), kingfisher, willy wagtail Flora: casuarina trees, soft pitpit, sedges and other grass 2) Aquatic ecosystem: Fauna: pink protozoa, tadpole, rainbow trout, tilapia, freshwater eel Flora: green algae
62	Bilu River	422+500	5°52'125"S 144°39'323"E	vegetation is modified with houses, store and coffee plots	1) Terrestrial ecosystem: Fauna: dragonfly (Anisoptera), Flora: casuarina trees, pandanus marita (Pandanus julianettii), soft pitpit 2) Aquatic ecosystem: Fauna: pond skaters, rainbow trout Flora: green algae
63	Darmena River	423+530	5°51'773"S 144°38'338"E	vegetation is modified with houses, store and service station	1) Terrestrial ecosystem: Fauna: small yellow butterfly (Eurema hecabe), dragonfly (Anisoptera), Flora: casuarina & klinki pine trees 2) Aquatic ecosystem: Fauna: pond skaters, water beetle, trout, Flora: green algae
64	Ambeke River	425+000	5°51'781"S 144°38'401"E	Modified vegetation with anthropogenic grass and domesticated trees including houses, trade store, coffee plots and guest house.	1) Terrestrial ecosystem: Fauna: small yellow butterfly (Eurema hecabe), small blue butterfly, dragonfly (Anisoptera), Flora: casuarina & klinki pine trees, bamboos 2) Aquatic ecosystem: Fauna: pond skaters, rainbow trout, stonefish Flora: green algae
65	Mildip River	425+250	5°51'647"S 144°38'252"E	Modified vegetation with church, trade stores, and houses.	1) Terrestrial ecosystem: Fauna: small yellow butterfly (Eurema hecabe), small blue butterfly, dragonfly (Anisoptera), Flora: casuarina, klinki pine, bananas, bamboos, pandanus marita (P. julianettii), 2) Aquatic ecosystem: Fauna: water beetle, trout Flora: green algae
66	Kurumula River	427+800	5°50'599"S 144°37'291"E	vegetation comprises of aggravated land and houses	1) Terrestrial ecosystem: Fauna: small white butterflies, dragonfly (Anisoptera), bees (Apis cerena), mosquitoes Flora: casuarina & klinki pine 2) Aquatic ecosystem:

					Fauna: tadpole, trout Flora: nil
67	Waganil	432+300	5°50'632"S 144°35'117"E	Highly modified vegetation with market and Kudjip township nearby.	1) Terrestrial ecosystem: Fauna: small brown butterfly, small blue butterfly, dragonfly (Anisoptera), bees, fruit flies Flora: casuarina & klinki pine, elephant grass, 2) Aquatic ecosystem: Fauna: tadpole, trout Flora: green algae
68	Tumam River	449+500	5°48'290"S 144°27'058"E	Vegetation has been modified as this is a quarry zone with lots of weeds and crawling plants such as mimosa grass	1) Terrestrial ecosystem: Fauna: caterpillar, small yellow butterfly (Eurema hecabe), dragonfly (Anisoptera), bees (A. cerena), black ants, kingfisher, Flora: mostly weeds and mimosa grass 2) Aquatic ecosystem: Fauna: pond skaters, trout Flora: green algae
69	Piri River	455+400	5°49'384"S 144°24'022"E	Modified vegetation for agriculture especially coffee and processing site for drying coffee.	1) Terrestrial ecosystem: Fauna: black ants, willy wagtail Flora: casuarina & klinki pine, bamboo, elephant grass, 2) Aquatic ecosystem: Fauna: trout, freshwater eel, Flora: green algae
70	Komun River	462+100	5°50'053"S 144°20'594"E	modified vegetation with aggravated land and quarry	1) Terrestrial ecosystem: Fauna: willy wagtail Flora: casuarina trees, P.adancum, sunflower, coffee trees, bamboo, elephant grass, 2) Aquatic ecosystem: Fauna: water beetle, pond skaters, larvae, mollusk Flora: Nil
71	Whagi River	463+900	5°50'298"S 144°19'580"E	modified vegetation with aggravated land for market and dump site as well as coffee plantation	1) Terrestrial ecosystem: Fauna: grasshopper, mosquitoes, spider, willy wagtail Flora: elephant grass, soft pitpit, 2) Aquatic ecosystem: Fauna: trout (Rainbow trout), tilapia (O.mossambica), freshwater eel, Flora: Nil

### Annex D: Cost Estimated for Environmental Quality Monitoring

#### Volume II – SHHIP Tranche 2: Erap River Bridge (Km 46+500) to Kabalipi River (Km 288 + 100)


It was prepared for construction phase in 36 months, at 22 locations of bridge construction and 1 location culvert replacement by bridge

Unit: K

	Content	Parameters	Unit Price	No. of location	No. of sampling	Total sample	Total cost	References
<b>A</b>	<b>Pre- construction Phase:</b> monitoring and field sampling 1 time before work commencement, two (2) water samples (upstream and downstream) at each location of replacement bridge, two (2) air quality and noise level samples at two sides of the bridge							
1	Surface Water Quality	Temperature	23.00	46	1	46	1,058	Actual cost of SHHIP Tranche 1
		pH	23.00	46	1	46	1,058	
		Turbidity	21.00	46	1	46	966	Quotation of National Analytical & Testing Services LTD, April 2019
		BOD5	85.00	46	1	46	3,910	
		COD	85.00	46	1	46	3,910	
		Total Nitrogen	70.00	46	1	46	3,220	
		Total Phosphorus	62.00	46	1	46	2,852	
		Total Suspended Solids (TSS)	43.00	46	1	46	1,978	
		Oil and Grease	85.00	46	1	46	3,910	
Tota Coliform	50.00	46	1	46	2,300			
2	Air Quality	PM10	25.00	46	1	46	1,150	Actual cost of SHHIP Tranche 1
		PM2.5	25.00	46	1	46	1,150	
3	Noise Level	Noise	25.00	46	1	46	1,150	
	<b>Sub Total A</b>						<b>25,162</b>	
<b>B</b>	<b>Construction phase:</b> monitoring and field sampling every 3 months during the construction phase, two (2) water samples (upstream and downstream) at each location of replacement bridge, two (2) air quality and noise level samples at two sides of the bridge							

1	Surface Water Quality	Temperature	23.00	46	12	552	12,696	Actual cost of SHHIP Tranche 1
		pH	23.00	46	12	552	12,696	
		Turbidity	21.00	46	12	552	11,592	Quotation of National Analytical & Testing Services LTD, April 2019
		BOD5	85.00	46	12	552	46,920	
		COD	85.00	46	12	552	46,920	
		Total Nitrogen	70.00	46	12	552	38,640	
		Total Phosphorus	62.00	46	12	552	34,224	
		Total Suspended Solids (TSS)	43.00	46	12	552	23,736	
		Oil and Grease	85.00	46	12	552	46,920	
		Tota Coliform	50.00	46	12	552	27,600	
2	Air Quality	PM10	25.00	46	12	552	13,800	Actual cost of SHHIP Tranche 1
		PM2.5	25.00	46	12	552	13,800	
3	Noise Level	Noise	25.00	46	12	552	13,800	
	<b>Sub Total B</b>						<b>301,944</b>	
	<b>TOTAL (A+B)</b>	<b>in Kina</b>					<b>327,106</b>	
		<b>in USD ( K1 = USD 0.294, as of October 2019)</b>					<b>96,169</b>	

## Annex E: Location Map of Volume II Bridges for Environmental Quality Monitoring

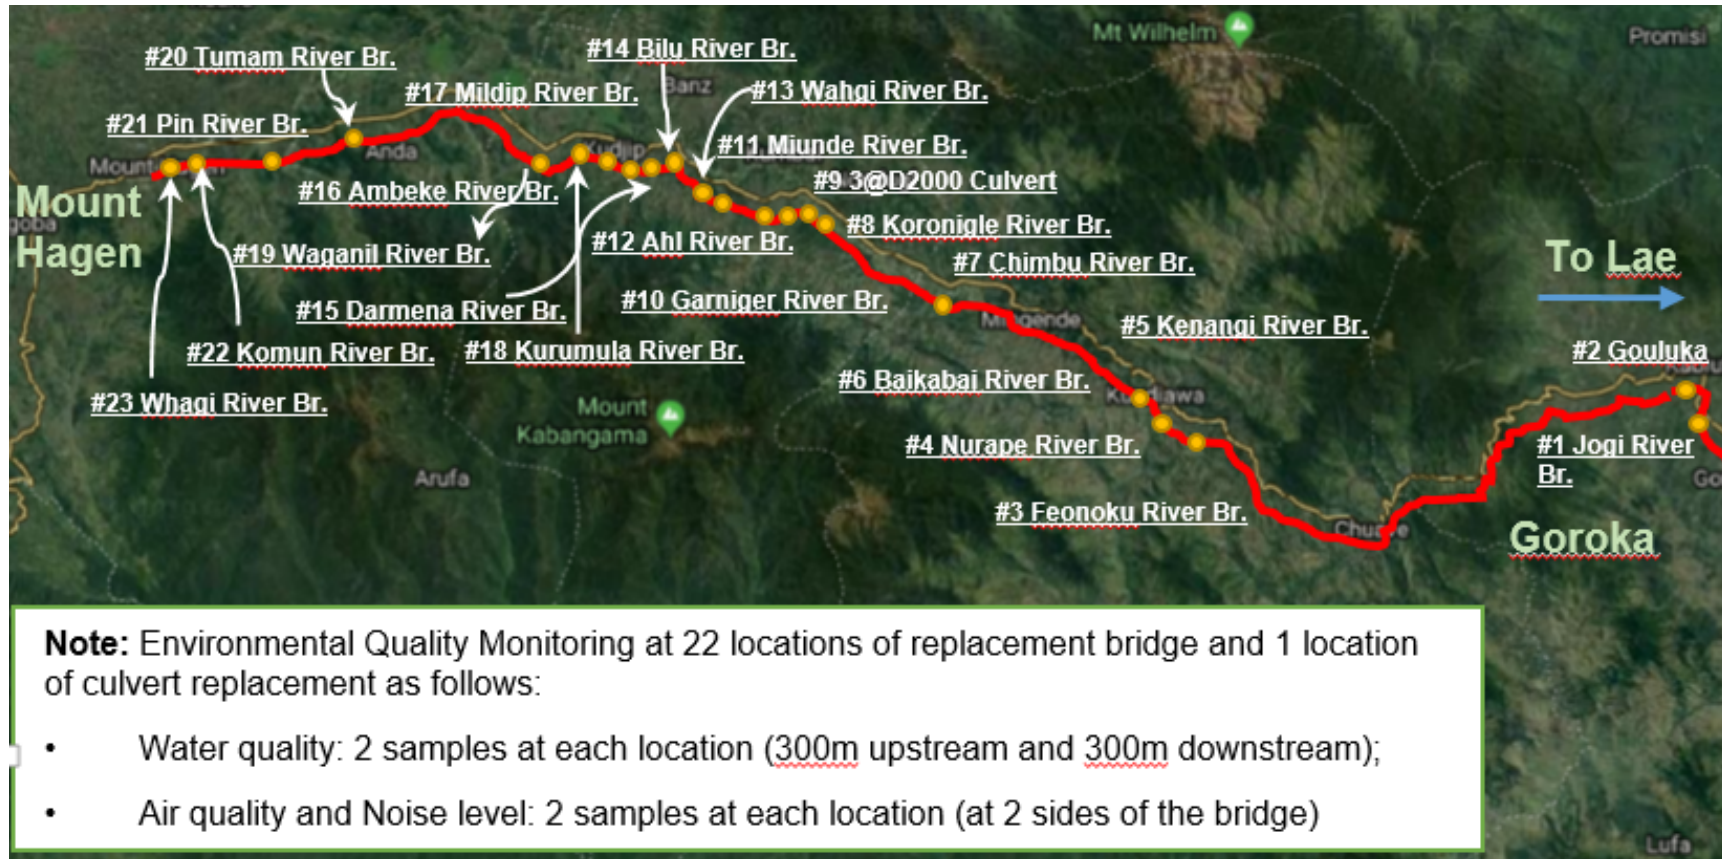

**Note:** Environmental Quality Monitoring at 22 locations of replacement bridge and 1 location of culvert replacement as follows:

- Water quality: 2 samples at each location (300m upstream and 300m downstream);
- Air quality and Noise level: 2 samples at each location (at 2 sides of the bridge)

## Annex F: Public Consultation Meetings

Various consultation and information dissemination activities have been conducted as part of the SHHIP tranche 2 preparation. This included consultation and awareness activities with key stakeholders including the affected communities, governments at the Provincial, district and local levels, transport entrepreneurs, businesses, and the general public, amongst others. Summary of such key activities is presented as below.

Date	Venue	Attendants	Key Issues/Queries/Feedback
17 Jul'19/	Four Mile Area, Kainantu	32 participants registered (12 females), altogether around 60 estimated participants (approx. 25 females) in the event. Most of them preferred not to register their names (was accepted).	SHHIP consultation and awareness-building focused on overall Program components, current status, social and environmental impacts (both adverse and beneficial ones), social/community infrastructure support, resettlement requirements, legacy issues, etc. Feedback, queries and responses received have been primarily related to the pending legacy issue in the area, dust control during works, employment opportunities, women participation, trainings, etc. Appropriate responses were made by the social specialist, CRO and Project Manager (Lalio Erasi) for the section.
16 Aug'19	Miunde, Jiwaka	87 participants including 43 female participants	SHHIP consultation and awareness-building focused on overall Program components, current status, social and environmental impacts (both adverse and beneficial ones), social/community infrastructure support, resettlement requirements, legacy issues, etc. Feedback, queries and responses received have been primarily related to the pending legacy issue in the area, dust control during works, employment opportunities, women participation, trainings, etc. Appropriate responses were made by the Social and Environmental Specialists and the CRO.
16 Aug'19	Ku, Simbu	45 participants including 18 female participants	SHHIP consultation and awareness-building focused on overall Program components, details on Tranches 1 and 2 including current status, social and environmental impacts (both adverse and beneficial ones), social/community infrastructure support, resettlement requirements, legacy issues, etc. Feedback, queries and responses received have been primarily related to resettlement, legacy issues, adverse impact mitigations,

Date	Venue	Attendants	Key Issues/Queries/Feedback
			employment opportunities, community infrastructure needs, women participation, etc. Appropriate responses were made by social and environmental specialists and the CROs. Overall happiness about the SHHIP was received from almost all participants.
28 Aug'19	Hengano fi Town	84 participants including 37 female participants	SHHIP consultation and awareness-building focused on overall Program components, details on Tranches 1 and 2 including current status, social and environmental impacts (both adverse and beneficial ones), social/community infrastructure support, resettlement requirements, legacy issues, etc. Feedback, queries and responses received have been primarily related to resettlement, legacy issues, adverse impact mitigations, employment opportunities, community infrastructure needs, women participation, etc. Appropriate responses were made by Social And Environmental Specialists, CROs and Project Managers. Overall happiness about the SHHIP was received from almost all participants.
9 Sep'19	Chuave, Dumun and Mingende in Simbu Province	Altogether 2150 participants (estimated) including 650 female participants (estimated)	SHHIP consultation and awareness-building focused on overall Program components, details on Tranches 1 and 2 including current status, social and environmental impacts (both adverse and beneficial ones), social/community infrastructure support, resettlement requirements, legacy issues, etc. Feedback, queries and responses received have been primarily related to resettlement, legacy issues, adverse impact mitigations, employment opportunities, community infrastructure needs, women participation, etc. Appropriate responses were made by social and environmental specialists, CROs and Project Managers. Overall happiness about the SHHIP was received from almost all participants.
9 Sep'19	Nadzab and 40 Mile in Huon	Altogether 3250 participants (estimated) including 875	SHHIP consultation and awareness-building focused on overall Program components, details on Tranches 1 and 2 including current status, social and environmental impacts (both

Date	Venue	Attendants	Key Issues/Queries/Feedback
	District, Mutzing and Watarais in Markham District; Morobe Province	female participants (estimated)	adverse and beneficial ones), social/community infrastructure support, resettlement requirements, legacy issues, etc. Feedback, queries and responses received have been primarily related to resettlement, legacy issues, adverse impact mitigations, employment opportunities, community infrastructure needs, women participation, etc. Appropriate responses were made by social and environmental specialists, CROs and Project Managers. Overall happiness about the SHHIP was received from almost all participants.
10 Sep'19	Kurumul, Jiwaka Province	Altogether 42 participants including 7 female participants	Consultation with the Public Administrators including representatives from the three levels of governance, police, PNGDF, civil society, etc. Major coverage on Tranche 1 and Tranche 2 components, civil works, social and environmental impacts, status, management, etc. Feedback received mainly on ensuring Highway corridor enforcement (prevention of encroachments), finding solutions to waterlogging/flooding in some of the sections, and happiness about no significant pending legacy issues along the SHHIP section in the Province.
10 Sep'19	Minj, Kudjip and Anglimp Market in Jiwaka Province	Altogether 2250 participants (estimated) including 675 female participants (estimated)	SHHIP consultation and awareness-building focused on overall Program components, details on Tranches 1 and 2 including current status, social and environmental impacts (both adverse and beneficial ones), social/community infrastructure support, resettlement requirements, legacy issues, etc. Feedback, queries and responses received have been primarily related to resettlement, legacy issues, adverse impact mitigations, employment opportunities, community infrastructure needs, women participation, etc. Appropriate responses were made by Social Specialist, CROs and Project Manager for the section. Overall happiness about the SHHIP was received from almost all participants.



<b>Date</b>	<b>Venue</b>	<b>Attendants</b>	<b>Key Issues/Queries/Feedback</b>
11 Sep'19	Kainantu, Barola Top, and Hengano fi Station in Eastern Highlands Province	Altogether 5375 participants (estimated) including 1225 female participants (estimated)	SHHIP consultation and awareness-building focused on overall Program components, details on Tranches 1 and 2 including current status, social and environmental impacts (both adverse and beneficial ones), social/community infrastructure support, resettlement requirements, legacy issues, etc. Feedback, queries and responses received have been primarily related to resettlement, legacy issues, adverse impact mitigations, employment opportunities, community infrastructure needs, women participation, etc. Appropriate responses were made by social and environmental specialists, CROs and Project Managers. Overall happiness about the SHHIP was received from almost all participants.
12 Sep'19	Goroka, Asaro, Daulo Middle Market, Daulo Top Market, Daulo Third Market, and Snake Village in Eastern Highlands Province	Altogether 2200 participants (estimated) including 800 female participants (estimated)	SHHIP consultation and awareness-building focused on overall Program components, details on Tranches 1 and 2 including current status, social and environmental impacts (both adverse and beneficial ones), social/community infrastructure support, resettlement requirements, legacy issues, etc. Feedback, queries and responses received have been primarily related to resettlement, legacy issues, adverse impact mitigations, employment opportunities, community infrastructure needs, women participation, etc. Appropriate responses were made by social and environmental specialists, CROs and Project Managers. Overall happiness about the SHHIP was received from almost all participants.

## **Annex G: References**

1. A Geological Synthesis of Papua New Guinea, Bureau of Mineral Resources, Geology and Geophysics, Department of Natural Resources, Australian Government Publishing Service, 1977.
2. Climate Change Vulnerability Assessment Report of SHHIP conducted on June 2017.
3. District and Provincial Profiles - National Research Institute.
4. Environmental Impact Assessment, Highlands Highway Rehabilitation Project, Volume 2-WB/SMEC, 2002.
5. Initial Environmental Examination Report, SHHIP, February 2017.
6. National Population and Housing Census, 2011.
7. National Weather Service, Papua New Guinea
8. Pacific Climate Futures Program; Climate Futures Exploration Tool, 2012.
9. Papua New Guinea Policy on Protected Areas.
10. Papua New Guinea Rural Development Handbook
11. Protected areas of PNG CEPA, 2017.

### **Web link source:**

1. Available at Oct 2019. <http://www.diva-gis.org/gdata>; Indicative Highlands Highway alignment (reconstructed overlay), SHHIP PPTA 2016.
2. Available at Oct 2019. <https://population.un.org/wpp/Download/Standard/Population/>
3. Available at Oct 2019. <https://www.epa.gov/green-book/green-book-national-area-and-county-level-multi-pollutant-information>.