

Initial Environmental Examination

October 2022

Pakistan: Second Power Transmission Enhancement Investment Program (Tranche 4)

Subproject 1: Design, supply, installation, testing and commissioning of approximately 70 km of 220kV double circuit transmission line for looping in/out of the proposed Hala Road-Jamshoro single circuit transmission line at 220kV Mirpur Khas New Grid Station

Prepared by the National Transmission and Despatch Company Limited (NTDC) for the Asian Development Bank.

CURRENCY EQUIVALENTS

As of 1 October 2022

Currency Unit – Pak Rupees (Pak Rs.)

Pak Rs 1.00 = \$ 0.0044

US\$1.00 = Pak Rs. 228.08

ABBREVIATIONS

AC	Alternating Current
ADB	Asian Development Bank
AOI	Area of Influence
EARF	Environmental Assessment and Review Framework
EIA	Environmental Impact Assessment'
EHS Guidelines	The World Bank Group's Environmental, Health and Safety Guidelines
EHS Manager	Environmental, Health, and Safety Manager (under ESIC)
EMF	electromagnetic field
EMP	Environmental Management Plan
ESIC	Environment and Social Impact Cell
ETL	Electricity Transmission Line
FMC	Facility Management Consultant
FMC-IESS	FMC's International Environmental Safeguards Specialist
FMC-NESS	FMC's National Environmental Safeguards Specialist
FMC-NEI	FMC's National Environmental Inspector
GIIP	Good International Industry Practice
GoP	Government of Pakistan
GSHAP	Global Seismic Hazard Assessment Program
HESCO	Hyderabad Electric Supply Company
HSE	Health, Safety and Environment
HTLS	high-temperature low sag
IEE	Initial Environmental Examination
IFC	International Finance Corporation
IUCN	International Union for Conservation of Nature
LARP	Land Acquisition and Resettlement Plan
LBOD	Left Bank Outfall Drain
MFF	Multi Tranche Financing Facility
NOC	No Objection Certificate
NTDC	National Transmission and Despatch Company
PBC	Pakistan Building Code

PEPA	Pakistan Environmental Protection Agency
PM	Particulate Matter
PMU	Project Management Unit
PPE	Personal Protective Equipment
RoW	Right of Way
SEPA	Sindh Environmental Protection Agency
SEQS	Sindh Environmental Quality Standards
SPS	Safeguard Policy Statement (2009)
SSEMP	Site-specific EMP
UNOSAT	UN Satellite Centre
USEPA	Environmental Protection Agency in the United States of America
WAPDA	Water & Power Development Authority
WHO	World Health Organization

WEIGHTS AND MEASURES

$\mu\text{g}/\text{m}^3$	Microgram per cubic meter
amsl	Above mean sea level
dB(A)	decibels (A-weighted)
km	Kilometer
km ²	Square kilometer
m	Meter
m ³ /sec	Cubic meter per second

CONVERSIONS

1 meter	= 3.28 feet
1 hectare	= 2.47 acre

NOTES

In this report, "\$" refers to US dollars.

This initial environmental examination is a document of the borrower. The views expressed herein do not necessarily represent those of ADB's Board of Directors, Management, or staff, and may be preliminary in nature. Your attention is directed to the "terms of use" section on ADB's website.

In preparing any country program or strategy, financing any project, or by making any designation of or reference to a particular territory or geographic area in this document, the Asian Development Bank does not intend to make any judgments as to the legal or other status of any territory or area.

Table of Contents

Executive Summary	i
1. Introduction	6
1.1 Brief Description of the project and Background	6
1.2 Environmental Category	7
1.3 Project Proponent and Study Consultants	7
1.4 Approach to the IEE	7
1.4.1 Phase 1 – Scoping	7
1.4.2 Phase 2 – Baseline Studies	8
1.4.3 Phase 3 – Stakeholder Consultation	8
1.4.4 Phase 4 – Impact Assessment Methodology	8
1.4.5 Phase 5 – Documentation	8
1.5 Project Benefits	9
1.6 Organization of the Report	10
2. Policy, Legal, and Administrative Framework.....	12
2.1 Historical and Constitutional Context	12
2.2 Sindh Environmental Protection Act of 2014.....	12
2.3 Institutional Framework	13
2.4 Requirements for Environmental Impact Assessment	14
2.5 Administrative Framework on Environmental Issues	16
2.6 Other Applicable Laws	23
2.7 Asian Development Bank Policies and Guidelines	25
2.7.1 ADB's Safeguard Policy Statement 2009	27
2.7.2 Social Protection Requirements	28
2.7.3 Access to Information Policy (2018).....	28
2.7.4 Gender and Development Policy 1998.....	29
2.7.5 Climate Change Risk Management Framework.....	29
2.8 IFC Performance Standards	29
2.9 The World Bank Group Environmental, Health and Safety Guidelines (EHS Guidelines)	30
2.10 International Treaties and Agreements	30
2.11 Electric and Magnetic Field Exposure Guidelines	34
3. Description of the Project	34
3.1 Project Detail	34
3.2 Location and the Layout.....	34

3.3	Land Use on the Project Site	34
3.4	Road Access	35
3.5	Vegetation Features of the Project Site	35
3.6	Cost and Magnitude of the Operations	35
3.7	Schedule of Implementation.....	35
3.8	Project Design	35
3.8.1	Project Alignment	35
3.8.2	Width of Right of Way	35
3.8.3	Design Standards for Transmission Line.....	36
3.8.4	Climatic Consideration	37
3.8.5	Civil Works and Other Facilities.....	37
3.8.6	Equipment & Machinery	37
3.9	System Safety	40
3.10	Public Safety	40
3.10.1	Conductor to Ground Clearance.....	40
3.10.2	Tower Erection and Scale of the Project	41
3.10.3	Associated Facilities	41
3.11	Material and Human Resource Usage	42
3.12	Restoration and Rehabilitation Plans	42
3.13	Other Government Department Approvals.....	42
4.	Description of the Environment (Baseline Data).....	43
4.1	Project Area of Influence	43
4.2	Physical Environment.....	43
4.2.1	Topography, Geology, and Soil	43
4.2.2	Land Use	44
4.2.3	Seismicity	49
4.2.4	Climate	51
4.2.5	Climate Change and Flooding	56
4.2.6	Water Resources.....	58
4.2.7	Water Quality.....	59
4.2.8	Air Quality	65
4.2.9	Noise	71
4.2.10	Environmental Sensitive Receptors.....	76
4.3	Ecology	78
4.3.1	Flora	79
4.3.2	Fauna	79
4.3.3	Wetlands and Aquatic Biology.....	84
4.4	Socioeconomic Environment.....	87

4.4.1	Methodology and Data Sources	87
4.4.2	Administrative Setting	87
4.4.3	Demographics	88
4.4.4	Social Infrastructure	89
4.4.5	Physical Infrastructure	91
4.4.6	Sources of Income and Livelihood	94
4.4.7	Archaeological Sites	94
4.4.8	Indigenous People.....	95
5.	Anticipated Environmental Impacts and Mitigation Measures	96
5.1	Methodology for Impact Assessment	96
5.1.1	Evaluation of Significance of Potential Impacts.....	96
5.2	Pre-construction (design) phase Impacts.....	97
5.2.1	Lack of Integration of IEE/EMP/EIA Requirements into Construction Bid Documents	99
5.2.2	Lack of Planning in ETL Design	99
5.2.3	Improper Location of Camps Leading to Environmental and Social Issues	100
5.2.4	Lack of Project environmental safeguards (human resource) capacity	100
5.2.5	Removal of vegetation/trees.....	101
5.2.6	Noise caused by construction equipment.....	101
5.2.7	Land Acquisition	102
5.2.8	Waste Generation	102
5.2.9	Disruption to Existing Drainage Pathways and Utilities	103
5.2.10	Impacts on Sensitive and High Value Areas	103
5.2.11	EMF	103
5.2.12	Impact on Community Safety due to Structure/ Mechanical Failure of the overhead conductors	107
5.3	Construction Phase Impacts	108
5.3.1	Physical Environment.....	111
5.3.2	Ecological Environment.....	124
5.3.3	Socioeconomic Environment.....	127
5.4	Operation Phase	131
5.4.1	Physical Environment.....	133
5.4.2	Ecological Environment.....	133
5.4.3	Socioeconomic Environment.....	135
5.5	Cumulative, and Induced impacts	138
6.	Analysis of Alternatives	140
6.1	No Project Alternative	140
6.2	Alternative Construction Methods	140
6.3	Design/Technology Alternatives.....	140

6.4	Alternative Alignments for Transmission Line	140
7.	Information Disclosure, Consultation, and Participation	144
7.1	Consultation	144
7.1.1	Methodology	144
7.1.2	Consultation Material	144
7.1.3	Community Consultation Mechanism	144
7.1.4	Institutional Consultation Mechanism	150
7.2	Summary of Concerns Raised by Stakeholders	152
7.3	Information Disclosure	159
7.4	Grievance Redress Mechanism	160
8.	Environmental Management Plan	164
8.1	General	164
8.2	Construction Schedule	164
8.3	Summary of Impacts and Mitigation Measures	164
8.4	Capacity Building and Training	198
8.5	Site-Specific Environmental Management Plan (SSEMP)	199
8.6	Equipment Maintenance Details	199
8.7	Waste Management	199
8.8	Worker Accommodation Plan	200
8.9	Environmental Monitoring and Reporting	200
8.10	Institutional Arrangement	207
8.10.1	National Transmission and Despatch Company Limited (NTDC)	207
8.10.2	Project Management Unit (PMU) under NTDC	207
8.10.3	Facility Management Consultant (FMC)	208
8.10.4	Construction Contractor	209
8.11	Change Management	210
8.12	Environment Management Cost	211
9.	Conclusion and Recommendations	215
9.1	Conclusion	215
9.2	Recommendations	216

List of Annexures

Annexure I:	ADB's Rapid Environmental Assessment (Rea) Checklist
Annexure II:	Field Sampling Plan (Physical Environment)
Annexure III:	Laboratory Provided Analysis Reports
Annexure IV:	Sensitive Receptors
Annexure V:	IBAT Findings Report
Annexure VI:	Consultation Material
Annexure VII:	Consultation Logs
Annexure VIII:	Dust Management Plan
Annexure IX:	Construction Noise and Vibration Management Plan
Annexure X:	Chance Finds Procedure
Annexure XI:	Traffic Management Plan
Annexure XII:	Waste Management Plan
Annexure XIII:	COVID-19 Management Plan
Annexure XIV:	Occupational Health, Safety, and Environment (OHSE) Management Plan
Annexure XV:	Emergency Response Plan
Annexure XVI:	Tree Plantation Plan
Annexure XVII:	Resource Conservation Plan
Annexure XVIII:	Site Specific EMP
Annexure XIX:	Fire Management and Protection Plan
Annexure XX:	Calibration Certificate of Noise and Air Quality Measuring Instruments

List of Figures

Figure 1-1: Location of Subproject 1	11
Figure 3-1: Inverted ‘T’ Type Tower Foundation	38
Figure 3-2: Proposed Elevation of Strain Tower	38
Figure 3-3: Proposed Elevation of Suspension Tower.....	39
Figure 4-1: Project Area of Influence	45
Figure 4-2: Topography	46
Figure 4-3: Geology of the Subproject Area	47
Figure 4-4: Land Use in Aol	48
Figure 4-5: Seismic Hazard Map	50
Figure 4-6: Wind Rose for 2011	55
Figure 4-7: Annual Climate Cycle	57
Figure 4-8: Historical Precipitation Profile	57
Figure 4-9: Historical Precipitation vs 2022 Rainfall	58
Figure 4-10: Water Quality Sampling Locations	62
Figure 4-11: Air Quality Sampling Locations.....	67
Figure 4-12: Noise Sampling Locations	73
Figure 4-13: Wind Speed During Noise Measurements	74
Figure 4-14: Sensitive Receptors in Aol	77
Figure 4-15: Asian Migratory Birds Flyways	83
Figure 4-16: Transmission Line Location and Protected Areas	86
Figure 4-17: Gender Ratio of Respondents	88
Figure 4-18: Prevailing of Disease in the Project Area	90
Figure 4-19: Education Level in the Project Area	91
Figure 4-20: Access to Social Amenities in the Project Area	92
Figure 4-21: Housing Conditions of Respondents	93
Figure 4-22: Income Level of Households	95
Figure 5-1: Electromagnetic Spectrum	105
Figure 5-2: Magnetic Strength from Overhead ETLs	105
Figure 6-1: Alternative Alignments for Transmission Line	143
Figure 7-1: Locations of Community Consultations	148
Figure 7-2: Grievance Redress Mechanism	162
Figure 7-3: Institutional set-up	163

List of Tables

Table 2-1: SEQS Limits for Ambient Air Quality	20
Table 2-2: Comparison of Local and International Standards	20
Table 2-3: SEQS Limits and IFC Guideline Values for Effluents	21
Table 2-4: Local and International Drinking Water Quality Standards	22
Table 2-5: Sindh Environmental Quality Standards (SEQS) for Noise	23
Table 2-6: Comparison of Local and International Standards.....	23
Table 2-7: Laws Relevant to the Project	24
Table 2-8: IFC Performance Standards	30
Table 2-9: International Environmental Treaties Endorsed by Pakistan	31
Table 2-10: ICNIRP Exposure Limits for General Public Exposure to EMF.....	34
Table 2-11: ICNIRP Limits for Occupational Exposure to EMF	34
Table 3-1: Permissible Conductor Clearance at 65°C	37
Table 3-2: List of Equipment Required for ADB-200 (Lot-I)	37
Table 4-1: Land Use in the Aol	44
Table 4-2: Seismic Zone Categorization, PBC 2007	49
Table 4-3: Seismic Zone Categorization, PBC 1986	49
Table 4-4: Temperatures of the Project Area	52
Table 4-5: Current Temperature Data in the Project Area	52
Table 4-6: Rainfall in the Project Area (Longer Period)	53
Table 4-7: Current Rainfall Data in the Project Area	53
Table 4-8: Mean Wind in the Project Area	54
Table 4-9: Indus River Monthly Flow at Kotri Barrage	59
Table 4-10: Water Quality Sampling Location Description	60
Table 4-11: Water Quality Sampling Results	63
Table 4-12: Details of Air Quality Sampling Locations	65
Table 4-13: Methodology and Duration of Sampling.....	66
Table 4-14: Results of Ambient Air Quality Sampling	70
Table 4-15: Noise Sampling Locations	71
Table 4-16: Noise Measurement Levels	74
Table 4-17: Hourly Measured Noise Levels	75
Table 4-18: Sensitivity Risk Scale	76
Table 4-19: Sensitive Receptors and Environmental Values	76
Table 4-20: Mammal Species in Project Area	79
Table 4-21: Winter Migratory Birds	82
Table 4-22: Summer Migratory Birds	82
Table 4-23: Access to Social Amenities in the Project Area	92
Table 5-1: Evaluation of Impact Significance Matrix (Likelihood Scale)	97
Table 5-2: Evaluation of Impact Significance Matrix (Consequence Scale)	97
Table 5-3: Evaluation of Impact Significance Matrix (<i>Risk Score Table</i>)	97
Table 5-4: Screening of Potential Impacts at Pre-construction (design) phase	98

Table 5-5: Magnetic Fields Observed for Overhead Transmission Lines.....	106
Table 5-6: Safety Distances for 220 kV Transmission Line	106
Table 5-7: Potential Impacts at Construction Phase	109
Table 5-8: Construction Equipment Noise Ranges, dB (A).....	113
Table 5-9: Construction Equipment Vibration Level	120
Table 5-10: Predicted Minimum Separation between Piling Operations and Sensitive Buildings.....	120
Table 5-11: Potential Impacts at Operation Phase.....	132
Table 6-1: Analysis of Alternative Alignments for Transmission Line	141
Table 7-1: List of Communities Consulted	145
Table 7-2: Participant of the Community Consultations	145
Table 7-3: List of Institutional Stakeholders	150
Table 7-4: Summary of the Concerns Raised by Community	153
Table 7-5: Summary of the Concerns Raised by Institutions	154
Table 7-5: Implementation Arrangements for Tranche 4	164
Table 8-1: Environmental Management Plan.....	166
Table 8-2: Training Schedule.....	198
Table 8-3: Environmental Monitoring Plan (EMoP).....	203
Table 8-4: Instrumental Environmental Monitoring Plan.....	205
Table 8-4: Implementation Arrangements for Tranche 4	207
Table 8-5: Roles and Responsibilities for Implementation of EMP	209
Table 8-6: Estimated Cost for Contractor’s EMP Implementation.....	213
Table 8-7: Estimated Cost for FMC’s EMP Implementation	213
Table 8-8: Estimated Cost for ESIC’s EMP Implementation.....	213

Executive Summary

1. The Government of Pakistan (GoP) signed a loan agreement with the Asian Development Bank (ADB) for financial support for the construction of the Power Enhancement Projects in Pakistan. The multi-tranche financing facility for the Second Power Transmission Enhancement Investment Program (Multi Tranche Financing Facility [MFF] II or the Program)¹ expands and reinforces Pakistan's power transmission system, enabling the system to provide a reliable and quality service capable of meeting increasing customer demand and supporting economic growth. MFF II comprises four tranches.
1. Environmental Assessment and Review Framework (EARF)² was prepared for MFF II in May 2016. This EARF is applicable for subprojects under MFF II and Tranche-I, funded by ADB. The EARF outlines the policy, procedures, and institutional requirements for preparing the subprojects. These subprojects need to be processed under ADB Safeguards Policy Statement (2009) (SPS).
2. Under Tranche 4 Readiness, National Transmission and Despatch Company Limited (NTDC) is planning to construct new 220 kV ETLs, construction of a grid station, augmentation of 10 existing grid stations and procurement of grid station equipment, through 6 Subprojects listed hereunder:
 - 1) Subproject 1 is the turnkey contract for design, supply, installation, testing and commissioning of approximately 70 km of 220kV double circuit transmission line for looping in/out of the proposed Hala Road -Jamshoro single circuit transmission line at 220kV Mirpur Khas New Grid Station
 - 2) Subproject 2 is the turnkey contract for design, manufacture, supply, installation, testing and commissioning of approximately 20 km of 220kV double circuit transmission line for looping in/out one circuit of the existing 220kV Jamshoro - T.M. Khan double circuit transmission line at Hala Road 220kV Grid Station
 - 3) Subproject 3 involves procurement of goods for the addition and augmentation of the six existing grid stations to remove NTDC system constraints (500kV Dadu grid station, 500kV Faisalabad West grid station, 500kV Lahore (Sheikhpura) grid station, 500kV New Multan grid station, 500kV Rahim Yar, 220kV Guddu grid station
 - 4) Subproject 4 involves procurement of goods for the construction of a new 220kV Jamrud grid station and approximately 20 km of the associated 220kV Jamrud-Sheikh Muhammadi transmission line in the south-western area of Pakistan.
 - 5) Subproject 5 involves procurement of goods for the construction of about 105 km of 220kV Daharki – Rahim Yar and about 150 km of 220kV Rahim Yar – Bahawalpur transmission lines and extension of 220kV Daharki and 220kV Bahawalpur grid stations for interlinking of 220kV Daharki – Rahim Yar Khan and Bahawalpur grid stations in the south-eastern area of Pakistan
 - 6) Subproject 6 involves procurement of goods for operation and maintenance of NTDC assets to reduce the grid stations breakouts (550kV, 245kV, and 145kV circuit breakers and replacement of one 500/220 kV, 450 MVA Auto Transformer Bank (ATB) at the existing 500 kV Rawat Grid Station.

¹ [48078-002: Second Power Transmission Enhancement Investment Program | Asian Development Bank \(adb.org\)](https://www.adb.org/projects/48078-002/second-power-transmission-enhancement-investment-program)

² [Second Power Transmission Enhancement Investment Program: Environmental Assessment and Review Framework | Asian Development Bank \(adb.org\)](https://www.adb.org/projects/second-power-transmission-enhancement-investment-program/environmental-assessment-and-review-framework)

3. This document is the Initial Environmental Examination (IEE) for the proposed Subproject 1 (referred to as “the Project” collectively in this study).

Legal and Policy Framework

4. Under the country system, the Sindh Environmental Protection Act (2014), the Review of Initial Environmental Examination and Environmental Impact Assessment Regulations (IEE-EIA Regulations 2014) provides the necessary details on the preparation, submission, and review of the IEE and the Environmental Impact Assessment (EIA). The categorization of projects for IEE and EIA is one of the main components of the IEE-EIA Regulations 2014. The ETL Projects with 11kV or higher are kept in Schedule II of the regulations and thus an EIA is required for such projects.
5. The Project³ requires filing an EIA with Sindh Environmental Protection Agency (SEPA) for No Objection Certificate (NOC). NTDC has already submitted an EIA to SEPA on 18 April 2022. However, approval process is still pending with the Agency. The applicable law binds the Agency (SEPA) to inform the proponent (NTDC in this case) on the approval in four months from the date of filing EIA, failing which the EIA shall be deemed to have been approved as per the Act,⁴ to the extent to which it does not contravene the provisions of the Act and the rules and regulations.
6. According to ADB’s Safeguard Policy Statement (2009) (SPS), Tranche 4 is classified as Category B for environment, therefore requires an IEE. IEEs are prepared, following the EARF (footnote 2) prepared for MFF II, respectively for Subprojects 1, 2, 4 and 5, while environmental audit report (of existing facility) was prepared for Subprojects 3 and 6. This IEE covers Subproject 2.

Project Description

7. The Subproject 1 passes through three districts namely Hyderabad, Tando Allah Yar, and Mirpur Khas.
8. The project area (in 3 km left and right from ETL) consists of agricultural fields (78% in the Aol. The remaining land consists of settlements (5.2%) followed by roads and hills/mountains and water bodies (8%).
9. The construction cost of ADB-401D Package and Mirpur Khas ETL (ADB-201A) has been estimated to be \$15.76 million.
10. The Project proponent (NTDC) plans to have the tranche-4 completed within 2 to 3 years, after completing the necessary arrangements, on the fast track.

Description of Environment

11. Summary of existing environmental condition of the Project area is presented below.

Physical Environment

12. The ETL passes through the districts of Hyderabad., Tendo Allahyar and Mirpur Khas is flat. Orchards of bananas, date palm, guava, and mangoes were observed within the project areas being highly fertile land with intensive cropping
13. The proposed ETL area is mostly covered with seasonal crops and also some scattered forest trees. Naturally grown shrubs are also present on the land. The major

³ Each subproject under Tranche 4 requires an independent EIA to be submitted to provincial EPAs. However, Subproject 1 and Subproject 2 are interconnected with no geographical difference therefore a single EIA has been submitted by NTDC to SEPA for approval which is still valid and acceptable.

⁴ <https://epa.sindh.gov.pk/files/EPA-Sindh/Rules/EIA%20IEE%20Regulations%202014.pdf>, paragraph 16.

trees in the area are Kikar, Eucalyptus, Neem, palm trees, guava trees, and Conocarpus are found in abundance in the surroundings of the project area.

14. The soils formed here are sandy, silt loam/fine sand and calcareous/fine textured respectively. The soils are calcareous alluvial loam fine to medium textured homogenized and well-drained.
15. According to this classification in Pakistan Building Code (PBC), the Project is located in Zone 2A and Zone 2B or between 0.08 and 2.4 m/s² indicating in zone having low to moderate earthquake risk as per characterization by PBC.
16. The climatic pattern in the area based on the 30-year climatic data of Hyderabad Weather Station is, hottest month is June in which the maximum average monthly temperature exceeds 40 °C. The winters are mild with the temperature dropping to 20 °C in January.
17. The major surface water feature in the area is the Indus River.
18. Groundwater in the Project area is generally fresh and potable near canals and distributaries but at some locations, it is reported as brackish. Settlements in the project area use the groundwater for drinking and irrigation purposes through tube wells and hand pumps.
19. Primary data collected for air quality shows that measured values were within the Sindh Environmental Quality Standards (SEQS) limits.
20. Primary data measured for sound levels values at two locations. The location that selected in rural area was within the SEQS and IFC guidelines for both, daytime, and nighttime. However, values were found in exceedance compared to the SEQS and IFC guidelines values at location measured near urban settlements.

Fauna and Flora

21. The ETL is passing mostly from agricultural fields (85%).
22. Mammals found in the project area are mainly jackal (*Canis aureus*) and rabbit (*Lepus nigricollis*). Porcupine (*Hystrix indica*) and wild boar (*Sus scrofa*) are common in the plains of Sindh. Domestic animals include cows, buffaloes, sheep, goats, cats, and camels. Another important domestic animal of the area is the donkey, which is used for cart pulling
23. Reptiles include snakes and small-sized lizards, which are a common sight in the area. Squirrel (*Funambulus layardi*) and Mouse (*Mus musculus*) are the basic rodents found in the project area,
24. The maximum bird diversity was observed in agricultural fields. The most abundant bird species seen in the area included the Rock Pigeon *Columba livia* and the Great Cormorant *Phalacrocorax carbo* followed by the Little Egret *Egretta garzetta* and House Crow *Corvus splendens*.
25. No wetlands which are notified by the GoP lie within the project area of the Project alignment in any Angle Marking of the project. Thus, there will be no impact on any wetland biodiversity.
26. The proposed project route will not pass through or cross any protected areas i.e., Game Reserves, National Parks, and Wildlife Sanctuaries, etc. The proposed Project, therefore, will not cause any impact on the flora and fauna of the Reserved Forest.

Socioeconomic Environment

27. According to the census of 2017, the total population of Hyderabad is 2,199,463. The current population of Hyderabad in 2022 is 2,463,398 Based on average 2.40% growth rate at 2017 population.

28. The cast groups are Mammon, Halipota, Somoro, Solingi, Thaker, Syed and Panher in the project area. Sindhi as a mother tongue is spoken in the project area. However, Urdu and Punjabi are also spoken
29. Natural gas (also known as Sui Gas, in local term) is available to 63.7% of the household in the project area, however, it has emerged as the need of the entire project area, and it is ranked as the top priority demand of women in the project area.
30. Potable drinking water supply is available to 50% of the houses and people are only relying on the groundwater, extracted either manually through hand pump or electrically through the electric pump. There are the cases that people bring the drinking water from the tube well, being installed for irrigation purposes.
31. Similarly, only 65.7% of the households have access to the sewerage and drainage system while 34.3% are still looking to have this facility. People complained that their life becomes miserable especially during the rain owing to have a muddy situation in the streets.
32. Pacca houses (37%) are constructed with bricks, cement, and concrete having wooden and steel doors and windows. Semi pacca houses (38%) are made of bricks (joint with mud) and their roofs are mostly of wood, iron sheet and partially bricks, whereas kacha houses (25%) are made of mud and other local material such as sticks, reeds, and iron sheet.

Environmental Management Plan

33. An environmental management plan (EMP), which establishes the linkages between the environmental and social impacts, mitigation strategy and the agencies responsible for execution. The EMP covers:
 - A comprehensive listing of mitigation measures (actions).
 - The institution(s)/ person(s) responsible for implementation of specific actions.
 - The parameters to be monitored to ensure the effective implementation of the actions.
 - A timescale for the implementation of actions has been indicated subject to the project life cycle.
 - A plan for impact mitigation and monitoring for the construction and operation activities
34. Proposed Project activities were reviewed and their potential impacts on the physical, biological, and socio-economic environment were assessed. Where appropriate, mitigation measures have been proposed to keep potential adverse environmental impacts within acceptable limits.
35. An EMP has been developed in this report to effectively implement the mitigation measures identified in the impact assessment. Contractor will develop Site-specific EMP (SSEMP) based on the EMP before construction activities start. No access to the site will be allowed until the SSEMP is approved by the Environment and Social Impact Cell (ESIC; Project Management Unit [PMU] of NTDC).

Information Disclosure

36. The executive summary of the IEE and the EMP will be translated to Sindhi and Urdu languages for disclosure along with complete existing document (in English).⁵ Within

⁵ Sindhi as a mother tongue is spoken in the Project area. However, Urdu and Punjabi are also spoken. (para. 273 on page 87)

2 weeks after ADB's clearance of the IEE, the summary (including the EMP) in Sindhi and Urdu languages will be disclose on NTDC's website. The summary will also be placed at main gate of TM Khan Grid Station for public access.

Conclusion and Recommendations

37. if the Project construction and operation activities, including the implementation of all proposed mitigation measures, are carried out as described in this document, the anticipated impact of the project on the area's natural and socioeconomic environment shall remain well within acceptable limits.

38. The major proposed mitigation measures are summarized as follows:

- Temporary labor camps will be developed inside the grid station boundary and will be facilitated with proper drainage facilities.
- Soil erosion and contamination, water contamination, air pollution, and high noise levels will be controlled with the use of good engineering practices.
- The contractor will develop subplans (listed in footnote 156 on page 199 of this IEE) as part of SSEMP before starting the construction activities. No access to the site will be allowed until the SSEMP is approved by the ESIC.
- Fair and negotiated compensation following the prevailing market prices will be made for the loss of crops and trees during the construction activities of the project.
- The erection of towers in the water bodies will be avoided as far as possible. However, at places where realignment of the ETL is unavoidable, towers with the maximum span will be used to minimize the number of towers in the water body.
- The contractor will take due care of the local community and its sensitivity towards local customs and traditions.

1. Introduction

1. The GoP signed a loan agreement with the Asian Development Bank (ADB) for financial support for the construction of the Power Enhancement Projects in Pakistan. The multi-tranche financing facility for the Second Power Transmission Enhancement Investment Program (MFF II or the Program) will expand and reinforce Pakistan's power transmission system, enabling the system to provide a reliable and quality service capable of meeting increasing customer demand and supporting economic growth. MFF II comprises four tranches and Projects located in different areas of the country.

2. Under Tranche 4 Readiness, NTDC is planning to construct new 220 kV ETLs, construction of a grid station, argumentation of 10 existing grid stations and procurement of grid station equipment. The name of these subprojects is listed hereunder:

- 1) Subproject 1 is the turnkey contract for design, supply, installation, testing and commissioning of approximately 70 km of 220kV double circuit transmission line for looping in/out of the proposed Hala Road-Jamshoro single circuit transmission line at 220kV Mirpur Khas New Grid Station.
- 2) Subproject 2 is the turnkey contract for design, manufacture, supply, installation, testing and commissioning of approximately 20 km of 220kV double circuit transmission line for looping in/out one circuit of the existing 220kV Jamshoro - T.M. Khan double circuit transmission line at Hala Road 220kV Grid Station.
- 3) Subproject 3 involves procurement of goods for the addition and augmentation of the six existing grid stations to remove NTDC system constraints (500kV Dadu grid station, 500kV Faisalabad West grid station, 500kV Lahore (Sheikhpura) grid station, 500kV New Multan grid station, 500kV Rahim Yar, 220kV Guddu grid station);
- 4) Subproject 4 involves procurement of goods for the construction of a new 220kV Jamrud grid station and approximately 20 km of the associated 220kV Jamrud-Sheikh Muhammadi transmission line in the south-western area of Pakistan.
- 5) Subproject 5 involves procurement of goods for the construction of about 105 km of 220kV Daharki – Rahim Yar and about 150 km of 220kV Rahim Yar – Bahawalpur transmission lines and extension of 220kV Daharki and 220kV Bahawalpur grid stations for interlinking of 220kV Daharki – Rahim Yar Khan and Bahawalpur grid stations in the south-eastern area of Pakistan.
- 6) Subproject 6 involves procurement of goods for operation and maintenance of NTDC assets to reduce the grid stations breakouts (550kV, 245kV, and 145kV circuit breakers and replacement of one 500/220 kV, 450 MVA Auto Transformer Bank (ATB) at the existing 500 kV Rawat Grid Station.

3. This document is the Initial Environmental Examination (IEE) for the proposed Sub-project 1 Above (referred to as “the Project” or “220KV Mirpur Khas ETL” in this study).

1.1 Brief Description of the project and Background

4. The 70 km long 220 kV electrical transmission line (ETL), Sub-project 1 ADB-210A (220kV double circuit ETL for looping in/out of the proposed Hala Road-Jamshoro single circuit ETL at 220kV Mirpur Khas New Grid Station, hereafter referred as the Project, the Study or 220 kV Mirpur Khas ETL in this IEE) will connect at 220 kV Hala Road Grid Station and under construction Mirpur Khas Grid Station in Mirpur Khas.

5. A change in the land use pattern was noticed on the ETL route initially selected in 2017 due to delays in implementation. Thus, NTDC has proposed a new ETL route with fewer settlements on the route to minimize environmental and socioeconomic impacts.

6. This IEE has been developed considering the new ETL route.

1.2 Environmental Category

7. According to ADB SPS, a Rapid Environmental Assessments (REA) checklist was prepared for the sub-project (**Annexure I**). Based on the initial findings of the checklist, Tranche 4 falls under Category 'B' under ADB SPS which requires IEE.

8. The project is assigned this category because of the limited number of specific environmental and social impacts, which can be avoided or mitigated by adhering to the generally recognized best practices.

9. However, in local regulations, the ETLs (11 kV and above) and distribution projects are included in Schedule II which requires an EIA⁶ under the Sindh Environmental Protection Act, 2014, the Review of Initial Environmental Examination and Environmental Impact Assessment Regulations (IEE-EIA Regulations 2014).

10. An EIA has already prepared by NTDC and submitted to the Sindh Environment Protection Agency (SEPA) for seeking environmental approval or no objection certificate (NOC).

1.3 Project Proponent and Study Consultants

11. The Proponent of the proposed Project is NTDC. NTDC was incorporated on 6 November 1998 and took over all the properties, rights and assets obligations and liabilities of the network of 220 kV and 500 kV Grid Stations and ETLs owned by Pakistan Water and Power Development Authority (WAPDA).⁷

1.4 Approach to the IEE

2. An EARF (footnote 2) was prepared for MFF II in May 2016. This EARF is applicable for subprojects under MFF II and Tranche-I, funded by ADB. The EARF outlines the policy, procedures, and institutional requirements for preparing the subprojects. These subprojects need to be processed under ADB SPS.

12. The IEE was performed in five main phases described below and was prepared following the EARF.

1.4.1 Phase 1 – Scoping

13. The activities included in this phase are:

- Project Data Compilation: A generic description of the proposed Project activities was compiled.
- Published Literature Review: Secondary data on physical, ecology and the socioeconomic environment was compiled.
- Legislative Review: Information on relevant legislation, regulations, guidelines, and standards were compiled including those of Asian Development Bank (ADB)'s policies and guidelines.
- Evaluation of Project Activities: Based on available information on Project activities including land requirement according to the Project options, construction, operations, and maintenance.

⁶ <https://epasindh.gov.pk/Rules/EIA%20IEE%20Regulations%202014.pdf>.

⁷ <http://www.ntdc.com.pk>.

- An impact assessment methodology was defined by identifying significance of impact through both the consequence and the likelihood of occurrence of the impact.
- Identification of Potential Impact: The information collected in the above steps was reviewed, and potential environmental and socio-economic issues were identified with impact significance in the Project Area of Influence (Aol).

1.4.2 Phase 2 – Baseline Studies

14. Following the scoping exercise, the Aol of the Project was surveyed to collect primary data during the field visit conducted between May 25, 2022, and June 30, 2022.

1.4.3 Phase 3 – Stakeholder Consultation

15. Local communities were identified in Aol as the major stakeholder, which can affect the Project or be affected by the Project. The socioeconomic team conducted community consultations to establish community perception of the proposed development. The institutions that may have an interest in the proposed Project were also consulted.

1.4.4 Phase 4 – Impact Assessment Methodology

16. The baseline studies conducted for the Project and the available Project description was used to assess the potential environmental impact of the proposed Project. The significance of impact was determined. Significance of the potential impacts can be determined by considering both the *consequence* and the *likelihood of occurrence* of the impact. The consequence of the proposed activity is evaluated by comparing it against recognized significance criteria, such as institutional recognition, technical recognition, scientific or technical knowledge, or judgment of recognized experts, public recognition, and professional and experience-based interpretation of the evaluator.

17. The issues studied included potential Project impacts on:

- Geomorphology and Soils
- Surface and groundwater
- Ambient air quality
- Noise and traffic
- Ecology of the area, including aquatic ecology and terrestrial flora and fauna
- Socioeconomic environment of the area
- Community health and safety including EMF impacts during operations

18. Mitigation measures were identified to address these impacts. The mitigation measures are designed to *reduce* the potential adverse impact to acceptable levels and wherever feasible to further reduce it as far as possible.

19. After implementation of mitigation measures identification of the residual impact significance is also determined.

1.4.5 Phase 5 – Documentation

20. Finally, this IEE report has been prepared according to the relevant environmental legislation. The report includes the findings of the assessment, identifies the Project impacts, and suggests mitigation measures to be implemented during the execution and operations.

1.5 Project Benefits

21. The benefits associated with the proposed sub-Project mainly include:

- Improvement in power supply position at/around 220 kV Mirpur Khas.
- Increase in system capacity to meet future load demands of the area.
- Improvement in voltage profile of the existing 132 kV grid station in the vicinity of Mirpur Khas.
- Reduction in transmission system losses.
- Reduction in the loading of 220/132 kV transformers at T.M Khan Road, Halla Road, and Jamshoro.
- Elimination of overloading of 132 kV T/Lines from Tando Jam to Tando Allah Yar and from Hala Road to Matiari
- Improvement in the reliability of NTDC and HESCO system networks.
- Overall power supply position In the Hyderabad area will be improved.
- The Project will help to provide an uninterrupted power supply to underdeveloped areas of Sindh province.
- Implementation of the Project will help to uplift the social life of the area, creation of new jobs and business opportunities
- Additional revenue to government exchequer from the levy of taxes on finished goods, electricity duty due to additional sale of power & associated government taxes.

22. The other benefits of the proposed Project are as follows:

- Increase in the available system capacity to meet future load growth at/around the proposed project.
- Improvement in the reliability of NTDC and HESCO system networks.
- Serve 220 kV source of power to feed the HESCO load center.
- Improvement in the power supply position of HESCO.

23. Envisaged social benefits of the Project are:

- Provision of a more reliable supply of electricity to the consumers.
- Fulfillment of power demand for rural electrification program etc.
- Improvement in living standards of the local communities.
- Creation of small business services.
- Creation of new job opportunities for local communities.
- Development of new accommodation facilities and the local people will be exposed to new income generation opportunities.
- Socio-economic uplifts of the community such as improved production, incomes, and market activities.
- Tube wells electrification which will provide additional water for irrigation, increase cropped areas and also production.
- The development of new industries in the area will create gainful employment for the increasing workforce.
- Additional revenues to Government exchequer from the levy of taxes on finished goods, electricity duty due to additional sale of power and associated taxes, etc.

- In the overall analysis, the improvement in ecological environments coupled with higher production is envisaged to bring out substantial economic gains for the people living in the Project area.

1.6 Organization of the Report

24. Section 1 (Introduction) provides an introduction of the Project and outlines the objectives of the IEE.
25. Section 2 (Policy, Legal, and Administrative Framework) presents the legislative requirements that need to be followed while conducting an IEE study.
26. Section 3 (Description) contains information about the key features of the proposed Project and describes the proposed Project activities.
27. Section 4 (Description of the Environment (Baseline Data)) documents in detail the existing physical, ecological and socioeconomic conditions around the Project site.
28. Section 5 (Anticipated Environmental Impacts and Mitigation Measures) presents an assessment of the Project's impact to the physical, biological, and socioeconomic environment, as well as proposed mitigation measures. The section also discusses the alternatives of the proposed Project that were considered.
29. Section 6 (Analysis of Alternatives) discusses the alternatives of the proposed Project that were considered.
30. Section 7 (Information Disclosure, Consultation, and Participation) presents the objectives and outcomes of the public consultation that were conducted during the IEE study. The section also covers the information disclosure steps and grievance redress mechanism (GRM) prepared for this project.
31. Section 9 (Environmental Management Plan) facilitates the implementation and monitoring of the mitigation measures identified in the IEE.
32. Section 10 (Conclusion and Recommendations) summarizes the findings and recommendations of this IEE study and concludes the report.



Figure 1-1: Location of Subproject 1

2. Policy, Legal, and Administrative Framework

33. This section outlines the Project category, environmental and social legislation, standards, and codes of practice governing the IEE and the Project.

2.1 Historical and Constitutional Context

34. The development of statutory and other instruments for environmental management has steadily gained priority in Pakistan since the late 1970s. The Pakistan Environmental Protection Ordinance, 1983 was the first piece of legislation designed specifically for the protection of the environment. The promulgation of this ordinance was followed, in 1984, by the establishment of the Pakistan Environmental Protection Agency (Pak-EPA), the primary government institution at that time dealing with environmental issues. Significant work on developing the environmental policy was carried out in the late 1980s, which culminated in the drafting of the Pakistan National Conservation Strategy. Provincial environmental protection agencies were also established at about the same time. The National Environmental Quality Standards (NEQS) were established in 1993. In 1997, the Pakistan Environmental Protection Act (PEPA) 1997 was enacted to replace the 1930 Ordinance. PEPA conferred broad-based enforcement powers to the environmental protection agencies. This was followed by the publication of the *Pakistan Environmental Protection Agency Review of Initial Environmental Examination and Environmental Impact Assessment Regulations 2000* which provided the necessary details on the preparation, submission, and review of initial environmental examinations (IEE) and environmental impact assessments (EIA).

35. Before the 18th Amendment to the Constitution of Pakistan in 2010, the legislative powers were distributed between the federal and provincial governments through two 'lists' attached to the Constitution as Schedules. The Federal list covered the subjects over which the federal government had exclusive legislative power, while the 'Concurrent List' contained subjects regarding which both the federal and provincial governments could enact laws. The subject of 'environmental pollution and ecology' was included in the Concurrent List and hence allowed both the national and provincial governments to enact laws on the subject. However, as a result of the 18th Amendment, this subject is now in the exclusive domain of the provincial government. The main consequences of this change were as follows:

- The Ministry of Environment at the federal level was abolished. Its functions related to the national environmental management were transferred to the provinces. To manage the international obligations in the context of the environment, a new ministry—the Ministry of Climate Change—was created at the federal level.
- The PEPA 1997 was technically no longer applicable to the provinces. The provinces were required to enact their own legislation for environmental protection. However, to ensure legal continuity PEPA 1997 continued to be the legal instrument for environmental protection in the provinces till the enactment of the provincial law.

36. All four provinces have enacted their environmental protection laws. These provincial laws are largely based on PEPA 1997 and, hence, provide the same level of environmental protection as the parent law.

2.2 Sindh Environmental Protection Act of 2014

37. The Sindh Environmental Protection Act 2014 (Sindh Act 2014) is the basic legislative tool empowering the government to frame regulations for the protection of the environment. As per the law, the Sindh Environmental Protection Agency (SEPA) is responsible to implement the provisions of this Act in Sindh. The Sindh Act 2014 applies to a broad range of issues and extends

to air, water, industrial liquid effluent, marine, and noise pollution, as well as to the handling of hazardous wastes. The articles of the Sindh Act 2014 that have a direct bearing on the proposed Project are listed below. The details are discussed in the following sections.

- Article 11 deals with the Sindh Environmental Quality Standards (SEQS) and its application
- Article 13 deals with hazardous substances
- Article 14 prohibits various acts detrimental to the environment
- Article 17 establishes the requirement for environmental impact assessment.

38. To implement the provisions of the Sindh Act 2014, *rules* and *regulations* are required.⁸ The key rules and regulations are:

- National Environmental Quality Standards (Self-Monitoring and Reporting by Industries) Rules, 2001
- Environmental Samples Rules, 2001
- Sindh Environmental Protection Agency Review of Initial Environmental Examination and Environmental Impact Assessment Regulations, 2014 (IEE-EIA Regulations 2014)

39. Guidelines are issued by the Pak-EPA for the preparation of the environmental assessment. The relevant guidelines are discussed in **Section 2.3**. All the rules, regulations, and guidelines issued under PEPA 1997 and discussed above remain valid after the promulgation of the Sindh Act of 2014.

2.3 Institutional Framework

40. Under the Sindh Act 2014, SEPA is an autonomous agency. For administrative purposes, it is part of the Forest, Environment and Wildlife Department of the Government of Sindh. SEPA is a regulatory agency with the following main functions:

- Enforcement of Sindh Act 2014
- Prepare environmental policies for approval of the Government of Sindh
- Implement environmental policies
- Publish annual state of the environment report for Sindh
- Prepare or revise SEQS
- Ensure implementation of SEQS
- Establish systems and procedures for environmental management
- Promote research and studies on environmental issues
- Issue license for the handling of hazardous substance
- Certify environmental laboratories
- Initiate legislation for environmental protection
- Assist government agencies in case of environmental accidents
- Providing advice to the government on issues related to the environment

⁸ Rules and regulations are similar instruments but differ in their hierarchy. The power to make rules and regulations is given in the enabling law, PEPA 1997 and Sindh Act 2014 in this case. The rules are made by the government (federal or provincial, as the case may be) and require publication in the official gazette. Regulations are made by the government agency, which is empowered by the law, environmental protection agencies in this case, and are not always published in the official gazette. Rules deal with relatively important matters such as delegation of powers and authorities, whereas regulations usually deal with procedural matters.

- Assist governments agencies in the implementation of waste management schemes
- Guide public on environmental matters
- Assist education institutions in prescribing environmental curricula
- Undertake measures to enhance awareness on the environment among the general public
- Disseminate knowledge on environment
- Specify safeguards for the prevention of accidents which may cause pollution
- Review and approve mitigation plans and give guidance for clean-up operations
- Encourage the formation and working of nongovernmental organizations, community organizations, and village organizations for environmental protection
- Carry out any other task related to the environment assigned by the government.

41. SEPA will be responsible for the review and approval of the EIA of the proposed Project.

2.4 Requirements for Environmental Impact Assessment

42. The articles of Sindh Act 2014 that have a direct bearing on the environmental assessment of the proposed Project are:

- Article 17(1): 'No proponent of a project shall commence construction or operation unless he has filed with the Agency⁹ an initial environmental examination or an environmental impact assessment and has obtained from the Agency approval in respect thereof.'
- Article 17(3): 'Every review of an environmental impact assessment shall be carried out with public participation...'

43. The IEE-EIA Regulations 2014 provides the necessary details on the preparation, submission, and review of the IEE and the EIA. The categorization of projects for IEE and EIA is one of the main components of the IEE-EIA Regulations 2014. Projects have been classified based on the expected degree of adverse environmental impact. Project types included in Schedule II of the regulations include those that are likely to have a potentially significant impact on the environment and thus an EIA is required for such projects, whereas those included in Schedule I are listed as having potentially less adverse effects and therefore require an IEE. The ETL projects with 11kV or higher are kept in Schedule II of the regulations and thus, an EIA is required for such projects.

44. Regulation 9 of the IEE-EIA Regulations 2014 requires that '(1) Ten paper copies and two electronic copies of an IEE or EIA shall be filed with the Federal Agency; (2) Every IEE and EIA shall be accompanied by (a) an application, in the form set out in Schedule V; (b) copy of the receipt showing payment of the review fee; (c) no-objection certificates from the relevant departments in case of EIA shall be the part of reports; and (d) the environmental checklist as per its guidelines.

45. Procedure for review of EIA by the EPA which is contained in Regulations 10–17. The key features are:

- On acceptance of the EIA for review, EPA will place a public notice in national English and Urdu newspapers and local language newspapers informing the public about the Project and where it's EIA can be accessed. It will also set a date for a public hearing which shall be at least 30 days after the publication of the notice.

⁹ The term 'Agency' refers to the Sindh Environmental Protection Agency.

- If it considers necessary, the EPA can form a Committee of Experts to assist the EPA in the review of the EIA. The EPA may also decide to inspect the Project site.

46. Article 17(4) of the SEPA Act 2014 binds the SEPA to 'communicate its approval or otherwise within four months from the date, the environmental impact assessment is filed complete in all respects following the regulations, failing which the environmental impact assessment shall be deemed to have been approved, to the extent to which it does not contravene the provisions of this Act and the rules and regulations'.

47. Regulation 7 of the IEE-EIA Regulations 2014 pertains to the guidelines. It states that: '(1) The Agency may issue guidelines for the preparation of an IEE or EIA or an environmental checklist, including guidelines of general applicability and sectoral guidelines indicating specific assessment requirements for planning, construction, and operation of projects relating to a particular sector. (2) where guidelines have been issued under sub-regulation (1), an IEE or EIA shall be prepared, to the extent practicable, in accordance therewith and the proponent shall justify in the IEE or EIA or environmental checklist any departure therefrom.'

48. The relevant guidelines are the follows:

- Policy and Procedures for the filling, review, and approval of environmental assessments set out the key policy and procedural requirements. It contains a brief policy statement on the purpose of environmental assessment and the goal of sustainable development and also states that environmental assessment is integrated with feasibility studies.
- Guidelines for the preparation and review of environmental reports which cover the following:
 - Scoping, alternatives, site selection, and format of environmental reports
 - Identification, analysis and prediction, baseline data, and significance of impacts
 - Mitigation and impact management and preparing an environmental management plan
 - Reporting
 - Review and decision making
 - Monitoring and inspection
 - Project management.
- Guidelines for Public Consultation which covers the following:
 - Consultation, involvement, and participation
 - Identifying stakeholders
 - Techniques for public consultation (principles, levels of involvement, tools, building trust)

49. Effective public consultation (planning, stages of EIA/ IEE where consultation is appropriate)

- Consensus building and dispute resolution
- Facilitating involvement (including the poor, women, building community, and NGO capacity)
- Guidelines for sensitive areas which identifies the sensitive areas

50. Article 11(1) of the Sindh Act 2014 states that: 'Subject to the provisions of this Act and the rules and regulations, no person shall discharge or emit or allow the discharge or emission of

any effluent, waste, pollutant, noise or any other matter that may cause or likely to cause pollution or adverse environmental effects, as defined in Section 2 of this Act, in an amount, concentration or level which is in excess to that specified in Sindh Environmental Quality Standards (SEQS).

51. The SEPA has promulgated several standards, the SEQS, which applied to the entire province of Sindh.

52. These include:

- Ambient air quality (9 parameters)
- Drinking water (32 parameters)
- Ambient noise
- Industrial effluents (32 parameters)
- Industrial gaseous emissions (18 parameters).

53. The Project¹⁰ requires filing an EIA with SEPA for NOC. NTDC has already submitted an EIA to SEPA on 18 April 2022. However, approval process is still pending with the Agency. The applicable law binds the Agency (SEPA) to inform the proponent (NTDC in this case) on the approval in four months from the date of filing EIA, failing which the EIA shall be deemed to have been approved as per the Act,¹¹ to the extent to which it does not contravene the provisions of the Act and the rules and regulations. The approval once granted is valid for 3 years from the date of issue. If the construction work does not start or complete within 3 years, an application required to be submitted to the Agency for extension to maximum another 3 years period.

2.5 Administrative Framework on Environmental Issues

54. The proposed project is legally required to comply with the SEQS. The environmental standards applicable in Sindh are NEQS as developed by Pakistan Environmental Protection Agency before the 18th Amendment. The only exception is the ambient air quality standards which Sindh Environmental Protection Agency has notified separately.

55. SEQS for air quality are presented in **Table 2-1**. **Table 2-2** provides a comparison of SEQS (local standards) with international standards and guideline values.

56. SEQS for effluent water are presented in

¹⁰ Each subproject under Tranche 4 requires an independent EIA to be submitted to provincial EPAs. However, Subproject 1 and Subproject 2 are interconnected with no geographical difference therefore a single EIA has been submitted by NTDC to SEPA for approval which is still valid and acceptable.

¹¹ <http://www.pas.gov.pk/index.php/acts/details/en/31/242>

57. Table 2-3 with IFC guideline values.
58. SEQS for drinking water with WHO standards are presented in

59. Table 2-4.
- 60.

61. Table 2-5 provides local noise standards and a comparison of these (local standards) with international standards is presented in **Table 2-6**.

Table 2-1: SEQS Limits for Ambient Air Quality

Pollutants	Time-weighted Average	Sindh Standards ($\mu\text{g}/\text{m}^3$)
Sulfur Dioxide (SO_2)	Annual*	80
	24 hours**	120
Oxide of Nitrogen as (NO)	Annual	40
	24 hours	40
Oxide of Nitrogen as (NO_2)	Annual	40
	24 hours	80
Ozone (O_3)	1 hour	130
Suspended Particulate Matter (SPM)	Annual	360
	24 hours	500
Respirable particulate Matter. PM_{10}	Annual	40***
	24 hours	150
Respirable Particulate Matter. $\text{PM}_{2.5}$	24 hours	75
	Annual Average	40
Lead (Pb)	Annual Average	1
	24 hours	1.5
Carbon Monoxide (CO)	8 hours	5,000
	1 hour	10,000

*Annual arithmetic means of minimum 104 measurements in a year taken twice a week, hourly and uniform interval.

**24 hourly/8 hourly values should be met 98% in a year, 2% of the time. It may exceed but not on two consecutive days.

***Annual Average limit of $40 \mu\text{g}/\text{m}^3$ or background annual average concentration plus the allowable allowance of $9 \mu\text{g}/\text{m}^3$, whichever is lower.

Table 2-2: Comparison of Local and International Standards

Pollutant	SEQS (Local Standards)		WHO Global Air Quality Guidelines	
	Avg. Time	Standards	Avg. Time	Standards
SO_2	Annual Mean 24 hours	$80 \mu\text{g}/\text{m}^3$ $120 \mu\text{g}/\text{m}^3$	24 hours 10 Minutes	$40 \mu\text{g}/\text{m}^3$ $500 \mu\text{g}/\text{m}^3$
CO	8hours 1 hour	$5 \text{ mg}/\text{m}^3$ $10 \text{ mg}/\text{m}^3$	24 hours 8 hours 15 minute	$4 \square\text{g}/\text{m}^3$ $10 \square\text{g}/\text{m}^3$ $100 \square\text{g}/\text{m}^3$
NO_2	Annual Mean 24 hours	$40 \mu\text{g}/\text{m}^3$ $80 \mu\text{g}/\text{m}^3$	1 Year 24 hour 1 hour	$10 \square\text{g}/\text{m}^3$ $25 \square\text{g}/\text{m}^3$ $200 \square\text{g}/\text{m}^3$
O_3	1 hour	$135 \square\text{g}/\text{m}^3$	8 hours Peak season	$100 \square\text{g}/\text{m}^3$ $60 \square\text{g}/\text{m}^3$
TSP	24 hours	$500 \mu\text{g}/\text{m}^3$		
PM_{10}	24 hours	$150 \mu\text{g}/\text{m}^3$	1 Year 24 Hours	$15 \mu\text{g}/\text{m}^3$ $45 \mu\text{g}/\text{m}^3$
$\text{PM}_{2.5}$	24 hours	$75 \mu\text{g}/\text{m}^3$	1 Year 24 Hours	$5 \mu\text{g}/\text{m}^3$ $15 \mu\text{g}/\text{m}^3$

Note: The standards highlighted in green for each pollutant are the most stringent based on a comparison between local and international regulations and thus shall be applicable for the proposed project.

Table 2-3: SEQS Limits and IFC Guideline Values for Effluents

(mg/l, unless otherwise defined)

Parameter	SEQS (Into Inland Waters)	SEQS (Sewage Treatment)	IFC ¹²
Temperature increase*	40°C or increase less than 3°C	40°C or increase less than 3°C	< 3°C
pH value	6 to 9	6 to 9	6 to 9
Five-day biochemical oxygen demand (BOD) at 20°C	80	250	50
Chemical oxygen demand (COD)	150	400	250
Total suspended solids (TSS)	200	400	50
Total dissolved solids (TDS)	3500	3500	
Grease and oil	10	10	10
Phenolic compounds (as phenol)	0.1	0.3	0.5
Chlorides (as Cl')	1000	1000	
Fluorides (as F')	10	10	
Cyanide total (as CN')	1.0	1.0	
Anionic detergents (as MBAS)	20	20	
Sulfates (SO ₄ ²⁻)	600	1000	
Sulfides (S ²⁻)	1.0	1.0	1.0
Ammonia (NH ₃)	40	4.0	10
Pesticides	0.15	0.15	
Cadmium	0.1	0.1	0.1
Chromium (trivalent and hexavalent)	1.0	1.0	0.1
Copper	1.0	1.0	0.5
Lead	0.5	0.5	0.1
Mercury	0.01	0.01	0.01
Selenium	0.5	0.5	0.1
Nickel	1.0	1.0	0.5
Silver	1.0	1.0	0.5
Total toxic metals	2.0	2.0	10
Zinc	5.0	5.0	2.0
Arsenic	1.0	1.0	0.1
Barium	1.5	1.5	
Iron	8.0	8.0	3.5
Manganese	1.5	1.5	
Boron]	6.0	6.0	
Chlorine	1.0	1.0	0.2

*The effluent should not result in a temperature increase of more than 3oC at the edge of the zone where initial mixing and dilution take place in the receiving body. In case the zone is not defined, use 100 meters from the point of discharge.

Notes: The standards highlighted in green for each pollutant are the most stringent based on a comparison between local and international regulations and thus shall be applicable for the proposed project.

¹² Limits for Process Wastewater, Domestic Sewage, and Contaminated Stormwater Discharged to Surface Waters, for General Application.

Notes: The standards highlighted in green for each pollutant are the most stringent based on a comparison between local and international regulations and thus shall be applicable for the proposed project.

Table 2-4: Local and International Drinking Water Quality Standards

<i>Parameter</i>	<i>Unit</i>	<i>SEQS</i>	<i>WHO Guidelines</i>
Physical			
Temperature	°C	NGVS	
Odor		Non-Objectionable	Non
Color	TCU	≤ 15	≤ 15
Taste		Non-Objectionable	Non
pH		6.5-8.5	6.5-8.5
Total Hardness (as CaCO ₃)	mg/l	< 500	< 500
Total dissolved solids	mg/l	< 1000	< 600
Turbidity	NTU	< 5	<4
Chemicals			
Aluminum (Al)	mg/l	≤ 0.2	≤ 0.2
Antimony (Sb)	mg/l	≤ 0.005	≤ 0.02
Arsenic (As)	mg/l	≤ 0.05	≤ 0.01
Barium (Ba)	mg/l	≤ 0.7	≤1.3
Boron (B)	mg/l	≤ 0.3	≤ 2.4
Cadmium (Cd)	mg/l	≤ 0.01	≤ 0.003
Chloride (Cl)	mg/l	< 250	-
Chromium (Cr)	mg/l	≤ 0.05	≤ 0.05
Copper (Cu)	mg/l	≤ 2.0	≤ 2.0
Cyanide (CN ⁻)	mg/l	≤ 0.05	-
Fluoride (F ⁻)	mg/l	≤ 1.5	≤ 1.5
Lead (Pb)	mg/l	≤ 0.05	≤ 0.009
Manganese (Mn)	mg/l	≤ 0.5	≤ 0.08
Mercury (Hg)	mg/l	≤ 0.001	≤ 0.006
Nickel (Ni)	mg/l	≤0.02	≤0.07
Nitrate (NO ₃ ⁻)	mg/l	≤ 0.50	≤ 50
Nitrite (NO ₂ ⁻)	mg/l	≤ 3.0	≤ 3.0
Selenium (Se)	mg/l	≤ 0.01	≤ 0.04
Residual Chlorine	mg/l	≤ 0.5	-
Zinc (Zn)	mg/l	≤ 5.0	≤ 0.05
Biological			
Total Coliforms	mL CFU	0/ 100	0
Fecal Coliforms	mL CFU	0/ 100	0
Biological			
Phenolic Compounds (as Phenols)	mg/l	<0.002	<0.02
Pesticides	mg/l	NGVS	
Polynuclear Aromatic Hydrocarbons (as PAH)	g/l	0.01 (By GC/MS method)	≤ 0.00007 mg/l

Note:

TCU True color unit NGVS No Guideline Value Set

CFU Colony Forming Unit NTU Nephelometric Turbidity Unit

Note: The standards highlighted in green for each pollutant are the most stringent based on a comparison between local and international regulations and thus shall be applicable for the proposed project.

Table 2-5: Sindh Environmental Quality Standards (SEQS) for Noise

No.	Category of Area/Zone	Effective from 1st July 2010		Effective from 1st January 2015	
		Limit in dB(A) Leq*			
		Day Time	Nighttime	Day Time	Nighttime
1.	Residential area (A)	65	50	55	45
2.	Commercial area (B)	70	60	65	55
3.	Industrial area (C)	80	75	75	65
4.	Silence zone (D)	55	45	50	45

Note:

1. Day time hours: 6 .00 am to 10.00 pm
2. Nighttime hours: 10.00 pm to 6.00 am
3. Silence zone: Zones which are declared as such by the competent authority. An area comprising not less than 100 meters around hospitals, educational institutions and courts, and courts.
4. Mixed categories of areas may be declared as one of the four above-mentioned categories by the competent authority.
5. *dB(A) Leq: a time-weighted average of the level of sound in decibels on scale A which is relatable to human hearing.

Table 2-6: Comparison of Local and International Standards

Category of Area/Zone	Limit in dB(A) Leq			
	SEQS		WHO/ IFC	
	Nighttime (22:00-06:00)	Daytime (06:00-22:00)	Nighttime (22:00-07:00)	Daytime (07:00-22:00)
Residential area (A)	45	55	45	55
Commercial area (B)	55	65	70	70
Industrial area (C)	65	75	70	70
Silence zone (D)	45	50	45	55

Note: The standards highlighted in green for each respective Area/Zone are the most stringent based on a comparison between local and international regulations and thus shall be applicable for the proposed project.

2.6 Other Applicable Laws

62. There are several other laws in the statute books of Pakistan which have a bearing on the environmental performance of the Project. These are listed in **Table 2-7**.

Table 2-7: Laws Relevant to the Project

Law	Description	Applicability to the - project
The Forest Act 1927	Authorizes the provincial forest department to establish forest reserves and protected forests. The ordinance prohibits any person from setting fires in the forest; quarrying stone; removing any forest produce; or causing any damage to the forest by cutting trees or clearing areas for cultivation or any other purpose without the express permission of the relevant provincial forest department.	The project area does not include any forest reserve or protected forests established by the provincial forest department. Therefore, this law is not relevant to the Project.
Sindh Wildlife Protection Ordinance, 1972 (Sindh Wildlife Protection (Amendment) Act, 2008.)	This law was enacted to protect the province's wildlife resources directly and other natural habitats indirectly. It classifies wildlife by degree of protection, i.e., animals that may be hunted on a permit or special license, and species that are protected and cannot be hunted under any circumstances. The Act specifies restrictions on hunting and trade in animals, trophies, or parts. The Act also defines various categories of wildlife-protected areas, i.e., National Parks, Wildlife Sanctuaries, and Game Reserves.	The project area does not include any protected wildlife species; therefore, this law is not relevant to the Project.
Land Acquisition Act, 1894	The Act empowers the government to acquire land for public interests (including for projects of national importance whether in the public or private sector). The law sets out procedures for land acquisition, valuation of land, payment of compensation to landowners, including any damage caused to their properties, crops, and trees by a Project.	The law will be applicable only if the state decides to acquire private land for the project and transfer to the Proponent. In case, the land is acquired directly through private negotiations, this law has no implications.
Fisheries West Pakistan. Ordinance XXX of 1961	This law prohibits the destruction of fish by explosives, poisoning water, and the hunting of protected fish species. The law also forbids the use of the net or fixed engine traps without a permit or license. The law grants power to the Director-General Fisheries to issue fishing permits. The ordinance protects fish against destruction by explosives and by poisoning of waters.	The law shall apply to Project where there is a construction activity near water bodies such as a river or canal
The Sindh Irrigation Act 1879	This Act empowers the Government of Sindh to use the natural sources of water such as lakes, rivers, and streams, for the supply of water for irrigation and other purposes. It allows the government to develop the required infrastructure, for example, canals, channels, pipelines, for the supply of water. It also allows the government to charge a fee for the supply of water and regulate the water supply.	The law shall apply to Project where there is a construction activity near water bodies such as a river or canal
Road Transport Workers Ordinance, 1961	This law sets conditions for the driver of a vehicle and imposes driving time limits.	The law shall apply to all Project vehicles and drivers, including those of contractors.

Law	Description	Applicability to the - project
Motor Vehicle Ordinance, 1965 (MVO 1965)	This law sets rules for driving license, registration, permits, speed limits, size of vehicle and axle weight.	The law shall apply to all project vehicles and drivers, including those of contractors.
National Highway Safety Ordinance, 2000 (NHSO 2000)	This law is similar to MVO 1965 and applicable to the national highway and motorway network.	The law shall apply to all Project vehicles and drivers, including those of contractors.
Factories Act 1934	Requirements for occupational health and safety at the workplace	Applicable to workers' accommodation and rights during construction and operations
The Building Code of Pakistan (2008)	Requirements for safety to be included in the design of buildings in Pakistan. The Building Code of Pakistan – Fire Safety Provisions (2016) provide the requirements for fire prevention, life safety about fire and fire protection of buildings and building-like structures.	Applicable on both construction and operations phases of the -project.
The Antiquities Act of 1975	The Act ensures the protection of Pakistan's cultural resources. The Act defines 'antiquities' as ancient products of human activity, historical sites, or sites of anthropological or cultural interest, national monuments, etc.	Not applicable as no archeological or cultural-historical site found on the RoW of the project.

2.7 Asian Development Bank Policies and Guidelines

63. ADB SPS builds upon the three previous safeguard policies on the environment, involuntary resettlement, and indigenous peoples, and brings them into one single policy that enhances consistency and coherence, and more comprehensively addresses environmental and social impacts and risks. ADB SPS aims to promote sustainability of Project outcomes by protecting the environment and people from Project's potential adverse impacts by avoiding adverse impacts of projects on the environment and affected people, where possible; minimizing, mitigating, and/or compensating for adverse project impacts on the environment and affected people when avoidance is not possible; and helping borrowers/clients to strengthen their safeguard systems and develop the capacity to manage environmental and social risks.

64. The following ADB policies and guidelines may apply to the proposed Project:

- ADB SPS – Safeguards Requirement (SR) 1 on Environment, SR2 on Involuntary Resettlement (IR), and SR 3 on Indigenous Peoples (IP)
- ADB Social Protection Strategy (2001)
- ADB Gender and Development Policy (1998)
- Access to Information Policy (2018);¹³ and

¹³ Asian Development Bank (ADB), September 2018, Access to Information Policy, Available at <https://www.adb.org/sites/default/files/institutional-document/450636/access-information-policy.pdf>. Accessed on 18 June 2019.

- Relevant ADB Operations Manual (OM) such as OMF1 for ADB SPS, OML3 for Access to Information Policy¹⁴, OMD10 for Non-sovereign Operations, OMC3 for Incorporation of Social Dimensions into ADB Operations, OMC2 for Gender and Development;¹⁵
- ADB's Accountability Mechanism Policy (2012)¹⁶

65. ADB's environmental policy is grounded in its Poverty Reduction Strategy and its Long-Terms Strategic Framework. To ensure the reduction of poverty through environmentally sustainable development, the ADB's Environment Policy contains five main elements: (i) promoting environment and natural resource management interventions to reduce poverty directly, (ii) assisting developing member countries to mainstream environmental considerations in economic growth, (iii) helping maintain global and regional life support systems that underpin future development prospects, (iv) building partnerships to maximize the impact of ADB lending and non-lending activities, and (v) integrating environmental considerations across all ADB operations.

66. Under the last element, the ADB pledges to address the environmental aspects of its operations through the systematic application of procedures for (i) environmental analysis for country strategy and programming; (ii) environmental assessment of project loans, program loans, sector loans, loans involving financial intermediaries, and private sector loans; (iii) monitoring and evaluation of compliance with environmental requirements of loans; and (iv) implementation of procedures for environmentally responsible procurement. In the context of policy-based lending and policy dialogue, the ADB will identify opportunities to introduce policy reforms that provide incentives to improve environmental quality and enhance the sustainability of natural resource management.

67. ADB classifies projects into category A (with potentially significant environmental impact); category B (with potentially less significant environmental impact); or, category C (unlikely to have a significant environmental impact).¹⁷ An IEE is required for category B projects and an EIA, requiring greater depth of analysis, for category A projects. No environmental assessment is required for category C projects although their environmental implications nevertheless need to be reviewed. The proposed Project has been classified as a category B project for the environment.

68. The ADB requires public consultation and access to information in the environmental assessment process. It specifies the need for meaningful consultation, which involves two-way communication between the borrower/client and the affected communities and stakeholders. It also involves the active participation of affected communities and stakeholders in various stages in the project design and implementation. The following principles apply to meaningful consultations:¹⁸

- begins early and is carried out on an ongoing basis throughout the project cycle,
- ensures timely disclosure of relevant information,

¹⁴ Asian Development Bank (ADB), January 2019, Access to Information Policy Operations Manual, Available at <https://www.adb.org/sites/default/files/institutional-document/31483/om-l3.pdf>.

¹⁵ Asian Development Bank (ADB), September 2016, Operations Manual, Institutional Document, ADB, Available at <https://www.adb.org/documents/operations-manual>.

¹⁶ Asian Development Bank (ADB), 2012, Accountability Mechanism Policy, ADB Available at <https://www.adb.org/sites/default/files/institutional-document/33440/files/accountability-mechanism-policy-2012.pdf>.

¹⁷ A fourth category, FI (credit line for subprojects through a financial intermediary, or equity investment in a financial intermediary), requires that an appropriate environmental management system should be developed, and assessment carried out.

¹⁸ Asian Development Bank (ADB), Environmental Safeguards: A Good Practice Sourcebook Draft Working Document, December 2012.

- is free of intimidation or coercion,
- is gender-inclusive and responsive, and tailored to the needs of disadvantaged and vulnerable groups, and
- incorporates relevant views of affected people and other stakeholders into project design and decision-making.

2.7.1 ADB's Safeguard Policy Statement 2009

69. ADB SPS framework consists of three operational policies on the environment, indigenous peoples, and involuntary resettlement. A brief detail of all three operational policies has been mentioned below:

- *Environmental Safeguard*: This safeguard is meant to ensure the environmental soundness and sustainability of projects and to support the integration of environmental considerations into the project decision-making process. The requirements apply to all ADB-financed and/or ADB-administered sovereign and non-sovereign projects, and their components regardless of the source of financing, including investment projects funded by a loan; and/or a grant; and/or other means, such as equity and/or guarantees (hereafter broadly referred to as projects). This policy and its requirements about environmental assessment, baseline, and impact assessment will apply to this project and the EIA will be undertaken to ensure that the project is designed to comply with the policy.
- *Involuntary Resettlement Safeguard*: This safeguard has been placed to avoid involuntary resettlement whenever possible; to minimize involuntary resettlement by exploring project and design alternatives; to enhance, or at least restore, the livelihoods of all displaced persons in real terms relative to pre-project levels; and to improve the standards of living of the displaced poor and other vulnerable groups. This policy and its requirements will apply to this project and the EIA and LARP will be undertaken to ensure that the project is designed to comply with the policy.
- *Indigenous Peoples Safeguard*: This safeguard looks at designing and implementing projects in a way that fosters full respect for Indigenous Peoples' identity, dignity, human rights, livelihood systems, and cultural uniqueness as defined by the Indigenous Peoples themselves so that they receive culturally appropriate social and economic benefits; do not suffer adverse impacts as a result of projects; and participate actively in projects that affect them. Based on the available information no indigenous people live in the project area. However, this will be further confirmed during the study.
- *Information, Consultation, and Disclosure*: Consultation and participation are essential in achieving the safeguard policy objectives. This implies that there is a need for prior and informed consultation with affected persons and communities in the context of safeguard planning and for continued consultation during project implementation to identify and help address safeguard issues that may arise. The consultation process begins early in the project preparation stage and is carried out on an ongoing basis throughout the project cycle. It provides timely disclosure of relevant and adequate information that is understandable and readily accessible to affected people and is undertaken in an atmosphere free of intimidation or coercion. Also, it is gender-inclusive and responsive and tailored to the needs of disadvantaged and vulnerable groups and enables the incorporation of all relevant views of affected people and other stakeholders into decision making. ADB requires the borrowers/clients to engage with communities, groups or people affected by proposed projects and with civil society through information disclosure, consultation, and informed participation in a manner commensurate with the risks to and impacts on affected communities. For projects with significant adverse environmental, involuntary resettlement or Indigenous Peoples

impacts, ADB project teams will participate in consultation activities to understand the concerns of affected people and ensure that such concerns are addressed in project design and safeguard plans.

70. Following requirements of ADB SPS, NTDC will apply pollution prevention and control technologies and practices consistent with international good practice as reflected in internationally recognized standards such as EHS Guidelines (footnotes 22, 23 and 24). When Government regulations differ from these levels and measures, NTDC will achieve whichever is more stringent. If less stringent levels or measures are appropriate in view of specific project circumstances, NTDC will provide full and detailed justification for any proposed alternatives that are consistent with the requirements presented in ADB SPS.

2.7.2 Social Protection Requirements

71. ADB SPS requires the Borrower to comply with applicable labor laws concerning the project, and take the following measures to comply with the core labor standards¹⁹ for the ADB financed portion of the project:

- carry out its activities consistent with the intent of ensuring legally permissible equal opportunity, fair treatment and non-discrimination about recruitment and hiring, compensation, working conditions and terms of employment for its workers (including prohibiting any form of discrimination against women during the hiring and providing equal work for equal pay for men and women engaged by the Borrower);
- not restrict its workers from developing a legally permissible means of expressing their grievances and protecting their rights regarding working conditions and terms of employment
- engage contractors and other providers of goods and services:
- who do not employ child labor²⁰ or forced labor²¹;
- who have appropriate management systems that will allow them to operate in a manner which is consistent with the intent of (A) ensuring legally permissible equal opportunity and fair treatment and non-discrimination for their workers, and (B) not restricting their workers from developing a legally permissible means of expressing their grievances and protecting their rights regarding working conditions and terms of employment; and
- whose subcontracts contain provisions which are consistent with paragraphs (i) and (ii) above.

2.7.3 Access to Information Policy (2018)

72. The objective of The Access to Information Policy (2018) is to promote stakeholder trust in ADB and to increase the development impact of ADB activities. The policy reflects ADB's commitment to transparency, accountability, and participation by stakeholders in ADB-supported development activities in Asia and the Pacific. It also recognizes the right of people to seek, receive, and impart information about ADB's operations.

¹⁹The core labor standards are the elimination of all forms of forced or compulsory labor; the abolition of child labor; elimination of discrimination in respect of employment and occupation; and freedom of association and the effective recognition of the right to collective bargaining, as per the relevant conventions of the International Labor Organization.

²⁰Child labor means the employment of children whose age is below the statutory minimum age of employment in the relevant country, or employment of children in contravention of International Labor Organization Convention No. 138 "Minimum Age Convention" (www.ilo.org).

²¹Forced labor means all work or services not voluntarily performed, that is, extracted from individuals under threat of force or penalty.

73. The policy applies to documents and information that ADB produces, requires to be produced by its borrowers or clients, or is produced and provided to ADB by other parties in the course of ADB operations.

2.7.4 Gender and Development Policy 1998

74. ADB's Gender and Development Policy (1998) adopts gender mainstreaming as a key strategy for promoting gender equity, and for ensuring that women participate in and that their needs are explicitly addressed in the decision-making process for development activities. The key elements of ADB's gender policy are: (i) Gender sensitivity, to observe how the project affects women and men differently and to take account of their different needs and perspectives in resettlement planning; (ii) Gender analysis, which refers to the systematic assessment of the project impact on men and women and on the economic and social relationships between them; (iii) Gender planning, which refers to the formulation of specific strategies to bring about equal opportunities to men and women; and (iv) Mainstreaming, to consider gender issues in all aspects of ADB operations, accompanied by efforts to encourage women's participation in the decision-making process in development activities.

75. ADB SPS and safeguards requirements also reiterate the importance of including gender issues in the preparation of safeguards documents at all stages to ensure that gender concerns are incorporated, including gender-specific consultation and information disclosure. This includes special attention to guarantee women's assets, property, and land-use rights and restoration/improvement of their living standards; and to ensure that women will receive project benefits.

2.7.5 Climate Change Risk Management Framework

76. The climate risk management approach of the ADB aims to reduce risks resulting from climate change to investment projects in Asia and the Pacific. ADB's framework identifies climate change risks to project performance in the early stages of project development and incorporates adaptation measures in the design of projects at risk. ADB climate risk management framework comprises the following steps:

- context-sensitive climate risk screening at the concept development stage to identify projects that may be at medium or high risk
- climate change risk and vulnerability assessment during the preparation of projects at risk
- a technical and economic evaluation of adaptation options
- identification of adaptation options in project design; and
- monitoring and reporting of the level of risk and climate-proofing measures.

2.8 IFC Performance Standards

77. The IFC Performance Standards were published in April 2006 and revised in 2012. Information on the IFC standard and applicability for the project is provided in **Table 2-8**.

78. PS 1 establishes the importance of integrated assessment to identify the social and environmental impacts, risks and opportunities of projects, effective community engagement through disclosure of Project-related information and consultation with local communities on matters that directly affect them, and management of social and environmental performance throughout the life of the project.

79. PS 2 through 8 establishes requirements to avoid, reduce, mitigate, or compensate for impacts on people and the environment, and to improve conditions where appropriate.

Table 2-8: IFC Performance Standards

IFC PS	Applicability
Performance Standard 1: Assessment and Management of Environmental and Social Risks and Impacts	Applicable to the IEE process.
Performance Standard 2: Labor and Working Conditions	Applicable to employment and labor policies of the Project.
Performance Standard 3: Pollution Prevention and Abatement	Applicable to the Project's pollution prevention and abatement options.
Performance Standard 4: Community Health, Safety, and Security	Applicable to the potential community health and safety risk and the security system of the Project.
Performance Standard 5: Land Acquisition and Involuntary Resettlement	Applicable to the land acquired for the Project.
Performance Standard 6: Biodiversity Conservation and Sustainable Management of Living Natural Resources	Not likely to be applicable. However, part of biodiversity conservation will be covered in ecological assessment in IEE process under PS1.
Performance Standard 7: Indigenous Peoples	Not applicable.
Performance Standard 8: Cultural Heritage	Not applicable.

2.9 The World Bank Group Environmental, Health and Safety Guidelines (EHS Guidelines)

80. EHS Guidelines²² were initially published in 2007 and 2008.

81. The EHS Guidelines are technical reference documents with general and industry-specific examples of Good International Industry Practice, as defined in IFC's Performance Standard 3 on Pollution Prevention and Abatement.

82. The General EHS Guidelines²³ and EHS Guidelines for Electric Power Transmission and Distribution²⁴ will be applied to the Project.

2.10 International Treaties and Agreements

83. **Table 2-9** lists important international environmental treaties that have been signed by Pakistan and may have relevance to the Project. They concern climate change and depletion of the ozone layer; biological diversity and trade in wild flora and fauna; desertification; waste and pollution; and cultural heritage.

²² [Environmental, Health, and Safety Guidelines \(ifc.org\)](https://www.ifc.org/wps/wcm/connect/29f5137d-6e17-4660-b1f9-02bf561935e5/Final%2B-%2BGeneral%2BEHS%2BGuidelines.pdf?MOD=AJPERES&CVID=nPtguVM)

²³ <https://www.ifc.org/wps/wcm/connect/29f5137d-6e17-4660-b1f9-02bf561935e5/Final%2B-%2BGeneral%2BEHS%2BGuidelines.pdf?MOD=AJPERES&CVID=nPtguVM>

²⁴ <https://www.ifc.org/wps/wcm/connect/7b65ce6b-129d-4634-99dc-12f85c0674b3/Final%2B-%2BElectric%2BTransmission%2Band%2BDistribution.pdf?MOD=AJPERES&CVID=nPtfp32&id=1323162154847>

Table 2-9: International Environmental Treaties Endorsed by Pakistan

Topic	Convention	Date of Treaty	Entry into Force in Pakistan
Climate change and the ozone layer	United Nations Framework Convention on Climate Change - the primary objective is the stabilization of greenhouse gas concentrations in the atmosphere at a level that would prevent dangerous anthropogenic interference with the climate system.	1992	1994
	Kyoto Protocol to the United Nations Framework Convention on Climate Change - enabled by the above Convention on Climate Change. It has more powerful and legally binding measures. It sets binding targets for 37 industrialized countries and the European community for reducing greenhouse gas emissions.	1997	2005
	Vienna Convention for the Protection of the Ozone Layer - acts as a framework for the international efforts to protect the ozone layer with a primary objective to protect human health and the environment against adverse effects resulting from human activities that modify or are likely to modify the ozone layer.	1985	1993
	The Montreal Protocol on Substances that Deplete Ozone Layer and associated amendments - enabled by the Vienna Convention, it is designed to protect the ozone layer by phasing out the production and consumption of several substances believed to be responsible for ozone depletion.	1987	1993
Waste and pollution	Basel Convention on the Control of Trans Boundary Movements of Hazardous Wastes and their Disposal - regulates the transboundary movement of hazardous waste and other waste with a stated purpose to protect human health and the environment against the adverse effects from generation and management of hazardous waste and other waste. The Convention provides for three sets of measures with binding obligations. These are Strict control of the transboundary movement of hazardous waste; Environmentally sound management of hazardous waste; and Enforcement and implementation of the provisions of the convention at international and national levels.	1989	1994
	International Convention on Oil Pollution Preparedness, Response and Co-operation	1990	1995
	Stockholm Convention on Persistent Organic Pollutants - seeks to protect human health and the environment from Persistent Organic Pollutants, which are chemicals that remain intact in the environment for long periods, become widely distributed geographically and accumulate in the fatty tissue of humans and wildlife.	2001	2008

Topic	Convention	Date of Treaty	Entry into Force in Pakistan
	International Convention for the Prevention of Pollution from Ships (MARPOL) – is the main international convention that covers the prevention of pollution of the marine environment by ships from operational or accidental causes. The Convention includes regulations aimed at preventing and minimizing pollution from ships, both accidental pollution and that from routine operations, and currently includes six technical Annexes.	1983	
Desertification	International Convention to Combat Desertification –to combat desertification and mitigate the effects of drought. It is supported by international cooperation and partnership arrangements, to achieve sustainable use of land and water resources and sustainable development in affected areas.	1994	1997
Biodiversity and the protection of plants and animals	Convention on Biological Diversity – covering ecosystems, species, and genetic resources and also the field of biotechnology. The objectives are: <ul style="list-style-type: none"> • conserve of biological diversity; • sustainable use of its components; and • fair and equitable sharing of benefits arising from genetic resources. 	1992	1994
	Cartagena Protocol on Biosafety to the Convention on Biological Diversity - addresses potential risks posed by living modified organisms resulting from modern biotechnology.	2000	2009
	Bonn Convention on the Conservation of Migratory Species of Wild Animals - aims to conserve terrestrial, marine, and avian migratory species throughout their range. It is concerned with the conservation of wildlife and habitats on a global scale.	1979	1987
	Memorandum of Understanding concerning Conservation Measures for the Siberian Crane - parties undertake to provide strict protection to Siberian Cranes and identify and conserve wetland habitats essential for their survival.	1998	1999
	Convention on International Trade in Endangered Species of Wild Fauna and Flora - to ensure that international trade in specimens of wild animals and plants does not threaten their survival.	1973	1976
	International Plant Protection Convention (1997 Revised Text) - to prevent the international spread of pests and plant diseases. It requires maintenance of lists of plant pests, tracking of pest outbreaks, and coordination of technical assistance between member nations.	1951/52	1954

Topic	Convention	Date of Treaty	Entry into Force in Pakistan
	Agreement for the Establishment of the Near East Plant Protection Organization - to establish the Near East Plant Protection Organization (NEPPO), which promotes international co-operation to implement the International Plant Protection Convention.	1993	2009
	Plant Protection Agreement for the Asia and Pacific Region and amendments – establishes the Asia and Pacific Plant Protection Commission to review and promote the region's progress in the implementation of the Agreement. Trade-in plants and plant products are regulated by certification, prohibition, inspection, disinfection, quarantine, destruction, etc., as necessary.	1955 (amendment 1967)	1958 (amendment 1969)
	Convention on Wetlands of International Importance especially as Waterfowl Habitat and associated protocols and amendments - to promote conservation and sustainable use of wetlands. The Ramsar List of Wetlands of International Importance now includes almost 1,800 sites (known as Ramsar Sites). There are currently 19 Ramsar sites in Pakistan.	1971 (amended 1987)	1976 (amended 1994)
Cultural heritage	Convention concerning the Protection of the World Cultural and Natural Heritage - requires parties to adopt a general policy on the protection of the natural and cultural heritage, to set up services for such protection, to develop scientific and technical studies, to take appropriate legal, technical, scientific, and administrative measures and to foster training and education for such protection.	1972	1976

2.11 Electric and Magnetic Field Exposure Guidelines

84. Electric and magnetic fields (EMF) are invisible lines of force emitted by and surrounding any electrical device such as power lines.

85. **Table 2-10** lists exposure limits for general public exposure to electric and magnetic fields published by the International Commission on Non-Ionizing Radiation Protection (ICNIRP)²⁵ while **Table 2-11** provides the exposure limits for occupational exposure.

Table 2-10: ICNIRP Exposure Limits for General Public Exposure to EMF

Frequency	Electric Field (V/m)	Magnetic Field (uT)
50 Hz	5,000	100
60 Hz	4,150	83

Table 2-11: ICNIRP Limits for Occupational Exposure to EMF

Frequency	Electric Field (V/m)	Magnetic Field (uT)
50 Hz	10,000	500
60 Hz	8,300	415

3. Description of the Project

86. This section describes the main elements of the Project, including associated construction and operation activities. In the description, particular emphasis has been placed on those aspects that can potentially affect the environment.

3.1 Project Detail

87. The Project is one of the components of the Tranche 4 of multi-tranche financing facility (MFF) for the Power Transmission Enhancement Projects in Pakistan. The Project (Subproject 1) is the turnkey contract for design, supply, installation, testing and commissioning of approximately 70 km of 220kV double circuit ETL for looping in/out of the proposed Hala Road-Jamshoro single circuit ETL at 220kV Mirpur Khas New Grid Station.

3.2 Location and the Layout

88. The subproject 1 Mirpur Khas ETL (ADB-201A Package) passes through three districts namely Hyderabad, Tando Allah Yar, and Mirpur Khas.

89. The location map is provided in **Figure 1-1**.

3.3 Land Use on the Project Site

90. The ETL is passing mostly from agricultural fields (85% of AOI) within which 18% is covered with orchards. 8% of land consists of settlements. The rest of the land is comprised of open areas, roads, and water bodies.

²⁵ ICNIRP (1998): "Guidelines for limiting exposure to time-varying electric, magnetic, and electromagnetic fields (up to 300 GHz)"

3.4 Road Access

91. The available existing roads will be used during the construction of the Project. Temporary access roads will be built where no track or road access is available to a tower location after consultation with the local community and compensation for damages to the crops will be done as per requirement.

3.5 Vegetation Features of the Project Site

92. The proposed ETL area is mostly covered with mango orchards and seasonal crops and also some scattered forest trees. Naturally grown shrubs are also present on the land. The major trees in the area are mango and guava trees, kikar, eucalyptus, neem, palm trees, and conocarpus are found in abundance in the surroundings of the Project area.

3.6 Cost and Magnitude of the Operations

93. The construction cost of Mirpur Khas ETL (ADB-201A Package) has been estimated to be 15.76 million United States Dollar (USD).

94. The total length of ETL part of the Project is 70 km. Tower erection will be carried out on the concreted pile pad locations with the help of derrick poles or cranes. The required working area for this activity is about 50 - 100 m² for each tower. The tower is erected in panels. The panels are assembled on the ground, lifted in parts with the help of derrick poles/crane and then joined together with nuts and bolts, which are tightened at the specified torque.

3.7 Schedule of Implementation

95. The Project proponent (NTDC) plans to have the tranche-4 completed within 2 to 3 years, after completing the necessary arrangements, on the fast track. There will not be any significant land acquisition or compensation process except for the crop compensation of the ETL towers. Designs, power transmission arrangements, access, review of environmental management and construction processes will need to be completed in about three months. When the detailed designs are completed, tendering and award of contract will take place over about three to six months. The construction period will follow, and best estimates indicate between eighteen to twenty-four months.

3.8 Project Design

96. Project design or construction flow is discussed below.

3.8.1 Project Alignment

97. As the components of the Project are on a 'turn-key' basis i.e., construction by a contractor or developer and handover to NTDC in a ready-to-use condition which includes design, supply, and installation. In this context, the proposed design provided by NTDC will be finalized by the contractor at the stage of implementation. The Survey & Investigation (S&I) wing of NTDC has marked the route alignment of the ETL on the grand trunk sheet (G.T. Sheet). Thus, it is pointed out that although the proposed alignment/ route alignment of ETL including design and right-of-way was provided by the concerned section of NTDC (i.e., Survey & Investigation), this will be finalized by the contractor/ developer. Once the detailed design work has been completed, NTDC will review these designs before contracts are finalized and modifications will be incorporated, if considered necessary.

3.8.2 Width of Right of Way

98. In consultation with the Survey & Investigation section and the Environment and Social Impact Cell (ESIC), of Project Management Unit (PMU) of NTDC, the width of RoW for ETL considered was 30 m, i.e., 15 m on either side from the center of ETL and it was 225 m² (i.e., 15m x15m) in case of tower spotting.

3.8.3 Design Standards for Transmission Line

99. NTDC has developed design parameters for the planning and design of transmission systems in Pakistan (see **Table 3-1**). The design parameters are based on standard NTDC's existing specifications and practices for the existing as well as proposed grid stations and ETLs.

Table 3-1: Permissible Conductor Clearance at 65°C

for 220 kV ETL)		
No	Description	Clearance (m)
1	Across country (including across/along street)	8.23
2	Roads and highways	9.45
3	Rivers and major canals (from high flood line)	9.14
4a	Railway track – inside the station	11.89
4b	Railway track – outside the station	9.14
5a	Building part – vertical	7.62
5	Building part – horizontal	9.14
6	Earth part of lines	4.57
7	Telegraph lines	4.57
8	400 volts (and below), 11 kV, and 33 kV lines	3.96
9	66 kV and 132 kV lines	4.88

3.8.4 Climatic Consideration

100. Local climatic conditions, i.e., the temperature, wind velocity, thunderstorm levels, relative humidity, etc., control the selection of materials to be used.

101. The following climate parameters were considered in the design criteria.

Maximum Temperature	41.5°C
Minimum Temperature	2.1°C
Annual Mean temperature	29.6°C (maximum) to 14.6°C (minimum)
Maximum Rainfall	420 mm/month
Annual Relative Humidity	60.1%

3.8.5 Civil Works and Other Facilities

102. Civil work for the installation of grid station equipment and erection of towers will be required for construction of 220 kV double circuit ETL and Grid Station at Mirpur Khas, for which necessary provision has been made in the cost estimate.

3.8.6 Equipment & Machinery

103. **Table 3-2** identifies some key equipment required for the Project Construction.

Table 3-2: List of Equipment Required for ADB-200 (Lot-I)

In/Out of D/C T/L Hala Road - Jamshoro at Mirpur Khas

No.	Item	Unit	Qty.
1.	TOWERS	To be estimated during detailed design	
	Light angle (DA1)	No.	42
	Heavy angle (DD1)	No.	32
	Suspension (DS1)	No.	138
	Total		212
2.	Conductor (Rail)	Km	882
3.	OPGW	Km	74
4.	INSULATORS		
	Suspension 100 kN	No.	13,687
	Tension 100 kN	No.	44,069
	Total		57,755
5.	HARDWARE	Lot	1

Tower Structures for Transmission Line

104. All the towers shall be self-supporting type, lattice steel structures, fabricated from galvanized structural steel shapes. The steel employed will be following the latest edition of the standards implemented by NTDC at various ETL projects. All towers will be equipped with danger plates, number plates, and anti-climbing devices.

105. The normal foundations (inverted T shaped) as shown in **Figure 3-1** would be laid/ applied for the erection of new towers which would be placed on a plain field. The tower height will be 5 to 10 meters higher, and the foundation span will be changed 1 to 5 meters wider.

106. The choice of foundation is usually influenced by the type of terrain encountered and the underlying geotechnical conditions. The actual size and type of foundation to be installed will depend on the soil bearing capacity (actual sub-soil conditions).

107. All towers will be equipped with danger plates, number plates, and anti-climbing devices. The other tower designs to be used are provided in **Figure 3-2** and **Figure 3-3**.

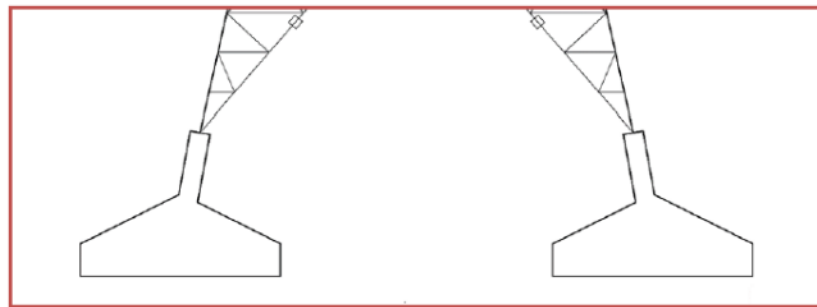


Figure 3-1: Inverted 'T' Type Tower Foundation

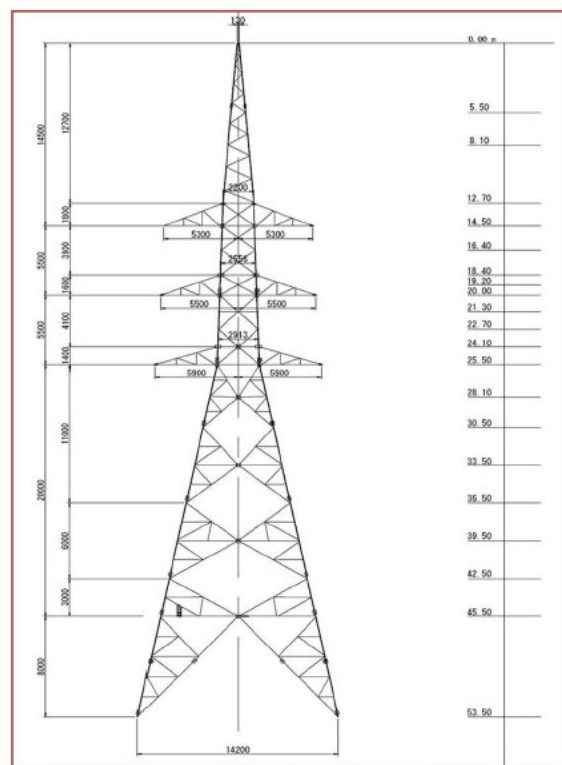


Figure 3-2: Proposed Elevation of Strain Tower

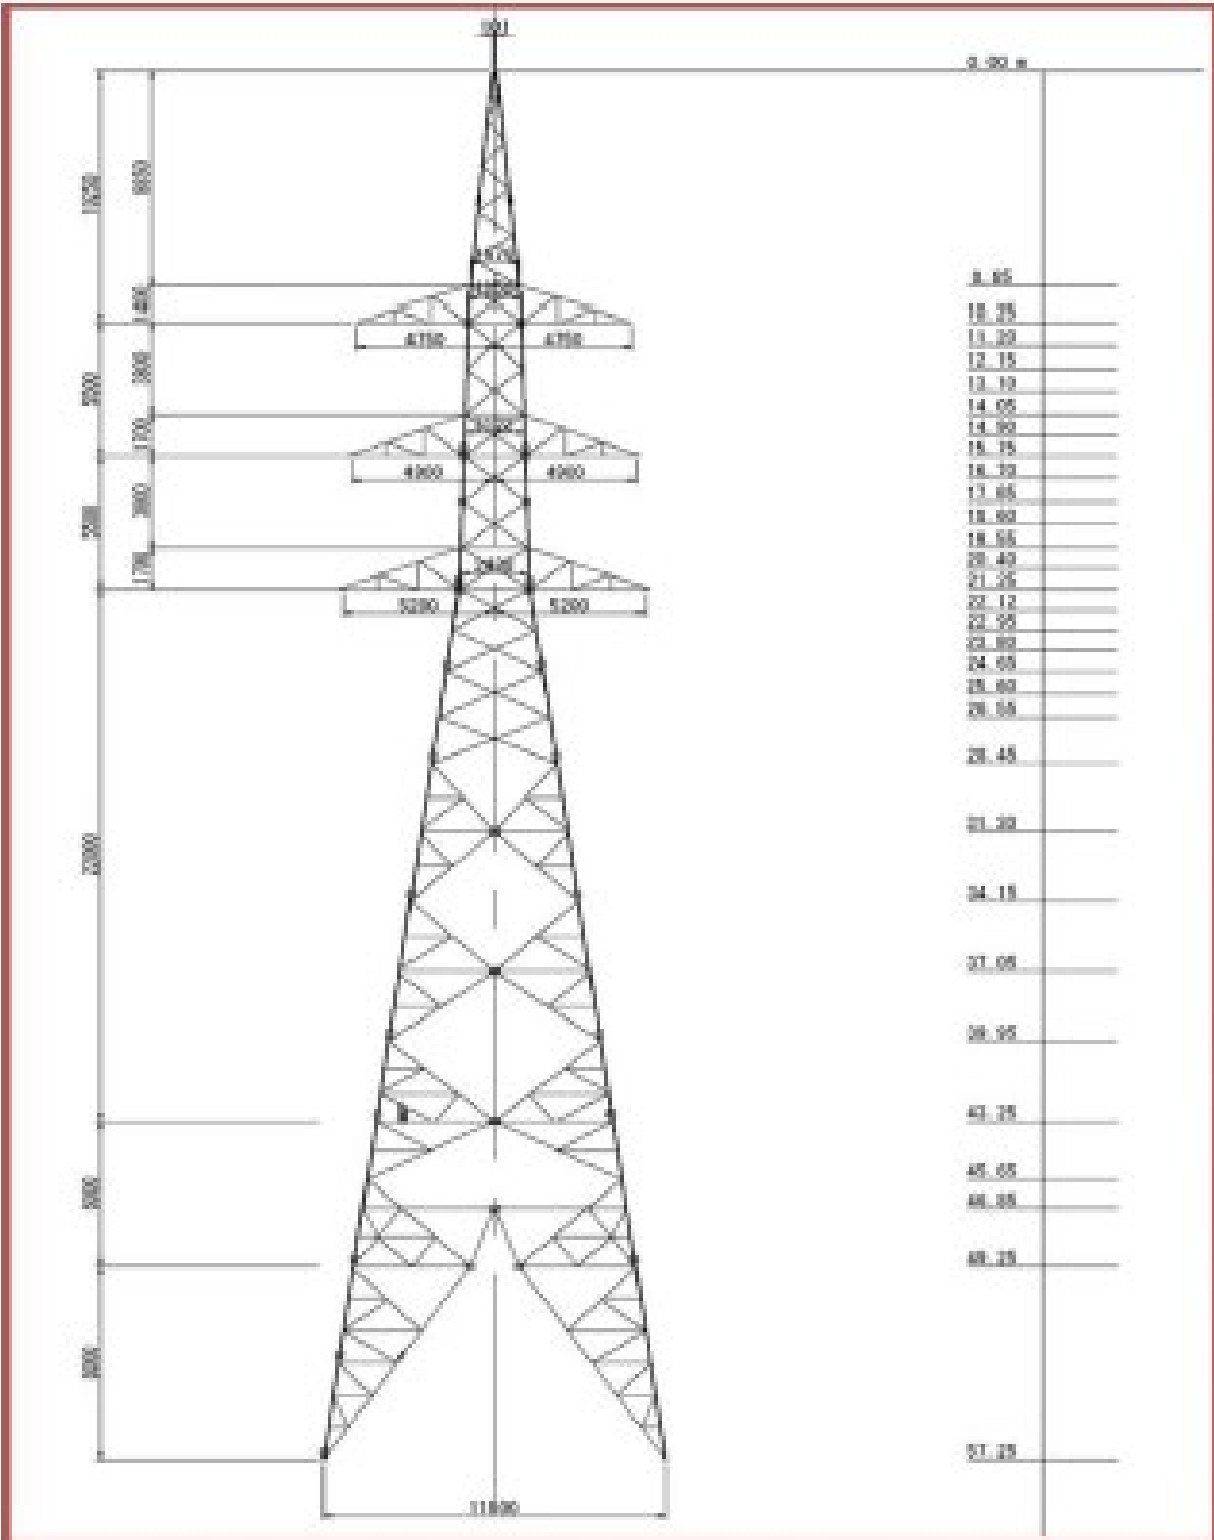


Figure 3-3: Proposed Elevation of Suspension Tower

Safety Parameters

108. For extra-high voltage (EHV) lines, safety considerations are of two types. One is related to the safety of the system, while others are those that are related to the public. It is for this reason

that NTDC has adopted a 30 m wide (15 m either side from the centerline) corridor as the RoW for 220 kV ETL in this Project. The aspects are to be considered in this regard are as under:

3.9 System Safety

109. Conductor to Tower Clearance: For the safety of the system, any factor that may interrupt the power supply must be considered in the design. The clearance of the conductor from tower legs and trusses is of prime importance. Therefore, in the design, a minimum clearance of 1.55 m has been adopted under extreme wind conditions. This is based on regulations of GoP/WAPDA and minimum requirements of the National Electric Safety Code (ANSI C2). With this clearance, there is a 99% probability of withstanding switching surge of 3-sigma margin due to maximum overvoltage under adverse climatic conditions.

110. Earthing of the System: Every tower is connected to an earthing system. This is to keep tower footings resistance at a level lower than 10 ohms. For this, two earth electrodes of copper-clad steel rods are sunk vertically into the ground to a minimum depth of 3 m and at the locations where the required resistance is not achieved, crow footing will be done.

111. Lightning Performance: The tower geometry, clearance, and insulation of the system are designed to perform safely within the permitted lighting intensities. In this respect, consideration has been given to the tower footing resistance and the Isokeraunic level of the area. The accepted level is one trip out/ 100 km/ year due to lightning.

112. Security Arrangements: Given the prevailing law and order and security position in the area around the proposed project area, the necessary armed security staff is necessary. Reinforced security will be required at work base, labor camp, material depot, equipment yard and the locations where work is in progress.

113. Work Uniform and Health and Safety Equipment: Grid Station and allied ETL construction is a special job and the labor working on such activities requires special protective uniform and personal protection equipment to cope up with safety and health requirements. It will be ensured that the labor engaged in handling rough construction materials, mixing of concrete and handling ETLs, etc. shall have all necessary Personal Protective Equipment (PPE), including but not limited to, long boots, overall dresses, goggles, gloves, and safety hats. They will invariably have their company identity cards worn around their necks with the help of a ribbon. As an overall safety, health and environment measure, anyone going into the construction area will also wear a safety helmet and safety shoes. Special arrangements must be made for fire protection by way of providing appropriate types of fire extinguishers with firefighting training to concerned personnel.

3.10 Public Safety

114. General Aspects: Because of public safety, NTDC has adopted a policy that the existing orchards having fruit trees with a height of not exceeding 2.5 m can remain under the lines. Similarly, open wells, including Persian wheels, can remain under the ETLs. However, tube wells and peter pumps are not permitted under the high voltage conductors. This is to prevent piping and cranes used to refurbish such wells encountering the lines.

115. No residential or other public buildings like factories, schools, hospitals, etc. are permitted within the corridor. However, farm buildings, which are not used for residential purposes can remain under the high voltage lines, provided a 7.0 m minimum clearance is maintained. The height of the towers can be increased to accommodate such buildings.

3.10.1 Conductor to Ground Clearance

116. : The conductor to ground clearance has been planned to be worked out based on over-voltage due to switching surge. In this consideration, safe clearance is required to be provided for moving objects under the line with a height of 4.5 m, withstanding switching surge of 3-sigma margin with 99.7% probability under adverse atmospheric conditions. This should keep the maximum voltage gradient at ground level and maximum current induced in a person less than the internationally allowable values. As such, the total conductor to ground clearance shall in no way be less than 7.0 meters. This is following the regulations of GoP and NTDC practice.

3.10.2 Tower Erection and Scale of the Project

117. Tower erection is carried out on the concreted pile pad locations with the help of derrick poles or cranes. The required working area for this activity is about 50-100 m² for each tower. The tower is erected in panels. The panels are assembled on the ground, lifted in parts with the help of derrick poles/crane and then joined together with nuts and bolts, which are tightened at the specified torque.

118. In aligning the high-voltage ETL the design aims to avoid cultivated fields and pass through the area as thinly populated as possible. As such, accessibility will not be a problem. There are rough tracks and trail ways, and the contractor may have to develop a few tracks for transporting the materials. This should result in very little if any, damage to the vegetation or disruption of the farmland in the vicinity of the route of the ETL. The ETL route is easily accessible mostly through metaled roads or by rough tracks or village roads. Almost all the village tracks are linked to the metaled roads and are thus accessible to vehicles. The contractor is unlikely to need to transport the materials manually. In any event, care will be taken to ensure that the disruption to the vegetation is kept to a minimum.

119. The whole project tract is flat, and no considerable elevation difference exists except for small depressions present at some locations.

3.10.3 Associated Facilities

Access Tracks

120. The ETL route passes through agricultural fields and settlements. Already available access routes will be used. New tracks will be made only when access route is not available. Complete compensation will be given to the landowners as per market rates for damages and the land will be rehabilitated after completion of the construction activities.

Construction Camps

121. The ETL total length is 70 km, and one or 2 construction camps will be constructed. However, the exact location of these camps will be decided by contractors as per their work plan. The construction camps will include residential quarters, washing areas, kitchen, toilets, fuel storage, water storage, sewage disposal arrangements, firefighting arrangements, electric generators, and others. Preference will be given to establishing these camps within the NTDC-owned premises or settled areas. Otherwise, the land for these camps will be obtained on a rental or lease basis. Proper waste (solid and liquid) handling facilities will be developed, and the waste will be disposed of as per recommendations in this IEE.

122. On average domestic water uses in Pakistan per capita consumption varies significantly from 30 liter per capita per day to 350 liters per capita per day.²⁶ On average 50 gallons per capita per day if taken for estimate purposes, and if there will be 50 persons on-board in two camps then

²⁶ https://ssms.jp/img/files/2019/04/sms10_183.pdf

about 2,500 gallons per day water will be required for the camps. 3-5 times more water will be required at construction sites. An estimate of daily wastewater flows of approximately 30 gallons per person per day and so based on 50 persons on-board, 1,500 gallons per day wastewater will be generated from the two camps.

123. On average 0.613 kg²⁷ of solid waste generation is estimated per person per day and if there will be 50 persons on board in two camps then about 23 kg per day solid waste will be generated from the camps. A similar number of wastes is expected at construction sites.

124. The contractor, before mobilization for construction, a site camping layout plan will share as part of Site-Specific EMP. The layout plan will clearly show all camp facilities including runoff and sewerage drainage streams and end disposal points.

125. A machinery yard will also be needed for each construction team; it can be combined with the construction camp or established separately. The machinery yard will be parking bays, maintenance, and washing bays, fueling arrangements, oil and fuel storage, firefighting arrangements, and tools and parts storage.

Batching Plants

126. The contractors may need to establish concrete mixing and batching plants for tower foundation construction. These plants will be established at appropriate places based upon the distance from and accessibility to the tower locations. The batching plants will be complete with dust control arrangements and away from water bodies and settlements.

3.11 Material and Human Resource Usage

127. The Project will be required 100 - 150 skilled and unskilled workers. Unskilled workers will be engaged from the locals. Skilled workers if not available locally then will be hired from other regions of the province.

128. The tower and circuit materials will be provided by NTDC. Material for concrete and reinforcement will be acquired from Hyderabad.

3.12 Restoration and Rehabilitation Plans

129. All damaged areas including access tracks will be rehabilitated upon completion of the construction work to near pre-construction conditions and natural areas impacted during construction will be rehabilitated with locally indigenous grasses typical of the representative botanical unit.

3.13 Other Government Department Approvals

130. No designated forest or protected area falls on the RoW. The approvals required from other departments will be sorted before the start of construction. Examples of such departments include the National Highway Authority (NHA) and provincial highways department where ETL crosses a national highway or provincial highway. The ETL Route is located 2 km east of the Hyderabad Airport, it would be good practice to consult relevant department (Civil Aviation Authority) if formal approval is required on the proposed design.

²⁷ https://epd.punjab.gov.pk/solid_waste

4. Description of the Environment (Baseline Data)

131. This section describes the existing physical, ecological, and socioeconomic conditions in the Project area. The information presented in this section was collected from the field surveys and the available literature.

4.1 Project Area of Influence

132. For the impact assessment, the definition of the Aol given in International Finance Corporation Performance Standard 1 (IFC PS1) is used.

133. “The area likely to be affected by: (i) the Project and the client’s activities and facilities that are directly owned, operated or managed (including by contractors) and that are a component of the Project; (ii) impacts from unplanned but predictable developments caused by the Project that may occur later or at a different location; or (iii) indirect project impacts on biodiversity or on ecosystem services upon which Affected Communities’ livelihoods are dependent”

134. For the Project, the direct Aol is the spatial extent of the Project footprint and related facilities as well as on the associated effects on the receiving environment (**Figure 4-1**). This encompasses the ETL RoW to 1.5 km on each side of the ETL Project.

4.2 Physical Environment

135. The physical baseline includes a description of the topography, land use, geology and soils, seismicity, climate, water resources, water quality, ambient air quality and sound levels in the Aol of the Project.

136. The field survey plan that was adopted for field data collection is provided in **Annexure II**.

4.2.1 Topography, Geology, and Soil

137. The topography²⁸ in the Project area, passing through the districts of Hyderabad, Tendo Allahyar and Mirpur Khas are flat. Orchards of bananas, date palm, guava, and mangoes were observed with the Project areas being highly fertile land with intensive cropping. The topography of the Project area is shown in **Figure 4-2**.

138. Pakistan geologically overlaps both with the Indian and the Eurasian tectonic plates. Sindh province lies on the north-western corner of the Indian plate. Aol lies on the southeastern fringe of the Kirthar range, a hill range that runs in the north to the south direction for about 400 km along the Sindh-Balochistan provincial boundary.²⁹ Primary lithology in the Aol is of sedimentary origin, consisting of limestone with occasional shale and sandstone of Laki Formation. Laki Formation is very rich in fossils of Eocene age (56-34 million years ago). The Aol mostly consists of flood plain deposits. Two major active fault lines located near the Aol are Surjam Fault, about 30 km to the west and the Jhimpir Fault, about 25 km to the southwest. Maximum recorded earthquakes on the Surjam and Jhimpir Faults were 6.1 and 5.6 on the Richter scale, respectively.³⁰

139. The soils formed here are sandy, silt loam/fine sand and calcareous/fine textured, respectively. The soils are calcareous alluvial loam fine to medium textured homogenized and well-drained. These are highly fertile and productive. Moisture content in the soils is extremely

²⁸ An IEE prepared for Tranche 2: 220 kV Mirpur Khas Substation in June 2017: [Power Transmission Enhancement Investment Program II - Tranche 2: 220 kV Mirpur Khas Substation Initial Environmental Examination | Asian Development Bank \(adb.org\)](#)

²⁹ Geology and tectonics of Pakistan, Kazmi. A. H and Jan. M. Q, 1997.

³⁰ Sindh Provincial Monsoon/Floods contingency Plan 2011 (Draft Version), provincial disaster management authority, Government of Sindh.

high. The soil falls in the erinaceous zone. Suitability criteria of the soils for the construction of the grid station and ETL are provided below.³¹ The low-lying loams are heavier and may have a hardpan. Some of these soils contain a high percentage of soluble salts in the lower horizons, turning water in the wells to brackish (IEE in July 2017. See footnote 95 on page 89).

140. The area comprises of stream and meander bed deposits consisting of unconsolidated silty sand/sandy silt intervened by leveled flood plains formed by the river Indus. The depth of such deposits may vary up to several hundreds of meters and belongs to Pleistocene to Recent age.³²

141. The alluvial deposits along the proposed ETL are mainly from the Indus River. These alluvial landforms are distributed in an orderly pattern concerning the amount of the deposits in the river. The Indus has flown through a broad track of active flood plain. Flanking this landform and lying parallel to it are broad almost unbroken belts of meander flood plains. These have a general level somewhat higher than that of the river.³³

142. The soil map of Sindh³⁴ categorizes the area of the Jamshoro and its surrounding as 'rough mountainous land' whereas the area close to Indus River is categorized as loamy and seasonal flooded soil of river plains. The dominant soil group in both areas is Calicisols³⁵, which are loamy soils with the accumulation of secondary calcium carbonates. The geology of the Project area is shown in **Figure 4-3**.

4.2.2 Land Use

143. The ETL is passing mostly from agricultural fields (78% in the Aol. The remaining land consists of settlements (5.2%) followed by roads, barren land, and water bodies (8%).

144. Land use in the Aol is summarized in **Table 4-1** and shown in **Figure 4-4**.

Table 4-1: Land Use in the Aol

<i>Land Use</i>	<i>Agricultural Fields</i>	<i>Orchard Areas</i>	<i>Settlements</i>	<i>Water Bodies</i>	<i>Barren/ Hilly Area</i>	<i>Roads and Open Area</i>	<i>Total Area</i>
Area(sq.km)	162.1	17.5	10.8	3.2	13.3	0.7	207
Area (Acre)	40,056	4324	2668	791	3286	173	51,298
In Percentage (%)	78.4	8.5	5.2	1.6	6.4	0.3	100

³¹Sindh Provincial Monsoon/Floods contingency Plan 2011 (Draft Version), provincial disaster management authority, Government of Sindh.

³²Ibid.

³³Ibid.

³⁴Soil Map of Sind 1:1,000,000. Soil Survey of Pakistan, Lahore. 1978.

³⁵Calicisols is a soil with substantial accumulation of lime.



Figure 4-1: Project Area of Influence

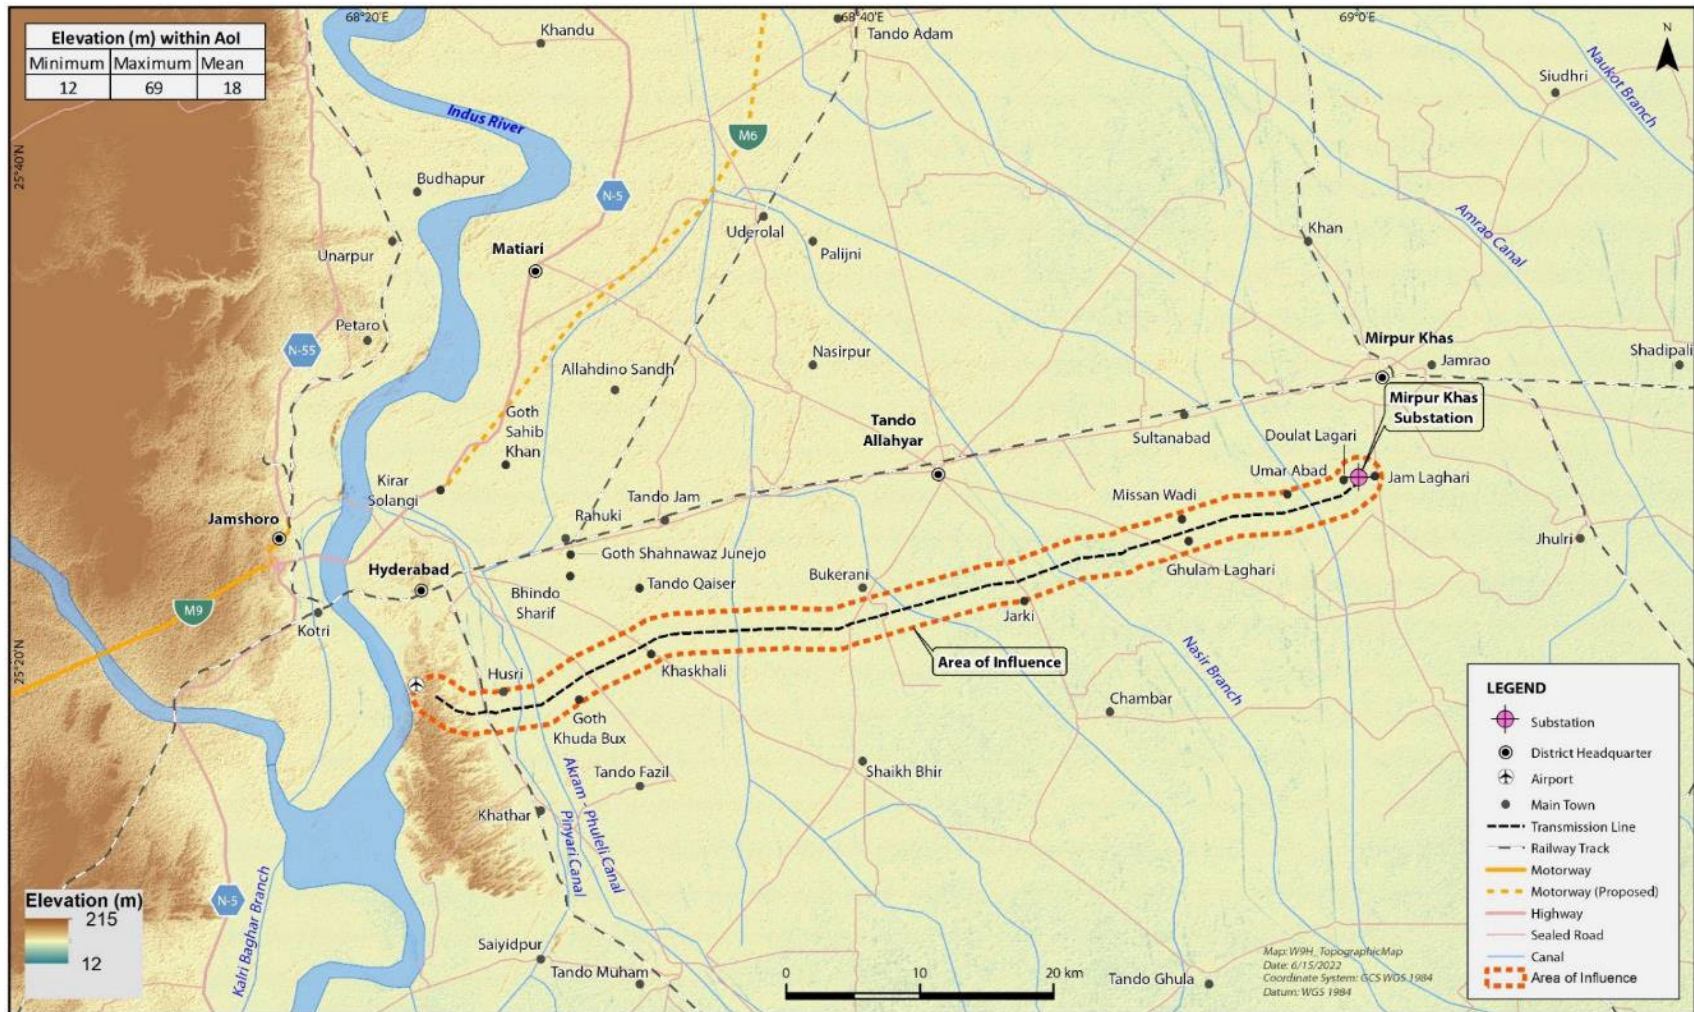


Figure 4-2: Topography

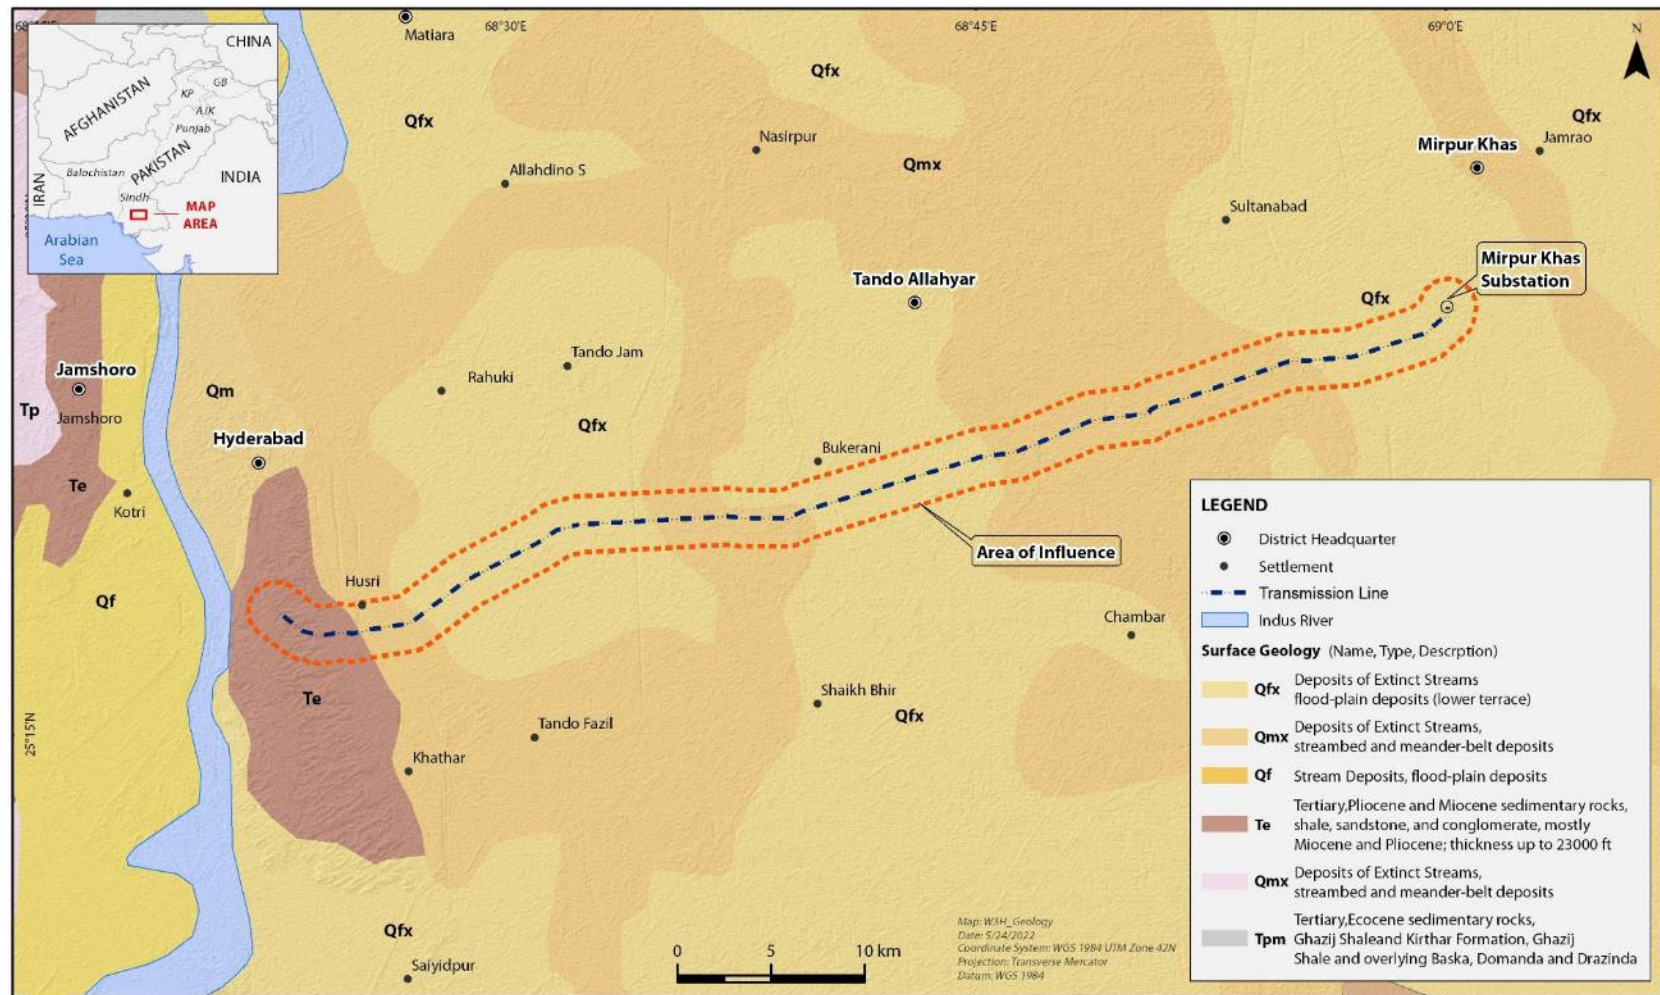


Figure 4-3: Geology of the Subproject Area



Figure 4-4: Land Use in Aol

4.2.3 Seismicity

145. In 2007, Pakistan Building Code (PBC) revised the seismic zone categorization to 5 seismic zones based on peak ground acceleration³⁶ as provided in **Table 4-2** and **Table 4-3** provides hazard significance.

146. According to this classification, the Project is located in Zone 2A and Zone 2B or between 0.08 and 2.4 m/s². The Project area falling in Mirpur Khas and Tando Allah Yar Districts is in Zone 2A. The Project area which falls in Hyderabad District falls in Zone 2A and some of the portions also fall in Zone 2B.

Table 4-2: Seismic Zone Categorization, PBC 2007

Seismic Zone	Peak Horizontal Ground Acceleration
1	0.05 to 0.08g
2A	0.08 to 0.16g
2B	0.16 to 0.24g
3	0.24 to 0.32g
4	> 0.32g

Note: g is the acceleration due to gravity, where $g = 9.81 \text{ m/s}^2$.

147. The Global Seismic Hazard Assessment Program (GSHAP)³⁷ launched in 1992, conducted a seismicity analysis in 1999. The Seismic Hazard Map of Pakistan is shown in **Figure 4-5**. Based on the GSHAP,³⁸ the peak ground acceleration (PGA), with 10% probability of exceedance in 50 years with a return period of 475 years, is between 1.6 and 2.4 m/s²

Table 4-3: Seismic Zone Categorization, PBC 1986


Seismic Zone	Peak Horizontal Ground Acceleration
0	Negligible damage
1	Minor damage, distant earthquakes may cause damage to structures with fundamental periods greater than 1.0 seconds, corresponds to intensity V and VI of the M.M. scale
2	Moderate damage, corresponds to intensity VII of the M.M. scale
3	Major damage, corresponds to intensity VII and higher of the M.M. scale

148. According to these classifications, the Project is located in Zone 2A and 2B in PBC 2007 classification which is for minor to moderate risk zone.

³⁶Peak ground acceleration is equal to the maximum ground acceleration that occurred during earthquake shaking at a location. PGA is equal to the amplitude of the largest absolute acceleration recorded on an accelerogram at a site during an earthquake. Its units are $g = 9.8 \text{ m/s}^2$

³⁷www.ndma.gov.pk/sep/researchpapers/r2.pdf (accessed Jan. 3, 2017).

³⁸Giardini, D., Grünthal, G., Shedlock, K. M. and Zhang, P. The GSHAP Global Seismic Hazard Map. *Annali di Geofisica* 42 (6), 1225-1228, 1999.

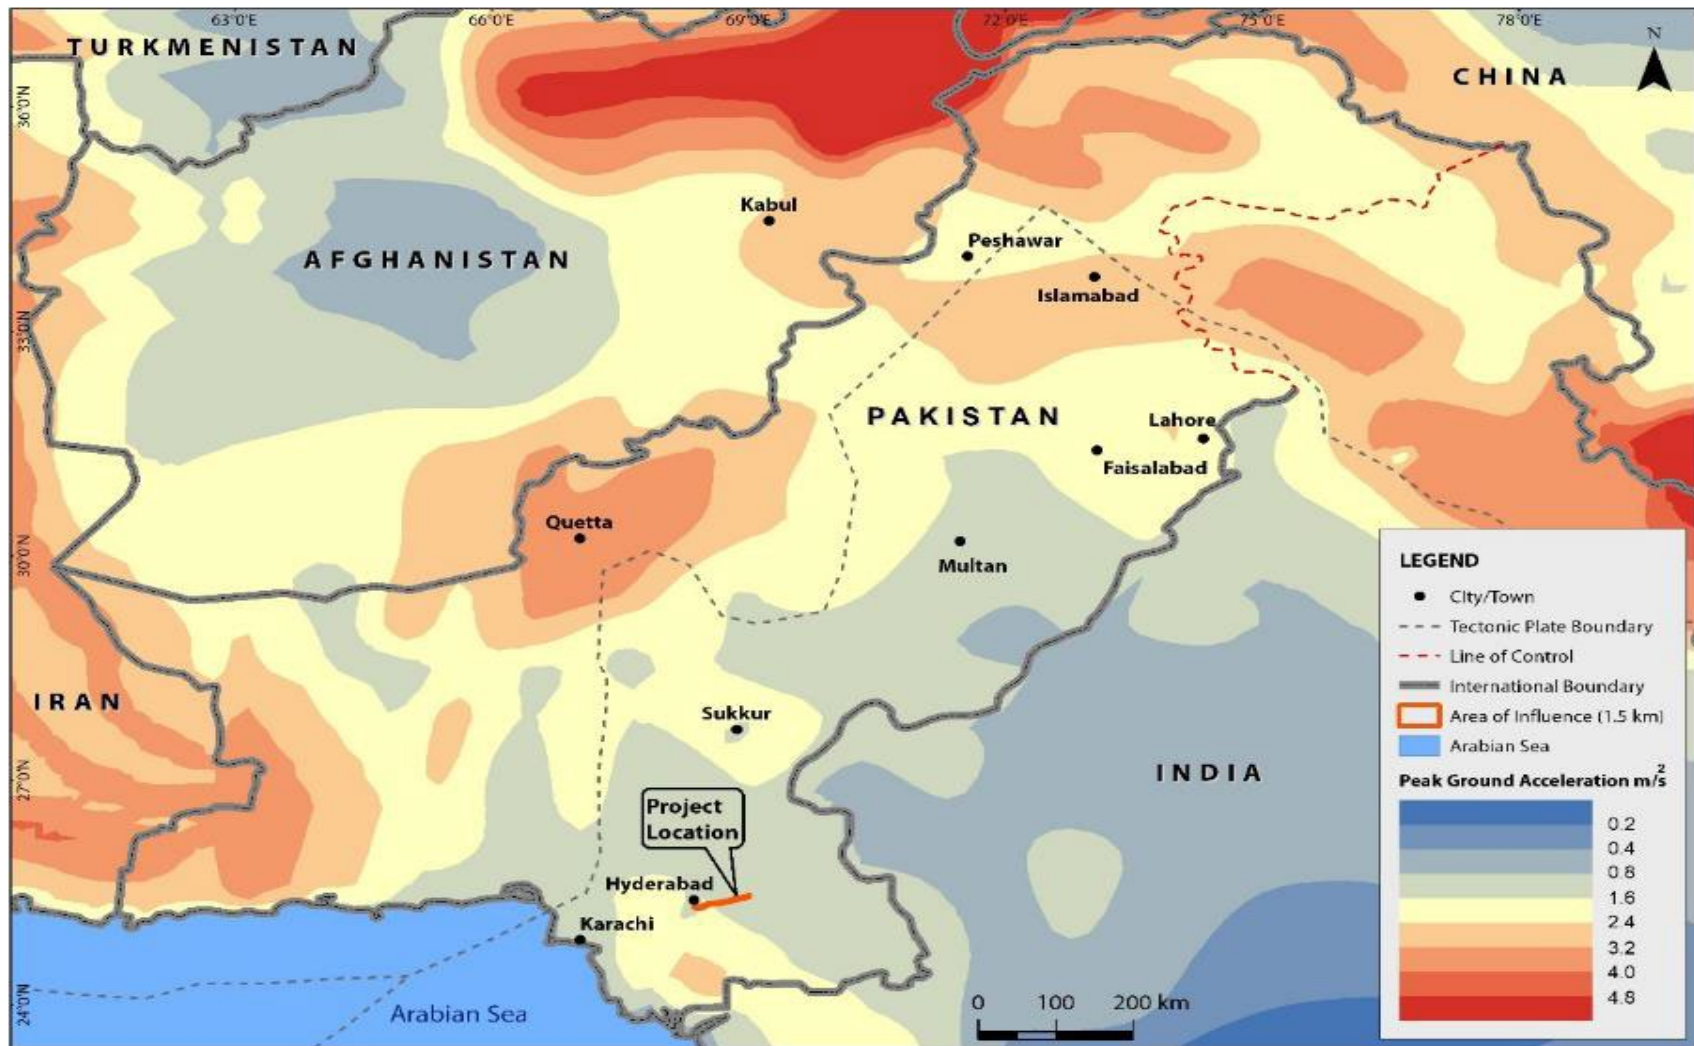

Source: Adapted from Giardini, D., Grünthal, G., Shedlock, K. M. and Zhang, P. *The GSHAP Global Seismic Hazard Map*. *Annali di Geofisica* 42 (6), 1225-1228, 1999.

Figure 4-5: Seismic Hazard Map

4.2.4 Climate

149. Climate is the average course or condition of the weather at a place usually over the years as exhibited by temperature, wind velocity, and precipitation. The climate of the Aol is broadly hot and dry summer mild winter and rainfall in monsoon.

150. The weather station closest to the Aol is located at Hyderabad (25° 38' N, 68° 42' E). The climatic description of the Aol presented in this section is based on an extensive study conducted by the Pakistan Meteorological Department for 50-years (1960-2010) climatic data of different weather stations in Sindh Province³⁹.

151. The hottest month is June in which the maximum average monthly temperature exceeds 40 °C. The winters are mild with the temperature dropping to 20 °C in longer data and 11.2 °C in current data for January.

152. The Aol receives approximately 178 mm of precipitation annually⁴⁰ based on the average of data obtained in-situ weather station at Hyderabad from 1961 to 2011. The current data from the same stations shows 247 mm in July 2022. This station is operated and monitored by Pakistan Meteorological Department.

153. Almost 65 % of the rain is concentrated in the monsoon months of July and August. The monthly temperature, rainfall and wind data are provided in **Table 4-4** to **Table 4-8**.

154. The annual and seasonal wind-roses⁴¹ are shown in **Figure 4-6**. During the months of Oct- Feb, the high winds are coming from the north of Aol, while during the rest of the months the major winds are from the south- west direction. In term of speed, the fastest winds hit the project area from May-September (**Table 4-8**).

155. According to Koppen climate classification, the climate in the Aol is the arid desert hot climate which is broadly hot and dry summer with mild winter rainfall. Broadly speaking, there are four seasons in Pakistan. These seasons are defined based on temperature and the changes associated with the southwest monsoon. The southwest monsoon is a wind system that prevails from April to October in the Indian Ocean and is characterized by a reversal in wind direction and heavy rainfall over most of the Indian Subcontinent. Within Pakistan, considerable variation is found in temperature and monsoonal changes. Thus, the specific characteristics and duration of seasons depending on geographic location. The general characteristics of the season in the Aol based on climatic data of Hyderabad is presented below:

³⁹Rasul, Ghulam & Zahid, Maida & Syed, Ahsan & Bukhari, Ali. (2012). Climate Change in Pakistan Focused on Sindh Province.

⁴⁰ A. A. Mahessar, (Dec. 2020) "Rainfall Analysis for Hyderabad and Nawabshah, Sindh, Pakistan", *Eng. Technol. Appl. Sci. Res.*, vol. 10, no. 6, pp. 6597–6602.

⁴¹Wind rose is a circular graphical chart used by meteorologists to characterize the speed and direction of wind at a particular location. The length of each "spoke" around the circle indicates the amount of time that the wind blows from a particular direction. Colors along the spokes indicate categories of wind speed.

Table 4-4: Temperatures of the Project Area*In °C*

Month	Mean of Monthly		Highest Recorded*		Lowest Recorded*	
	Maximum	Minimum	Value	Date	Value	Date
Jan	29.8	20.1	35	20/1/1902	-1	31/1/1929
Feb	33.7	22.1	39	27/2/1943	2	1/2/1929
Mar	39.1	27.2	47	28/3/1949	5	2/3/1898
Apr	43.5	33.2	48	26/4/1986	12	3/4/1903
May	46.1	37.4	49	25/5/1932	17	2/5/1916
Jun	45.0	35.6	50	9/6/1941	20	26/6/1902
Jul	41.5	32.1	46	23/7/1951	21.4	26/7/1989
Aug	40.5	31.7	44	20/8/1958	22	2/8/1884
Sep	40.8	33.2	45	22/9/1974	18	29/9/1923
Oct	41.0	32.6	45	11/1/1941	11	31/10/1949
Nov	37.0	26.6	41	4/11/1977	6	29/11/1938
Dec	31.4	21.0	35	11/12/1963	3	23/12/1945
Annual	39.1	29.4	50	9/6/1941	-1	31/1/1929

* Highest and lowest recorded temperatures are based on data collected at the Hyderabad station since it was established in 1877.

Source: Pakistan Meteorological Department

Table 4-5: Current Temperature Data in the Project Area

Month	Mean Temp (°C)	Max Temp (°C)	Min Temp (°C)
Sep-2022	30.9	35.5	26.2
Aug-2022	29.5	32.7	26.3
Jul-2022	30.8	34.5	27.1
Jun-2022	34.2	40.1	28.2
May-2022	34.4	41.9	26.9
Apr-2022	33.2	41.9	24.4
Mar-2022	28.5	36.8	20.5
Feb-2022	22.2	29.3	15
Jan-2022	17.4	23.2	11.5
Dec-2021	19.2	24.4	13.2
Nov-2021	24.8	31.1	18.2
Oct-2021	29.3	35.8	23
Sep-2021	31.7	36.9	27.7
Aug-2021	30.6	36.1	26.8

Source: Pakistan Meteorological Department

- Winter (December to early March): The winters have mild weather with minimum temperatures ranging between 11 to 19 °C with January being the coldest month. Winter is mostly dry with accumulative rainfall of about 10 mm similarly relative humidity is around 50%. The Wind direction is mostly towards North in the entire winter with an average speed of 1.4 meters per second (m/s) and shift to the southwest direction in March and remains there for the rest of the year.

- Summer (April to June): The summers are hot with average temperatures reaching 35 °C. June is the hottest month and sees temperatures that cross 40 °C. Summer is also dry with rainfall of less than 14 mm in June relative humidity ranges between 50% in April to 64% in June. The wind direction is towards the southwest with an average wind speed of 3 m/s.
- Monsoon (July to August): Monsoon is the characteristic feature of the subcontinent with hot average temperature reaching 36 °C and heavy rainfall. From the historic climatic data (1961-1990) almost 65% of the rainfall occurs in this season with slightly higher rainfall in August than July. The relative humidity reaches a monthly average of more than 65%. The wind direction is still towards the southwest with an average wind speed of 3.6 m/sec.
- Post-Monsoon summer (September to November): In Post, Monsoon temperatures start dropping and reach 24 °C by November, although in September the recorded rainfall is 16 mm, and the rest of season is mostly dry with humidity of around 50%. Wind direction is towards southwest which changes its course towards the north at the end of the season.

Table 4-6: Rainfall in the Project Area (Longer Period)

Month	Mean Monthly (mm)	Wettest Month*		Mean Number of Rainy Days
		Value (mm)	Year	
Jan	1.2	49.0	1888	0.2
Feb	3.9	55.1	1906	0.4
Mar	5.1	92.2	1911	0.4
Apr	5.8	46.7	1963	0.3
May	3.5	56.4	1889	0.3
Jun	13.9	149.8	1964	0.6
Jul	56.7	401.6	1908	0.6
Aug	60.8	276.6	1944	2.4
Sep	21.4	286.0	1962	0.9
Oct	1.5	26.2	1956	0.1
Nov	2.1	48.3	1890	0.1
Dec	2.0	28.8	1979	0.2
Annual	177.7	546.7	1913	8.5

* Based on data collected at the Hyderabad station since it was established in 1877

** 'Rainy day' is defined as a day on which at least 0.1 mm of rain is recorded

Source: Pakistan Meteorological Department

Table 4-7: Current Rainfall Data in the Project Area

Month	Total Precipitation (mm)
Sep-2022	2
Aug-2022	243

Jul-2022	247
Jun-2022	0
May-2022	0
Apr-2022	0
Mar-2022	0
Feb-2022	0
Jan-2022	20.1
Dec-2021	11
Nov-2021	0
Oct-2021	0
Sep-2021	45.6
Aug-2021	0

Source: Pakistan Meteorological Department

Table 4-8: Mean Wind in the Project Area

Month	Wind Speed (m/s)	Wind Direction
Jan	1.2	N
Feb	1.3	N
Mar	1.3	SW
Apr	2.2	SW
May	3.5	SW
Jun	3.9	SW
Jul	3.7	SW
Aug	3.6	SW
Sep	2.8	SW
Oct	1.4	SW
Nov	1.3	N
Dec	1.2	N
Year	2.3	SW

* Based on data collected at the Hyderabad station between 1975 and 1979.

Source: Pakistan Meteorological Department.

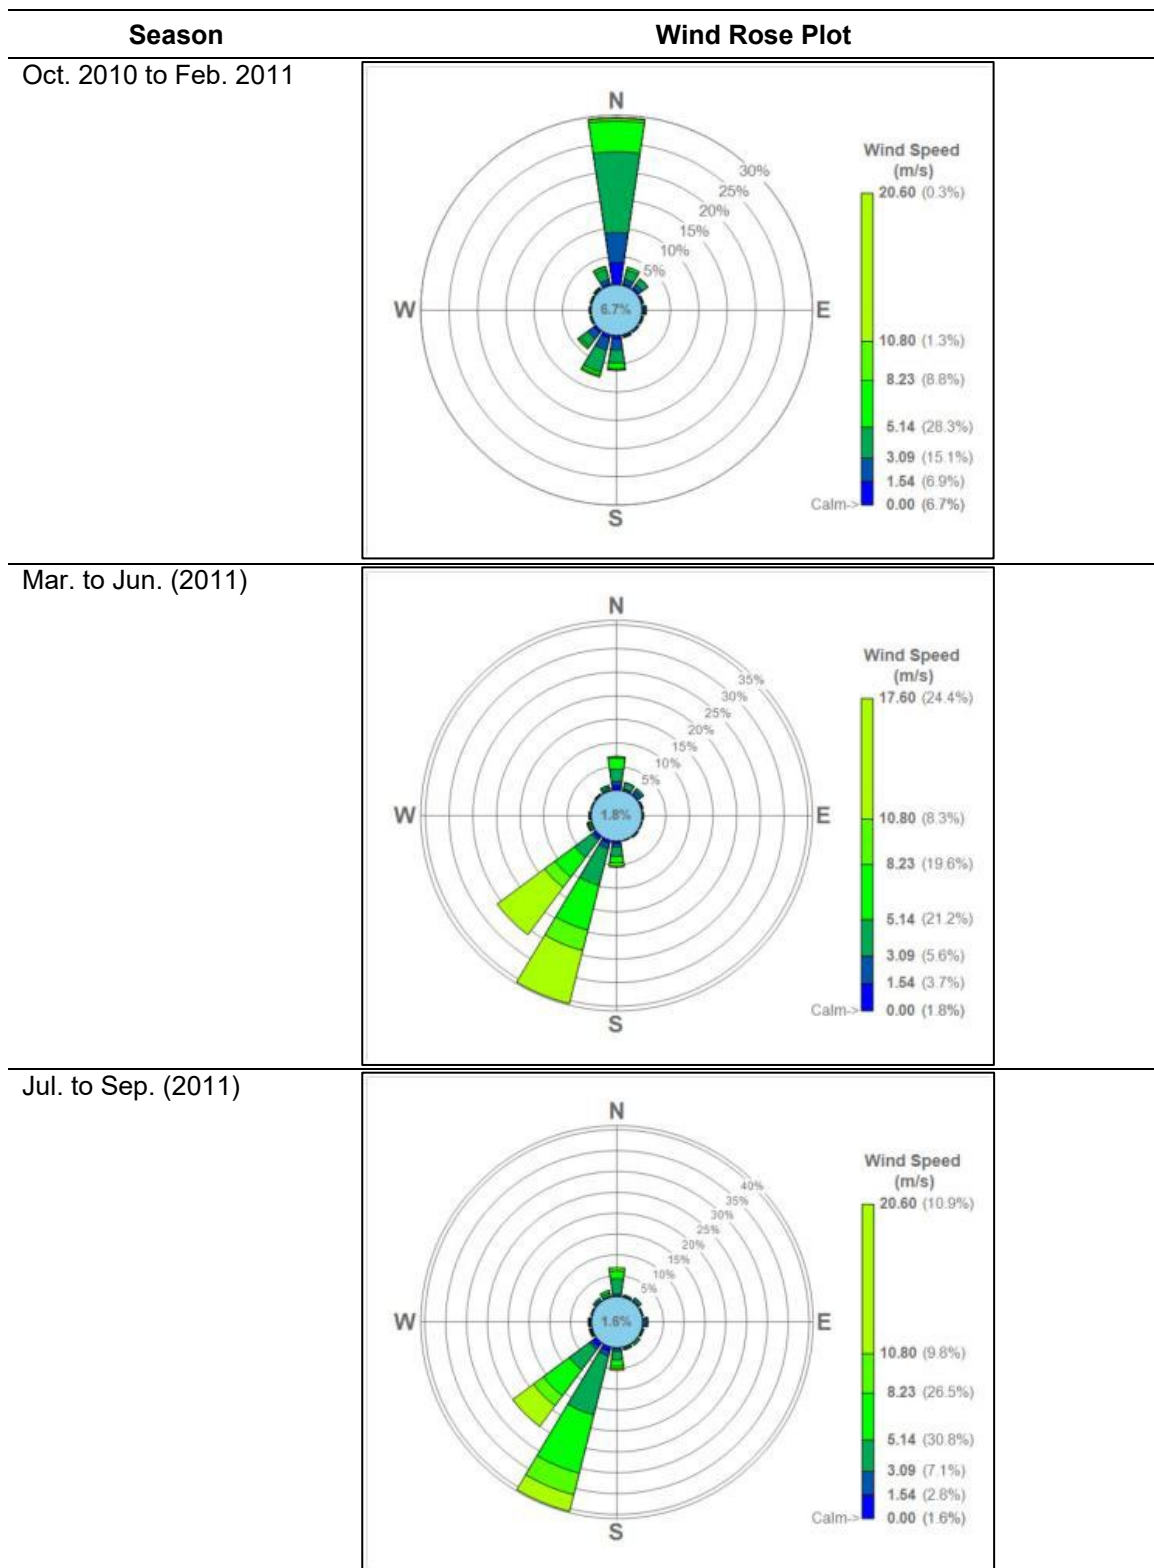


Figure 4-6: Wind Rose for 2011

4.2.5 Climate Change and Flooding

Temperature Trend

156. As per the Climate Risk and Vulnerability Assessment (CRVA)⁴², Pakistan's national level, warming is strongly biased towards the more southerly regions, with Punjab, Sindh, and Balochistan all experiencing winter warming in the region of 0.91°C - 12°C over the same period, and Khyber Pakhtunkhwa in the north experiencing only 0.52°C.

157. The rise in average daily maximum temperatures (0.87°C between 1961–2007) has been slightly stronger than the rise in average temperatures. A concurrent increase in the frequency of heat wave days has been documented, particularly in Sindh Province.⁴³

Precipitation Trend

158. As per the Climate Risk and Vulnerability Assessment (CRVA)⁴⁴, the early 20th century was characterized by a prolonged decline in annual rainfall, but since 1960, a slight increasing trend has prevailed. The number of heavy rainfall events has increased since 1960, and the nine heaviest rains recorded in 24 hours were recorded in 2010.⁴⁵ However, recent rains in July and August 2022 were the all-time high in 62 years in Sindh and Balochistan province.⁴⁶

159. Pakistan's annual climate cycle is presented in **Figure 4-7**⁴⁷ and **Figure 4-8** Pakistan provides a complex historical precipitation profile.⁴⁸

2022 Floods

160. A preliminary assessment of July and August 2022 by the UN Satellite Centre (UNOSAT) comparing satellite data from 1 to 7 September to data from 8 to 14 September indicates that many districts in Sindh, two in Balochistan and one in Punjab were affected by increasing floodwaters, while floodwaters appear to be stagnating or receding in many other parts of the country. As of October 2022, Large floods were observed to still be inundating villages and agricultural areas along the Indus River, while in Sindh increasing floodwater was observed in Jamshoro, Malir Karachi, Thatta, Tando Allahyar, Mirpur Khas, Umer Kot and Tharparkar districts, and increasing floodwater was also observed in Gwadar and Lasbela districts in Balochistan and in Khusbab district in Punjab.⁴⁹

161. In 2022, the country has been hit by the largest amount of rainfall in three decades (**Figure 4-9**).

162. The 220 kV Mirpur Khas ETL Project is passes through three districts namely Hyderabad, Tando Allah Yar, and Mirpur Khas.

163. The Hyderabad district received heavy rains spills (up to 243 mm)⁵⁰ during August 2022 causing an urban flooding situation within Hyderabad city.

164. However, the district was relatively safe from river and flash flooding compared to the neighboring districts of Mirpur Khas, Tando Allah Yar, Umer Kot, and Thar Parker, where a large

⁴² <https://www.adb.org/sites/default/files/linked-documents/49026-002-sd-03.pdf>.

⁴³ Ibid.

⁴⁴ Ibid.

⁴⁵ <https://www.adb.org/publications/climate-risk-country-profile-pakistan>.

⁴⁶ <https://tribune.com.pk/story/2369415/heavy-rainfall-broke-62-year-record-in-sindh-balochistan>.

⁴⁷ Ibid.

⁴⁸ Ibid.

⁴⁹ <https://earthobservatory.nasa.gov/images/150279/devastating-floods-in-pakistan>.

⁵⁰ http://www.pmd.gov.pk/cdpc/Pakistan_Monthly_Climate_Summary_August_2022.pdf.

flood water still be inundating villages and agricultural areas due to overspill and wash away of the shoulder bunds at multiple location of the spinal drain, the Left Bank Outfall Drain (LBOD) system.

165. LBOD brings the water of different districts including Shaheed Benazirabad, Sanghar, Mirpur Khas and Umerkot district. Its design capacity is 4,600 cusecs, but more than 12,000 cusecs passed in late August and early September 2022 due to intense rains in the region.⁵¹


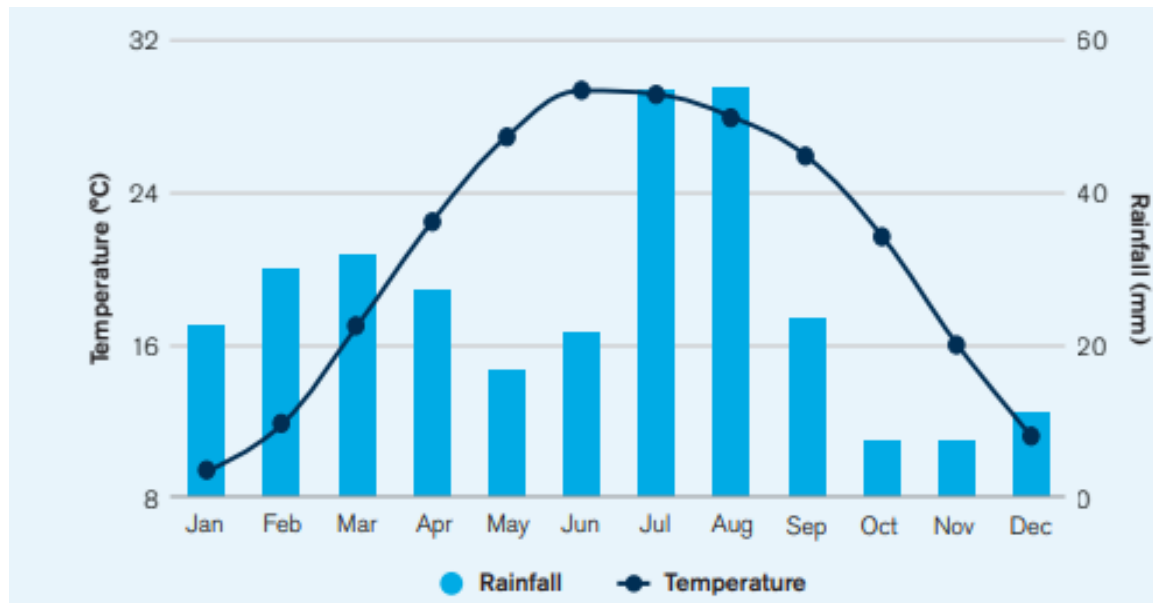


Figure 4-7: Annual Climate Cycle

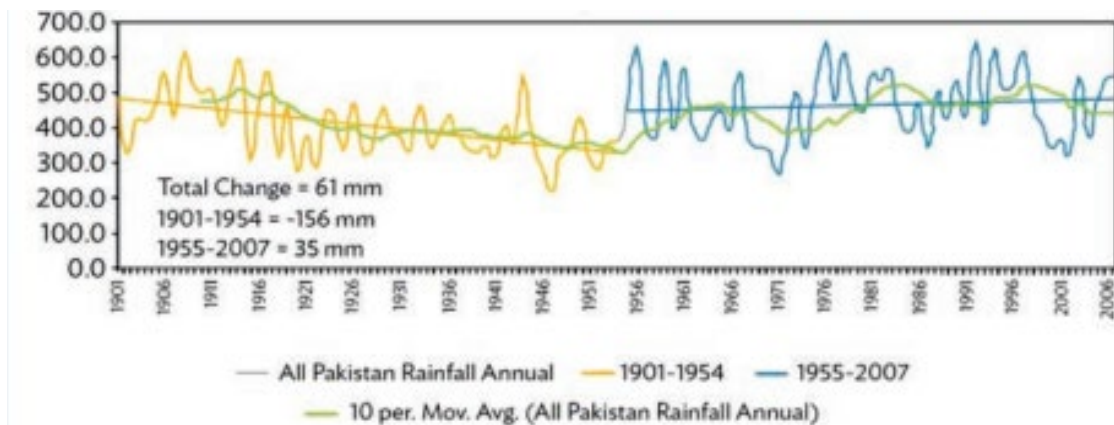

Source: Q. Z. Chaudhry et al. 2009. *Climate Change Indicators of Pakistan*. Technical Report. No. 22. Islamabad: Pakistan Meteorological Department.

Figure 4-8: Historical Precipitation Profile

⁵¹<https://www.nation.com.pk/16-Sep-2022/lbod-design-blamed-for-floods-in-sindh>.

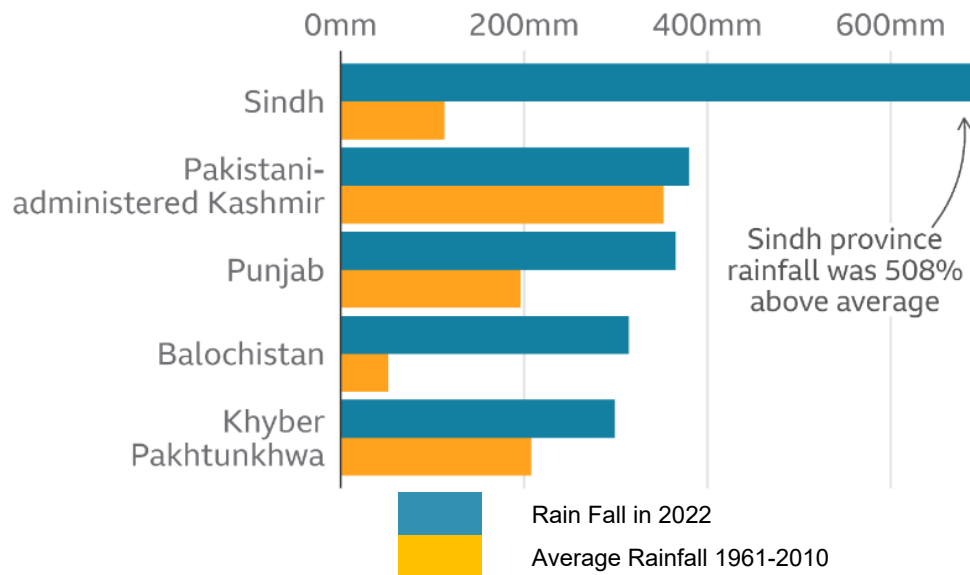


Figure 4-9: Historical Precipitation vs 2022 Rainfall

4.2.6 Water Resources

166. The major surface water feature in the area is the Indus River. The Indus drains an area of about 950,000 km², which generates a mean annual discharge of 6,682 m³/s. The hydrograph of the river is strongly seasonal with a long low water season between October and March and a high-water season between April and September – driven primarily by snowmelt in the upper catchment and monsoon rainfall. The river usually peaks in mid-August or early September. The 18-year monthly averaged flow data for the Indus River recorded from 1986-87 season to 2003-04 season at Kotri barrage is presented in **Table 4-9**.⁵²

167. In the Project area, water resources i.e., groundwater and surface water exist at various locations. Surface water canals and distributary channels are observed in the Project area. The Mirpur Khas ETL crosses at least six major canals and distributaries including, Phuleli Canal, Akaram Wah, Ghotana Distry, Sarfaraz Canal, Nasir Branch and West Branch (Jamraw Canal).

168. Most of the Project area is in a fresh groundwater area. However, at places, brackish groundwater has also been encountered. Irrigation requirements are fulfilled through these resources by installing tube wells, canals, and rain (barani). The branches of Nara canal and Jamarow west branch canal irrigate the area of Hyderabad, Tendo Allahyar and Mirpur Khas (IEE in July 2017. See footnote 95 on page 89).

169. Groundwater in the Project area is generally fresh and potable near canals and distributaries but at some locations, it is reported as brackish. Settlements in the Project area use the groundwater for drinking and irrigation purposes through tube wells and hand pumps. In general, the depth of the groundwater varies between 10 to 15 meters.⁵³

170. The water table depth decreases as we move away from the main canals. The settlements near the Project area utilize the groundwater for drinking purposes through hand pumps and motor pumps. The groundwater is also utilized for irrigation purposes through the tube wells,

⁵²EIA of Jamshoro Power Generation Project, 2013.

⁵³Ibid.

especially in the tail areas of the canals (minor), where the water supply through the canal stream is reduced.⁵⁴

Table 4-9: Indus River Monthly Flow at Kotri Barrage

Month	Flow (cumec)*	
	Upstream	Downstream
Jan	369	161
Feb	305	91
Mar	465	105
Apr	648	427
May	1,005	565
Jun	1,535	741
Jul	4,056	3,227
Aug	7,517	6,826
Sep	3,905	3,276
Oct	1,035	586
Nov	387	110
Dec	213	68
Annual	1,787	1,349

* The difference in upstream and downstream flow is the volume diverted to canals.
Source: Sindh Irrigation and Drainage Authority.

4.2.7 Water Quality

171. The water quality was defined based on primary data collected during the current survey.

172. A total of three water samples from the drinking sources were collected. These sampling points were selected based on the land use and sensitive receptor i.e., near densely populated settlement (GW-3 and GW-4) and near a settlement area with sparsely populated and agricultural area (GW-2). The depth of the wells (handpumps) from which the groundwater was extracted is approximately 22 to 27 meters.

173. The samples were analyzed from the Aol for establishing baseline conditions for groundwater.

Sampling and Methodology

174. **Table 4-10** provides information on sampling points and containers collected and the rationale for selection.

175. **Photo 4-1** provides photographs during the sample collection.

176. The sampling locations are shown in **Figure 4-10**.

⁵⁴EIA of Jamshoro Power Generation Project, 2013.

Table 4-10: Water Quality Sampling Location Description


Sample ID	Coordinates	Sample Taken	Location	Rationale of Selection
GW-2	25°20'52.74"N,6 8°31'39.88"E	Drinking-Water (Handpump Bore)	Omaid Ali Burano, Hyderabad	This point near RoW and is close to sensitive environmental Receptors i.e. residential area and agricultural area in sparsely populated settings
GW-3	25°22'30.61"N,6 8°42'18.71"E	Drinking-Water (Handpump Bore)	Muhammad urs Dars, Tandu Alla Yar	This point is just in the center of ETL length and is close to sensitive environmental Receptors i.e. residential area and agricultural area.
GW-4	25°26'29.61"N,6 8°58'54.00"E	Drinking-Water (Handpump Bore)	Goth Aject Ali Rajpoot, Mirpur Khas	This sampling point was chosen on the ETL route towards under construction Mirpur Khas Grid Station. Agricultural land and nearby settlement.

Results and Analysis

177. The results of the groundwater quality sampling are summarized in **Table 4-11**. The complete results are given in **Annexure III**.

178. From the measured values the following conclusions can be drawn:

- The taste of water was slightly salty at GW-2 and GW-4. the TDS values were found exceeding SEQS limits and those of WHO guideline values for drinking water due to the aquifer condition which is saline.
- Chloride ion was also found in exceedance to SEQS limits and those of WHO guideline values for drinking water in GW-2 and GW-4 samples. The reason for this can be the clayey composition of soil in this region which holds more nutrients.
- All other parameters analyzed were found within the World Health Organization (WHO) Standards for drinking water and the SEQS drinking water limits.

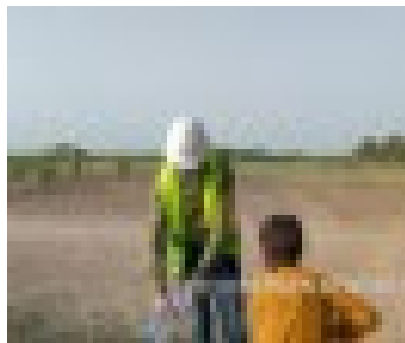

Drinking-Water Sampling Point, GW-2
(June 2022)



Drinking-Water Sampling Point, GW-3
(June 2022)



Drinking-Water Sampling Point, GW-4
(June 2022)

Photo 4-1: Water Quality Sampling Photographs

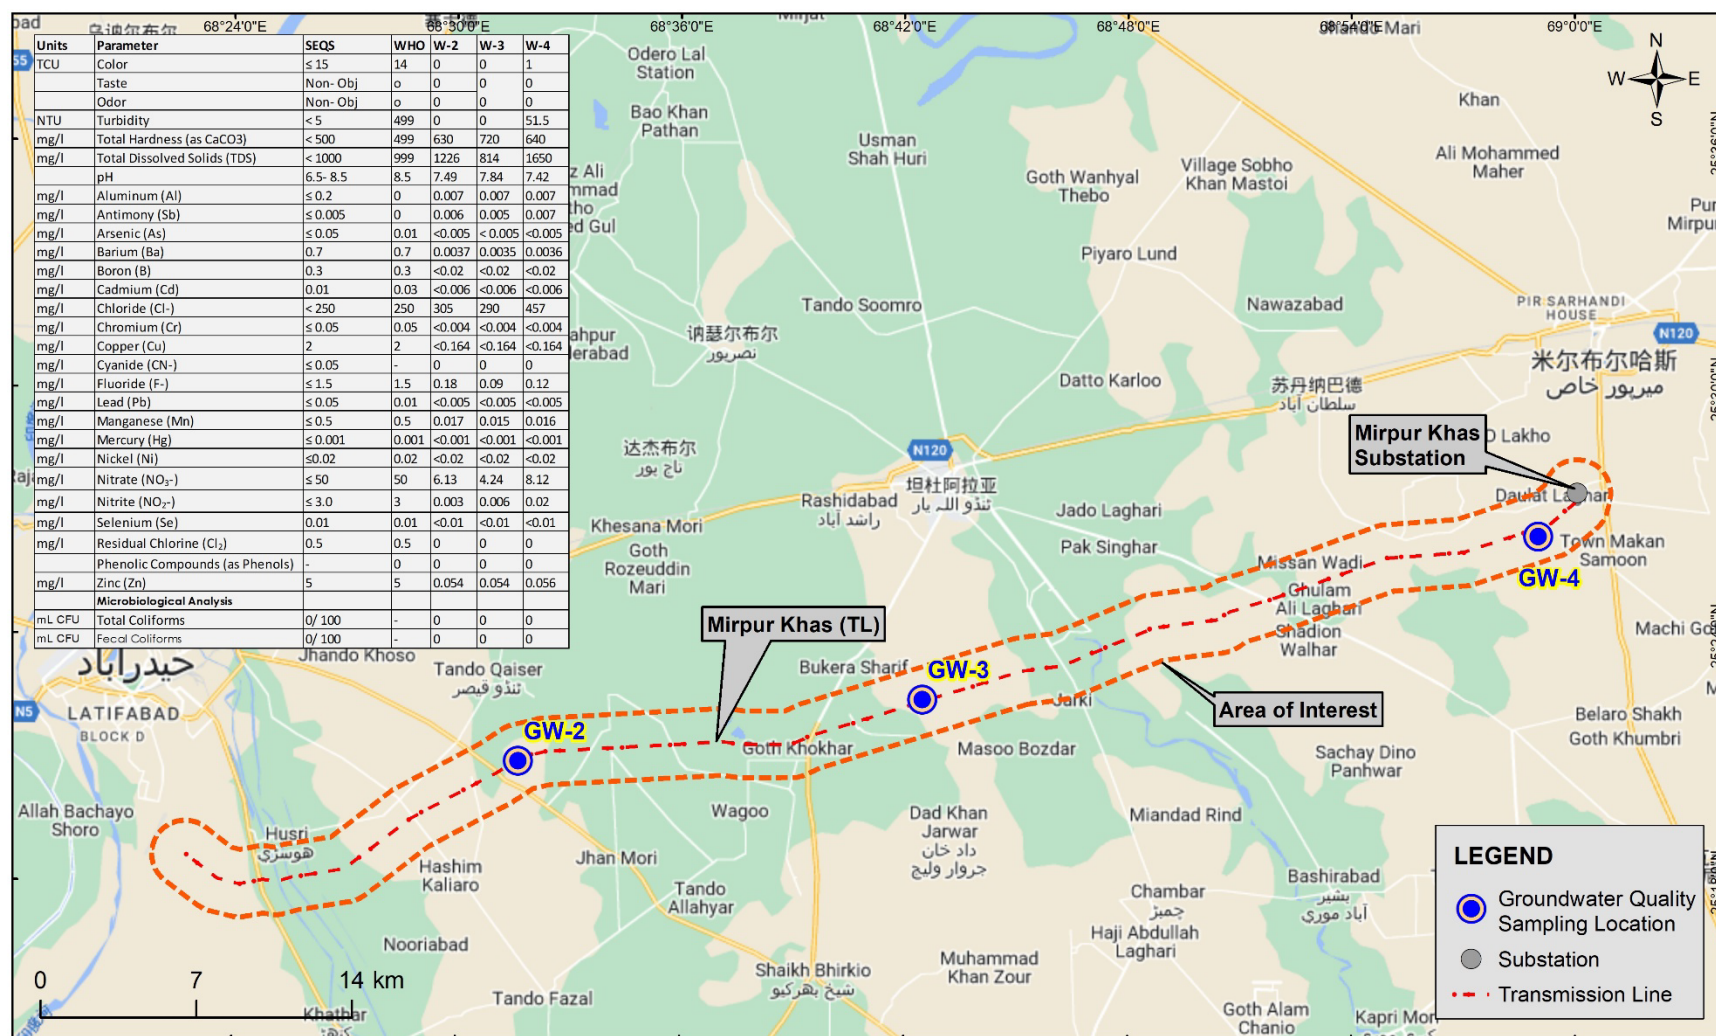


Figure 4-10: Water Quality Sampling Locations

Table 4-11: Water Quality Sampling Results

Parameter	Analysis Method	Units	SEQS for Drinking Water	WHO Guideline Values for Drinking Water	25°20'52.74" N, 68°31'39.88" E	25°22'30.61"N, 68°42'18.71"E	25°26'29.61" N, 68°58'54.00" E
					Omaid Ali Burano, Hyderabad	Muhammad urs Dars, Tandu Alla Yar	Goth Aject Ali Rajpoot, Mirpur Khas
					GW-2	GW-3	GW-4
Color	SMWW 2120 C	TCU	≤ 15	<15	0	0	1
Taste	SMWW 2160 C		Non-Objectionable	-	Salty	Non-objectionable	salty
Odor	SMWW 2150 B		Non-Objectionable	-	Non-Objectionable	Non-objectionable	non-objectionable
Turbidity	SMWW 2130 B	NTU	< 5	< 5	0	0	51.5
Total Hardness (as CaCO ₃)	SMWW 2340 C	mg/l	< 500	< 500	630	720	640
Total Dissolved Solids (TDS)	SMWW 2540 C	mg/l	< 1000	< 1000	1226	814	1650
pH	SMWW 4500 H+ B		6.5- 8.5	6.5 – 8.5	7.49	7.84	7.42
Aluminum (Al)	SMWW 3111 B	mg/l	≤ 0.2	-	0.007	0.007	0.007
Antimony (Sb)	SMWW 3114 B	mg/l	≤ 0.005	-	0.006	0.005	0.007
Arsenic (As)	SMWW 3114 B	mg/l	≤ 0.05	0.01	<0.005	< 0.005	<0.005
Barium (Ba)	SMWW 3113 B	mg/l	0.7	0.7	0.0037	0.0035	0.0036
Boron (B)	SMWW 3113 B	mg/l	0.3	0.3	<0.02	<0.02	<0.02
Cadmium (Cd)	SMWW 3113 B	mg/l	0.01	0.03	<0.006	<0.006	<0.006
Chloride (Cl-)	SMWW 4500 Cl- B	mg/l	< 250	250	305	290	457
Chromium (Cr)	SMWW 3113 B	mg/l	≤ 0.05	0.05	<0.004	<0.004	<0.004
Copper (Cu)	SMWW 3111 B	mg/l	2	2	<0.164	<0.164	<0.164
Cyanide (CN-)	SMWW 4500 CN- F	mg/l	≤ 0.05		0	0	0
Fluoride (F-)	SMWW 4500 F- D	mg/l	≤ 1.5	1.5	0.18	0.09	0.12
Lead (Pb)	SMWW 3114 B	mg/l	≤ 0.05	0.01	<0.005	<0.005	<0.005
Manganese (Mn)	SMWW 3113 B	mg/l	≤ 0.5	0.5	0.017	0.015	0.016
Mercury (Hg)	SMWW 3114 B	mg/l	≤ 0.001	0.001	<0.001	<0.001	<0.001
Nickel (Ni)	SMWW 3113 B	mg/l	≤0.02	0.02	<0.02	<0.02	<0.02

Parameter	Analysis Method	Units	SEQS for Drinking Water	WHO Guideline Values for Drinking Water	25°20'52.74" N, 68°31'39.88" E	25°22'30.61"N, 68°42'18.71"E	25°26'29.61" N, 68°58'54.00" E
					Omaid Ali Burano, Hyderabad	Muhammad urs Dars, Tandulla Yar	Goth Ajeet Ali Rajpoot, Mirpur Khas
					GW-2	GW-3	GW-4
Nitrate (NO ₃ -)	SMWW 4500 NO ₃ -B	mg/l	≤ 50	50	6.13	4.24	8.12
Nitrite (NO ₂ -)	SMWW 4500 NO ₂ -B	mg/l	≤ 3.0	3	0.003	0.006	0.02
Selenium (Se)	SMWW 3114 B	mg/l	0.01	0.01	<0.01	<0.01	<0.01
Residual Chlorine (Cl ₂)	SMWW 4500 Cl- B	mg/l	0.5	0.2 – 0.5	0	0	0
Phenolic Compounds (as Phenols)	SMWW 5530 D	mg/l	-	-	<0.01	<0.01	<0.01
Zinc (Zn)	SMWW 3113 B	mg/l	5	5	0.054	0.054	0.056
Microbiological Analysis							
Total Coliforms	SMWW 9222 B	mL CFU	0/ 100	-	0	0	0
Fecal Coliforms	SMWW 9222 D	mL CFU	0/ 100	-	0	0	0

"- "means not available.

4.2.8 Air Quality

179. There are no major anthropogenic sources in the AoI other than local roads and cooking stoves in villages. The agricultural land results in windblown dust in dry conditions. The pollutants selected for evaluation, based on the expected emissions from the Project activities and the level of risk to human health posed by these pollutants, are as follows:

- Respirable particulate matter—Coarse (PM₁₀)⁵⁵, Fine (PM_{2.5})⁵⁶ and Particulate Matter (PM Total)
- Sulfur dioxide (SO₂)
- Oxides of Nitrogen (NO_x)—Mainly Nitrogen dioxide (NO₂) and Nitric oxide (NO)
- Carbon Monoxide (CO)

Methodology and Sampling Locations

180. Air quality sampling was carried out at three locations in the AoI between 24th and 29th June 2022.

181. These sampling points A-2 and A-3 were selected based on the land use and sensitive receptor i.e near densely populated settlement area and the point A-4 is located near Mirpur Khas Grid Station surrounded by agricultural land and nearby settlements.

182. A description of sampling locations and the rationale of selection is given in **Table 4-12: Details of Air Quality Sampling Locations**.

Table 4-12: Details of Air Quality Sampling Locations

Sample ID	Coordinates	Location	Pollutants Sampled	The rationale for Site Selection
A-2	25°20'55.29"N, 68°31'39.46"E	Omaid Ali Burano, Hyderabad	CO, SO ₂ , NO ₂ , and NO PM ₁₀ , PM _{2.5} and PM Total	This point near ETL route and is close to sensitive environmental Receptors i.e. residential area and agricultural area.
A-3	25°22'30.61"N, 68°42'18.71"E	Muhammad urs Dars, Tandu Alla Yar	CO, SO ₂ , NO ₂ , and NO PM ₁₀ , PM _{2.5} and PM Total	This point is just in the center of ETL length and is close to sensitive environmental Receptors i.e. residential area and agricultural area.
A-4	25°26'29.61"N, 68°58'54.00"E	Goth Ajeet Ali Rajpoot, Mirpur Khas	CO, SO ₂ , NO ₂ , and NO PM ₁₀ , PM _{2.5} and PM Total	This sampling point was chosen on the ETL route towards under construction Mirpur Khas Grid Station. Agricultural land and nearby settlement.

⁵⁵PM₁₀ is particulate matter 10 micrometers or less in diameter.

⁵⁶PM_{2.5} is particulate matter 2.5 micrometers or less in diameter.

183. Particulate matter was sampled using MP101M (Automatic particulate Analyzer) Portable Air Sampler. This instrument has high accuracy and not influenced by the physicochemical nature, color, or shape of particles. Sampling flowrate continuously regulated to the atmospheric temperature and pressure, reduces evaporation artifacts of volatile compounds (mandatory for PM_{2.5} according to EU regulations). The instrument has a regulated sampling tube (RST) compliant with CEN PM10 and USEPA standards.

184. CO was measured using CO12e (Carbon Monoxide Analyzer). The CO12e is a continuous carbon monoxide analyzer with a detection limit of 0.035 ppm. Its measurement principle is based on carbon monoxide detection by absorption of infrared light.

185. NO and NO₂ were measured using AC32e (Nitrogen Oxide Analyzer) which has embedded Communication Protocol for XR® Management Software with automatic recognition and configuration.

186. SO₂ was measured AF22e (Sulfur Dioxide Analyzer). The AF22e is a continuous ambient air-quality monitoring analyzer (CAMs), based on the ultraviolet fluorescence principle, which is the standard method for the measurement of SO₂ concentration (EN 14212).

187. The sampling location, along with nearby settlements and roads are shown in **Figure 4-11**.

188. The method, duration of sampling and laboratory for analysis is summarized in **Table 4-13**.

189. Photographs of the online analyzer at various sampling sites are shown in **Photo 4-2**.

Table 4-13: Methodology and Duration of Sampling

Parameter	Equipment	Date and Duration of Sampling	Lab for Analysis
CO	CO12e Carbon Monoxide Analyzer	24 th to 29 th June 2022 24 hours each location	HSE Services, Karachi through Asian Environmental Services, Lahore
NO and NO ₂	AC32e Nitrogen Oxide Analyzer	24 th to 29 th June 2022 24 hours each location	HSE Services, Karachi through Asian Environmental Services, Lahore
SO ₂	AF22e Sulfur Dioxide Analyzer	24 th to 29 th June 2022 24 hours each location	HSE Services, Karachi through Asian Environmental Services, Lahore
PM ₁₀ , PM _{2.5} and PM Total	MP101M Automatic particulate Analyzer	24 th to 29 th June 2022 24 hours each location	HSE Services, Karachi through Asian Environmental Services, Lahore

Note: Hourly reading was taken from the arithmetic mean of 12 readings recorded by the monitoring instrument with five-minute interval. For 24 Hours Value, arithmetic means of hourly average is considered to depict conditions of each hour.

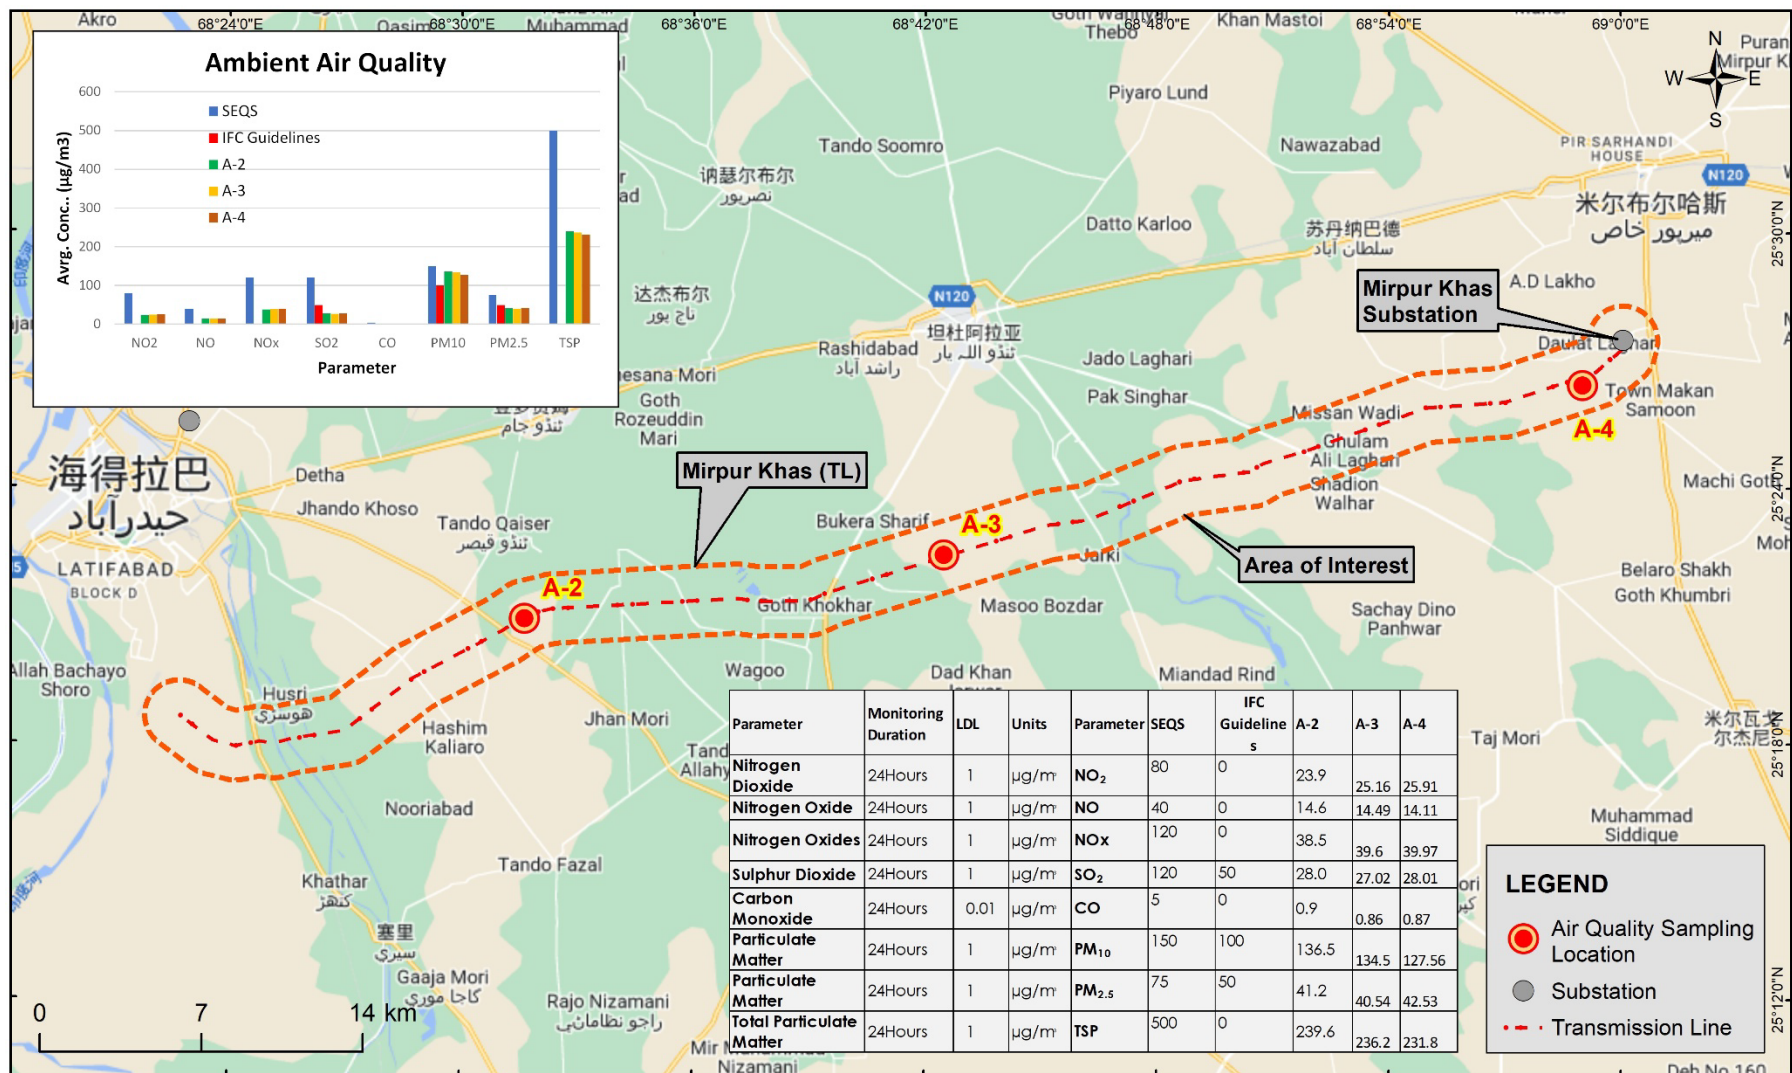


Figure 4-11: Air Quality Sampling Locations



Ambient Air Quality Equipment Installation A-2 (June 2022)



Ambient Air Quality monitoring at A-3 (June 2022)



Ambient Air Quality Monitoring at A-4 (June 2022)

Photo 4-2: Ambient Air Quality Sampling Site Photographs

Ambient Air Quality Results

190. The sampling results are provided in **Table 4-14** and the complete results are given in **Annexure III**.

191. At all sampling locations, NO and NO₂ were found within SEQS. No IFC guideline value available for 24-hour measurement. However, hourly measured values of NO₂ were found well within the IFC's guideline value of 200 µg/m³.

192. At all sampling locations, Sulfur Dioxide (SO₂) measured values were found within SEQS, WHO AGQ and the IFC's Interim Target 1 and Interim Target 2 Standards. However, the values were found slightly higher than the IFC SO₂ Guideline of 20 µg/m³.

193. At all sampling locations, Particulate Matter (PM₁₀) measured values were found within SEQS. However, at all the locations, the measured values were found higher than the WHO AGQs guideline value of 45 µg/m³.

194. At all sampling locations, Particulate Matter (PM_{2.5}) measured values were found within SEQS. However, the measured values were found higher than the WHO Global Air Quality Guidelines value of 15 µg/m³.

195. This is due to existing conditions in the area as samples were taken near non-metalled roads and residential area where the traffic can cause increased air dust particles. Agricultural activities and combustion of gasoline and wood are also a contributing factor towards high particulate matter (both PM₁₀ and PM_{2.5}) in ambient air.

196. As per General EHS Guidelines (footnote 23 on page 30), the WHO Global Air Quality Guidelines are applicable in the absence of national legislated standards.

Table 4-14: Results of Ambient Air Quality Sampling

($\mu\text{g}/\text{m}^3$) unless otherwise specified

Parameter	Monitoring Duration	LDL	Parameter	SEQS	WHO AGQ Level	A-2	A-3	A-4
Nitrogen Dioxide	24Hours	1	NO ₂	80	25	23.92	25.16	25.91
Nitrogen Oxide	24Hours	1	NO	40	25	14.61	14.49	14.11
Nitrogen Oxides	24Hours	1	NO _x	120	-	38.48	39.6	39.97
Sulphur Dioxide	24Hours	1	SO ₂	120	40	28.02	27.02	28.01
Carbon Monoxide	24Hours	0.01	CO	5	4	0.9	0.86	0.87
Particulate Matter	24Hours	1	PM ₁₀	150	45	136.45	134.48	127.56
Particulate Matter	24Hours	1	PM _{2.5}	75	15	41.18	40.54	42.53
Total Particulate Matter	24Hours	1	TSP	500		239.61	236.16	231.8

Note: *24- hours Interim target-2[IFC Interim targets are provided in recognition of the need for a staged approach to achieve the recommended guidelines].

4.2.9 Noise

197. This section defines the baseline ambient noise levels in the Aol in a manner that can be used for the assessment of the noise impact of the proposed Project. Noise levels were measured at three selected locations considered representative of the nearby receptors of possible noise disturbance from the Project.

198. The following is a brief description of the terminology used in this assessment:

- Sound: A vibratory disturbance created by a vibrating object, which, when transmitted by pressure waves through a medium such as air, is capable of being detected by a receiving mechanism, such as the human ear or a microphone
- Noise: Sound that is loud, unpleasant, unexpected, or otherwise undesirable
- Decibel (dB): A unitless measure of sound on a logarithmic scale, which indicates the squared ratio of sound pressure amplitude to a reference sound pressure amplitude. The reference pressure is 20 micro-pascals
- A-Weighted Decibel (dB(A)): An overall frequency-weighted sound level in decibels, which approximates the frequency response of the human ear. The typical human ear is not equally sensitive to all frequencies of the audible sound spectrum. Therefore, when assessing potential noise impacts on people, an electronic filter is used that de-emphasizes certain frequencies in a manner corresponding to the human ear's decreased sensitivity to low and extremely high frequencies. All the noise levels reported in this Section are A-weighted
- Equivalent Sound Level (Leq): The equivalent steady-state sound or vibration level, which is a stated period, typically one hour, would contain the same acoustical or vibration energy.

Sampling Methodology

199. Noise measurements were taken at one location listed in **Table 4-15**. Noise readings were taken for 24 hours at the sampling sites.

200. These sampling points N-2 and N-3 were selected based on the land use of Aol and sensitive receptor i.e., near populated settlement area and agricultural area. The point A-4 is located near Mirpur Khas Grid Station surrounded by agricultural land and nearby settlements.

Table 4-15: Noise Sampling Locations

Sample ID	Coordinates	Location	Date and Duration	The rationale for Site Selection
N-2	25°20'55.29"N, 68°31'39.46"E	Omaid Ali Burano, Hyderabad	24 th to 29 th June 2022 24 hours each location	This point near ETL route and is close to sensitive environmental Receptors i.e. residential area and agricultural area.
N-3	25°22'30.61"N, 68°42'18.71"E	Muhammad urs Dars, Tandu Alla Yar	CO, SO ₂ , NO ₂ , and NO PM ₁₀ , PM _{2.5} and PM Total	This point is just in the center of ETL length and is close to sensitive environmental Receptors i.e. residential area and agricultural area.
N-4	25°26'29.61"N, 68°58'54.00"E	Goth Aject Ali Rajpoot, Mirpur Khas	CO, SO ₂ , NO ₂ , and NO PM ₁₀ , PM _{2.5} and PM Total	This sampling point was chosen on the ETL route towards under construction Mirpur Khas Grid Station. Agricultural land and nearby settlement.

201. The noise levels were measured using portable BSWA308 (Type 1 Sound Level Meter). The BSWA308 has a dynamic range of 102 dB and always measure noise from 29 dBA to 131 dBA in a single range. It can measure three parameters simultaneously with the A, C, and Z frequency weightings and with F, S, and I time weightings. Besides, the equivalent continuous sound pressure level, maximum and minimum values are calculated. The BSWA308 is ideal sound level sound for general purposes of noise measurements where the Class 1 accuracy is required.

202. The meter was calibrated at the start of measurement at each site, using CA111 Sound Calibrator. The calibrator can be used on 1/2-inch and 1/4-inch microphones with an adapter. It conforms to IEC 60942:2003 Class 1, ANSI S1.40-1984 and GB/T 15173-1994. - Calibration of measurement microphones, sound level meters and other sound measurement equipment (**Annexure XX**).

203. The instrument was mounted on a tripod, to avoid interference from reflecting surfaces within the immediate neighborhood, and a windshield was used in all measurements.

204. The noise levels measurement locations map is provided in **Figure 4-12**.

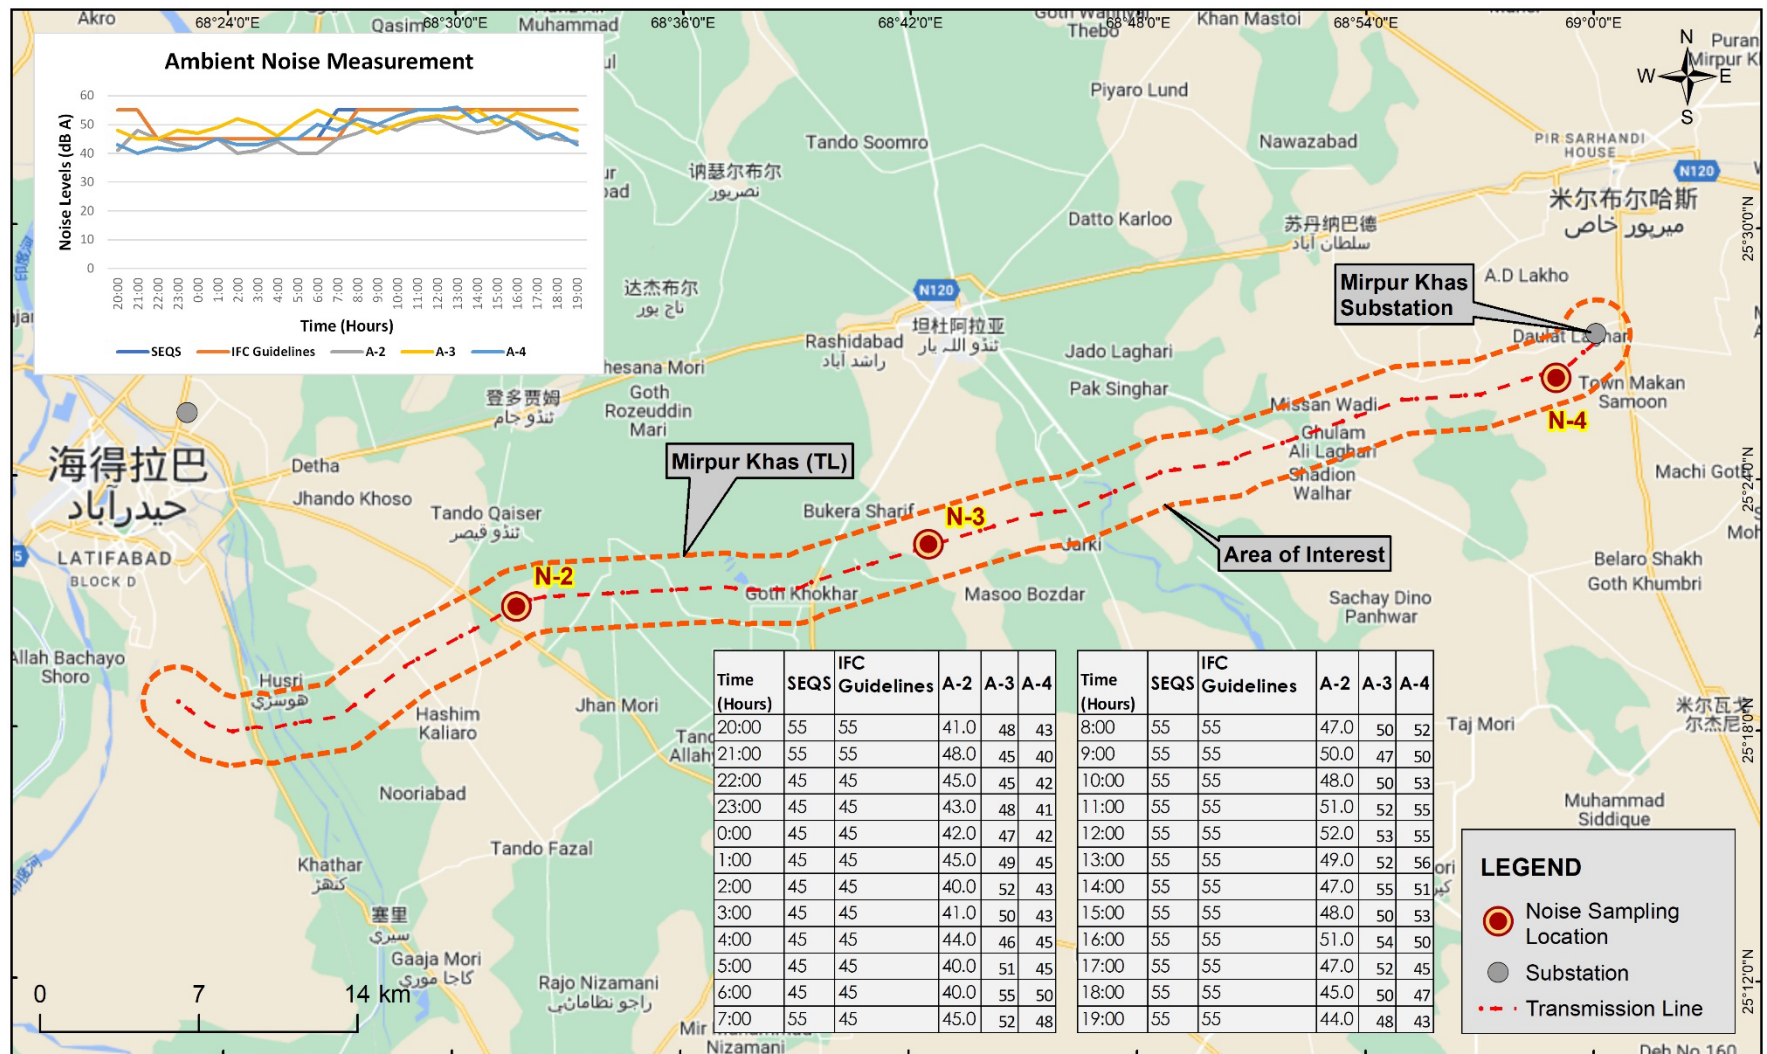


Figure 4-12: Noise Sampling Locations

Noise Measurement Results and Analysis

205. A summary of results is provided in **Table 4-16** with an hourly instantaneous value in **Table 4-17**.

206. The complete data provided by the testing team are presented in **Annexure III**.

207. The wind speed at measurement locations during noise measurement period is presented in **Figure 4-13**.

208. From the measured values the following conclusions can be drawn:

- The values measured at N-2, N3 and N4 were within the SEQs and IFC guideline values for both, daytime, and nighttime. The area is sparsely populated with agricultural fields and no industrial activity.
- The nighttime values have a marginal difference with reported reference values and may be due to the wind blow during the night on the measurement day. The average wind speed during the nighttime measurement was 2.49 m/s at N-3 and 2.04 m/s at N-2.
- Overall, daytime values are measured higher compared to the nighttime values. This may be due to anthropogenic sources such as traffic and other human activities.

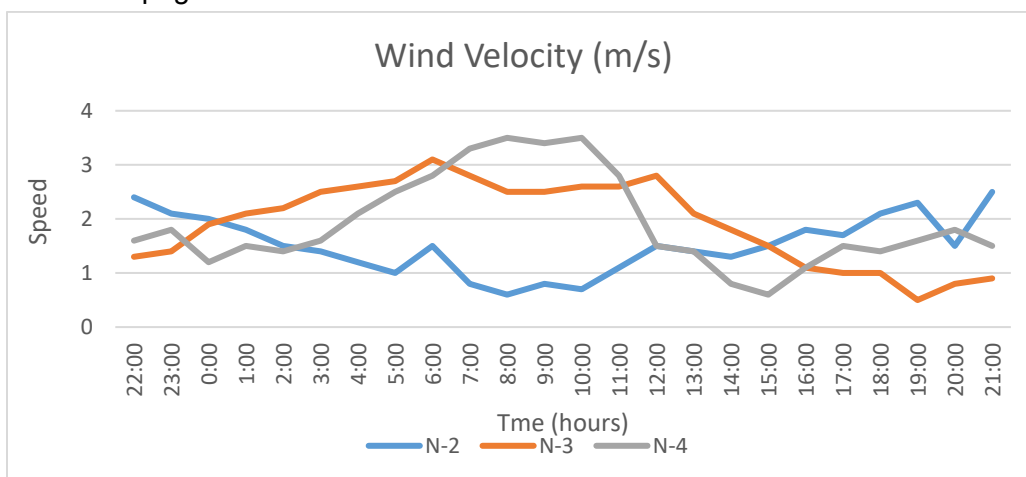


Figure 4-13: Wind Speed During Noise Measurements

Table 4-16: Noise Measurement Levels

Average Values for Nighttime and Daytime, Leq, dB A⁵⁷⁵⁸

Measurement Point/ Reference Values	Daytime	Nighttime
N-2	48.53	42.97
N-3	51.21	43.46
N-4	51.65	43.40
SEQs	55	55
IFC Guideline Values	45	45

⁵⁷ Leq was calculated from instantaneous values based on the logarithmic scales averaging (i.e., take antilog of values to get energy levels and then log of an average of all instantaneous energy levels calculated from the first step).

⁵⁸ <https://www.acoustic-glossary.co.uk/sound-intensity.htm>.

Table 4-17: Hourly Measured Noise Levels

dB A

Time (Hours)	SEQS	IFC Guidelines	Instantaneous Measurements			Energy levels		
			N-2	N-3	N-4	N-2	N-3	N-4
20:00	55	55	41	48	43	12,589	63,096	19,953
21:00	55	55	48	45	40	63,096	31,623	10,000
22:00	45	45	45	44	42	31,623	25,119	15,849
23:00	45	45	43	43	41	19,953	19,953	12,589
0:00	45	45	42	43	42	15,849	19,953	15,849
1:00	45	45	45	41	42	31,623	12,589	15,849
2:00	45	45	45	40	43	31,623	10,000	19,953
3:00	45	45	45	40	43	31,623	10,000	19,953
4:00	45	45	45	42	42	31,623	15,849	15,849
5:00	45	45	45	43	43	31,623	19,953	19,953
6:00	45	45	45	44	43	31,623	25,119	19,953
7:00	55	45	45	48	48	31,623	63,096	63,096
8:00	55	55	45	50	52	31,623	100,000	158,489
9:00	55	55	45	47	50	31,623	50,119	100,000
10:00	55	55	45	50	53	31,623	100,000	199,526
11:00	55	55	45	52	55	31,623	158,489	316,228
12:00	55	55	45	53	55	31,623	199,526	316,228
13:00	55	55	45	52	56	31,623	158,489	398,107
14:00	55	55	45	55	51	31,623	316,228	125,893
15:00	55	55	45	50	53	31,623	100,000	199,526
16:00	55	55	45	54	50	31,623	251,189	100,000
17:00	55	55	45	52	45	31,623	158,489	31,623
18:00	55	55	45	50	47	31,623	100,000	50,119
19:00	55	55	45	48	43	31,623	63,096	19,953

Note: SEQS daytime means from 06:00 hours to 22:00 hours and nighttime from 22:00 to 06:00 hours.

IFC daytime means from 07:00 to 22:00 hours and nighttime hours from 22 hours to 07:00 hours.

[a] for getting Leq^{59} levels, anti-log $[10^{xx}/10]$ of instantaneous level then log $[10 \cdot \log 10 \cdot \text{Average Energy Levels}]$.

⁵⁹ Leq is the equivalent continuous sound level and represents the total sound exposure for the period of interest or an energy average noise level for the period of interest.

4.2.10 Environmental Sensitive Receptors

209. Sensitive receptors are people/places more susceptible to the adverse effects of exposure to pollutants and social disturbance, due to the developmental projects. Thus, sensitive receptors are necessary to be identified, to evaluate the potential impacts of the proposed project on public health and the environment and adopt necessary mitigation measures to minimize the impact.

210. The sensitive receptors identified for the proposed project within AOI are residential areas; educational institutions; health facilities; and religious places (graveyards and mosques). They are prone to sensitivity during the construction phase, due to emission of air pollutants, noise and vibration, traffic jams/access, the temporary edifice of construction camps, and mobilization issues.

211. The sensitivity feature of receptor is divided into a three-scale score considering sensitivity and risk to the receptors. These include High, Medium, and Low risk. **Table 4-18** shows a description of the risk scale.

212. The sensitive receptor and environmental values in the AOI are mentioned in **Table 4-19** shown in **Figure 4-14**.

213. Detailed list of sensitive receptors (covering type, distance from RoW and orientation) is provided in **Annexure IV**.

Table 4-18: Sensitivity Risk Scale

Risk Category	Description
High	Definite susceptible to a potential impact of project activity and the high priority of mitigation
Medium	Moderate susceptible to a potential impact of project activity and the mitigation of impact is required
Low	Unlikely (or low likelihood) impact, minor deterioration and/or short-term impact and/or small footprint

Table 4-19: Sensitive Receptors and Environmental Values

Feature Category	Feature Sensitivity	Number of Features Found
Agricultural Land Area	Low	multiple
Settlements - Large (>30 houses)	High	1
Settlements - Medium (<30 houses)	High	6
Settlements – Small (<15 houses)	Medium	46
Major Roads	High	3
Water Bodies/ Crossings	Medium	17
Educational Facilities	High	7
Religious/Cultural	High	9

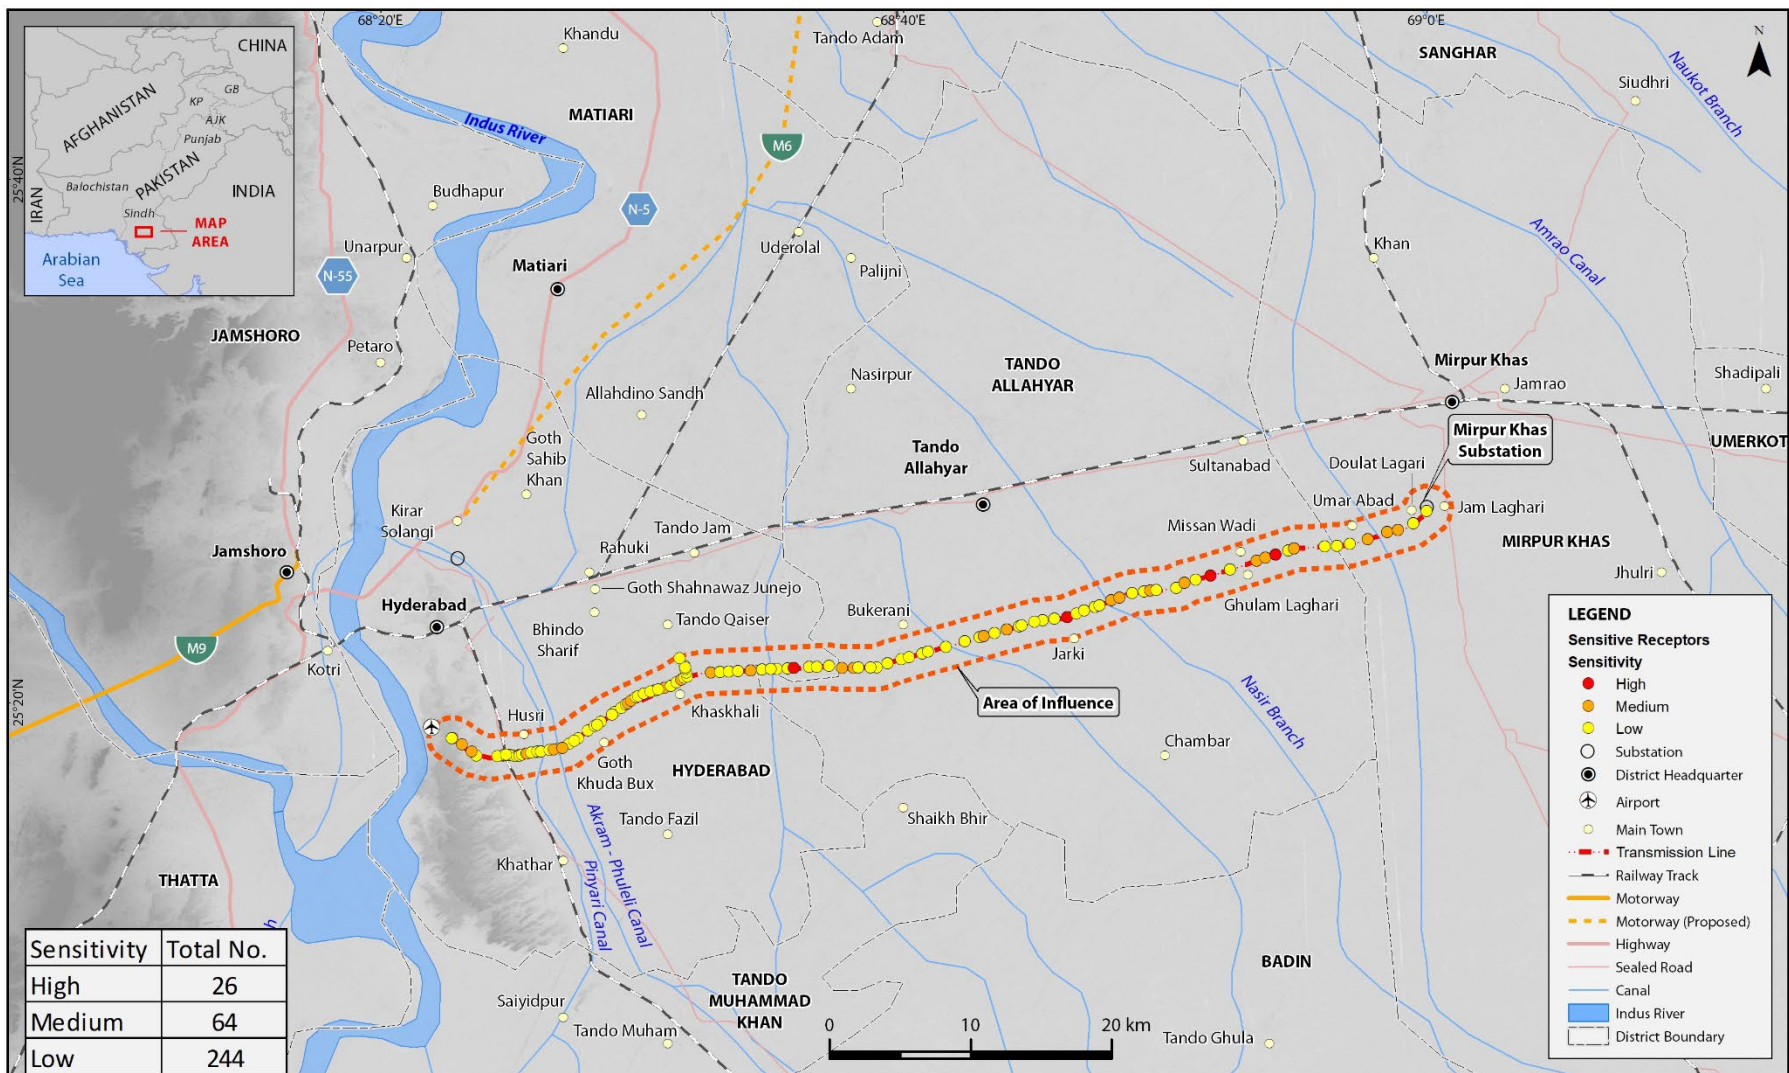


Figure 4-14: Sensitive Receptors in Aol

4.3 Ecology

214. The ecology baseline has been prepared to provide an overview of the ecological conditions in the Aol and surroundings. It includes information collected from a literature review and IEE study undertaken for the Project (IEE in July 2017. See footnote 95 on page 89).

215. The information in the section has been reviewed by the ecologist during this IEE study.

216. The Aol for ecology is the same as defined in **Section 3.1**.

217. The proximity analysis was carried out using Integrated Biodiversity Assessment Tool (IBAT) to identify the biodiversity features and species which are located within 10 km of the Project radius. The IBAT findings report is provided in **Annexure V**.

218. No critical or endangered species found in the Aol. IBAT identifies no key biodiversity areas or protected areas within a buffer of 10 km around The Project area.

219. The IBAT identifies 36 species of different classes (Mammalia, Aves and Reptilia) in 50 km buffer area of the proposed ETL.

220. However, the IBAT predicted the presence of some species in the project area but based on available literature and IUCN data the some of the IBAT predicted species are not found in the project area. For example,

- The IBAT predicted the presence of Common Leopard *Panthera pardus* in the near vicinity of the project area but the published data shows that Common Leopard has been extirpated from this region long ago.
- Similarly, the IBAT also predicted the presence of Asiatic Black Bear *Ursus thibetinus* but the IUCN species distribution data shows that the distribution range of Asiatic Black Bear does not fall in Sindh province.
- The past record of Black Bear distribution shows that once Black Bear was distributed in neighboring province (Baluchistan), however in present time the Baluchistan Black Bear *Ursus thibetanus gedrosianus* has a narrow distribution range in Baluchistan and the species has extirpated from most of its former range.
- In the same way the IBAT claimed the presence of Greater Adjutant *Leptoptilos dubius* in the project area but based on the IUCN data this species is extinct from Pakistan.
- Pallas Fish Eagle *Haliaeetus leucoryphus*, Lesser Florican *Sypheotides indicus*, Sociable Lapwing *Vanellus gregarius*, Red-headed Vulture *Sarcogyps calvus*, Indian Vulture *Gyps indicus*, Yellow Monitor Lizard *Varanus flavescens*, Indian Skimmer *Rynchops albicollis*, Black-bellied Tern *Sterna acuticauda* and Urial Ovis *vignei* presence are predicted by IBAT in and around the project area but the published literature and IUCN species distribution data shows that the aforementioned species are not found in 10-15 km buffer area of the project.

221. About 24 globally threatened wildlife species presence predicted by IBAT and also from published literature^{60, 61, 62} and IUCN data includes.

222. Among them the White-rumped Vulture *Gyps bengalensis* is listed as Critically Endangered in the IUCN Red List.

223. The Endangered species found in and around the project area includes Indian Pangolin *Manis Crassicaudata*, Hog Deer *Axis porcinus*, White-headed Duck *Oxyura leucocephala*,

⁶⁰ Roberts, T.J. and Bernhard (principe d'Olanda.), 1977. The mammals of Pakistan.

⁶¹ Molur, Sanjay. "Status and Red List of Pakistan's Mammals." (2003).

⁶² Grimmett, R., Roberts, T.J., Inskipp, T. and Byers, C., 2008. *Birds of Pakistan*. A&C Black.

Egyptian Vulture *Neophron percnopterus*, Steppe Eagle *Aquila nipalensis*, Saker Falcon *Falco cherrug*, Softshell Turtle *Nilssonina gangetica*, Spotted Pond Turtle *Geoclemys hamiltonii*, Crowned River Turtle *Hardella thurjii*, and Indian Peacock Softshell Turtle *Nilssonina hurum*. The globally listed as Vulnerable species found in and around the project area includes Fishing Cat *Prionailurus viverrinus*, Marbled Teal *Marmaronetta angustirostris*, Common Pochard *Aythya ferina*, Yellow-eyed Pigeon *Columba eversmanni*, River Tern *Sterna aurantia*, Greater Spotted Eagle *Clanga*, Tawny Eagle *Aquila rapax*, Eastern Imperial Eagle *Aquila heliaca*, Asian Houbara *Chlamydotis macqueenii*, Mugger Crocodile *Crocodylus palustris*, Indian Roofed Turtle *Pangshura tecta*, Indian Flapshell Turtle *Lissemys punctata* and Indian Spiny-tailed Lizard *Saara hardwickii*.

4.3.1 Flora

224. There are four phytogeographical regions in Pakistan. The Aol falls into the Saharo-Sindian region. This region is considered poor in vegetative diversity; despite its enormous size, only 9.1% of the known 5,738 floral species of Pakistan are found in this region (Rafiq and Nasir 1995)⁶³. The vegetation of this region is typical of arid regions and consists of xerophytic species that are adapted to extreme seasonal temperatures, moisture fluctuation, and a wide variety of soil conditions.

225. The common plants are Thuhar (*euphorbia caducifolia*), phog (*calligonum polygonoeides*), ak (*calotropis gigantea*). In irrigated tracts babor/babul (*acacia nilotica*), talhi (*Dalbergia sisoo*), neem (*azatriteha indica*), jar (*salvadora oleoides*), kri (*tamarix gallica*) are found.⁶⁴

226. The project area passes through various types of land uses including agriculture, grassland, desert, etc. The major agricultural crops in Sindh province include rice, wheat, cotton, sugarcane, peanut, fodder crop and vegetables.⁶⁵

227. It is estimated that 1500-2000 different fruit trees will be required to clear hose fall on RoW. The contractor will plan for planation of mature trees in ration of 1:10 (10 trees for each falling tree).

4.3.2 Fauna

228. Fauna within the Project area includes the following.

229. Mamalian species found in the project area or in 10 km buffer area are common in the plains of Sindh (**Table 4-20**). Domestic animals include cows, buffaloes, sheep, goats, cats, and camels. Another important domestic animal of the area is the donkey, which is used for cart pulling (IEE in July 2017. See footnote 95 on page 89).⁶⁶

Table 4-20: Mammal Species in Project Area

References ^{67, 68}		
Common Name	Scientific Name	Conservation Status
Red Fox	<i>Vulpes vulpes</i>	Least Concern
Small Asian Mongoose	<i>Herpestes javanicus</i>	Least Concern
Golden Jackal	<i>Canis aureus</i>	Least Concern

⁶³Rafiq, Rubina A., and Nasir, Yasin J. 1995. Wildflowers of Pakistan, Oxford University Press.

⁶⁴Ibid.

⁶⁵Ibid.

⁶⁶Roberts, T.J. and Bernhard (principe d'Olanda.), 1977. The mammals of Pakistan.

⁶⁷Molur, Sanjay. "Status and Red List of Pakistan's Mammals." (2003).

⁶⁸Roberts, T.J. and Bernhard (principe d'Olanda.), 1977. The mammals of Pakistan.

Common Name	Scientific Name	Conservation Status
Indian Hare	<i>Lepus nigricollis</i>	Least Concern
Porcupine	<i>Hystrix indica</i>	Least Concern
Wild boar	<i>Sus scrofa</i>	Least Concern
Five Striped Palm Squirrel	<i>Funambulus pennantii</i>	Least Concern
Indian Hedgehog	<i>Paraechinus micropus</i>	Least Concern

230. Some mammalian species which were once common in the area have now become extinct or near extinction in the area on account of the excessive shooting, hunting/poaching, and loss of habitat. For example,

- The Common Leopard distribution range was known to fall in the project area but in present time the Leopard is extirpated from this region.
- Species other than Common Leopard include Indian Pangolin, Grey Wolf *Canis lupus* and Hog Deer which are critical habitat triggers in the project area, as listed in the IBAT report (IEE in July 2017. See footnote 95 on page 89). Based on the IUCN species distribution Data the Indian Pangolin current distribution falls in the project area while the distribution range of Hog Deer is falls away from the project area. Both species are listed as Endangered in the IUCN Red List.
- Furthermore, the range of grey wolf falls in the project area but the species is globally listed as Least Concern.

231. Rodents and other small mammalian species found in the project area include Indian Hare *Lepus nigricollis*, Indian Crested Porcupine *Hystrix indica*, Indian Hedgehog *Paraechinus micropus*, Five Striped Palm Squirrel *Funambulus pennantii*, House Mouse *Mus musculus* are the basic rodents found in the project area.⁶⁹⁷⁰

232. None of these small mammal's species found in the project area is listed as threatened globally on the IUCN Red Data Book.

Reptiles

233. Reptiles include snakes and small-sized lizards, which are a common sight in the area (IEE in July 2017. See footnote 95 on page 89). Based on IBAT assessment the globally listed as endangered reptile species found in the project area are include Softshell Turtle, Spotted Pond Turtle, Crowned River Turtle, and Indian Peacock Softshell Turtle while vulnerable reptile species found in the area are includes Mugger Crocodile, Indian Roofed Turtle, Indian Flapshell Turtle and Indian Spiny-tailed Lizard.

Amphibian

234. Toad (*Bufo bufo*) and Frog (*Rana tigrina*) are commonly found in the project area (IEE in July 2017. See footnote 95 on page 89).

Birds

235. A total of 451 bird individuals belonging to 25 species were reported in the available literature.⁷¹ The maximum bird abundance was observed in the wetlands followed by the agricultural fields. The maximum bird diversity was observed in agricultural fields.

⁶⁹Roberts, T.J. and Bernhard (principe d'Olanda.), 1977. The mammals of Pakistan.

⁷⁰Ibid.

⁷¹EIA of Jamshoro Thermal Generation Project, 2013.

236. The most abundant bird species seen in the area included the Rock Pigeon *Columba livia* and the Great Cormorant *Phalacrocorax carbo* followed by the Little Egret *Egretta garzetta* and House Crow *Corvus splendens*.

237. Although detailed study about the bird diversity, abundance and distribution is not available for the project area however, based on the IBAT assessment and data from some published literature⁷² and IUCN shows that globally threatened bird species found in the project area include White-rumped Vulture which is listed as Critically Endangered in the IUCN Red List. The endangered bird species found in and around the project area includes White-headed Duck, Egyptian Vulture, Steppe Eagle, Saker Falcon while the Vulnerable species found in and around the project area includes Marbled Teal, Common Pochard, Yellow-eyed Pigeon, River Tern, Greater Spotted Eagle, Tawny Eagle, Eastern Imperial Eagle, and Asian Houbara.

238. Beside threatened species, thousands of migratory birds like cranes, goose, ducks, storks, and raptors such as the Steppe Eagle migrates to Pakistan from Europe, and the Central Asian States each year during winter due to extreme winter condition in their native ground.

239. These birds that originally reside in the northern states spend winters in various wetlands and deserts of Pakistan from the high Himalayas to coastal mangroves and mudflats in the Indus delta. These migratory birds mostly enter Pakistan's northern area and follow the Indus Flyway⁷³ and reach the southern part of the country and return to their native ground before the start of summer.

240. This famous route (Central Asian - Indian Flyway) from Siberia and other part of Europe to various destinations in Pakistan over the Karakorum, Hindu Kush, and Suleiman Ranges along Indus River down to the delta is known as International Migratory Bird Route Number 4.

241. It is also called the Green Route or more commonly Indus Flyway⁷⁴ (Figure 4-15).

242. The birds start on this route in November. February is the peak time and by March they start flying back home. These periods may vary depending upon weather conditions in Siberia and/or Pakistan. As per an estimate based on regular counts at different Pakistani wetlands, between 700,000 and 1,200,000 birds arrive in Pakistan through Indus Flyway every year.⁷⁵ Some of these birds stay in the lakes but the majority migrates to coastal areas.

243. The proposed ETL project lies in the Indus Flyway and common migratory birds that pass through this area include Northern Shoveler *Spatula clypeata*, Lesser Whistling Duck *Dendrocygna javanica*, Graylag Goose *Anser anser*, Bar-Headed Goose *Anser indicus*, Common Shelduck *Tadorna tadorna*, Gadwall *Mareca strepera*, Mallard *Anas platyrhynchos*, Eurasian Teal *Anas crecca*, Northern Pintail *Anas acuta*, Common Pochard *Aythya ferina*, Common Crane *Grus grus*, Demoiselle Crane *Anthropoides virgo*, Eurasian Spoonbill *Platalea leucorodia*, Little Grebe *Tachybaptus ruficollis*, etc.

244. The electrocution of large birds is not considered significant because there is an EMF around the high voltage ETLs and due to excessive noise, which defers birds. However, even if the birds sit on the conductors, the danger will arise if two phases of the current meet, but as there is sufficient distance between the two opposite phased conductors; therefore, no danger to birdlife is expected.

⁷² Grimmett, Richard, Tom J. Roberts, Tim Inskipp, and Clive Byers. 2008. *Birds of Pakistan*. A&C Black.

⁷³ Convention on the Conservation of Migratory Species. 1 February 2006. Central Asian Flyway Action Plan for the Conservation of Migratory Waterbirds and their Habitats. New Delhi, 10-12 June 2005: UNEP/CMS Secretariat.

⁷⁴ Convention on the Conservation of Migratory Species. 1 February 2006. Central Asian Flyway Action Plan for the Conservation of Migratory Waterbirds and their Habitats. New Delhi, 10-12 June 2005: UNEP/CMS Secretariat.

⁷⁵ Pakistan Wetlands Programme. 2012. Migratory Birds Census Report.

245. The collision and siting of birds will be further avoided by installing visibility enhancement objects such as marker balls, bird deterrents, or diverters.

246. Several migratory birds have been reportedly seen in the Sindh province. The winter visitors' birds' details are provided in **Table 4-21**.

Table 4-21: Winter Migratory Birds

Common Name	Scientific Name	Conservation Status
Grey Heron	<i>Ardea cinerea</i>	Least Concern
Common Teal	<i>Anas crecca</i>	Least Concern
Northern Shoveler	<i>Anas clypeata</i>	Least Concern
Common Coot	<i>Fulica atra</i>	Least Concern
Common Pochard	<i>Aythya ferina</i>	Least Concern
Eurasian Wigeon	<i>Anas Penelope</i>	Least Concern
Gadwall	<i>Anas strepera</i>	Least Concern
Garganey	<i>Anas querquedula</i>	Least Concern
Mallard	<i>Anas platyrhynchos</i>	Least Concern
Eurasian Sparrow Hawk	<i>Accipiter nisus</i>	Least Concern
Osprey Hawk	<i>Pandion haliaetus</i>	Least Concern
Peregrine Falcon	<i>Falco peregrines</i>	Least Concern
Black-headed Gull	<i>Larus ridibundus</i>	Least Concern
<i>Northern Pintail</i>	<i>Anas acuta</i>	Least Concern
Caspian Gull	<i>Larus cachinnans</i>	Least Concern
Eurasian Spoonbill	<i>Platalea leucorodia</i>	Least Concern
Common Crane	<i>Grus grus</i>	Least Concern
Demoiselle Crane	<i>Anthropoides virgo</i>	Least Concern
<i>Little Grebe</i>	<i>Tachybaptus ruficollis</i>	Least Concern
<i>Steppe Eagle</i>	<i>Aquila nipalensis</i>	Endangered

247. Detail of summer migrant birds is provided in **Table 4-22**.

Table 4-22: Summer Migratory Birds

Common Name	Scientific Name	Conservation Status
Small Pratincole	<i>Glareola lactea</i>	Least Concern
Indian Skimmer	<i>Rynchops albigollis</i>	Vulnerable
Chestnut-shouldered Petronia	<i>Petronia xanthocollis</i>	Least Concern

248. The area is not declared as a protected wetland of international importance (Ramsar site).⁷⁶ It is also not part of a game sanctuary or game reserve. Since the Aol is located relatively close to the coast, most of the migratory birds do not use it as a breeding and nesting area but merely as a resting ground on their way to coastal areas where there are greater food and habitat available.⁷⁷

⁷⁶The Convention on Wetlands of International Importance, called the Ramsar Convention, is an intergovernmental treaty that provides the framework for national action and international cooperation for the conservation and wise use of wetlands and their resources.

⁷⁷ EIA of Jamshoro Thermal Generation Project, 2013.

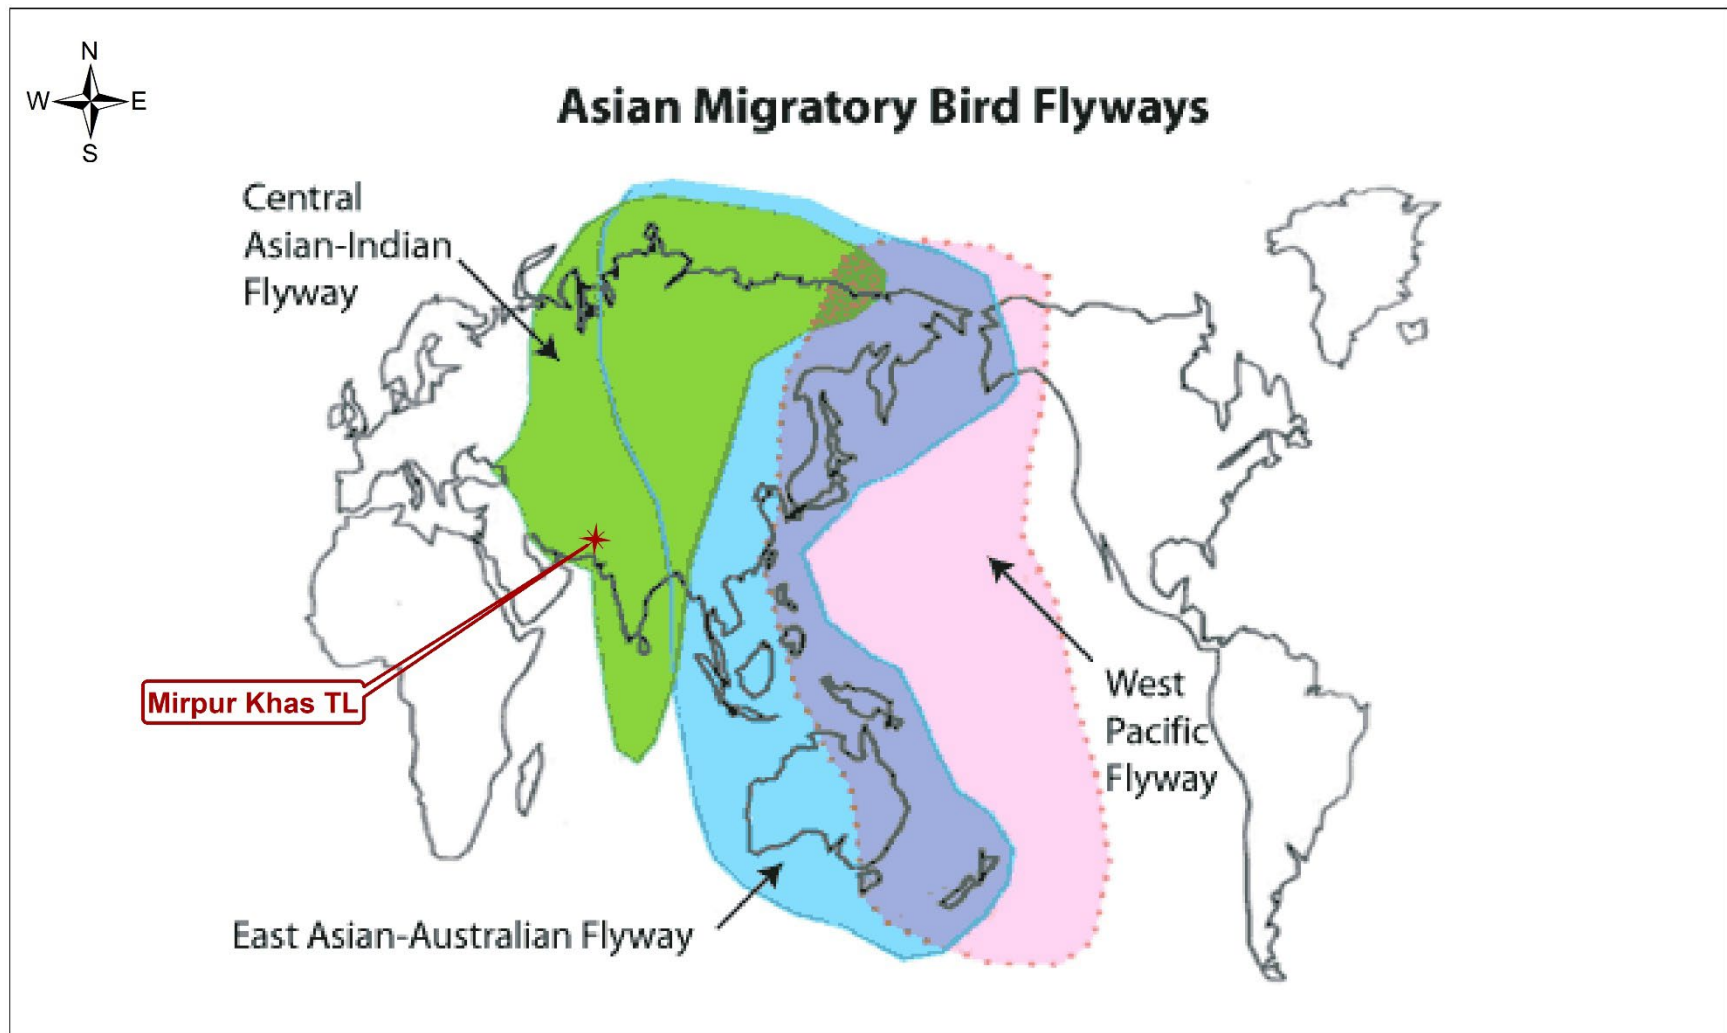


Figure 4-15: Asian Migratory Birds Flyways

Fisheries

249. Fishery activities were neither observed nor reported by the local inhabitants of the project area during the field survey. As such, fishery discipline is conspicuous by its absence in the area; therefore, the project will not pose any threat/impact to the Fishery sector (IEE in July 2017. See footnote 95 on page 89).

250. At least 49 fish species⁷⁸ have been recorded from the reaches of the River Indus near the Aol and its environs⁷⁹ and a number of these species, with the exception of reservoir species, are also likely to occur in the Phuleli Canal and Akram wah Canal.

251. These include members from the Family Clupeidae, Cyprinidae, Bagridae, Schilbeidae, Chandidae etc. Common fish species found in the Study Area include Mrigal *Cirrhinus mrigala* (Morakha), Kurialabeo *Labeo gonius* (Seereha), Spotfin Swamp Barb *Puntius sophore* (Popra), Pabdah Catfish *Ompok pabda* (Dimmon), Freshwater Shark *Wallago attu* and the Zig-zag Eel *Mastacembelus armatus* (Goj).

252. Most of the species are common but the species *Chitala chitala*, *Macrognathus pancalus* and *Tenuelos ailisha* are rare in the area. Species *Chitala chitala* and *Macrognathus pancalus* are generally rare throughout the country while the species *Tenuelos ailisha* is rare in the reservoir at Kotri Barrage due to overfishing in the breeding season, scarcity of water and destruction of breeding grounds.⁸⁰

4.3.3 Wetlands and Aquatic Biology

253. No wetlands, which are notified by the GoP lie within the project area of the Project alignment in any Angle Marking of the project. Thus, there will be no impact on any wetland biodiversity.⁸¹

4.3.4 Game Reserves & Wildlife Sanctuaries

254. The proposed project route will not pass through or cross any protected areas i.e., Game Reserves, National Parks, and Wildlife Sanctuaries, etc. The proposed sub-Project, therefore, will not cause any impact on the flora and fauna of the Reserved Forest.⁸²

4.3.5 Conclusion

255. The IBAT identified a total 36 species of mammals, birds, and reptiles however, 12 out of these 36 species are not found in the project area.

256. Few of these species are extirpated from the area like Common Leopard while some species distribution range does not fall in and near vicinity of the proposed Project area like Black Bear.

257. About 24 globally threatened wildlife species presence predicted by IBAT and from published literature^{83, 84, 85} and IUCN data.

⁷⁸ <https://www.adb.org/sites/default/files/linked-documents/47094-001-eiaab.pdf>.

⁷⁹ Hussain, Z., (1973) Fish and fisheries of the lower Indus basin (1966-67), Agric. Pakistan, (24): 170-188.

⁸⁰ <https://www.adb.org/sites/default/files/linked-documents/47094-001-eiaab.pdf>.

⁸¹ Ibid.

⁸² Ibid.

⁸³ Roberts, T.J. and Bernhard (principe d'Olanda.), 1977. The mammals of Pakistan.

⁸⁴ Molur, Sanjay. "Status and Red List of Pakistan's Mammals." (2003).

⁸⁵ Grimmett, R., Roberts, T.J., Inskipp, T. and Byers, C., 2008. *Birds of Pakistan*. A&C Black.

258. Among these the White-rumped Vulture is listed as Critically Endangered in the IUCN Red List.

259. The Endangered species found in and around the project area includes Indian Pangolin White-headed Duck, Egyptian Vulture, Steppe Eagle, Saker Falcon, Softshell Turtle, Spotted Pond Turtle, Crowned River Turtle, and Indian Peacock Softshell Turtle.

260. The globally listed as Vulnerable species found in and around the project area includes Fishing Cat, Marbled Teal, Common Pochard, Yellow-eyed Pigeon, River Tern, Greater Spotted Eagle, Tawny Eagle, Eastern Imperial Eagle, Asian Houbara, Mugger Crocodile, Indian Roofed Turtle, Indian Flapshell Turtle and Indian Spiny-tailed Lizard.

261. Although, a number of global conservation wildlife species presence are identified by IBAT and IUCN species distribution data, but this data does not trigger any critical habitat criteria as these species have wide distribution range and none of the species found in the project area is endemic.

262. The ecological important areas in the region are shown in **Table 4-18**.



4.4 Socioeconomic Environment

263. The sub-section provides information on socio-economic environments existing in and around the Aol including methodology, administrative setup, demographic characteristics, educational and institutional facilities, transportation, water supply, income sources, common diseases, religious/archeological and historical sites (if any) existing in the area.

4.4.1 Methodology and Data Sources

264. Information required for the socioeconomic baseline is based on information collected from a literature review, IEE⁸⁶ of the Project conducted in July 2017 and Land Acquisition and Resettlement Plan (LARP)⁸⁷ for the Project conducted in June 2017.

4.4.2 Administrative Setting

265. The proposed sub-Project includes installation of towers and ETLs. The land required for the construction of proposed ETL of 70 km passes through 92 villages⁸⁸, 7 tehsils (Kotri, Qasimabad, Latifabad, Tando M. Khan, Chamber, Jhando Mari, and Shujababd) fall in the jurisdiction of 3 districts namely Hyderabad, Tando Allah Yar, and Mirpur Khas districts of Sindh Province, Pakistan.⁸⁹

266. The potential administration system is identical all over the country. Union Council (UC) is the lowest tier of the local government. A sherwan or village council in Pakistan is an elected local government body headed by a Nazim (which is equivalent to a mayor) and a Naib Nazim (Deputy Mayor). Union councils are the fifth tier of government in Pakistan and are often known as "village councils" in rural areas, the territory represented by a village council usually comprises a large village and surrounding areas, often including nearby small villages. The term "union council" may be used for localities that are part of cities (IEE in July 2017. See footnote 95 on page 89).

267. Headed by a union Nazim, each union council has 13 elected members or councilors. In addition to four male and two female members elected directly, there are two male and two female representatives of the labor, a minority member, a union council Nazim and his deputy known as union council Naib Nazim. Beside elected members, there are several government employees and functionaries in every union council, who report to the secretary of the union council. The territory of a union council or village council is usually part of a tehsil (a district subdivision).⁹⁰

268. Taluka/Tehsil Council is the next tier of local government. About 4 to 5 UCs fall in the Taluka/Tehsil Council (TC). Taluka/Tehsil is a sub-unit of the district, which is the highest tier of

⁸⁶Grimmett, R., Roberts, T.J., Inskipp, T. and Byers, C., 2008. *Birds of Pakistan*. A&C Black.

⁸⁷Draft LARP of 220 kV Mirpur Khas Grid Station with associated Transmission Line, June 2017.

⁸⁸Khuda Bux Gopang, Khud Bux, Tando Thoro, Long Chand, Rong Chand, Agan Khaskheli, Peroz Parhyar, Ali Bux Gopang, Haji Hadi Bux, Parho Gopang, Sukhapur, Khameso Shoro, Achar Shoro, Watto Shoro, Balochi Goth, Hosri City, Jamal Kachi, Haji Mosa Shoro, Mrtaza shorohyd, Hassan Shoro, Wali M Shoro, Pir Bux, Sahib Khan Merani, Mangsi Goth, Ditha Station, Haji Mochar, Idrees Goth, Detha Station, Akk Detho, Ranjho Khan, Khawind Bux, Rahuki, Shah Nawaz Junejo, Noor M Junejo, Dhamach, Haji Abdul Nabi Noorani, Mir Zamir Koat, Gul M Burfat, Dehli farm tando Jam, Tando jam Town, Mir goth, Razdin Mari, Sarrang Faqeer, Sarang faqeer gopang, Allah Bux magsi, Allah rakhio khoso, jamal khan kolai, Abdullah nahiyun, sabhago kabi, Sabhyo khan kalhao, haji rasheed, Suhail sahib, Dhinganro Bozdar, Shah M. Jamali, Haji Nazeer (Rashidabad), Haji Nazeer Goth, Magsi Park, Magsi Farm, Tando Allahyar, Jamali Pump, Haji Iqbal Memon, Ghulam hussain Pitafi, Qazi M. Halepoto, Metlo Kalro, Bashir Ahmed Yousfani, Bhatti Hotel, A. Qadir Yousfani, Noor Ahmed, Shah Jilani, Haji Mohammad Bux Brohi, Qadir Bux Gopang, M.Soomar Kakepoto, Haji Umer Kakepoto, Hameed Farm/Kamaro Shareef, Agaya Dino Dall, Shoukat Halepoto, M. Ali , Halepoto, Haji Malik, Mir M hingoro, Khuwaja Goth, Misri bheel, Jananr Hingoro, Haji M. Rahim Memon, Qasim Rangers farm, Haji Kareem Dad, Budho Khan Laghari, IslamPur, Haji Karim Dad, Nandi Mesan, Hussainabad, Yar M Laghari and Haji Jafar Hakro.

⁸⁹Draft LARP of 220 kV Mirpur Khas Grid Station with associated Transmission Line, June 2017.

⁹⁰Ibid.

the local government system, dealing with administrative matters at the district level. In Sindh province, it is called a Taluka Council (IEE in July 2017. See footnote 95 on page 89).

269. A district is composed of 3 to 5 Talukas/Tehsils and is governed by the District Coordination Officer (DCO). The local government system comprises UCs consisting of members directly elected through an open competition, which is also from the Electoral College for the selection of the members for the next higher tier. This reveals that UCs have a sizable representation from the vulnerable groups belonging to the local community including female members. Considering the social, geographical as well as the traditional settings of the area in the Project area, the lives of the people in rural areas have “Bradari system”, which determines the socio-economic pattern of the people’s life.⁹¹

270. Union Council Nazim is responsible to collect and maintain statistical information for socio-economic surveys in the community and to consolidate village and neighborhood development needs and priorities them into union-wide development proposals with the approval of the Union Council and make recommendations thereof to the district government of Tehsil Municipal Administration, as the case may be. Union council Nazim also manages O&M of public resources such as drinking water, including wells, water pumps, tanks, ponds, and other works for the supply of water. Union council Nazim has access to Tehsil Nazim and Tehsil Nazim has access to District Nazim. The district government takes funds from the provincial government and district Nazim allocate funds with the coordination of DCO to tehsil Nazim and Tehsil Nazim allocates funds as per the need of the administrative set up at the district, tehsil, and Union Council levels.⁹²

4.4.3 Demographics

Population

271. According to the census of 2017, the total population of Hyderabad is 2,199,463, Tando Allah Yar is 836,887 and Mirpur Khas is 1,505,876.⁹³ Based on average 2.4% growth rate of 2017 population the current population of Hyderabad is 2,259,948, Tando Allah Yar is 937,312 and Mirpur Khas is 1,686,581.

272. The male population is high 52% as compared to the female population which is 48% of the total population (**Figure 4-17**). Household size may also affect the economic situation of the household.⁹⁴

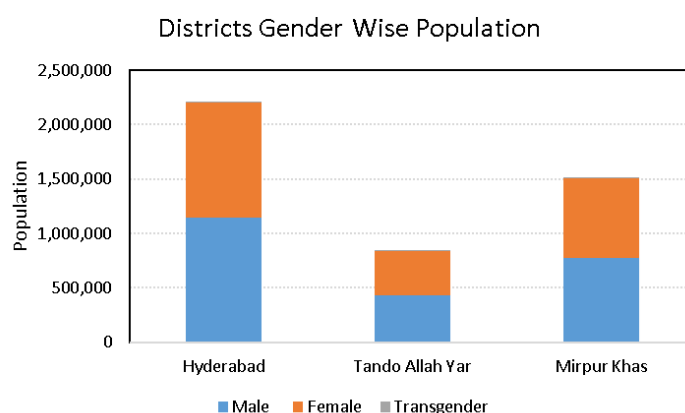


Figure 4-17: Gender Ratio of Respondents

⁹¹ Draft LARP of 220 kV Mirpur Khas Grid Station with associated Transmission Line, June 2017.

⁹² Ibid.

⁹³ Population census of Pakistan, 2017.

⁹⁴ Ibid.

Family / Household Size

273. The highest average household size is 8.5 and the lowest average household size is 5.5. The joint family system is common throughout the Project area, whereas only a small percentage of families is living like a single family (called a nuclear family system). In a few areas, the tribal system exists, thus people give preference to live as a joint family. During the discussions with the locals, it was clarified that the larger family size is treated as the strength of the family. Based on the social survey, the overall average household size is concluded as 7, which is higher than DCRs average family size. The higher values of household size are based on the fact that most of the part of the proposed ETL will cross the rural areas, while in the district Census Report (DCR), the average household size of the entire district is provided.⁹⁵

Ethnicity/ Caste Groups

274. The core unit of social organization is the baradari/caste group, which is either defined based on specific occupation or lineage. Occupationally defined caste groups are considered as lower status in the social setup in which they are living. For instance, occupationally defined baradari /caste groups are Mochi (Cobbler), Machi (Fisherman), Nai (Barbar), Gujjar (Dairy and Livestock), Julahay (Weavers) while lineage based baradari/caste groups are Mammon, Halipota, Somoro, Solingi, Thaker, Syed and Panher, Mochi (Cobbler).⁹⁶

275. It is worth mentioning here that the major castes/tribes were important because they have a key role in decision making regarding the resolution of social issues of family matters. For instance, Landlord (locally named as Vadaira/Raise) and Shah, as well as the head/ or elder of the respective tribe, generally make decisions related to the social issues at the village level as well as the social development works in their areas. It was assessed that before the initiation of any project/ program, it is essential to involve these effective groups/ tribes at each stage from the design, implementation, and operation of the Project for the success of the Project (IEE in July 2017. See footnote 95 on page 89).

Languages Spoken

276. Sindhi as a mother tongue is spoken in the Project area. However, Urdu and Punjabi are also spoken.⁹⁷

4.4.4 Social Infrastructure

Health

277. Health facilities are inadequate in the Project area. The people in the Project area trend to get treatment from indigenous healers, due to the lack of suitable and sufficient health facilities. Bad sanitary conditions, insufficient medical facilities, and meager parental care, all contribute to the prevalence of ill health and the high rate of mortality in the Project area.⁹⁸

278. Per health perspective in the Project area, 15% of the households did not suffer from any disease while 85% of the respondents spoke about various diseases like Diarrhea, Hepatitis, Malaria, Typhoid, Diabetes, Dengue, and Heart problem as presented in the **Figure 4-18**. The people reported that most of the diseases are happened due to poor sanitation and unsafe

⁹⁵ An IEE prepared for Tranche 2: 220 kV Mirpur Khas Substation in June 2017: [Power Transmission Enhancement Investment Program II - Tranche 2: 220 kV Mirpur Khas Substation Initial Environmental Examination | Asian Development Bank \(adb.org\)](#)

⁹⁶ Ibid.

⁹⁷ Ibid.

⁹⁸ Ibid.

drinking water. However, most of the households have shown un-satisfaction with the available health facilities (from the government) in the Project area. On average, they are spending about Rs.618 on medical treatment every month.⁹⁹

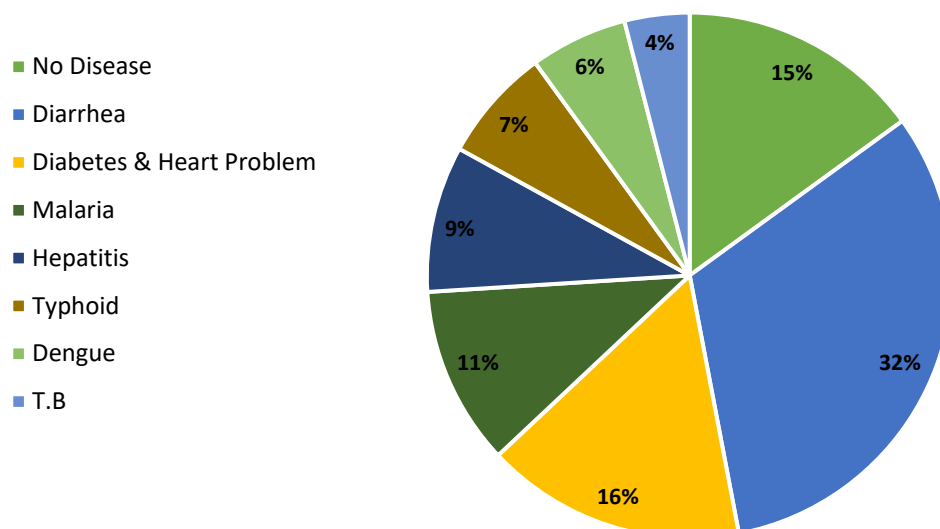


Figure 4-18: Prevailing of Disease in the Project Area

Literacy Status

279. The literacy rate is measured as the number of literate people among the population of 10 years and above. The literacy rate in the Project area is lower compared to the national level.¹⁰⁰

280. **Figure 4-16** shows 30 percent of the respondents reported illiterate, however in the perspective of education distribution, 27 percent of the respondents are educated till primary level (five years of schooling), 15 percent till middle school (8 years of schoolings), 13 percent of the respondents are matriculated. The respondent, 8%, 5%, and 2% are educated up to intermediate, graduation, and postgraduate/master respectively. Notably, 88% of the respondents have had Deeni (religious) education, i.e., can read the Holy Quran.

281. In terms of the availability of educational infrastructure, people are not satisfied with the higher education centers. They have to travel a maximum of 6 km away for higher education. Hence, it becomes difficult to provide education for the girl as due to lack of security they can't send their daughters alone for education purposes. However, all the people have easy access to lower education centers, i.e., till primary to the middle.¹⁰¹ It is graphically represented in **Figure 4-19**.

⁹⁹ Draft LARP of 220 kV Mirpur Khas Substation with associated Transmission Line, June 2017.

¹⁰⁰ First Draft LARP of 220 kV Mirpur Khas Substation with associated Transmission Line, June 2017.

¹⁰¹ Ibid.

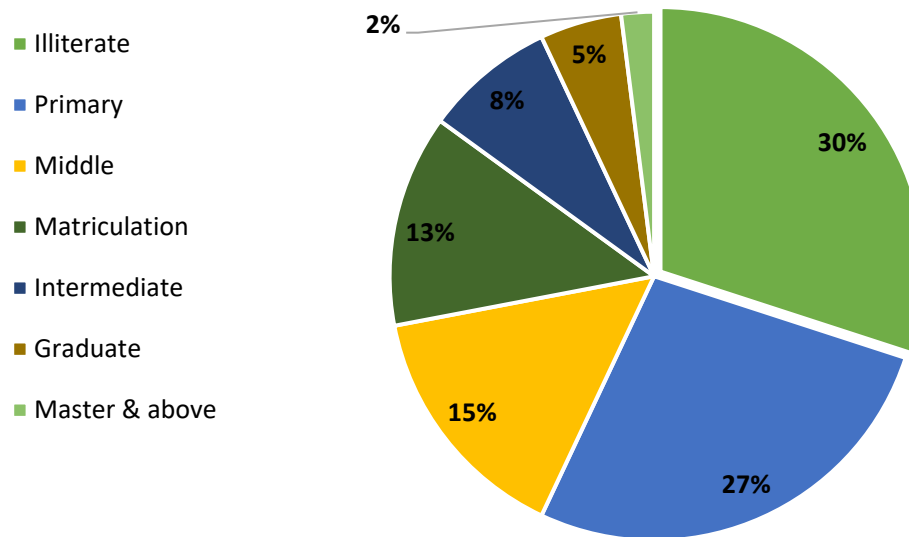


Figure 4-19: Education Level in the Project Area

4.4.5 Physical Infrastructure

282. **Table 4-23** and **Figure 4-20** depicts the picture of available social amenities in the Project area. It indicates that all the houses in the Project areas are electrified. However, people are not satisfied with the power supply. They complained about the frequent power failure and low voltage; eventually, leave an adverse impact on daily life.¹⁰²

283. Natural gas (or Sui Gas) is available to 63.7% of the household in the Project area, however, it has emerged as the need of the entire project area, and it is ranked as the top priority demand of women in the Project area (IEE in July 2017. See footnote 95 on page 89).

284. Potable drinking water supply is available to 50% of the houses and people are only relying on the groundwater, extracted either manually through hand pump or electrically through the electric pump. There are the cases that people bring the drinking water from the tube well, being installed for irrigation purposes.¹⁰³

285. Similarly, only 65.7% of the households have access to the sewerage and drainage system while 34.3% are still looking to have this facility. People complained that their life becomes miserable especially during the rain owing to have a muddy situation in the streets.¹⁰⁴

286. In terms of health and education facilities, these are available to 96% and 97% of the households respectively. Among them 48% of the respondents complained about the poor services provided in the Government hospitals and schools, hence they are forced to get the services from the private sources, ultimately have to personally bear the expenses (IEE in July 2017. See footnote 95 on page 89).

287. Besides, the roads are available to 97% of the households, however, the local people are not happy on the available road infrastructure, as mostly required extensive maintenance.¹⁰⁵

¹⁰² First Draft LARP of 220 kV Mirpur Khas Substation with associated Transmission Line, June 2017.

¹⁰³ Ibid.

¹⁰⁴ Ibid.

¹⁰⁵ Ibid.

Table 4-23: Access to Social Amenities in the Project Area

Facility	Road	Electricity	Education	Sui Gas	Water supply	telephone	Sewerage/ Drainage	Health care center/ BHU/ Dispensary
Access (%)	97.1	100	98	63.7	50	40.2	65.7	96.1

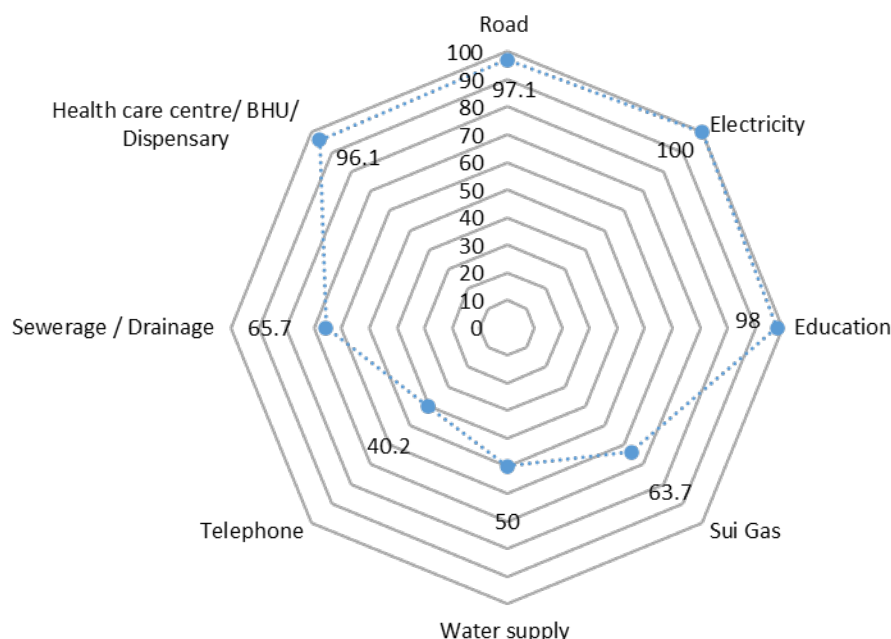


Figure 4-20: Access to Social Amenities in the Project Area

Housing

288. The housing condition is also an important parameter for the assessment of the living standard/household well-being of the locals. Information collected from primary as well as secondary sources indicates that the settlement pattern of the houses in all the districts of Sindh province is very simple.

289. In the Project area, poor people are living in a hut consisting of mud or cattle walls and a roof of thatch with a hedge around it. It consists of living rooms, a kitchen, a storeroom, a bathroom etc. The houses of Zamindar (Landlord) and well-off people are constructed of sun-dried bricks with a flat roof. It consists of a living room, with one or two side rooms, which serves as box-rooms. The houses of the rich people are distinguished by ample accommodation and more grandeur along the same lines. In the big towns such as Hyderabad, Tendo Jam, Tendo Allahyar, and Mirpur Khas, houses are usually made of burnt bricks and provided with necessary furniture and other luxury items (IEE in July 2017. See footnote 95 on page 89).

290. Pacca houses (37%) are constructed with bricks, cement, and concrete having wooden and steel doors and windows. Semi pacca houses (38%) are made of bricks (joint with mud) and their roofs are mostly of wood, iron sheet and partially bricks, whereas kacha houses (25%) are made of mud and other local material such as sticks, reeds, and iron sheet (**Figure 4-21**). The average numbers of rooms are 3.8. The field investigation shows that 98% of the respondents

are living at their self-made shelters while the 2% are living at the landlord houses and in return providing the services at their farmhouses.¹⁰⁶

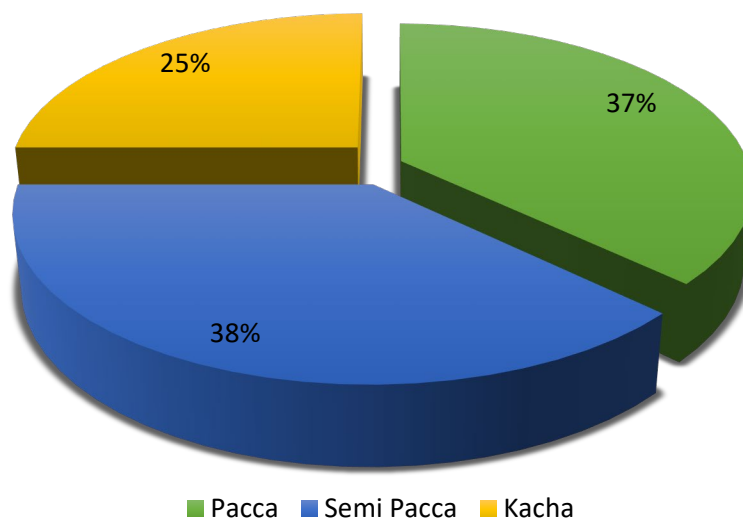


Figure 4-21: Housing Conditions of Respondents

Electricity

291. The electricity supply is available to almost all the villages and settlements along the line route. Electricity is provided by HESCO.

Sanitation / Drainage Facilities and Solid Waste

292. Sanitation is poor in the area. There is no proper sewerage system available and only a few villages of the Project area are connected with the sewerage system. In most of the cases, the village wastewater is disposed of into open spaces or nearby ponds. Ultimately, wastewater is drained into a pond/nullah, thus it becomes a source of pollution. Similarly, there is no proper arrangement for the disposal of solid waste.¹⁰⁷

Sui Gas

293. The facility of Sui gas available to the limited number of residents along the Project route. Data reveals that most people are using locally available wood and animal dung for cooking purposes, while gas is the second-highest source for cooking. Compared to wood, only a few people use kerosene oil because of the high prices of kerosene oil. The rationale to utilize wood for cooking is because it is cheap and easily available in rural areas as compared to other methods.¹⁰⁸

Education

294. During the field visit, it was observed that in the Project area, educational buildings are available. Educational institutions were found but were observed to be in poor condition. Due to

¹⁰⁶ Draft LARP of 220 kV Mirpur Khas Substation with associated Transmission Line, June 2017.

¹⁰⁷ First Draft LARP of 220 kV Mirpur Khas Substation with associated Transmission Line, June 2017.

¹⁰⁸ Ibid.

the non-availability of students as well as teachers, most of the school buildings have collapsed or are in poor condition.¹⁰⁹

Telecommunication

295. Mobile phone communication is widely spread in the RoW and the Project area, the frequent use of the mobile phone was observed. Landline facilities are available in the Project area outside the RoW. The landline facilities are available in urban areas only.

Post Offices and Banks

296. Postal, money order and bank facilities exist throughout the vicinity of the Project area.

Water Supply

297. In the Project area, the public water supply is not available, and people are dependent on the local water supply system to meet the drinking as well as household use requirements.

4.4.6 Sources of Income and Livelihood

298. It is useful to study the household's economic pattern that ultimately facilitates better planning and execution of the Project. Numerous income-generating activities are practiced in the Project area as reported by the survey. These include employment in government and private sector, wage labor, operating own business such as running fuel station, traders, shopkeepers, and transporter. Field investigation reveals that the farming is the dominant profession in the area, as 92% of the households have their affiliation with the farming practices along with the livestock rearing while 08% have alternate non-farming income sources like a job in government and private sector and labor work.¹¹⁰

Household Income Levels

299. Average household income is defined as the sum of incomes of all households' members during the month and dividing this total by the number of households. Survey data presented in **Figure 4-22** shows that the monthly average income of the household is Rs. 58,352/-.¹¹¹

300. A majority (49%) of the households fall in the high-income category (above Rs.100,000), followed by 14% representing the 2nd highest income level. These people are having big farmhouses or involved with multiple income-earning activities. Whereas, contrary to this, 3% of the households have no regular income flow, simply live in hand to mouth due to meager monthly income, less than Rs. 20,000/-. These people are living below the poverty line. Survey also reveals that 12% of the households are falling in the 2nd low-income category and are earning up to Rs. 30,000/-.¹¹²

301. The majority 49% of the households fall in category between 20,001 to 30,000 PKR/ -, followed by 25% within the range of Rs. 15001-20000, 16% for having income between Rs. 30,001-40,000/-. 19% has an income above 40,000.¹¹³

4.4.7 Archaeological Sites

¹⁰⁹ First Draft LARP of 220 kV Mirpur Khas Substation with associated Transmission Line, June 2017.

¹¹⁰ Ibid.

¹¹¹ Ibid.

¹¹² Ibid.

¹¹³ Ibid.

302. No archaeological or historical sites were observed within the Project area during the field visits (IEE in July 2017. See footnote 95 on page 89).

4.4.8 Indigenous People

303. As per the social survey, no indigenous people were found in the Project area (IEE in July 2017. See footnote 95 on page 89).

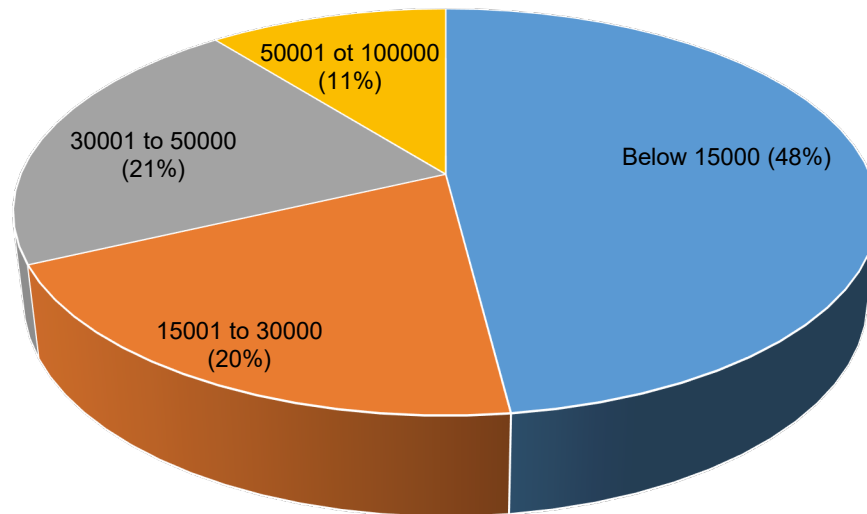


Figure 4-22: Income Level of Households

5. Anticipated Environmental Impacts and Mitigation Measures

304. This section discusses the Project's potential impact on the area's physical, ecology and socioeconomic environment and mitigation measures that will reduce, if not eliminate, its adverse impact. The mitigation measures then become part of the environmental management plan (EMP) for implementation provided in **Section 9**.

5.1 Methodology for Impact Assessment

305. Environmental and socioeconomic impacts are assessed in the following stages:

- **Scoping:** Scoping is a broad term that refers to the process through which potential environmental issues associated with the proposed project are identified. Potential impacts are identified by various means. These include, for example, concerns expressed by the community, formal checklists, and previous experience of the experts. The outcome of the exercise is the identification of all issues that need further investigation and screening out of issues that are not relevant.
- **Prediction of potential impacts:** This step refers to the evaluation and prediction, quantitatively, if possible, of the anticipated impacts of the proposed Project on various environmental factors.
- **Evaluation of the significance of predicted impacts:** Significance of the potential impacts can be determined by considering both the *consequence* and the *likelihood of occurrence* of the impact. The consequence of the proposed activity is evaluated by comparing it against recognized significance criteria, such as institutional recognition, technical recognition, scientific or technical knowledge, or judgment of recognized experts, public recognition, and professional and experience-based interpretation of the evaluator.
- **Mitigation measures:** If it is determined that the predicted impact is significant, practicable mitigation measures are identified to reduce impacts for each activity to acceptable levels.
- **Residual impacts:** This step refers to the identification of the anticipated remaining impacts after mitigation measures have been applied.
- **Management actions and monitoring:** The last step in the assessment process is the identification of the monitoring requirements to confirm that the residual impacts are within the predicted limits and to provide timely information if the impacts exceed predicted limits.

5.1.1 Evaluation of Significance of Potential Impacts

306. The significance of potential or the predicted impacts are evaluated based on their associated risk levels or effects on the receiving environment.

307. Risk is assessed as the likelihood that the activity will have an effect on the environment as well as the consequence of the effect occurring. It is often described like this:

$$\text{Risk} = \text{Likelihood} \times \text{Consequence}$$

308. Likelihood definition, consequence scale and risk score evaluation approach is provided in **Table 5-1**, **Table 5-2** and **Table 5-3**.

Table 5-1: Evaluation of Impact Significance Matrix (Likelihood Scale)

Likelihood	Definition	Scale
Certain	Will certainly occur during the activity at a frequency greater than every week if preventative measures are not applied	5
Likely	Will occur more than once or twice during the activity but less than weekly if preventative measures are not applied	3
Unlikely	May occur once or twice during the activity if preventative measures are not applied	2
Rare	Unlikely to occur during the project	1

Table 5-2: Evaluation of Impact Significance Matrix (Consequence Scale)

Consequence	Definition	Score
Catastrophic	The action will cause unprecedented damage or impacts on the environment or surrounding communities	5
Major	The action will cause major adverse damage to the environment or surrounding communities	3
Moderate	No or minimal adverse environmental or social impacts	2
Minor	No or minimal adverse environmental or social impacts	1

Table 5-3: Evaluation of Impact Significance Matrix (Risk Score Table)

Consequence				
	Catastrophic	Major	Moderate	Minor
Certain	25	15	10	5
Likely	15	9	6	3
Unlikely	10	6	4	2
Rare	5	3	2	1

Risk:

Critical: 15 – 25,

Significant/ Moderate:

6 – 10,

Low: 1 - 5

Critical and moderate risks will be addressed in EMP.

5.2 Pre-construction (design) phase Impacts

309. Proper planning during project design can significantly reduce the negative impacts at the time of construction and operation.

310. A summary of screening of potential impacts at the pre-construction (design) phase, based on methodology discussed in *Section 5.1*, is provided in **Table 5-4**.

Table 5-4: Screening of Potential Impacts at Pre-construction (design) phase

No.	Potential Impact	Likelihood (Certain, Likely, Unlikely, Rare)	Consequence (Catastrophic, Major, Moderate, Minor)	Risk Score (Critical, Significant/ Moderate, Low)	Residual Impact (Critical, Significant/ Moderate, Low)
1	Lack of integration of IEE/EMP/EIA requirements into construction bid documents	3 Likely	3 Major	9 Significant	Low
2	Lack of planning in ETL design ¹¹⁴	3 Likely	3 Major	9 Significant	Low
3	Improper Location of Camps Leading to Environmental and Social Issues	3 Likely	3 Major	9 Significant	Low
4	Lack of Project environmental safeguards (human resource) capacity	3 Likely	3 Major	9 Significant	Low
5	Removal of vegetation/trees	3 Likely	3 Major	9 Significant	Low
6	Noise caused by construction equipment	3 Likely	2 Moderate	6 Moderate	Low
7	Land acquisition	3 Likely	3 Major	9 Significant	Low
8	Waste generation	3 Likely	2 Moderate	6 Moderate	Low
9	Disruption to existing drainage pathways and utilities	3 Likely	2 Moderate	6 Moderate	Low
10	Impacts on Sensitive and High Value Areas	2 Unlikely	2 Moderate	4 Low	Low
11	EMF	3 Likely	2 Moderate	6 Moderate	Low
12	Impact on Community Safety due to Structure/ Mechanical Failure of the overhead conductors	2 Unlikely	3 Major	6 Moderate	Low
13	Natural hazard risks (flooding, earthquakes, etc.)	2 Unlikely	2 Moderate	4 Low	



Critical Risk Level

Significant/ Moderate Risk Level

Low Risk Level

¹¹⁴ Covering (i) Route Selection, (ii) Transmission, (iii) Structure Design, (iv) Tower Placement Add-ons, (v) Visual Amenity, and (vi) Mechanical Failure of the Overhead Conductors.

5.2.1 Lack of Integration of IEE/EMP/EIA Requirements into Construction Bid Documents

Assessment

311. The bidding documents must reflect the requirement to select a qualified and experienced Contractor from the perspective of ensuring implementation of required safeguards during project development.

Mitigation Measures

312. The mitigation measures described below will be implemented while completing the final design of the Project.

- The ESIC should be assigned the task to check that design and bid documents are responsive to key environmental, social, and safety considerations, and that the proposed method of work reflects the boundaries defined in the EMP.
- The bid documents must include the EMP, and its implementation cost must be reflected in the bill of quantity (BoQ).

5.2.2 Lack of Planning in ETL Design¹¹⁵

Assessment

313. Vulnerability to climate change and natural disasters poses an additional significant challenge to the sustainable and reliable electricity supply, as witnessed by the monsoon rains and the subsequent flashfloods in July and August 2022, which wreaked tremendous devastations in Pakistan.¹¹⁶ As per the NTDC's Rapid Flood Damage Assessment of its network, no damage was reported on 500 kilovolt (kV) and 220kV grid stations except two high voltage transmission lines with a total of thirteen towers collapsed as a result of floods.¹¹⁷ The Climate Risk and Vulnerability Assessment (CRVA)¹¹⁸ of September 2022 concluded that changes in intensity and frequency of extreme weather events and unseasonal deviations from average weather will affect current and future energy infrastructure, supply reliability, and the energy sector's profitability. Therefore, additional investment is required to ensure the transmission network resilient to climate change and natural disaster.

The pre-construction (design) phase planning is very important for the following parameters. Better planning will produce less environmental and social impacts during later phases of construction and operations.

- Route Selection
- Transmission Structure Design
- Tower Placement
- Add-ons
- Visual Amenity

¹¹⁵ Covering (i) Route Selection, (ii) Transmission, (iii) Structure Design, (iv) Tower Placement Add-ons, and (v) Visual Amenity, (vi) Mechanical Failure of the Overhead Conductors.

¹¹⁶ Islamic Relief Pakistan. 2022. [Rapid Assessment: Flood Emergency – Balochistan and Sind \(28 August 2022\)](#).

¹¹⁷ One tower on 220kV Khuzdar-Dadu transmission lines and 12 towers on 220kV Dadu-Sibbi transmission line.

¹¹⁸ The Climate Risk and Vulnerability Assessment is in Appendix 12.

- Mechanical Failure of the Overhead Conductors

Mitigation Measures

314. The mitigation measures described below will be implemented while completing the final design of the Project.

- Using corridor-sharing with existing ETLs for minimize right of way (RoW) requirements. Preference will be given to a route with a minimum community displacement and minimum tree cutting requirement
- Better planning during the selection of RoW will generate less negative socioeconomic impacts on the affected persons.
- Selection and use of the latest available technology for reducing the magnetic field from ETLs.
- a. ETLs to be designed for higher resilience to climate change impacts to ensure the transmission network resilient to climate change and natural disaster.
- Choosing a ETL tower with aesthetic appeal such as the darker color of oxidized steel structures may blend in better with forested backgrounds.
- Making minor adjustments in tower locations to avoid archeological sites or minimize effects on agricultural operations.
- Adding flight diverters to conductors to minimize bird collisions with the wires.
- Location of high-voltage transmission and distribution lines in less populated areas, where possible, to mitigate the impact on visual amenity and noise. This will also create less land acquisition and resettlement issues.

5.2.3 Improper Location of Camps Leading to Environmental and Social Issues

Assessment

315. The selection of campsites for construction and field residence is very important step to be taken by the contractors before mobilization for construction. Poor planning in selection of the sites and poor camping facilities, can cause environmental and social issues during construction.

Mitigation Measures

316. The mitigation measures described below will be implemented while completing the final design of the Project.

- Camp locations at least 200-300 m from the sensitive receptors including settlements and water bodies.
- Development of the campsite plans indicating walkways, car parking, recreational areas, rooms, kitchen, dining, storm run-off, toilets and sewerage lines and treatment, disposal, freshwater storage, and lines, etc.

5.2.4 Lack of Project environmental safeguards (human resource) capacity

Assessment

317. The lack of environmental and social safeguards team and lack of capacity within project proponent and contractors creates implementation issues of project environmental safeguard documents including local law requirements, ADB SPS requirements, IEE, EIA, SSEMP, and NoC.

Mitigation Measures

318. The mitigation measures described below will be implemented while completing the final design of the Project.

- b. The ESIC/PMU to make sure that it is staffed by EHS Manager, Deputy EHS Manager and Assistant EHS Manager in addition to social safeguard staff.
- The ESIC/PMU to ensure, contractor's environmental safeguards capacity before construction starts. Make sure that the Construction Contractor assigns and retains a full-time and qualified ESO and a full-time and qualified HSO.

5.2.5 Removal of vegetation/trees

Assessment

319. Due to the proposed project, 350-400 trees of varying species and sizes, may be affected by the project. This impact will be permanent and moderate adverse. Lack of planning in clearing RoW from trees can cause unnecessary cutting trees.

Mitigation Measures

320. The proposed mitigation measures will include:

- Incorporate technical design measures to minimize the removal of these trees, as far as possible.
- Compensatory planting of ten (10) trees against each fallen tree of similar floral function shall be planted; and,
- The plantation plan shall prefer the prevalent indigenous species of plants and ensure that there will be no exotic species in the plantation plan with known environmental setbacks.

5.2.6 Noise caused by construction equipment

Assessment

321. Increase in ambient noise levels are expected in construction phase of the Project especially in areas near to sensitive receptors. An early assessment in pre-construction (design) phase, at sensitive receptors, will be useful.

Mitigation Measures

322. The following measures will be implemented to ensure that the cumulative noise impacts are within acceptable limits during construction activities:

- Conduct detailed acoustic assessment for all residential buildings, schools, (other sensitive structures) within 50 m of RoW.
- After the assessment, identify the areas where noise barriers are required. Also, suggest noise reducing devices on equipment such as mufflers and silencers.
- The audible noise of the ETL is most severe under wet conditions. During detailed design, it will be ensured that audible noise under wet conditions is within acceptable limits.
- During detail design, it will be ensured that audible noise as per CISPR18-2 "Methods for measurement of RI characteristics of overhead power lines and high voltage equipment" shall be either category-I (which is Interference not audible) or category-ii (which is Interference just perceptible).

5.2.7 Land Acquisition

Assessment

323. Though no land will be acquired permanently, however, damages (crops and trees) to the land will be happened during ETL construction. This may result in loss of land, assets and livelihood associated with the loss of crops and trees. This impact will be permanent and high adverse in nature.

Mitigation Measures

324. Mitigation measures will involve careful alignment selection by the designer to minimize the impact by avoiding the acquisition of residential and commercial areas. Also, an adequate budget shall be provided in the project cost for the compensation to the affected people as per the Land Acquisition Act, 1894 and framing of a judicious and fair compensation package for the provision of compensation on the prevailing market rates.

- NTDC to select the route in a way that minimum impact on trees and crops occur.
- Assessment of loss of land, trees, and crops (if any) due to construction of ETL towers.
- Preparation of land acquisition and resettlement plan (LARP) for the proposed Project before commencement of construction activities.
- All the impacts identified by the IEE will be incorporated into the project LARP and relevant entitlements will be included into the Entitlement Matrix.
- All the payments / entitlements are paid according to the Entitlement Matrix, prepared according to the LARP.

325. According to Land Acquisition Act 1894, the following points are to be considered while determining compensation to the project affectees:

- The market value of the land at the date of publication of the notification under section 4 sub section (1).
- The damage sustained by the person interested, because of the taking of any standing crops, or trees which may be on the land at the time of the collector's taking possession thereof.
- The damage if any sustained by the person interested at the time of the collector's taking possession of the land because of acquisition injuriously affecting his other property, moveable, or immovable, in any other manner, or his earning; and
- As a consequence of the acquisition of the land by the collector, the person affected is compelled to change his residence or place of business, the reasonable expenses incidental to such change.

5.2.8 Waste Generation

Assessment

326. The appropriate disposal of waste and management of spills needs to be assessed at pre-construction (design) phase and its implementation cost must be reflected in BoQ.

Mitigation Measures

327. The following measures will be implemented to ensure that adequate disposal options for all wastes are in place:

- Identify enough locations for disposal of transformer oils, unsuitable soils, scrap metal "cradle to grave".

- Include in contracts for unit rates for re-measurement for disposal.
- Designate disposal sites in the contract and cost unit disposal rates accordingly.

5.2.9 Disruption to Existing Drainage Pathways and Utilities

Assessment

328. The construction of Project may affect the drainage system and irrigation crossings and other public utilities within right of way (RoW).

Mitigation Measures

329. The possible mitigation measures, to be include in preliminary and detailed designs, are as follows:

- Identify locations where drainage or irrigation crossing, utilities within RoW may be affected by works.
- Include in protection works contract as a payment milestone(s).

5.2.10 Impacts on Sensitive and High Value Areas

Assessment

330. The construction and operation of the Project will result in several impacts including air, noise and water pollution, electrocution, collisions, aesthetics, electric and magnetic fields and community health and safety.

331. However, the impact will be low as 1) the majority length of the ETL passes from the least populated area, 2) the ETL RoW is not located in any protected or ecologically sensitive area (**Section 4.3**) there is no mosque, graveyard, tomb or any other religious/archaeological site within 100 m boundary from the edge of the Project (**Section 4.4**).

Mitigation Measures

332. The following mitigation measures will be implemented:

- Siting the Project facilities away from any residential area.
- If, siting of Project facilities cannot be avoided altogether, the area of disruption should be minimized, and the impacts should be mitigated.

5.2.11 Electromagnetic field (EMF)

Assessment

333. Electric fields are produced by voltage and increase in strength as the voltage increases whereas magnetic fields result from the flow of electric current and increase in strength as the current increases. The operation of the Project will result in the production of EMF which needs to be controlled to protect environment and public health.

334. EMF are also created by electrical household appliances such as motors in refrigerators, vacuum cleaners, microwaves, televisions, and computers. Due to the proximity of humans to household appliances, the level of EMF is often far greater than those levels produced by ETLs fixed on high towers (**Figure 5-1**).¹¹⁹

¹¹⁹ <https://psc.wi.gov/Documents/Brochures/EMF.pdf>

335. Magnetic fields generated by electric lines are in the extremely-low-frequency (ELF) range of the electromagnetic spectrum. The energy from these magnetic fields is very small. Magnetic fields from appliances and ETLs cannot break molecular bonds. The highest frequency electromagnetic radiation, like gamma rays, can break apart DNA and lead to cancer. Low frequency radiations such as microwaves do not have enough energy to break molecular bonds but can heat food items.¹²⁰

336. For overhead ETLs, the magnetic fields typically range from about 5 to 150 mG (**Table 5-5**) depending on current load, separation of the conductors, and distance from the lines. In general, at a distance of about 300 feet from an ETL, measured magnetic fields are similar to typical ambient background levels found in most homes.¹²¹

337. The electromagnetic field interference is significantly dependent on the power line configurations, separation distance between ETL and objects underneath, separation distance between conductors of ETL, the ETL tower height, existence of the earth wire, and the length of system parallelism.¹²²

338. In the literature, magnetic field data are presented in either units of Gauss (G) or Tesla (T). A milligauss (mG) is equal to one-thousandth of a Gauss (G). One Tesla is equal to 10,000 Gauss. A microtesla (μ T) is equal to one-millionth of a Tesla or 10 mG.

339. Magnetic field strength and distances from overhead ETLs is provided in **Figure 5-2**. This generalized graphic view is showing on how magnetic fields quickly diminish with distance.¹²³

¹²⁰ <https://psc.wi.gov/Documents/Brochures/EMF.pdf>

¹²¹ *ibid*

¹²² Chaaban, Farid & Hassan, Heba. (2009). Modelling and Measurements of the Electromagnetic Field of High Voltage Transmission Lines: A Practical Case in Lebanon.

¹²³ *ibid*

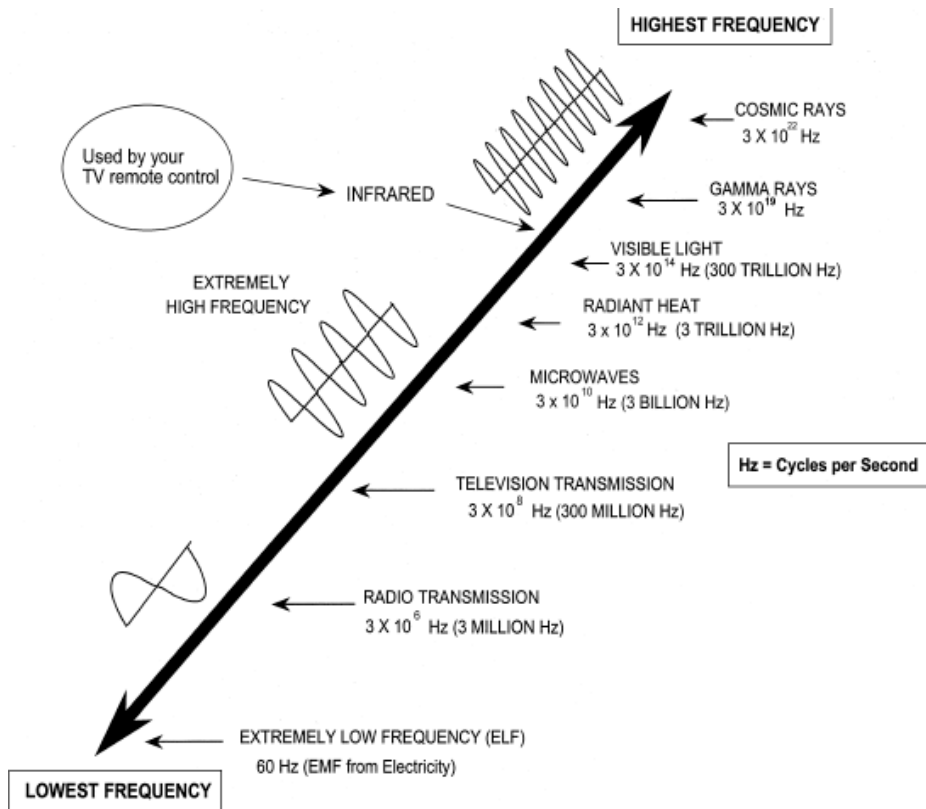


Figure 5-1: Electromagnetic Spectrum

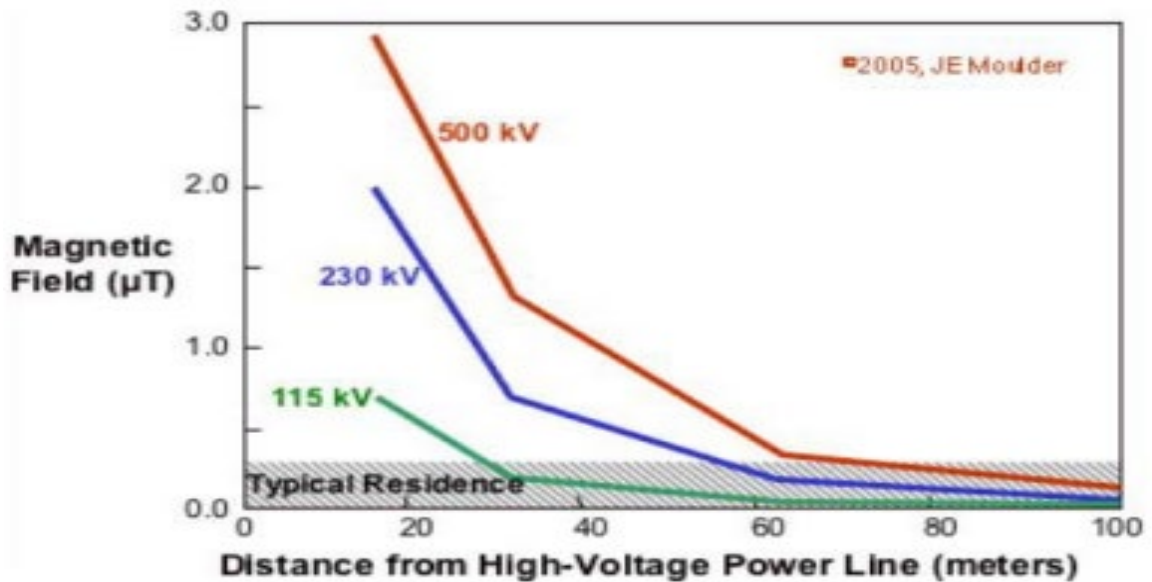


Figure 5-2: Magnetic Strength from Overhead ETLs

Table 5-5: Magnetic Fields Observed for Overhead Transmission Lines

Overhead Transmission Line Voltages	Usage	Typical Magnetic Field Measurements (mG)				
		Maximum in ROW	Approximate Distance From Centerline (Feet)			
			50	100	200	300
115 kV	Average	30	7	2	0.4	0.2
	Peak	63	14	4	0.9	0.4
230 kV	Average	58	20	7	1.8	0.8
	Peak	118	40	15	3.6	1.6
500 kV	Average	87	29	13	3.2	1.4
	Peak	183	62	27	6.7	3.0

Table 5-6: Safety Distances for 220 kV Transmission Line

Description ¹²⁴	Distance (meters)
Minimum Approach Distance for People	3m (Authorized person) 6m (Ordinary)
Minimum Safe Vertical Distance	8 m
Clearance distance from ETL to ground and road	7m
Clearance distance to trees/hedges	4.6
Clearance distance to water course	7.6 m
Vertical Passing clearance (if vehicles will below the power line)	2.4 m

340. Many studies have been conducted by researchers through animal experiments, clinical studies, computer simulations, and human population (epidemiological) to determine the relationship between exposure to electromagnetic fields and impact on health such as childhood leukemia¹²⁵, cardiovascular disease, cancer etc. In the past, numerous reports have presented conflicting information. Some of these reports have provided evidence of adverse health effects like anxiety, poor sleep¹²⁶; while results of most of these studies did not indicate any correlation between the electromagnetic field and chronic diseases emanating from power lines.^{127, 128, 129}

¹²⁴ UK Power Network Standards -EI 02-2019

¹²⁵ Tynes, T., & Haldorsen, T. (1997). Electromagnetic fields and cancer in children residing near Norwegian high-voltage power lines. *American journal of epidemiology*, 145(3), 219-226.

¹²⁶ Bagheri Hosseinabadi, M., Khanjani, N., Ebrahimi, M. H., Haji, B., & Abdolafard, M. (2019). The effect of chronic exposure to extremely low-frequency electromagnetic fields on sleep quality, stress, depression, and anxiety. *Electromagnetic biology and medicine*, 38(1), 96-101.

¹²⁷ Liu, J., Dawalibi, F. P., Ma, J., & Mitskevitch, N. (2006, August). Modeling techniques for analyzing electromagnetic interference caused by high voltage power lines to neighboring communication cables. In *The 2006 4th Asia-Pacific Conference on Environmental Electromagnetics* (pp. 235-243). IEEE.

¹²⁸ Valberg, P. A. (1996). Electric and magnetic fields (EMF): What do we know about the health effects. *International archives of occupational and environmental health*, 68(6), 448-454.

¹²⁹ Kim J Fernie and S James Reynolds. The effects of electromagnetic fields from power lines on avian reproductive biology and physiology: a review. *Journal of toxicology and environmental health. Part B, Critical reviews*. Vol. 8(2).

341. Birds use electrical power lines, and towers for perching, and nesting. Therefore, many bird species, like humans, are exposed to EMFs throughout their lives.¹³⁰

342. The significance of impact for this Project is moderate to major, because the ETL is passing overhead of a settlement near Hala Road Grid Station. The ETL will use the RoW of an existing 132 kV ETL.

343. This Project involves dismantling of the low-line existing 132 kV ETL owned by local distribution company and the same will be built again with similar standards as it planned for the Project and will result in decrease EMF effects on the residents due to increased height. The Project ETL will be designed with a better tower structure and technology compared to the existing transmission system at the Hala Road Grid Station and surroundings, as discussed in *Section*.

Mitigation Measures

344. The following mitigation measures will be implemented at pre-construction (design) phase to reduce the future impact on environment:

- NTDC's standard operating procedures (SOPs) of a minimum vertical ground clearance for ETL conductor of 7 meters will be ensured.
- Raising conductor height above the ground to 8 m, typically by increasing tower height, will be ideal.
- Reducing conductor spacing.
- Arranging phases so that fields tend to cancel.
- Increasing transmission voltage (since magnetic field intensities are a function of current, and increased voltage, all things being equal, will result in reduced current).
- Reducing loads (and therefore, currents).
- Identification of potential exposure levels in the work area including surveys of exposure levels and establishment of safety zones.
- Safety signs and warning zone shall be highlighted to indicate EMF in the area
- Limit access to properly trained workers and those equipped with appropriate PPE when entering safety zones.
- Increasing right-of-way widths or buffer zone widths, to move people further from ETLs.

5.2.12 Impact on Community Safety due to Structure/ Mechanical Failure of the overhead conductors

Assessment

345. Risks related to electromagnetic fields and natural hazards, such as earthquakes, landslides, and rockfalls, can result in adverse impacts during operation. Structure failure, especially near or at residential areas, may create public safety issues if better design and technology is not recommended.

Mitigation Measures

346. The following mitigation measures will be implemented at pre-construction (design) phase:

¹³⁰ Biasotto, L. D., & Kindel, A. (2018). Power lines and impacts on biodiversity: A systematic review. *Environmental Impact Assessment Review*, 71, 110-119.

- Ensure all safety aspects related to safety of structure is considered.
- Ensure seismic design requirements are incorporated in the Project design.
- The ETL will be constructed using very robust design and there is very low probability of mechanical failure even under extreme weather conditions. Nonetheless, following special arrangements will be made in this section to ensure safety in case of mechanical failure of the ETL conductors.
- Installation of special tower/pole structures that would support a long span of up to 500 m so that no tower/pole has to be installed inside the streets.
- Special tower/pole structures will be designed with load safety margin factor of 2.5 instead of generally used 1.5, thus having an extraordinary strength bearing margin to cater for any untoward mechanical hazardous situation.
- Special tower/pole structures will be designed to achieve enhanced vertical ground clearance of 15-20 meters whereas the standard requirement of ground clearance of 220 kV line is 7.1 meter.
- Installation of grounded metallic mesh beneath the lowest conductor to act as fall arrester in case of mechanical failure of the conductor in residential areas.

5.3 Construction Phase Impacts




347. The construction phase impacts on the physical environment, ecology, and socioeconomic environment are listed separately in the below sections.

348. A summary of potential impacts at the construction phase, based on methodology discussed in **Section 5.1**, is provided in **Table 5-7**.

Table 5-7: Potential Impacts at Construction Phase

No.	Potential Impact	Likelihood (Certain, Likely, Unlikely, Rare)	Consequence (Catastrophic, Major, Moderate, Minor)	Risk Score (Critical, Significant/ Moderate, Low)	Residual Impact (Critical, Significant/ Moderate, Low)
1	Dust from construction activity and Air emissions from construction equipment and vehicles	3 Likely	3 Major	9 Significant	Low
2	Noise from construction vehicles and heavy equipment	3 Likely	3 Major	9 Significant	Low
3	Sediment run-off from construction sites	3 Likely	3 Major	9 Significant	Low
4	Impact on Water Resources Quality and Quantity	3 Likely	3 Major	9 Significant	Low
5	Untreated disposal of effluent from worker camps and batching plant(s)	3 Likely	3 Major	9 Significant	Low
6	Vibrations	3 Likely	3 Major	9 Significant	Low
7	Traffic Congestions	3 Likely	2 Moderate	6 Moderate	Low
8	Disposal of spoils and waste materials	3 Likely	2 Moderate	6 Moderate	Low
9	Impact on Occupational Health and Safety	3 Likely	3 Major	9 Significant	Low
10	Habitat loss and impact on mammals, amphibians, birds, and reptiles	2 Unlikely	3 Major	6 Moderate	Low
11	Increased employment opportunities and local economy (positive impact)	–	–		
12	Overburden on local resources	3 Likely	2 Moderate	6 Moderate	Low
13		3	2	6	Low

No.	Potential Impact	Likelihood (Certain, Likely, Unlikely, Rare)	Consequence (Catastrophic, Major, Moderate, Minor)	Risk Score (Critical, Significant/ Moderate, Low)	Residual Impact (Critical, Significant/ Moderate, Low)
	Social Conflicts due to Influx of Workers	Likely	Moderate	Moderate	
14	Impact on Community Health and Safety Risk	2 Unlikely	3 Major	6 Moderate	Low
15	Impact on Physical Cultural Resources (PCRs)	2 Unlikely	3 Major	6 Moderate	Low
16	Uncontrolled Solid Waste Disposal, Communicable Diseases	3 Likely	3 Major	9 Significant	Low
17	Natural Hazard Risks (Flooding, Earthquakes etc.)	2 Unlikely	3 Major	6 Moderate	Low

	Critical Risk Level
	Significant/ Moderate Risk Level
	Low Risk Level

5.3.1 Physical Environment

5.3.1.1 Dust from construction activity and Air emissions from construction equipment and vehicles

Assessment

349. Fugitive dust and other emissions are expected from earthwork, construction site camps, vehicle traffic, and other construction activities including land clearing activities and materials stockpiles.

350. The baseline values for particulate matter were deducted 131 to 136 µg/m³ for PM₁₀ and 41 to 43 µg/m³ for PM_{2.5}. The values are well within SEQS but exceeding WHOAQGs values indicating already degraded environment for the pollutant.

351. The construction works will be carried out within RoW i.e., 15 m on both sides of ETL route. The nearest sensitive receptors such as settlements are located at about 40 m from center of ETL route. Therefore, at least a distance of about 25 m is expected from work sites to nearby settlements along ETL route.

352. The major activities related to construction which will generate dust emissions (or PM) during the construction phase include vehicular movement, site preparation, loading/unloading of materials, and stockpiles.

353. The amount of dust generation is highly dependent on the activity type, construction methods, and weather conditions during the activity hence any estimation of dust generation is highly uncertain therefore a worst-case area-based emission factor has been used to estimate the dust emissions from the construction activities. Level 1 general emission factor suggested in '*Improvement of Specific Emission Factors (BACM Project No. 1)*' report (MRI 1996) prepared for the South Coast Air Quality Management District¹³¹ have been used to estimate the emissions from the construction activities (Muleski, G.E, Garman G. 1996).¹³¹ The suggested emission factor of 0.11 ton/acre-month for average conditions and 0.40 ton/acre-month for worst-case scenarios (construction sites with active large-scale earth moving operations) were considered and worst-case scenario has been used for impact assessment.

- Emission Factor: 0.40 ton/acre-month
- Project Site Active Area: 525 Acre [a]
- Construction Phase time: 18 months
- Total Emission = $0.40 \times 525 \times 18 = 3780$ tons in 18 months
- Emission Rate: 1.05×10^{-10} g/s/m² (208 hours per month Assumed)

Notes: [a] Right of way of 30 m and 70 km long and two campsites of approximately 6 acres land.

354. Although the estimated emission rates are not significant, but as discussed before, the baseline concentrations of PM in the area are higher than the WHO AQGs values, therefore, additional dust could further deteriorate the quality of air in the area. If not mitigated.

¹³¹ Muleski, G.E, Garman G. (1996). Improvement of Specific Emission Factors (BACM Project No. 1); Prepared for South Coast Air Quality Management District, Contract 95040; Diamond Bar, CA.

355. During the construction phase, the area of probable impact for air can typically reach 500 m from the boundary of the construction site. It is envisaged that in areas more than 500 m away from the construction area, the impact due to fugitive dust will be insignificant due to settling effects, unless there are exceptional gusts of wind, in which case a small amount of very fine dust particles (<10µm in diameter) could reach up to 1,000 m. Apart from human health impacts and nuisance, PM₁₀ and PM_{2.5} when deposited on vegetation inhibits photosynthesis and potentially degrades habitats and also affect the crop yield of agricultural fields nearby.

356. Therefore, based on the above discussions, unmitigated air quality impacts due to dust emissions are considered to be significant.

Mitigation Measures

357. A Dust Management Plan must be prepared by the Contractor. A sample plan has been provided in **Annexure VIII**.

358. The following mitigation measures will be used to limit dust generation during construction activities:

- Water will be sprinkled through a dedicated water-bowser at source, around the construction site and along the routes used for construction activities to prevent the generation of dust and to minimize the levels of dust within the vicinity of orchards and fruit farms.
- A speed limit of not more than 30 kilometers per hour (km/h) will be imposed on the vehicles in areas where the potential of dust generation is greater including unpaved roads.
- Fuel-efficient and well-maintained haulage trucks will be employed to minimize exhaust emissions.
- Vehicles transporting soil, sand and other construction materials will be covered.
- The movement of vehicles through densely populated areas will be avoided.
- Water will be sprayed at bare areas that are prone to high dust emissions.
- Stockpiled soil and sand will be kept slightly wet before loading, particularly in windy conditions.
- Dust emissions at the camp and construction sites to be minimized by implementing good housekeeping and sound management practices.
- All project vehicles and other equipment will be maintained as per SEQS for vehicular emissions.
- The construction material will be stored in the boundary wall and no disturbance to surrounding areas is expected. The contractor will be, however, required to provide a traffic management plan before the commencement of work at the site.
- The need for large stockpiles will be minimized by careful planning of the supply of materials from controlled sources. Stockpiles (if required) will not be located within 50 m of schools, hospitals, or other public amenities such as wells and pumps and should be covered with tarpaulins when not in use and at the end of the working day to enclose dust.
- Concrete plants will not be located close to any sensitive receptors.
- A check will be kept by the NTDC that no construction will be allowed within 100 m of the ETL.

359. Once the mitigation measures given above are incorporated, it is expected that the project will not have any significant incremental impacts on the baseline dust and gaseous levels of the area. The effectiveness of the mitigation measures will be monitored during the construction, restoration, and operation phases.

5.3.1.2 Noise from construction vehicles and heavy equipment

Assessment

360. No blasting is anticipated. However, a slight increase in ambient noise conditions is expected due to construction activities. As per noise baseline values discussed in **Section 4.2**, levels found exceeded to the SEQs and IFC guidelines in ETL section that fall near the urban area of Hyderabad and the ETL area that fall in rural area is well within SEQs and IFC nighttime and daytime guidelines.

361. Construction activity employing heavy machinery such as powered mechanical equipment and heavy traffic such as trucks for transportation of construction materials and supplies can generate significant noise and vibration. The cumulative effects of several machines can be significant.

362. The construction works will be carried out within RoW i.e., 15 m on both sides of ETL route.

363. Majority length of ETL (12 km) falls in agricultural land and the nearest sensitive receptors such as settlements are located at about 40 m from center of ETL route. Therefore, at least a distance of about 25 m is expected from work sites to nearby settlements along ETL route.

364. However, part of ETL (8 km) is passing through populated areas where ETL passes nearby sensitive receptors. For example, a 400 m ETL is passing over settlements near Hala Road Grid Station, Hyderabad.

365. Therefore, the construction noise is considered significant due to nearby sensitive receptors to the construction sites.

366. **Table 5-8** represents typical noise levels from various construction equipment items. It should be noted that the values indicated in the table may differ depending on the brand and age of machinery provided/used by the construction company.

Table 5-8: Construction Equipment Noise Ranges, dB (A)

Equipment	Quantity	Usage Factor		Distance ft	Actual Lmax (50ft)	Lmax	Leq
Batch Plant		15%	0.15	1066	83	56.4	48.2
Concrete Mixers	1	40%	0.40	1066	78.8	52.2	48.2
Crane	1	16%	0.16	1066	80.6	54.0	46.1
Excavator	1	40%	0.40	1066	80.7	54.1	50.1
Tractor/Trolley	2	40%	0.40	1066	80	53.4	49.4
Bulldozers		40%	0.40	1066	80	53.4	49.4
Paver		50%	0.50	1066	77	50.4	47.4
Compactor	1	20%	0.20	1066	83	56.4	49.4

Equipment	Quantity	Usage Factor		Distance ft	Actual Lmax (50ft)	Lmax	Leq
Pumps		50%	0.50	1066	77	50.4	47.4
Generators	1	50%	0.50	1066	80.6	54.0	51.0
Vibrators	1	20%	0.20	1066	76	49.4	42.4
Drilling machines		10%	0.10	1066	90	63.4	53.4
Compressors	2	40%	0.40	1066	77.7	51.1	47.1
Dump Truck	1	40%	0.40	1066	76.5	49.9	45.9
Welder	1	40%	0.40	1066	74	47.4	43.4

Mitigation Measures

367. A Noise Management Plan must be prepared by the Contractor. A sample plan has been provided in **Annexure XVIII**.

368. The following specific measures will be adopted to mitigate any potential issues.

- Noise monitoring will be carried out at edge of RoW or at boundary wall of communities located within 100 m of RoW, if required, to assess compliance with day and nighttime noise limits of 55 dBA and 45 dBA prescribed in the SEQS / IFC guideline values.
- No nighttime work will be allowed in populated areas of ETL's RoW.
- All heavy equipment and machinery will be maintained as per SEQS/ IFC guideline values and with effective noise controlling devices in place such as silencers.
- The noise level from construction activity can be reduced by regular maintenance of machinery. Noise can be controlled through engineering control e.g., hammering actions can be substituted by hydraulic.
- Ensure that the workers are wearing necessary personal protection equipment (PPE's) such as earplugs, earmuffs, etc. where engineering control is not applicable to reduce the impact of noise.
- Equipment emitting excessive noise in comparison with other similar equipment will not be allowed to operate.
- Equipment under use will be regularly maintained, tuned, and provided with mufflers and speed controls to minimize noise levels.
- Blowing horns on all access roads except under emergency conditions will be prohibited.
- Muffled breakers and silenced diesel generators and compressors will be used to reduce construction noise.
- Contractor will take necessary measures to minimize noise nuisance using acoustic enclosures and barriers.
- A check will be kept by the NTDC that no construction will be allowed within 100 m of the ETL.

369. Once the mitigation measures given above are incorporated, it is expected that the project will not have any significant incremental impacts on the baseline noise levels of

the area. The effectiveness of the mitigation measures will be monitored during the construction, restoration, and operation phases.

5.3.1.3 Sediment run-off from construction sites

Assessment

370. Construction of the Project will require clearing of some vegetation, excavation, and stockpiling of excavated and construction material.

371. The following potential impacts on the geomorphology and soil are identified:

- Loss of soil fertility due to loss of topsoil
- Contamination of soil due to the accidental release of solvents, oils, and lubricants.
- Failure of stockpile areas resulting in increased erosion and sediment flash.
- Generation of waste (hazardous and non-hazardous)
- Soil erosion and surface run-off from materials sourcing areas and site preparation activities.
- Potential for hazardous materials and oil spills associated with heavy equipment operation and fueling activities.

372. The project involves excavation. Therefore, find a chance is to be considered while digging or excavation. In case of chance finding, The Contractor must follow procedures provided in **Annexure IX**.

373. The significance criteria were found significant based on the methodology discussed in **Section 5.1**.

Mitigation Measures

374. The mitigation measures described below will be implemented to reduce the impacts listed above:

- All construction workers will be provided awareness training on the prevention of waste generation and spill prevention.
- The topsoil can be preserved and used after the restoration of construction campsites and storage areas after the construction period.
- Surplus excavated material will be disposed of at appropriate or designated sites and will be disposed of in a manner that does not disturb the natural and community drainages and tracks.
- Equipment will be maintained properly to minimize oil or fuel leakages from construction machinery. Clean-up will be undertaken in the event of an oil spill larger than half a liter. This will include the removal of contaminated soil and disposal at a proper location.
- A Spill Prevention and Response Plan will be prepared including the induction of staff for spill prevention and management.
- All storage fuel tanks will be marked with their contents and stored in diked areas with an extra 10% of the storage capacity of the fuel tank. The area will be lined with an impervious base.
- Grease traps will be constructed wherever needed, to prevent the flow of oily water into drainage channels or waterbodies.

- Spill cleanup kits (shovels, plastic bags, and absorbent materials) will be available near fuel and oil storage areas. Should any accidental spills occur, the immediate cleanup will be undertaken, and all cleanup materials will be stored in a secure area for further disposal. Disposal of such will be undertaken by a waste management company contracted by the Contractors. The waste management company must have the required licenses to transport and dispose any hazardous waste before any such waste is removed from the site. The Contractors will keep copies of the company's licenses and provide waste transfer manifests at their camp site for routine inspection by the engineer.
- Cleanup kits will be carried in all fuel trucks.
- Fueling of construction vehicles and machinery will take place at designated places or over impermeable surfaces for fixed machinery.
- Hazardous materials will be stored in designated places having impervious linings.

375. In addition to above, the following measures will also be implemented to specifically mitigate soil erosion and surface run-off:

- Schedule works in sensitive areas (e.g., water body) for dry season.
- Temporary erosion control plan one month before commencement of works.
- Proper installation of TD and EC before works within 50 m of water bodies.
- Cut areas will be treated against flow acceleration while filled areas will be carefully designed to avoid improper drainage.
- Stockpiles will not be formed within such distances behind excavated or natural slopes that would reduce the stability of the slopes.
- In the short-term, either temporary or permanent drainage works will protect all areas susceptible to erosion.
- Measures will be taken to prevent pounding of surface water and scouring of slopes. Newly eroded channels shall be backfilled and restored to natural contours.
- Contractor will arrange to adopt suitable measures to minimize soil erosion during the construction period. Contractor will consult concerned authorities in the area before deciding mitigation measures.
- Clearing of green surface cover to be minimized during site preparation.
- Replanting trees to be done before the site is vacated and handed back to NTDC with appropriate trees (other vegetation cover as appropriate) to ensure interception of rainwater and the deceleration of surface run-off.

376. After the mitigation measures given above are incorporated, it is expected that the Project will not have any significant residual impacts on the area's geomorphology or soils. The effectiveness of the mitigation measures will be monitored during the construction and restoration phases.

5.3.1.4 Impact on Water Resources Quality and Quantity

Assessment

377. As stated in **Section 4.2**, the major surface water feature in the area is the Indus River. Phuleli Canal having discharge capacity of 15,000 cusec, was built in 1955, is passing in 1.5 km west of the ETL. Akram Wah Irrigation Canal is also passing within AOI in west of ETL.

378. However, the following are the potential impacts on water resources that may result during the construction of the ETL Project:

- Contamination of surface and groundwater due to improper handling of materials, leakage of oil and fuels and discharge from construction activities.
- Increased usage of local water resources due to its use in construction activities; and Blockade of natural drainage ways due to foundations construction.

379. The wastewater may be generated from the construction site or camp if constructed nearby may produce a major impact on these if not disposed of properly. However, the impact of construction activities on water availability may not be significant as there are few water resources available in the area.

Mitigation Measures

380. The following specific measures will be adopted to mitigate any potential issues:

- Erosion and sediment flash-control measures will be employed and maintained where necessary.
- Washing vehicles will be allowed only in designated places such as local car wash or a similar facility to be built at the site with the provision of oil-water separators (OWS) and waste collection pits. Further details on the construction of OWS, waste collection pits, and the handling of contaminated waste are included in the **Spill Prevention** and **Waste Generation** sections.
- Equipment will be maintained properly to minimize oil or fuel leakages from construction machinery.
- No effluents will be released to the environment untreated, as per procedures discussed in **Section 9.3**.
- All types of solid and liquid wastes will be handled as per procedures discussed in **Section 9.3**.
- The natural drainages will be restored after completion of civil works of the tower foundations in areas where tower locations fall within the catchment of dry stream beds.
- The source of water for construction from authorized abstraction sources will be agreed between the local communities, local government, and the contractor.
- Water conservation techniques will be developed and implemented by the contractor.
- Access routes of the community to water sources will be kept clear and open so that the community's ability to meet its water requirements are not compromised.
- Care will be exercised while moving heavy machinery to avoid damage or blockage of natural waterways and channels.
- Records will be kept of water usage in all Project activities.
- Construction camp and residential camp will not be built nearby water bodies.

381. In addition to above, the following are specific measures to mitigate hydrology and drainage aspects:

- Consideration of weather conditions when construction activities are undertaken.
- Limitations on excavation depths in use of recharge areas for material exploitation or spoil disposal.

- Use of landscaping as an integrated component of construction activity as an erosion control measure.
- Minimizing the removal of vegetative cover as much as possible and providing for its restoration where construction sites have been cleared of such areas.

382. In addition to above, the following are specific measures to mitigate water quality impacts:

- Compile temporary drainage management plan one month before commencement of works.
- Proper installation of Temporary Drainage (TD) and Erosion Control (EC) before works within 50 m of water bodies.
- Proper construction of TD and EC measures, maintenance and management including training of operators and other workers to avoid pollution of water bodies by the considerate operation of construction machinery and equipment.
- Storage of lubricants, fuels, and other hydrocarbons in self-contained dedicated enclosures >50 m away from water bodies.
- Proper disposal of solid waste from construction activities and labor camps.
- Cover the construction material and spoil stockpiles with a suitable material to reduce material loss and sedimentation and avoid stockpiling near to water bodies.
- Topsoil stripped material will not be stored where natural drainage will be disrupted.
- Borrow sites (if required) will not be close to sources of drinking water.

383. Once the mitigation measures listed above are incorporated, it is expected that the project will not have any significant impacts on the area's water resource. The effectiveness of the mitigation measures will be monitored during the construction and restoration phases.

5.3.1.5 Untreated disposal of effluent from worker camps and batching plant(s)

Assessment

384. The workers camp and construction camp facilities such as batching plant (s) will produce effluent during construction and if not handled and treated appropriately, it can contaminate local land, surface, and groundwater resources.

Mitigation Measures

385. The following specific measures will be adopted to mitigate any potential issues:

- Ensure safe storage and handling of fuels, oils, and other hazardous substances according to standard safety practices. Disposal should be carried out through SEPA approved contractors and facilities.
- All efforts will be made for the proper disposal of solid waste, applying principles of reducing waste as far as possible, reusing what is practical and recycling all recyclable materials.
- The solid waste generated during construction and campsites will be safely disposed of in demarcated waste disposal sites and the contractor will provide a proper waste management plan.
- The sewage system for camps will be properly designed (pit latrines or, as required, septic tanks) to receive all sanitary wastewaters.

- The solid residue from the septic tanks will be transported to the nearby municipal sewage disposal site.
- Lined wash areas will be constructed within the campsite or at the site, for the receipt of wash waters from construction machinery; and ensure proper labeling of containers, including the identification and quantity of the contents, hazard contact information, etc.
- Construction workers and supervisory staff will be encouraged and educated to practice waste minimization, reuse, and recycling to reduce the quantity of waste.

5.3.1.6 Vibration

Assessment

386. Piling-induced ground vibrations can lead to human disturbance and structural damage.

387. Other construction activity employing heavy machinery such as powered mechanical equipment and heavy traffic such as trucks for transportation of construction materials and supplies can also generate vibration. The cumulative effects of several machines can be significant.

388. The construction works will be carried out within RoW i.e., 15 m on both sides of ETL route. T

389. The ETL RoW falls in agricultural land and the nearest sensitive receptors such as settlements are located at about 40 m from center of ETL route. Therefore, at least a distance of about 25 m is expected from work sites to nearby settlements along ETL route.

390. Construction activities generate vibration. These activities include site clearing, site grading and soil compaction, pile driving, installation of deep foundations and industrial dynamic sources such as forge hammers etc. This vibration-inducing equipment used for land clearing are excavators, dozers, loaders, and large trucks.

391. For comparison, building impact vibration levels are often noted as a single number quantifying the peak particle velocity (PPV), in in/sec or mm/sec.¹³²

392. **Table 5-9** provides typical construction equipment vibration level. **Table 5-10** provide predicted minimum separation between piling operations and sensitive buildings.¹³³

393. According to The United States Bureau of Mines (USBM) RI 8507 vibration limits for 1- and 2-story houses which are the most typical structures in urban and rural areas, the vibration limits in the resonance zone are 12.7 mm/s and 19.0 mm/s for walls with plaster and dry walls, respectively.¹³⁴

394. British Standard provides vibration guidelines for two types of buildings.

- Industrial and heavy commercial buildings the limit of 51 mm/s is used for frequencies from 4 to 100 Hz.

¹³² Svinkin, Mark R. "A choice of proper criteria for soil and structural vibrations from construction and industrial sources." *ICSMGE 2017* "19th International Conference on Soil Mechanics and Geotechnical Engineering, Seoul, pp 1589â. Vol. 1592. 2017.

¹³³ http://www-civ.eng.cam.ac.uk/geotech_new/people/bolton/mdb_pub/117_DFC_2002_363_371.pdf

¹³⁴ FTA Report No. 0123 (2018), Transit noise and vibration impact assessment manual, U.S. Department of Transportation, Federal Transit Administration

- Residential or light commercial type buildings, the limits are: 15 mm/s at 4nHz increasing to 20 mm/s at 15 Hz and then increasing to 50 mm/s at 40 Hz and above.¹³⁵

Table 5-9: Construction Equipment Vibration Level

measured at 7.6 m from the source

Equipment	PPV, in in/sec or mm/sec
Vibratory Roller	5.6
Mounted Impact Hammer (Hoe Ram)	2.3
Grader	2.3
Compaction Machine	2.3
Excavator	2.3
Large Bulldozer	2.3
Loaded Trucks	1.9
Crane	1.9
Semi-Trucks	1.9
Cement Trucks	1.9
Dump Trucks	0.9
Jack Hammer	0.9

Table 5-10: Predicted Minimum Separation between Piling Operations and Sensitive Buildings

Building type (vibration limit from Eurocode 3)	Piling method					
	Press-in method (Eq ⁿ 4)	Impact hammer (stiff clay / medium dense sand; (C=0.75) (Eurocode 3)		Vibrator (Eurocode 3) kJ/cycle		
		5 kJ/blow	25 kJ/blow	2 kJ/cycle	10 kJ/cycle	50 kJ/cycle
Architectural merit (2 mm/s)	3.5 m	26.5 m	59 m	16 m	36 m	78 m
Residential area (4 mm/s)	1.75 m	13 m	30 m	8 m	18 m	39 m
Light commercial (10 mm/s)	0.7 m	5 m	12 m	3.1 m	7 m	16 m
Heavy Industrial (15 mm/s)	0.5 m	3.6 m	8 m	2.1 m	5 m	10 m

Mitigation Measures

395. A Vibration Management Plan must be prepared by the Contractor. A sample plan has been provided in **Annexure XVIII**.

396. The following specific measures will be adopted to mitigate any potential issues:

- Construction will not be allowed during nighttime (10 PM to 6 AM) and will only be conducted during daytime.
- Vibration from the construction of piles to support pads may be required for some tower construction and maybe a significant impact but this should be for a short

¹³⁵ BS 735-2:1993 (1993), Evaluation and measurement for vibration in buildings – Part 2: Guide to damage levels from groundborne vibration (British Standard)

duration. Where vibration could become a major consideration (within say 100 m of schools, religious premises, hospitals, or residences) a building condition survey will take place before construction.

- Use of better equipment with less vibration effects will be used such as Free-Suspended Vibrators (FSV).¹³⁶
- The physical effect of piling will be assessed before construction and measures will be discussed with the local population as well as the timing of the works to serve as a vehicle for further public consultation at the implementation stage and to assist in public relations. At nearby schools, the contractor will discuss with the school principals the agreed time for operating these machines and completely avoid machine use near schools during examination times, if such a need arises.
- Ensure that the workers are wearing necessary personal protection equipment (PPE's) such as earplugs, earmuffs, etc. where engineering control is not applicable to reduce the impact of noise.
- Equipment under use will be regularly maintained, tuned, and provided with mufflers and speed controls to minimize noise levels.

397. Once the mitigation measures given above are incorporated, it is expected that the vibration impacts will be significantly reduced at nearby buildings to RoW.

5.3.1.7 Traffic Congestions

Assessment

398. There will be limited traffic during construction of the Project and will have little or no incremental effects on the existing traffic on the national or provincial highways.

399. There will be an increase in traffic on the internal roads, used for the transportation of construction materials, spoils, equipment and machinery. However, the increase will be for a limited period i.e., during construction activities.

Mitigation Measures

400. Contractor to provide a traffic management plan as part of SSEMP. A template for typical traffic plan is provided in **Annexure XI**.

401. The following measures will be employed to minimize potential impacts:

- Efforts will be made to minimize the use of heavy trucks by preferring transport of equipment and supplies using 4x4 pickups, wherever possible, and
- A speed limit of not more than 30 km/h will be imposed near settlements, on unpaved roads and link roads for reducing traffic accident risks and dust generation.
- A traffic management plan, if required, will be prepared, and submitted to NTDC one month prior to start of works. Vicinity of schools, hospitals and communities will be considered while preparing plans and will be avoided to the extent feasible.
- Plan of alternate routes for heavy vehicles will be formulated and implemented. Existing roads will be used wherever practical for transportation of materials and a 'no-short-cut' policy will be used.

¹³⁶ <https://www.vpgroundforce.com/gb/footer-links/useful-links/industry-resources/reducing-ground-vibrations-during-the-piling-proce/>

- While preparing plan of access routes, existing conditions of roads and bridges will also be considered to see for any requirement of widening and upgrading of access paths and roads.
- Traffic warning signs will be installed, and traffic regulations will be enforced during transportation of materials and equipment and machinery.
- Nighttime construction traffic will be avoided as much as possible.
- Drivers will be instructed to give way to locals while driving on access tracks, to keep a close watch for wild/domestic animals and children while driving and to not throw any litter or cigarettes out of vehicle.
- The use of canal flood protection bunds for the movement of heavy vehicles will be minimized. Wooden/damaged bridges on canal/river/ other crossings will not be used for the movement of heavy vehicles.
- Dry stream beds will not be used as access routes.
- Any damage to access tracks, metaled roads, watercourses, or the canal/river protection bunds, etc., will be appropriately repaired to bring these structures to their pre-construction condition. Any damage, which may cause hardship to the local community or wildlife, will be immediately repaired.

5.3.1.8 Disposal of spoils and waste materials

Assessment

402. There is a possibility of the generation of hazardous and non-hazardous solid waste during construction such as used vehicle oil filters, oil-contaminated cloths, used batteries, iron and copper, cotton and kitchen waste, solid residue from the septic tanks, etc. These can create a nuisance to the environment if not handled appropriately.

403. It is anticipated that demolition of an existing ETL will be required. The demolition will not generate or relates to hazardous wastes such as PCB's, asbestos containing materials etc. However, if found then suitable waste disposal plans dealing with this type of wastes will be prepared and implemented.

Mitigation Measures

404. Measures that will be implemented are as follows:

- Ensure safe storage and handling of fuels, oils, and other hazardous substances according to standard safety practices. Disposal should be carried out through SEPA approved contractors and facilities.
- Management and storage of fuel, waste oil, hazardous waste will be planned in accordance with EHS General Guidelines on Hazardous Materials Management.¹³⁷ This includes the use of appropriate secondary containment structures capable of containing the larger of 110 % of the largest tank or 25% of the combined tank volumes in areas with above-ground tanks with a total storage volume equal or greater than 1,000 liters.
- All efforts will be made for the proper disposal of solid waste, applying principles of reducing waste as far as possible, reusing what is practical and recycling all recyclable materials.

¹³⁷

<https://www.ifc.org/wps/wcm/connect/90231ba8-5bb3-40f4-9255-eaf723d89c32/1-5%2BHazardous%2BMaterials%2BManagement.pdf?MOD=AJPERES&CVID=nPtqwmI>

- The solid waste generated during construction and campsites will be safely disposed of in demarcated waste disposal sites and the contractor will provide a proper waste management plan as part of SSEMP. A framework waste management plan is attached as **Annexure XII**.
- The sewage system for camps will be properly designed (pit latrines or, as required, septic tanks) to receive all sanitary wastewaters.
- The solid residue from the septic tanks will be transported to the nearby municipal sewage disposal site.
- Lined wash areas will be constructed within the campsite or at the site, for the receipt of wash waters from construction machinery; and ensure proper labeling of containers, including the identification and quantity of the contents, hazard contact information, etc.
- Construction workers and supervisory staff will be encouraged and educated to practice waste minimization, reuse, and recycling to reduce the quantity of waste.

5.3.1.9 Impact on Occupational Health and Safety

Assessment

405. The occupational health and safety hazards associated with the construction of ETLs mainly include:

- Exposure to fall hazards from working at heights for poles and structures
- Exposure to electric and magnetic fields to workers as the workers typically have a higher exposure to EMF than the general public due to working in proximity to electric power lines.
- The construction activities and vehicular movement at the construction site and access service roads may also result in roadside accidents particularly inflicting local communities who are not familiar with the presence of heavy equipment and machinery.

Mitigation Measures

406. The contractor will prepare OHSE Management Plan as part of SSEMP. A template for OHSE Management Plan is provided in **Annexure XIV**.

407. The following are prevention and control measures will be implemented to the extent feasible to mitigate any issue related to occupational health and safety:

- Provide adequate personal protective equipment (PPE) and working platforms as per the job requirements
- Install occupational safety warning signs at construction sites and camps.
- Provide workers with skull guard or hard hat.
- Allow only trained and certified workers to install electrical equipment with safety and insulation measures in place.
- Test structures for integrity prior to undertaking work.
- Prepare and implement fall protection program that will include training in climbing techniques and use of fall protection measures; inspection, maintenance, and replacement of fall protection equipment; and rescue of fall-arrested workers, among others.

- The fall protection system will be appropriate for the tower structure and necessary movements, including ascent, descent, and moving from point to point and fixtures will be installed, wherever possible, to facilitate the use of fall protection systems.
- Provide adequate work-positioning device system for workers to the extent possible.
- Properly maintained hoist equipment will be used along with properly trained personnel.
- Proper safety belts will be provided. The Safety belts should be of not less than 16 millimeters (mm) (5/8 inch) two-in-one nylon or material of equivalent strength.
- Use a backup safety strap when operating power tools at height.
- Remove signs and other obstructions from poles or structures prior to undertaking work.
- Provide an approved tool bag for raising or lowering tools or materials to workers on structures.
- Prepare and implement EMF safety program to prevented or minimize occupational hazards due to exposure to EMF.
- The contractor will prepare OHSE Management Plan as part of SSEMP. Also include provision of a safety champion program to be initiated on a monthly basis to encourage workers to adhere with H&S requirements.
- The plan will also include impacts and mitigation measures related with COVID-19. COVID-19 health and safety management plan is attached as **Annexure XIII**.
- The plan will also include details related with labour working conditions and details on prohibit child labour.
- Identify potential exposure levels in the workplace, including surveys of exposure levels in new projects and the use of personal monitors during working activities.
- Train workers in the identification of occupational EMF levels and hazards.
- Establish and identify safety zones to differentiate between work areas with expected elevated EMF levels compared to those acceptable for public exposure, limiting access to properly trained workers.
- Prepare and implement action plans to reduce adverse impact of EMF and to address occupational exposure. Action plans may include limiting exposure time through work rotation, increasing the distance between the source and the worker, when feasible, or the use of shielding materials.
- Worker's Accommodation Plan will be prepared in reference to Workers' Accommodation: Processes and Standards¹³⁸ as part of SSEMP and implemented.

408. Once the mitigation measures given above are incorporated, it is expected that the project will not have any significant incremental impacts. The effectiveness of the mitigation measures will be monitored during the construction, restoration, and operation phases.

5.3.2 Ecological Environment

409. This section assesses the impacts on ecology in and around the Project site and outlines the mitigation measures proposed for the management of those impacts.

¹³⁸ [A guidance note by IFC and the EBRD Workers' Accommodation: Processes and Standards](#) (August 2009)

5.3.2.1 Habitat loss and impact on mammals, amphibians, birds, and reptiles

Assessment

410. The Area of Habitat Loss is defined as the area that will be occupied due to the construction and operation of the Project infrastructure and from where vegetation will be cleared for the Project-related activities.

411. Since the proposed ETL passes through mostly covered with seasonal crops and mango and other fruit tree orchards so an estimate of 1,500-2,500 trees may be required to clear from RoW during construction.

412. The major trees that will be required to cut include mango and guava trees, Kikar, Eucalyptus, Neem, palm trees and Conocarpus. These are not categorized as endangered species.

413. Surface stripping of vegetation cover will remove the plant species in the Area of Habitat Loss, and this may cause accidental death of small mammals and reptiles. Construction-related activities leading to noise, vibration, illumination, vehicular and water pollution will affect and lead to a localized reduction in food, shelter, and range for mammals, birds, and herpetofauna.

414. As described in **Section 4.3, Ecology**, no plant species of conservation importance has been observed or reported from the Area of Habitat Loss or Aol. Similarly, none of the mammal species from the Aol are included in the IUCN Red List of Threatened Species. There are no threatened or endemic herpetofauna species. Therefore, there is a moderate impact on significance scale.

415. The flora and fauna species are common and widespread in the wider area around the Project. Though some birds of conservation importance, including migratory birds, have been reported near water bodies in the vicinity of the Aol. Birds are mobile and naturally, avoid disturbed areas. Moreover, no critical habitat is threatened, or unique ecosystem was identified in this area.

416. The IBAT identified a total 36 species of mammals, birds, and reptiles however, 12 out of these 36 species are not found in the project area.

417. Few of these species are extirpated from the area like Common Leopard while some species distribution range does not fall in and or in near vicinity of the proposed project area like Black Bear. About 24 globally threatened wildlife species presence predicted by IBAT, and also from published literature¹³⁹¹⁴⁰¹⁴¹ and IUCN data. Among these, the White-rumped Vulture is listed as Critically Endangered in the IUCN Red List.

418. The Endangered species found in and around the project area includes Indian Pangolin White-headed Duck, Egyptian Vulture, Steppe Eagle, Saker Falcon, Softshell Turtle, Spotted Pond Turtle, Crowned River Turtle, and Indian Peacock Softshell Turtle.

419. The globally listed as Vulnerable species found in and around the project area includes Fishing Cat, Marbled Teal, Common Pochard, Yellow-eyed Pigeon, River Tern, Greater Spotted Eagle, Tawny Eagle, Eastern Imperial Eagle, Asian Houbara, Mugger Crocodile, Indian Roofed Turtle, Indian Flapshell Turtle and Indian Spiny-tailed Lizard.

420. Although, a number of global conservation wildlife species presence are identified by IBAT and IUCN species distribution data, but this data does not trigger any critical

¹³⁹ Roberts, T.J., and Bernhard (principe d'Olanda.), 1977. The mammals of Pakistan.

¹⁴⁰ Molur, Sanjay. "Status and Red List of Pakistan's Mammals." (2003).

¹⁴¹ Grimmett, R., Roberts, T.J., Inskipp, T. and Byers, C., 2008. *Birds of Pakistan*. A&C Black.

habitat criteria as these species have wide distribution range and none of the species found in the project area is endemic.

421. During the construction phases habitat loss of many wildlife species may occur due to removal of vegetation.

422. The wildlife species will disturb due to movement of heavy vehicles and disturbance created by heavy machineries.

423. An addition to this the IBAT and IUCN data confirms the presence of some wildlife species which are heavily poached in Pakistan and across their distribution range. For example, the data shows that Indian Pangolin and Indian Spiny-tailed Lizard are found in the area. The Indian Pangolin is poached across the range and their scales are smuggled to China and other markets and this is one of the major reasons of species being listed as Endangered on the IUCN Red Data. Similarly, the Indian Spiny-tailed Lizard is also poached in high number across Pakistan for oil extraction. So, there is a great possibility that these species of illegally hunter/trapped during construction activities.

424. Migratory birds are also identified in the project area so there is also a possibility that workers may get involved in illegal hunting of migratory birds or trapping of raptor species.

425. The ETL does not cross any major water body or canal in Aol. The Phulaili Canal; is run 1.5 km west of the ETL therefore impacts of construction is not significant on aquatic resources nearby.

Mitigation Measures

426. The following mitigation measure will be followed during the project construction activities to minimize the impact on ecology:

- If tree cutting is unavoidable for RoW clearance, the contractor will keep a record of cut trees. During plantation, ten-time (1 x 10 times) more plants will be planted. Before the plantation campaign, the forest department will be consulted on the selection of local species. A tree management plan will be prepared as part of SSEMP. Annexure XVI provides a framework plan for tree plantation.
- Provide adequate knowledge to the Project workers on relevant government regulations and punishments for illegal poaching to prevent hunting, trapping and exploitation of wildlife
- Minimize disturbance to, or movement of, soil and vegetation to prevent soil damage and erosion leading to spread of alien invasive plant species
- Revegetate disturbed areas with native plant species
- Ensure that solid and liquid waste is disposed only at designated locations, to prevent pollution of the water bodies in the AOI and vicinity.
- In addition to this, spray water twice or thrice a day (as per needed) to avoid dispersal of dust on the adjacent flora.
- Lights used in the camps, during the construction of towers will be kept to the minimum requirement. Upward scattering lights will preferably be used.
- Vehicle speed will be controlled to avoid incidental mortality of small mammals and reptiles.
- The contractor's staff and labor will be strictly directed not to damage any vegetation such as trees or bushes.

- Clearing of green surface cover for construction, for borrow for development, cutting trees and other important vegetation during construction will be minimized.
- Provide awareness training identifications of animal hazards (such as venomous snakes); what to do if dangerous animals are encountered; report kills of large mammals and other migratory birds particularly designated species of conservation concern.
- Provide adequate knowledge to the workers on relevant government regulations and punishments for illegal poaching and trade in animals and plants; incorporate in contract documents regulations for Project staff and contractors to avoid illegal poaching of wild animals.
- The relevant stakeholders should ensure the protection of all wildlife species particularly species which are highly trafficked like Indian Pangolin and Indian Spiny-tailed Lizard.
- Reflective balls or a moving tag with different colors should be installed on lines for diverting the bird's flight. Reflective ball installment is very important for reducing mortality, especially among the nocturnal migrant species.
- A line space of about 1.4 m should be ensured between different conductors and between conductors and grounded wires or hardware. This mitigation will minimize the electrocution of large size birds such as vultures and other raptor species.

5.3.3 Socioeconomic Environment

427. The Project will have both positive and negative socio-economic impacts during the construction phase. Positive socio-economic impacts of the project are the creation of job opportunities and a boost to the local economy, while negative impacts include a disturbance to the privacy of locals due to the influx of workers and increased risks of community and occupational safety due to construction machinery and vehicles. The following sections provide impact assessment, significance, and mitigation measures for the positive and negative impacts of the project and measures to maximize the benefits of the project.

5.3.3.1 Increased Employment Opportunities and Local Economy

Assessment

428. Direct, indirect, and induced employment at the local level, resulting in increased prosperity and wellbeing due to higher and more stable incomes of people. The impact has positive and high significance as the Project will provide economic opportunities for local people.

Enhancement Measures

429. To maximize benefits to the local community, the following mitigation, enhancement, and good-practice measures will be adopted.

- The contractor and sub-contractors will explain the recruitment process to local communities.
- Local candidates will be given preference for jobs provided they have the required qualifications and skills for the announced positions
- Coordinate efforts to recruit unskilled labor, if any are required under the Project, from the adjacent areas.

- Determine what is 'fair and transparent' in the distribution of jobs between different community groups in consultation with local communities and their leaders.
- As the nearby economy is mostly based on agriculture, it will be ensured that construction activities do not disturb or disrupt agricultural activities in the surrounding areas.
- Local communities will be consulted before the start of work.

5.3.3.2 Overburden on Local Resources

430. During the construction, overburden on local resources is possible if construction facilities such as workers camp and construction camp built near rural areas and can create problems for local communities.

Mitigation Measures

431. Proposed mitigation measures include:

- Construction Contractor will prepare a resource conservation plan as per template given in **Annexure XV**.
- The use of water will not disturb public water availability and the source of water will be selected carefully.
- Contractor to source raw material and camp utilities from Hyderabad city to avoid overburden on local resources.

5.3.3.3 Social Conflicts due to Influx of Workers

Assessment

432. The influx of workers into the AOI can potentially result in the deterioration of social values and an increase in social conflict in the communities due to the in-migration of employees and jobseekers. The presence of outsiders can also restrict the movement of local women, affecting their economic and social opportunities. The growth in population and associated economic disparity can result in increased crime, such as theft and robbery.

433. The impact has moderate impact as most of the workers will be hired from local communities as this will provide a monetary benefit to the contractor as well by saving overheads on housings and food if hired personnel from other areas.

Mitigation Measures

434. Proposed mitigation, enhancement, and good-practice measures include.

- Require non-locals employed by the Project to adhere to a social 'code of conduct' in terms of relations with local communities including restricting their movement to stay within camping sites
- Provide employees and visitors with cultural awareness training.

5.3.3.4 Impact on Community Health and Safety

Assessment

435. During the construction phase, there will be a health and safety risks to community members and there is risk of spreading communicable diseases.

Mitigation Measures

436. To mitigate these risks the following measures are proposed:

- The camping sites of the Project site will be completely fenced off before the commencement of any other construction activities.
- Access to the site will be controlled and unauthorized people will not be allowed to enter. Workers will not allow socializing with local communities.
- Potential for the spread of vector-borne and communicable diseases (such as COVID-19, HIV infection, etc.) from labor camps will be suppressed through worker awareness orientation and appropriate accommodation and sanitation systems.
- Children will not be allowed to enter the site under any circumstances.
- The prescribed vehicle speed limit will be strictly enforced for community and worker safety.
- Dust emissions due to vehicular traffic will be minimized by enforcing the speed limit. Water will be sprinkled on unpaved surfaces where necessary.
- All vehicles used by the project will undergo regular maintenance and will be tuned following the requirements of the SEQS.
- The labor works with different transmittable diseases will be restricted within the construction site.
- Efforts will be made to create awareness about road safety among the drivers operating construction vehicles.
- Timely public notification on planned construction works.
- Close consultation with local communities to identify optimal solutions for diversions to maintain community integrity & social links
- Seeking cooperation with local educational facilities (schoolteachers) for road safety campaigns.
- Provision of proper safety and diversion signage, particularly at sensitive/accident-prone spots
- The use of water will not disturb public water availability and the source of water will be selected carefully.

5.3.3.5 Impact on Physical Cultural Resources (PCRs)

Assessment

437. The location of mosques and other cultural and other heritage sites has been reviewed. There is no mosque, graveyard, tomb, or any other religious/archaeological site within 100 m boundary from the edge of the Project; therefore, no impact on the site is expected.

Mitigation Measures

438. However, a chance find procedure is presented in **Annexure X** in case of finding any artifact during construction activities.

5.3.3.6 Uncontrolled Solid Waste Disposal, Communicable Diseases

Assessment

439. The main issues of concern are uncontrolled or unmanaged disposal of solid and liquid wastes into watercourses and natural drains, improper disposal of stormwater and black water and open defecation by construction workers.

440. Wherever water can accumulate in temporary drainage facilities, due to improper stormwater management, or improper disposal of wastewater generated from the site, there is the risk of mosquitoes and another insects breeding.

441. The impact has a significant impact on local communities if appropriate mitigation measures are not taken.

Mitigation Measures

442. To mitigate these risks the following measures are proposed:

- To maintain proper sanitation around construction sites, access to the nearby public lavatories will be allowed or provision of temporary toilets will be made. Construction worker camps will be necessary, based on the scale of the works needed. The construction camp will be provided with toilets with soakage pits or portable lavatories or at least pit latrines.
- Disposal of surplus materials will also be negotiated through local authority approvals before the commencement of construction. The Project work will not involve any significant cutting and filling, but minor excavations (down to 4m) and piling may be required to create the foundations for towers (if required). It is expected (depending on the mode of contract) that the surface under the towers will need to be scabbled to remove unstable materials, or to stockpile topsoil.
- If surplus materials arise from the removal of the existing surfaces from specific areas, it will be used elsewhere on the Project before additional soil, rock, gravel, or sand is brought in. The use of immediately available material will generally minimize the need for additional rock-based materials extraction from outside.
- Contractual clauses will require the contractor to produce a materials management plan (one month before construction commences) to identify all sources of cement and aggregates and to balance cut and fill. The plan will clearly state the methods to be employed before and during the extraction of materials and all the measures to be employed to mitigate nuisances to residents. Financial compensation will not be allowed as mitigation for environmental impacts or environmental nuisance.
- Contractual clauses will require the contractor to produce a solid waste management plan so that the proper disposal of waste can be ensured.
- Claims/complaints of the people on construction nuisance/damages close to RoW will be considered and responded promptly by the Contractor.
- Temporary and permanent drainage facilities will be designed to facilitate the rapid removal of surface water from all areas and prevent the accumulation of surface water ponds.
- The contractor will organize temporary means of access and make alternative arrangements to avoid access problems to local community and to avoid such short-term negative impacts.
- Potential for the spread of vector-borne and communicable diseases (such as COVID-19, HIV infection, etc.) from labor camps will be avoided through worker awareness orientation and appropriate sanitation systems.

5.3.3.7 Natural Hazard Risks (Flooding, Earthquakes etc.)

Assessment

443. According to the classifications in **Section 4.2.3**, the Project is located in minor to moderate risk zone for earthquakes and unprecedented precipitation events as observed

in the current year (see current data in **Section 4.2.4**), It is predicted to receive more rainfalls in the following years.

Mitigation Measures

444. The structures of the ETL such as tower bases should be built as per the rules of Pakistan Building Code (PBC).

445. The tower bases should be built considering the local climatic conditions including flooding.

446. Project construction facilities should be built considering climatic conditions such as risk of flash flooding in case of high precipitation events.

447. Material testing and tensile strength of conductors must be checked before commencement of works.

5.4 Operation Phase

448. The operation phase impacts on the physical environment, ecology, and socioeconomic environment are listed separately in the below sections.

449. A summary of potential impacts during operation phase, based on methodology discussed in **Section 5.1**, is provided in **Table 5-11**.

Table 5-11: Potential Impacts at Operation Phase

No.	1. Potential Impact	Likelihood (Certain, Likely, Unlikely, Rare)	Consequence (Catastrophic, Major, Moderate, Minor)	Risk Score (Critical, Significant/ Moderate, Low)	Residual Impact (Critical, Significant/ Moderate, Low)
1	Noise	2	2	4	Low
		Unlikely	Moderate	Low	
2	Impact of Faulted SF6	2	2	4	Low
		Unlikely	Moderate	Low	
3	Electrocution and Collision of birds	3	3	9	Low
		Likely	Major	Significant	
4	Occupational Health and Safety	3	3	9	Low
		Likely	Major	Significant	
5	Community Health and Safety Risk	3	3	9	Low
		Likely	Major	Significant	
6	Visual Amenity	3	3	9	Low
		Likely	Major	Significant	
7	Aircraft Navigation Safety	3	3	9	Low
		Likely	Moderate	Significant	
8	Reduced Pressure for Local Resources	3	3	9	Low
		Likely	Major	Significant	

	Critical Risk Level
	Significant/ Moderate Risk Level
	Low Risk Level

5.4.1 Physical Environment

5.4.1.1 Noise

Assessment

450. The Project works will extend the power distribution. Maintenance works will be very small in scale and infrequent. The operation of the ETL project is not likely result in atmospheric pollution during operation and generate liquid or solid waste during operation.

451. However, the operations may cause increased audible noise specially in raining times. This will have a major impact in areas where ETL is passing through settlements.

Mitigation Measures

452. The height of ETL and right of way as per NTDC standard for 220 kV ETL discussed in **Section 3** will be maintained to avoid audible noise issues.

453. In addition to above, much more robust design for ETL and its ground clearance with much higher levels have been proposed for this project due to the Project passing through settlements in parts of the right of way.

5.4.1.2 Impact of Faulted SF6

Assessment

454. Sulfur Hexafluoride (SF6) used as circuit breaker in electric transmission operations. Toxic decomposition products are formed when SF6 gas is subjected to an electric arc. The decomposition products are metal fluorides and form a white powder. Toxic gases are also formed which have the characteristic odor of rotten eggs.

455. Faulted Sulfur Hexafluoride (SF6) will be handled carefully ensuring standard industry practices. EHS Guidelines on Electric Transmission and Distribution (footnote 24) will also be followed to handle SF6.

Mitigation Measures

- Do not breathe the vapors remaining in a circuit breaker where arcing or corona discharges have occurred in the gas.
- Evacuate the faulted SF6 gas from the circuit breaker and flush with fresh air before working on the circuit breaker
- Arc products which do not recombine, or which combine with any oxygen or moisture present, are normally removed by the molecular sieve filter material within the circuit breaker.

5.4.2 Ecological Environment

5.4.2.1 Electrocution and Collision of birds

Assessment

456. Operations and maintenance will be very small in scale and infrequent and involve a few changes to the existing situation. The practice of allowing some re-growth of vegetation along the RoW will also have ecological benefits as it will allow plants and animals to re-colonize.

457. The combination of the height of transmission towers and distribution poles and the electricity carried by transmission and distribution lines can pose significant risk to birds and bats through collisions and electrocutions.

458. The following possible risks of bird's collision can occur during operation of the Project:

- Electrocuting: spacing of conductors (the current-carrying wires) and the availability of perches affect electrocution risk. The risk of electrocution of large birds by ETL is real as they provide a structure for birds from which they can hunt and roost.
- Electrocuting occurs when a bird encounters two wires or when it perches on a conductive pylon and comes into simultaneous contact with a wire. The impact of electrocution of birds depends on the electrotechnical design of a pylon and the natural features surrounding it.¹⁴² In short, the birds may be electrocuted by power lines in one of three ways:
 - Simultaneously touching an energized wire and a neutral wire
 - Simultaneously touching two live wires; and
 - Simultaneously touching an energized wire and any other piece of equipment on a pole or tower that is bonded to the earth through a ground wire.
- Collisions may also occur if the ETLs are difficult to see. Earth wires (sometimes called the static or ground wires, which protect the power line from lightning strikes) are thought to be responsible for a much higher rate of collisions than the thicker, often bundled conductor wires. This is because they are harder for birds to see and are typically positioned at the top of the wire array, putting them in the flight path of birds which have taken avoiding action to fly over the conductors.
- In addition to above, bird collisions with power lines may result in power outages and fires.

459. The net impact of electrocution of large birds is not considered significant because there is an EMF around the high voltage ETLs which produces noise and the excessive noise deters birds.¹⁴³ However, even if the birds sit on the conductors, the danger will arise if two phases of the current meet, but as there is sufficient distance between the two opposite phased conductors; therefore, no danger to birdlife is expected. The collision and siting of birds will be further avoided by installing visibility enhancement objects such as marker balls, bird deterrents, or diverters.

Mitigation Measures

460. The following mitigations are proposed to avoid the electrocution and collision affects:

- Maintain 1.5 meter (60-inch)¹⁴⁴ spacing between energized components and grounded hardware or, where spacing is not feasible, covering energized parts and hardware.
- Install visibility enhancement objects such as marker balls, bird deterrents, or diverters.¹⁴⁵
- Make power lines less of an 'obstacle' for birds to collide with
- Keep birds away from the power line by making the power lines more visible by placing colorful/fluorescent tape on the towers to make them conspicuous enough to enable birds to see them.
- Keep power line cables lower to the ground to the extent feasible as these are better for preventing bird collision.

¹⁴² EIA, 132kV ETL, Nikachhu Pothead Yard to Mangdechhu Pothead Yard, ADB, 2014

¹⁴³ <https://sciencing.com/sounds-frighten-birds-7807173.html>, and https://en.wikipedia.org/wiki/Bird_scarer

¹⁴⁴ Manville, Albert M. 2005. Tall Structures: Best Management Practices for Bird- Friendly Tall Buildings, Towers and Bridges – U.S. Fish and Wildlife Service Recommendations to Address the Problem. Prepared for the U.S. Fish and Wildlife Service.

¹⁴⁵ Crowder, Michael R. and Olin E. Rhodes, Jr. 1999. Avian Collisions with Power Lines: A Review. Proceedings of a workshop on Avian Interactions with Utility and Communication Structures Charleston, South Carolina, 2-3 December 1999. Edited by Richard G. Carlton. Electric Power Research Institute.

- Keep vertical separation of cables as less to the extent feasible, as it poses less of an 'obstacle' for birds to collide with.
- Provide horizontal separation of conductors and construct cage box on conductors to prevent birds from sitting or making nest on the towers; and
- Construct self-supporting towers, which do not require stay wires.

5.4.3 Socioeconomic Environment

5.4.3.1 Occupational Health and Safety

Assessment

461. The occupational health and safety hazards associated with operation, repair, and maintenance, and decommissioning of ETLs mainly include:

- Exposure with live power lines.
- Exposure to fall hazards from working at heights for poles and structures.
- Exposure to electric and magnetic fields to workers as the workers typically have a higher exposure to EMF than the general public due to working in proximity to electric power lines.

462. The impact has a significant impact related to occupational safety if appropriate mitigation measures are not taken.

Mitigation Measures

463. The following are prevention and control measures will be implemented to the extent feasible to mitigate any issue related to occupational health and safety:

- All associated ETLs will be shut down before conducting any repair and maintenance work as per the NTDC's operation and maintenance procedures.
- Adherence to the standards Occupational Health and Safety Guidelines.
- Allow only trained and certified workers to maintain, or repair electrical equipment with safety and insulation measures in place.
- Deactivate and properly ground the live power distribution prior to performing work on or in proximity to the ETLs.
- Ensure proper use of special safety equipment and procedures when working near or on exposed energized parts of an electrical system.
- Ensure worker is properly isolated and insulated from the energized part with gloves or other approved insulation and energized part is properly insulated from the worker.
- Test structures for integrity prior to undertaking work.
- Prepare and implement fall protection program that will include training in climbing techniques and use of fall protection measures; inspection, maintenance, and replacement of fall protection equipment; and rescue of fall-arrested workers, among others.
- The fall protection system will be appropriate for the tower structure and necessary movements, including ascent, descent, and moving from point to point and fixtures will be installed, wherever possible, to facilitate the use of fall protection systems.
- Provide adequate work-positioning device system for workers to the extent possible.
- Properly maintained hoist equipment will be used along with properly trained personnel.
- Proper safety belts will be provided. The Safety belts should be of not less than 16 millimeters (mm) (5/8 inch) two-in-one nylon or material of equivalent strength.

- Use a backup safety strap when operating power tools at height.
- Remove signs and other obstructions from poles or structures prior to undertaking work.
- Provide an approved tool bag for raising or lowering tools or materials to workers on structures.
- Prepare and implement EMF safety program to prevent or minimize occupational hazards due to exposure to EMF.
- Identify potential exposure levels in the workplace, including surveys of exposure levels in new projects and the use of personal monitors during working activities.
- Train workers in the identification of occupational EMF levels and hazards
- Establish and identify safety zones to differentiate between work areas with expected elevated EMF levels compared to those acceptable for public exposure, limiting access to properly trained workers.
- Prepare and implement action plans to reduce adverse impact of EMF and to address occupational exposure. Action plans may include limiting exposure time through work rotation, increasing the distance between the source and the worker, when feasible, or the use of shielding materials.
- Signs and barriers (e.g., locks on doors, use of gates, use of steel posts surrounding transmission towers) will be used.

5.4.3.2 Community Health and Safety

Assessment

464. The community health and safety impacts associated with operation, and decommissioning of ETLs include:

- **Electrocution:** Electrocution through direct contact with high-voltage electricity or from contact with devices or equipment that are in contact with high-voltage electricity
- **Noise:** Noise in the form of buzzing or humming can often be heard around transformers or high voltage power lines producing corona. Noise from ETLs reaches its maximum during periods of precipitation, including rain, sleet, snow, or hail, or as the result of fog. The sound of rain typically masks the increase in noise produced by the ETLs, but during other forms of precipitation (e.g., snow and sleet) and fog, the noise from overhead power lines can be troubling to nearby residents.
- c. **Aircraft Navigation Safety:** Power transmission towers, if located near an airport or known flight paths, can impact aircraft safety directly through collision or indirectly through radar interference. According to, there is a domestic airport of Hyderabad city at about 10 km southwest from ETL route.
- **Impacts of EMF:** The local people believe that their movement will be restricted in the project area due to EMF, and it may have adverse impacts on their health. However, there has been much research on the health and environmental impacts of EMF since the 1970s, but most research and laboratory studies have failed to show strong associations between exposure to EMF and health effects. Several scientific panels convened by national and international health agencies and the U.S. Congress reviewed the research and concluded that there was insufficient evidence to prove the same. However, they also concluded that there is insufficient evidence to prove that EMF exposure is safe.¹⁴⁶ Since the Project has been planned in the

¹⁴⁶ EIA, 132kV ETL, Nikachhu Pothead Yard to Mangdechhu Pothead Yard, ADB, 2014

least populated area, even if some effects due to EMF are envisaged, these will be minimal due to safe distance. More assessment on EMF has been provided in **Section 5.2.11**

Mitigation Measures

465. The following are prevention and control measures that will be implemented, to the extent feasible, to mitigate impacts related to community health and safety:

- Signs and barriers (e.g., lock on doors, use of gates, use of steel posts surrounding transmission towers) will be used.
- Conducting objects (e.g., fences or other metallic structures), installed near power lines, will be grounded to prevent shock.
- A vertical clearance, required as per international standards, will also be maintained especially near the populated areas. If required, application of engineering techniques will be considered to reduce the EMF produced by power lines and grid stations such as increasing height of transmission towers, modification to size, spacing, and configuration of conductors, shielding with metal alloys (This is effective for reduction of electric field exposure, but not for reduction of magnetic field exposure.).
- During the operation stage, a check will be kept by the NTDC that no construction will be allowed within 100 m of the ETL.
- Power lines will be designed, with due consideration to landscape views and important environmental and community features.
- Use of noise barriers or noise canceling acoustic devices will be considered as necessary.
- Adherence to regional or national air traffic safety regulations.
- Use of buried lines when installation is required in flight sensitive areas.

5.4.3.3 Visual Amenity

466. Impact on visual amenity due to the transmission and distribution facilities to communities may be visually intrusive and undesirable to nearby residents

467. However, it is common practice to create some local hard and soft landscaping and successful planting of fruit trees at such sites. This practice should be encouraged as far as practicable. Other opportunities for enhancements can be assessed before construction and proposed enhancements will be discussed with the local population to serve as a vehicle for further public consultation at the implementation stage and to assist in public relations.

5.4.3.4 Aircraft Navigation Safety

Assessment

468. Power transmission towers and ETL, if located near an airport or known flight paths, can impact aircraft safety directly through collision or indirectly through radar interference. A domestic airport is located in the city of Hyderabad and is about 2 km west of the ETL route. Therefore, aircraft collision or radar interferences if likely to occur due to the Project operations to be considered for eliminating the hazard.

Mitigation Measures

469. The following are prevention and control measures that will be implemented, to the extent feasible:

- Use of buried lines when the installation is required in flight sensitive areas.

- Making the power lines more visible by placing colorful/fluorescent tape on the towers and colorful balls on the conductor to make them visible.
- Keep power line cables lower to the ground to the extent feasible.

5.4.3.5 Reduced Pressure for Local Resources

470. During the operation phase, no negative social impacts are anticipated. Instead, the people will benefit positively due to the availability of uninterrupted power and reduced pressure on demand of liquid petroleum gas, kerosene, diesel, and fuelwood.

5.5 Cumulative, and Induced impacts

Assessment

471. Cumulative impacts are those impacts that result from the successive, incremental, and/or combined effects of an action, project, or activity when added to other existing, planned, and/or reasonably anticipated future ones. For practical reasons, the identification and management of cumulative impacts are limited to those effects generally recognized as important based on scientific concerns and/or concerns of affected communities (local communities directly affected by the Project).¹⁴⁷

472. The Project is being developed and will connect an existing grid station that already having many other ETLs and distribution lines.

473. Other ETLs include 500 kV ETL from Jamshoro Grid Station and 132kV distribution line from the Hala Road Grid Station.

474. The incremental EMF impacts are expected, and local population concern will be increased with the addition of this ETL.

Mitigation Measures

3. This Project involves dismantling of a low-line 132 kV ETL owned by local distribution company and the same will be built again with similar standards as it planned for the Project and will result in decrease EMF effects on the residents.

4. The Project ETL will be designed with a better tower structure and technology compared to the existing transmission system at the Hala Road Grid Station and surroundings, as discussed in **Section 5.2.11** so the EMF incremental impact of this project will be minimal.

475. The measures to be taken in the pre-construction (design) phase **Section 5.2.11** above will also further reduce the incremental EMF impacts of this ETL. The measures include,

- NTDC's standard operating procedures (SOPs) of a minimum vertical ground clearance for ETL conductor of 7 meters will be ensured.
- Raising conductor height above the ground to 8 m, typically by increasing tower height, will be ideal.
- Reducing conductor spacing.
- Arranging phases so that fields tend to cancel.
- Increasing transmission voltage (since magnetic field intensities are a function of current, and increased voltage, all things being equal, will result in reduced current).
- Reducing loads (and therefore, currents).

¹⁴⁷ Cadinale, Pablo, and Lorne Greig. "Cumulative Impact Assessment and Management: Guidance for Private Sector in Emerging Markets." In Good Practice Handbook: International Finance Corporation and ESSA Technologies Ltd, 2013.

- Identification of potential exposure levels in the work area including surveys of exposure levels and establishment of safety zones.
- Safety signs and warning zone shall be highlighted to indicate EMF in the area
- Limit access to properly trained workers and those equipped with appropriate PPE when entering safety zones.
- Increasing right-of-way widths or buffer zone widths, to move people further from ETLs.

6. Analysis of Alternatives

476. The Project is a subproject of Tranche 4 of MFF. Tranche 4 will expand the 220 kV transmission systems in the provinces of Sindh and Punjab and Khyber Pakhtunkhwa. It will also upgrade the supervisory control and data acquisition system across the national grid to enable the NTDC to monitor and control the grid in real-time, and to prevent network outages or reduce their duration, thereby increasing grid stability, reliability, and resilience to accommodate more intermittent renewable energy.

477. Several alternatives, including no project alternative, layout and design alternatives were considered for the proposed Project. The consideration of these alternatives is detailed below.

6.1 No Project Alternative

478. Based on the available information, the predictions have indicated that without the power enhancement projects, the supply will not be reliable. This Project is a part of an overall strategic improvement to the system.

479. In the absence of the Project, the potential for interruptions to the power supply will increase and socio-economic development, especially in the low-income areas of the province will be affected in the short to medium term.

480. In an un-enhanced state, the wear and tear on existing facilities will rise and further power disruptions may have occurred.

6.2 Alternative Construction Methods

481. The feasibility and constructability of the ETL towers are well established locally, and the installation of equipment is well-practiced in the international context (even if some types of equipment are new to Pakistan). The process includes the transportation of equipment to the site and the assembly of prefabricated units' in-situ. Thus, the impacts of construction activities are very manageable from the environmental viewpoint.

482. An alternative to overhead towerbased ETL is Underground ETL which was proposed but not implemented. Special towers will be designed for section of ETL passing through the residential areas for power evacuation considering community safety.

6.3 Design/Technology Alternatives

483. This project will promote high-level technologies and climate change resilient transmission system. It will promote deployment of high-temperature low sag (HTLS) conductors which can operate at higher ambient temperature within requested vertical clearance. Comparing to equivalently sized conventional aluminum conductor steel reinforced (ACSR) conductors, the HTLS conductors can also transfer more current with less loss. This project will also support the replacement of porcelain insulators with fog-resistant insulators such as glass or composite types in the heavily polluted area. Moreover, this project will contribute to the reduction of CO₂, due to loss reduction and improved efficiency.

484. The total conductor to ground clearance shall in no way be less than 7.0 meters.

6.4 Alternative Alignments for Transmission Line

485. Two alternative alignments were considered for the **Figure 6-1**ETL. **Table 6-1** presents an analysis of alternative alignments for ETL. The new alignment for ETL, Alternate II in **Table 6-1**, is selected with an aim to avoid presence of settlements.

486. This was the reason the old ETL alignment has been changed which was initially planned, due to the delay in the implementation, caused a change in land-use patterns on the old route through the construction of several residential houses by the private landowners.

487. The new ETL alignment will be constructed in an area with lesser residential houses and population, and the overall land area is mostly covered with seasonal crops with no environmentally sensitive receptors.

Table 6-1: Analysis of Alternative Alignments for Transmission Line

Aspect	Alternate I (Old ETL Alignment)	Alternate II (New ETL Alignment)
Description of Alternate	Sub-component: In/Out of D/C T/L Hala Road - Jamshoro at Mirpur Khas (70km)	Component: In/Out of D/C T/L Hala Road - Jamshoro at Mirpur Khas (70 km)
Design Considerations		
Right-of-way	The width of RoW for ETL considered was 30 m, i.e., 15 m on either side from the center of ETL and it was 225 m ² (i.e., 15m x15m) in case of tower spotting.	The width of RoW for ETL considered was 30 m, i.e., 15 m on either side from the center of ETL and it was 225 m ² (i.e., 15m x15m) in case of tower spotting.
Accessibility	Easily accessible, mostly through metaled road or by kacha tracks or village roads.	Easily accessible, mostly through metaled road or by kacha tracks or village roads.
Changes in land use	Construction of several residential houses on the route by private landowners due to delay in implementation schedule.	No residential activity is planned in the area.
Environmental and Social Considerations		
Physical displacement	<p>More physical displacement in terms of relocation and loss of shelter was involved.</p> <ul style="list-style-type: none"> Individual houses for resettlement – 21 Cluster of houses for resettlement – 34 	<p>Fewer physical displacement in terms of relocation and loss of shelter was involved.</p> <ul style="list-style-type: none"> Individual houses for resettlement – nil Cluster of houses for resettlement – Nil
Economic displacement	<p>More economic displacement in terms of loss of livelihood and assets was involved.</p> <ul style="list-style-type: none"> Potential tree cuttings – 625 Brick kilns – 5 Cattle farm – 1.79 km² Orchard area – 1.61 km² 	<p>Less economic displacement in terms of loss of livelihood and assets was involved.</p> <ul style="list-style-type: none"> Potential tree cuttings – 1500-2000 Brick kilns – 5 No cattle farm Orchard area – 0.91 km² Seasonal crops with no environmentally sensitive receptors
Indigenous people	No indigenous people were found in the area.	No indigenous people were found in the area.

Aspect	Alternate I (Old ETL Alignment)	Alternate II (New ETL Alignment)
Cultural sites	No archeological or cultural-historical site found on the RoW of the Project.	No archeological or cultural-historical site found on the RoW of the Project.
Ecology (see Figure 6-1)	<ul style="list-style-type: none"> No protected area i.e., Game Reserves, National Parks, and Wildlife Sanctuaries, fall on the RoW. No impact on the flora and fauna of the Reserved Forest. No wetlands, notified by the GoP, along the entire ETL route. Thus, no impact on any wetland biodiversity. No fishing activities observed or reported in the Project area. no plant species of conservation importance has been observed or reported from the Area of Habitat Loss or Aol. no threatened or endemic herpetofauna species. 	<ul style="list-style-type: none"> No protected area i.e., Game Reserves, National Parks, and Wildlife Sanctuaries, fall on the RoW. No impact on the flora and fauna of the Reserved Forest. No wetlands, notified by the GoP, along the entire ETL route. Thus, no impact on any wetland biodiversity. No fishing activities observed or reported in the Project area. no plant species of conservation importance has been observed or reported from the Area of Habitat Loss or Aol. no threatened or endemic herpetofauna species.
Benefits	<ul style="list-style-type: none"> Major benefits: improve power supply and reliability of system networks reduce transmission losses improve socioeconomic conditions of the area such as employment 	<ul style="list-style-type: none"> Major benefits: improve power supply and reliability of system networks reduce transmission losses improve socioeconomic conditions of the area such as employment
Economic Considerations	Almost same length of ETL 69KM	<ul style="list-style-type: none"> 70 km length of ETL for this component
Reason(s) for Selection		<ul style="list-style-type: none"> Most of the impacts and benefits are similar for both; old and new ETL alignments. Similar ecological and socioeconomic conditions exist along both, old and new ETL alignments. No change in land use as in the case of old alignment where land use has changed due to construction of houses by private owners. The new ETL alignment avoids the involuntary resettlement (economic and physical displacement i.e., livelihood of people and relocation of houses).

Note: Cluster of houses includes 2-50 houses

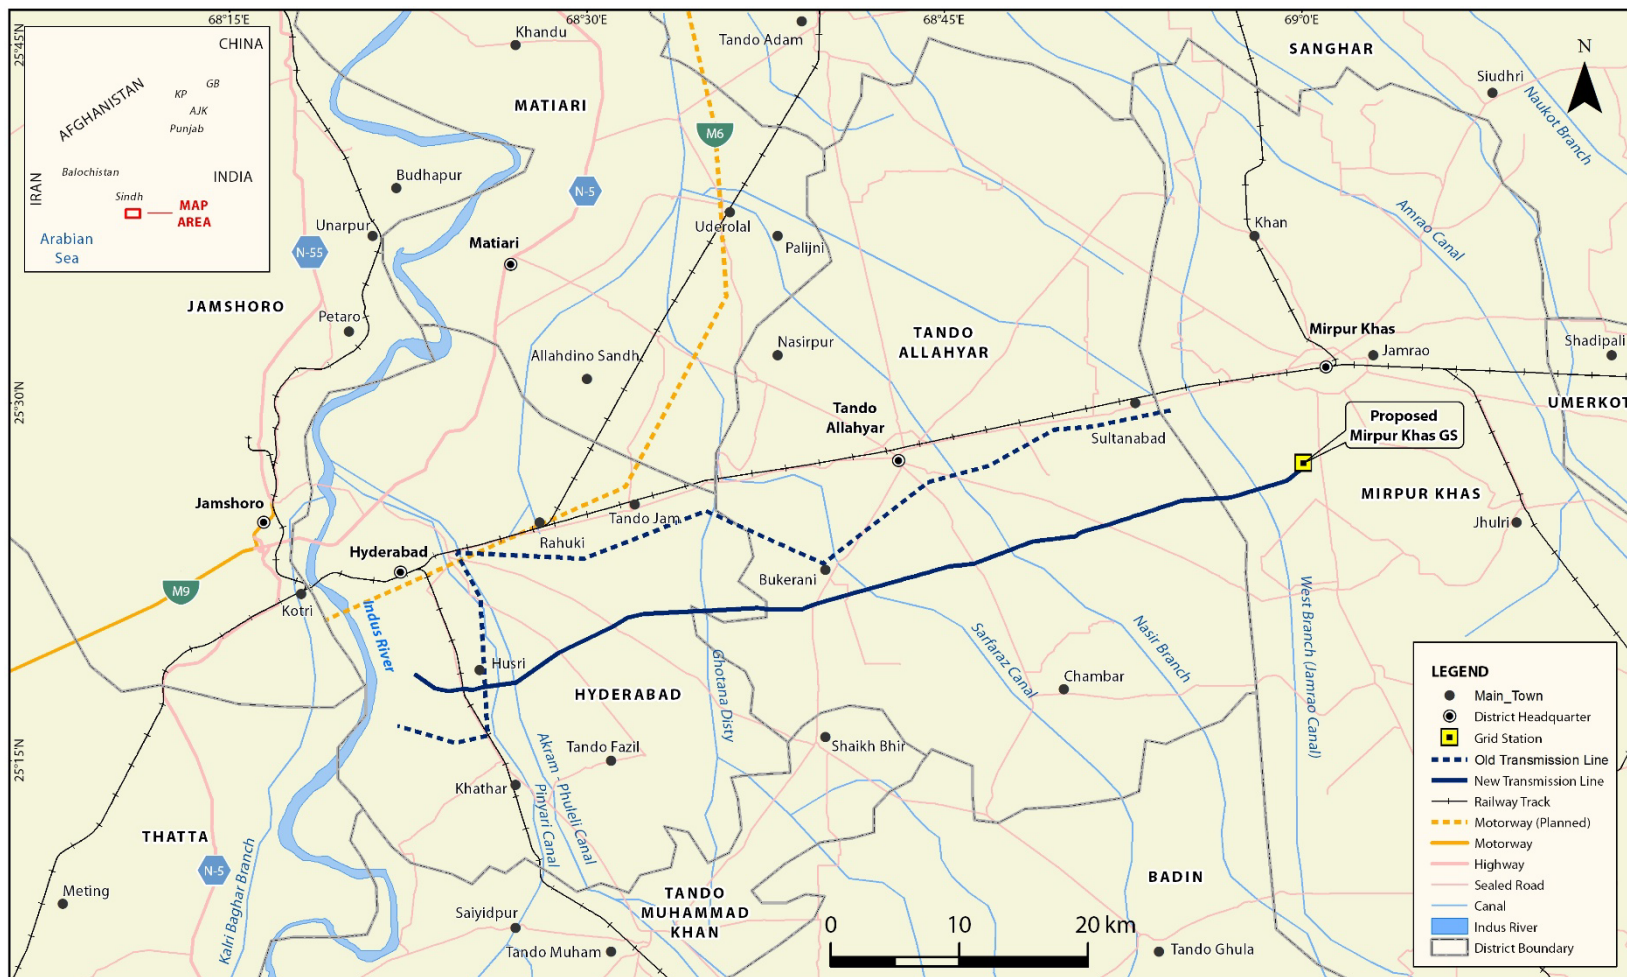


Figure 6-1: Alternative Alignments for Transmission Line

7. Information Disclosure, Consultation, and Participation

488. Stakeholders are groups and individuals that are affected by or can affect the outcome of a project. Stakeholder engagement is a broad, inclusive, and continuous process between a developer of a project and its stakeholders. This process comprises a range of coherent approaches and activities that spans the entire life cycle of the Project. This is achieved by informing the stakeholders on time about the proposed project and its potential consequences on the environment and by encouraging their feedback.

489. The purpose of this exercise is to inform all the stakeholders about the Project and include their concerns, suggestions, and opinions and develop confidence amongst them that the Project will be developed responsibly.

490. The continuous engagement with the local community and other stakeholders will be carried out throughout the Project lifecycle including construction and operations.

7.1 Consultation

7.1.1 Methodology

491. A stakeholder is either an individual, group or organization who is impacted by the outcome of a project. There are two types of stakeholders, i.e., community and institutions. Firstly, these stakeholders were identified. Then separate consultations have been done with both and their concerns, suggestions, and opinions have been recorded on a consultation form. Their concerns, suggestions, and opinions are included in the Project's potential impacts and mitigation measures are advised for each of the impacts.

492. The baseline data for this IEE was taken from the original IEE for initially designed ETL route (IEE in July 2017. See footnote 95 on page 89). The data was further updated in June 2022 through a field survey focusing new route for the ETL.

7.1.2 Consultation Material

493. During field survey for IEE of the Project, a Basic Information Document (BID) was prepared in English, Urdu, and Sindhi for communities living nearby the RoW.¹⁴⁸ BID was distributed to stakeholders during the consultation to inform the stakeholders about the Project. The BID contained information about the Project and the IEE process.

494. A consultation form was used to record the issues, concerns, and suggestions of the stakeholders. The BID and consultation form used for the Project is included as **Annexure VI**.

7.1.3 Community Consultation Mechanism

495. The focus of this consultation is the population living near the proposed ETL route i.e., the population that is living around the radius of 30 m to around 1.5 km of the proposed ETL (IEE in July 2017. See footnote 95 on page 89).

496. The vulnerable population in the Aol including local women and elderly groups were also part of the consultation process.

¹⁴⁸ Sindhi as a mother tongue is spoken in the Project area. However, Urdu and Punjabi are also spoken. (para. 273 on page 87)

497. The list of the communities consulted¹⁴⁹ is given in **Table 7-1**. The dates of consultations, names and contact details of community consultation participants are given in **Table 7-2**.

498. The location of these communities is shown in a Google image map with a ETL passing near these villages in **Figure 7-1**.

499. Photographs from the public consultation campaign are presented in **Photo 7-1**.

500. The community consultations were conducted in Sindhi and Urdu language to make consultations understandable to the communities. The meetings progressed in the following manner:

- Stakeholders were introduced to the visiting team and briefed about the consultation process and its objectives
- The main points of the BID were read out to the stakeholders in Urdu. Through the BID an overview of the Project and IEE/EIA process was provided
- Stakeholders could raise queries or concerns regarding the Project. Queries were responded to, and concerns were documented.

Table 7-1: List of Communities Consulted

Communities within Study Area	Coordinate
5. Pak Singaar	25°26'08.7"N 68°47'39.6"E
6. Mubarak Jarwar	25°25'52.0"N 68°50'10.7"E
7. Missan	25°25'41.2"N 68°52'53.4"E
8. Ch. Nizam Din Goth	25°26'43.8"N 68°57'32.2"E
9. Village Mohsin Dago	25°26'34.4"N 68°54'49.7"E
10. Dolat Lughari	25°27'23.1"N 68°59'18.6"E
11. Maqbool Memon (Bukera)	25°22'02.6"N 68°40'54.8"E
12. Darya Khan Solangi	25°24'05.2"N 68°46'20.6"E
13. Moosa Shoro	25°17'50.3"N 68°25'36.6"E

Table 7-2: Participant of the Community Consultations

No.	Participant Name	Village/Area	Date Consulted
1.	Madho Mal Manager 03003241912 Choudri Yoseen Radhoo Mal Kolhi Versi Mal Kachi M Aslam 0308345372 Shahid Ali Shah s/o Pir Ashraf (0303 3003879) Alli Dino s/o Sawan	Village Maqbool Memon (Bukera Sharif)	May 28, 2022

¹⁴⁹ Cadinale, Pablo, and Lorne Greig. "Cumulative Impact Assessment and Management: Guidance for Private Sector in Emerging Markets." In Good Practice Handbook: International Finance Corporation and ESSA Technologies Ltd, 2013.

No.	Participant Name	Village/Area	Date Consulted
2.	Ali Nawaz 03443653768 Shah Nawaz 0310033435 M Hanif Palah Ali Akbar Palah 03462520630 M Yousif Kalro 03460235758 Preem Kumar 03133518361 Muhammad Ali Palah Ghulam Muhammad 0301 3620351	Pak Singaar	May 28, 2022
3.	M Ishaque Jarwar 03003319259 Shahid Iqbal 03133633851 M Ameen Jarwar Abdul Razaq s/o Haji Sindino Misri s/o Ahmad Khan Faisal Karim s/o Karam Dad (0333 4119505)	Mubarak Jarwar	May 28, 2022
4.	Sadam Hussain 03142932127 Mansoor Ul Hoq 03133571734 Mumtaz Hussain 03142873751 Abdul Karim Kunbhar Mumtaz Ali Shoro	Missan	May 30, 2022
5.	Nabi Buksh Lighari 03003314619 Haji Majon s/o Sher Mohammad Shafi Mohammad s/o Haji Sobat Abdul Shakoor Lighari Bhagwano Jani	Dolat Laghari	May 30, 2022
6.	Mujeeb u Rahman Shoro Gulam Mujtaba 03063003676 Abdul Wahid Shoro 03063574132 Ali Muhammad 03083453884 Muhammad Nadeem Shoro 03463911273 Gulam Murtaza	Village Haji Moosa Shooro	May 31, 2022
7.	M sarwar Arain 03332993449 Ahtsham Sarwar 03003441556 Mataro Jatt Bhoro Bheel Lalchand 03432166465 Heero Mal Bheel Mohan Das Bheel Tajoo Bheel 03443215183	Ch. Nizam Din Goth	May 30, 2022
8.	Haji Habib Dagoo 03003316439	Goth Mohsin Dago	May 31, 2022

No.	<i>Participant Name</i>	<i>Village/Area</i>	<i>Date Consulted</i>
	Faiz Muhammad Dago Haji Muhammad Dago Rameesh Kumr		
9.	Hakim Ali Gull 03001002753 Ibraheem Solanghi Darya Khan Solanghi Muhammad Ali Muhammad Khan Haji Daod Arisar Jarki Moori Nadir Solangi 03180136110	Jarki Mori Stop Darya Khan Solangi	May 31, 2022

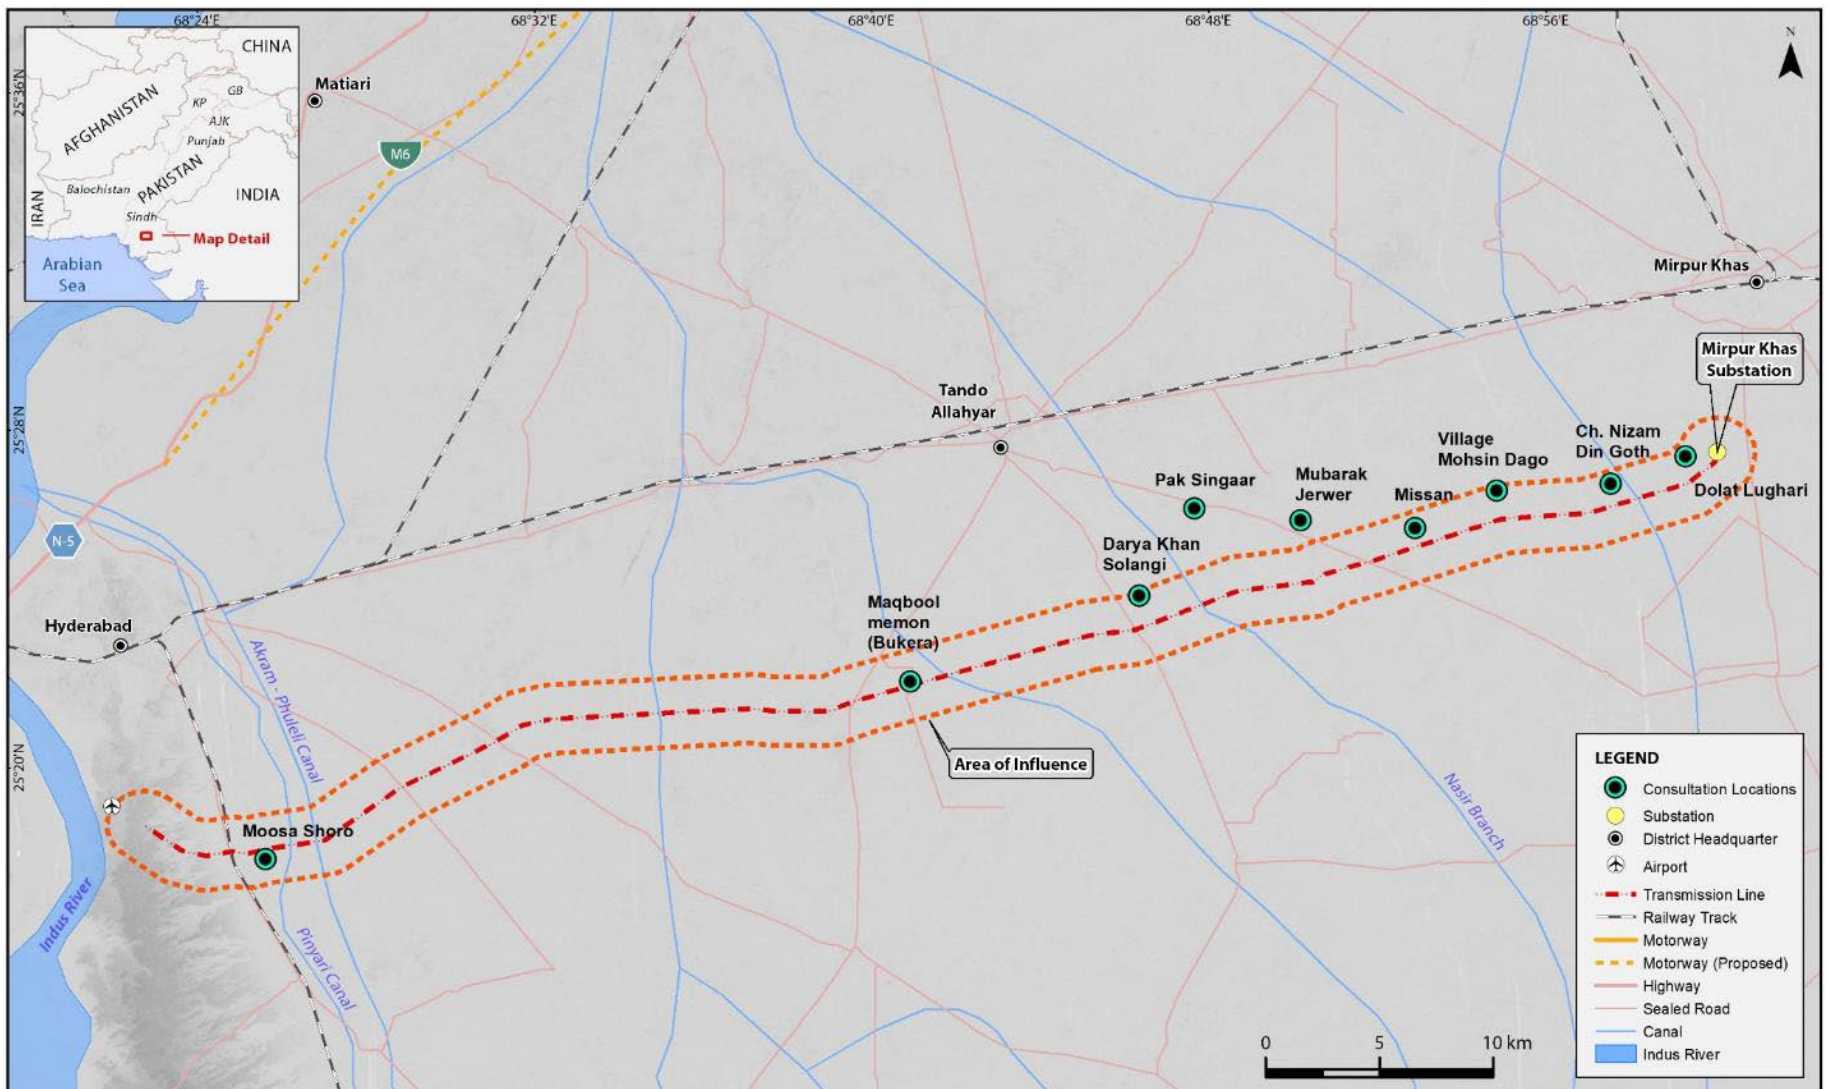


Figure 7-1: Locations of Community Consultations



Community Consultation at Village Dolat Lighari (May 2022)



Community Consultation at Village Paksanghar (May 2022)



Community Consultation at village Mubarak Jarwar (May 2022)



Community Consultation at village Mohsin Dago (May 2022)



Community Consultation at village Choudri Nizam (May 2022)



Community Consultation at village Missan (May 2022)



Community Consultation at village Maqbool Memon (May 2022)



Community Consultation at village Moosa Shoro (May 2022)





Community Consultations with Women (May 2022)

Photo 7-1: Community Consultations Photographs

7.1.4 Institutional Consultation Mechanism

501. Various important Government departments were consulted to accumulate their concerns concerning the Project activities. The list of institutional stakeholders is given in **Table 7-3**.

502. The meetings progressed in the manner mentioned below.

- The institutions were provided with the BID in advance of the meeting. Stakeholders were provided with an overview of the Project description.
- The IEE/EIA process that will be undertaken for the Project was briefly described and the structure of the IEE/EIA report was presented to facilitate understanding of the process.
- Their opinion, concern, and issues related to the physical environment, socioeconomic environment and other general views about the Project were documented.

503. Photographs from the institutional consultations campaign are presented in **Photo 7-2**.

Table 7-3: List of Institutional Stakeholders

No.	Institutional Stakeholders	Date Consulted
1	Forest Department, Hyderabad	May 23, 2022
2	Agriculture Department, Hyderabad	May 23, 2022
3	Environment Department, Hyderabad	May 23, 2022
4	Wildlife Department, Hyderabad	February 26, 2020
5	Environment Department, Hyderabad	February 26, 2020
6	UET Mehran, Jamshoro	February 26, 2020
7	Forest Department, Tando Allah Yar	February 27, 2020
8	Agriculture Department, Tando Allah Yar	February 27, 2020

No.	Institutional Stakeholders	Date Consulted
9	Forest Department, Mirpur Khas	February 28, 2020
10	Agriculture Department, Mirpur Khas	February 28, 2020
11	Environment Department, Mirpur Khas	February 28, 2020



Institutional Consultation with Agriculture Department Hyderabad (May 2022)



Institutional Consultation with Environmental Protection Agency Hyderabad (May 2022)



Institutional Consultation with Forest Department, Hyderabad (May 2022)



Institutional Consultation with Environmental Protection Agency Hyderabad (May 2022)



Institutional Consultation with Forest Department, Hyderabad (March 2020)



Institutional Consultation with Environmental Protection Agency Mirpur Khas (March 2020)



Institutional Consultation with Forest Department, Mirpur Khas (March 2020)



Institutional Consultation with Forest Department, Tando Allah Yar (March 2020)



Institutional Consultation with Mehran University of Engineering and Technology, Sindh, Hyderabad (March 2020)

Institutional Consultation with Agriculture Department Mirpur Khas (March 2020)



Institutional Consultation with Agriculture Department, Tando Allah Yar (March 2020)



Institutional Consultation with Agriculture Department, Hyderabad (March 2020)



Institutional Consultation with Wildlife Department, Hyderabad (March 2020)

Photo 7-2: Institutional Stakeholder Consultations

7.2 Summary of Concerns Raised by Stakeholders

504. Stakeholders raised various issues during the consultation process. The most raised issues were that the ETL will damage the crops and will impact the residents living near the ETL. The other significant point of view highlighted by the stakeholder was to provide timely and fair compensation to the affected people whose crops, trees or land might be affected by the Project.

505. In the stakeholder consultations, the other topics which were discussed with communities and government officials are noise pollution, dust pollution, environmental monitoring, EMP effect of ETL, water pollution, solid waste and chemical handling, disturbing residents, and some ecological issues. A detailed summary of the concerns raised by the community and institutions with responses are provided in **Table 7-4** and **Table 7-5**.

506. The consultation logs are provided in **Annexure VII**.

Table 7-4: Summary of the Concerns Raised by Community

<i>Environmental Parameter</i>	<i>Opinion, Concern, and Issues</i>	<i>Response Provided</i>
Physical Environment		
Damage to Vegetation	Minimum wastage of crops & orchids. avoid construction during the peak cropping season i.e. July to Sep	Minimum vegetation will be damaged and a proper record will be kept of vegetation loss.
Air Pollution	Dust and noise should be minimum near the residential areas	Proper control measures will be taken to reduce the impacts on the local community. The mitigation measures for the suppression of the dust generated by the Project are discussed in Section 5.3 (Physical Environment) .
Soil Pollution	Agricultural land should not be polluted as it affects soil productivity and crop yield.	Precautionary measures will be adopted to ensure minimum disturbance to the crops and agricultural fields. The mitigation measures for minimizing soil pollution are discussed in Section 5.3 (Physical Environment) .
Socioeconomic Environment		
Compensations	Fair & timely compensation of crops	A resettlement plan will be prepared to compensate for all the affectees of the Project.
Jobs	The Project should offer jobs to the affected persons and compensation should be provided according to shares in crops.	The Project will generate job and business opportunities for locals.
Cultural Issues	Company workers should take care of the local culture during the installation of T/L During the construction phase, labor and general workers should be inducted from the adjoining villages/areas.	Contractor camp will be set away from the residential area and the local culture will not be disturbed
Local employment	Employment should be given to local men	Locals will be preferred for the job.
General		

Environmental Parameter	Opinion, Concern, and Issues	Response Provided
Intimation of work	Early information before the start of work	The contractor will inform the locals before commencing the construction works
Privacy	Company works should not disturb the local during agricultural activities	The construction works will be limited to the Project area and the privacy of the locals will not be disturbed. The construction crew's interaction with the local population will be minimized
Health hazards for existing ETL	Rehabilitation of the existing ETL.	The existing conductors' loss height and is damaging crops as well as posing community health hazards; therefore; the people requested the rehabilitation of the existing ETL.

Table 7-5: Summary of the Concerns Raised by Institutions

Concern/Issue	Stakeholder	Response Provided
Physical Environment		
Develop a Grievance Redress Mechanism (GRM) to resolve community reservations and issues.	Environment Department, Hyderabad	A GRM has been made part of IEE (Section 8)
Consultant and NTDC representative raised the issue of delay in issuance of NOC from PEPA Sindh as EIA report has been submitted since Nov-Dec 2020 and requested to expedite the process.	Environment Department, Hyderabad	Noted
Regional Director has asked to provide a copy of EIA to the Hyderabad office and we will coordinate with Head office in this regard	Environment Department, Hyderabad	Noted
Socioeconomic Environment		
The contractor should promote local employment for skilled as well as non-skilled tasks.	Agriculture Office Hyderabad	Noted.
Most of the people in the region are farmers, the contractor should train them for non-skilled jobs and hire them	Agriculture Office Hyderabad	
Construction activities should not disturb the existing facilities such as gas or sewage water pipeline facilities.	Agriculture Office Hyderabad	
Ecology		
Major crops and orchards in the surrounding of the proposed ETL are mostly Banana, Mango, Sugarcane, Cotton, and vegetables.	Agriculture Office Hyderabad	Noted. The concern will be made part of IEE/EIA.

Concern/Issue	Stakeholder	Response Provided
Discussed the payment mechanism against tree cutting involving both public and private stakeholders	Forest Department Hyderabad	
The Chief conservator very graciously offered technical support needed for the tree plantation campaign in order to offset the negative impacts of the Project	Forest Department Hyderabad	
Engage landowners prior tree cutting	Forest Department Hyderabad	
Note down Girth and species carefully while estimation of compensation amount	Forest Department Hyderabad	
The ETL will cross at least three major canals. Precautionary measures should be adopted to avoid any damage to the surface water channels and associated fauna.	Environment Department, Hyderabad	
The major crops and orchards include sugarcane, wheat, banana, guava, and vegetables like onions	Agriculture Department, Hyderabad	
Mention the flora and fauna of the areas affected and also prepare a mitigation plan for the protection of the identified species.	Environment Department, Hyderabad	
Physical Environment		
A combined stakeholder meeting should be arranged during the initial phase of the Environmental Impact Assessment (EIA) to document and address the technical issues raised by all the stakeholders. Consulting the stakeholders individually is not much effective and also time-consuming.	Institute of Environmental Engineering and Management, Mehran UET, Jamshoro	Noted. Before the grant of approval, SEPA to arrange a public hearing session in which stakeholders get a chance to show their reservations, suggestions, and expectations.
The proponent should conduct stakeholder meetings with locals of the Project area. Technical stakeholders relating to the proposed project should also be consulted to evaluate the technicalities of the Project.	Institute of Environmental Engineering and Management, Mehran UET, Jamshoro	Noted. IEE/ EIA process encourages the involvement of all stakeholders.
Involve local students of environmental engineering or sciences in the Project- activities to help them getting exposure to the field.	Institute of Environmental Engineering and Management, Mehran UET, Jamshoro	Noted.
Environmental Impact Report (EIA) for any project should be easily accessible to the students pursuing their careers in environmental engineering for better knowledge and understanding.	Institute of Environmental Engineering and Management, Mehran UET, Jamshoro	Noted.

Concern/Issue	Stakeholder	Response Provided
Soil fertility will be affected in the construction phase as the topsoil will be disturbed.	Agriculture Department Mirpur Khas	Noted
A study should be carried out on the crops cultivated under the already installed ETLs comparing the crop yield with those away from the wires. This will reveal the effect of electromagnetic force (EMF) on the crop yield.	Agriculture Department Mirpur Khas	Noted
ETLs should not be located near or cross the residential areas. If it is unavoidable, there should be no land use under the high voltage wires. Preventive measures must be taken to manage risks.	Agriculture Department Mirpur Khas	Noted
Proper laws should be prepared regarding the passing of ETLs from the agricultural fields and orchids.	Agriculture Department Mirpur Khas	Noted
Institutional consultations with wildlife, forest, and agriculture department are important in updating EIA for the Project.	Environment Department Mirpur Khas	Noted
A public hearing should be conducted at a venue where all the potential stakeholders of the Project can participate easily.	Environment Department Mirpur Khas	Noted
The land on sides of the Hyderabad – Mirpur Khas Highway was declared as Ramsar site in 1972, any area in Ramsar site should be avoided for any construction activities.	Wildlife Department Hyderabad	Noted ¹⁵⁰
The construction waste should not be left unattended. There should be wastewater and solid waste management plan for domestic and hazardous waste disposal.	Environment Department Mirpur Khas	Environmental mitigation and monitoring plan are prepared to minimize the negative impacts of the Project and are discussed in Section 9 .
Develop a Grievance Redress Mechanism (GRM) to resolve community reservations and issues.	Environment Department, Hyderabad	Environmental mitigation and monitoring plan are prepared to minimize the negative impacts of the Project and are discussed in Section 9 .
Government institutions need to be contacted for stakeholder consultations such as Agriculture, Wildlife, Board of Revenue, and Irrigation Department.	Environment Department, Hyderabad	Noted
Soil analysis must be carried out before the Project execution.	Environment Department, Hyderabad	Noted

¹⁵⁰ The information appears to be incorrect based on the factual data presented on Ramsar Website: [https://rsis.ramsar.org/ris-search/?f\[0\]=regionCountry_en_ss%3APakistan](https://rsis.ramsar.org/ris-search/?f[0]=regionCountry_en_ss%3APakistan)

Concern/Issue	Stakeholder	Response Provided
Residential areas in the Right of Way (RoW) should be identified and the EIA report should incorporate relevant impacts and mitigation measures	Environment Department, Hyderabad	Site-Specific Environmental Management Plan will be prepared for the Project.
Earthing wires of the towers can be dangerous for domestic animals and farmers during rainy seasons as some cases have been reported of getting electrocuted from the earthing wires. EMF from high voltage wires may affect pollination, which in turn causes low crop and fruit yields.	Agriculture Department Mirpur Khas	Warning signs will be installed at the towers and awareness of the local community will be done. The ETL will be at a very height from the crops and EMF will not disturb the crops and pollination
Socioeconomic Environment		
The contractor should promote local employment for skilled as well as non-skilled tasks.	Agriculture Office Tando Allah Yar	Noted.
Most of the people in the region are farmers, the contractor should train them for non-skilled jobs and hire them	Agriculture Office Tando Allah Yar	
Construction activities should not disturb the existing facilities such as gas or sewage water pipeline facilities.	Agriculture Office Tando Allah Yar	
Compensation against the loss of the crops/trees should be paid effectively and in time. The revenue department should be consulted for compensation of damage as per local rates.	Agriculture Office Tando Allah Yar	Compensation will be paid for the damage done to the crops as per LARP.
The revenue department should be engaged for compensation against the damage to crops.	Agriculture Office Tando Allah Yar	
Ecology		
Major crops and orchards in the surrounding of the proposed ETL are mostly Banana, Mango, Sugarcane, Cotton, and vegetables.	Agriculture Office Tando Allah Yar	Noted. The concern will be made part of IEE/EIA. A tree planation in proportion of 1:10 mature trees has been proposed for each cut tree.
There is no reserved forest of Tando Allah Yar district Near the proposed ETL	Forest Department Tando Allah Yar	
The construction activities may affect the route of migratory birds. Construction activities to be minimized in the migratory season of birds, especially from the resting areas of these birds.	Forest Department Tando Allah Yar	
Minimize dust pollution so that the migratory birds find no hindrance during migratory season. Dust may also disturb the locals of the area.	Forest Department Tando Allah Yar	
Avoid cutting trees especially large canopy shady trees during construction activities	Forest Department Tando Allah Yar	

Concern/Issue	Stakeholder	Response Provided
Route for heavy machinery and equipment should be planned and to avoid traffic congestion and damage to orchards while going offroad.	Forest Department Tando Allah Yar	
The contractor should ensure no hunting policy during the whole construction phase of the Project.	Forest Department Tando Allah Yar	
There is no reserved forest of Mirpur Khas District near the proposed route of the ETL.	Forest Department Mirpur Khas	
Major crops and trees of the area include Conocarpus, babul and a wide range of vegetables	Forest Department Mirpur Khas	
Orchards and big trees must be avoided from the cutting. Minimum trees should be cut and for each tree cut plantation should be done.	Forest Department Mirpur Khas	
Hunting of local fauna must be prohibited by the contractor during the construction phase. Training on ecological preservation should be delivered to contractor staff.	Forest Department Mirpur Khas	
Tree plantation drive must be carried out in the affected areas of project facilities and also promote landscaping to enhance the aesthetic beauty of the area.	Forest Department Mirpur Khas	
Major crops in the area include wheat, sugarcane, rice, etc	Agriculture Department Mirpur Khas	
Orchards of lemon, guava, jojo (Bair), cheeku, and vegetables such as chilli, tomato, okra and maize are majorly present in the area.	Agriculture Department Mirpur Khas	
The area where the towers will be constructed will no longer be used by the farmers and will have economic effects on them.	Agriculture Department Mirpur Khas	
Orchards should be avoided as mango trees have a maximum height of 15-20 meters. Construction of ETL and operations may pose hazards if constructed.	Agriculture Department Mirpur Khas	
Kathro Forest near Husri might be 1200 meters from the ETL which may be affected. The contractor should take measures to avoid any negative impact on the forest. However, no major reserved forest is located near the surroundings of ETL	Forest Department Hyderabad	
avoid construction activities in major cropping season to minimize the loss of the crops.	Forest Department Hyderabad	
Construction should be carried in such a way that in excavation or foundation phase the	Forest Department Hyderabad	

Concern/Issue	Stakeholder	Response Provided
topsoil should persevere separately for later use.		
Orchards should be avoided as mango trees have a maximum height of 15-20 meters. Construction of ETL and operations may pose hazards if constructed.	Forest Department Hyderabad	
Migratory birds such as Partridges and Geese should not be interrupted in migratory season, also breeding shelters for the birds should be undisturbed.	Wildlife Department Hyderabad	
Wildlife species in the Project surrounding such as reptiles, Indian pangolin, snakes and lizards, should be of major concern.	Wildlife Department Hyderabad	
Worker camps construction should be made away from residential areas and resting areas of animals and birds.	Wildlife Department Hyderabad	
The ETL will cross at least three major canals. Precautionary measures should be adopted to avoiding any damage to the surface water channels and associated fauna.	Environment Department, Hyderabad	
The major crops and orchards mainly produced in the area include sugarcane, wheat, banana, guava, and vegetables like onions	Agriculture Department, Hyderabad	
Mention the flora and fauna of the areas affected and also prepare a mitigation plan for the protection of the identified species.	Environment Department, Hyderabad	

7.3 Information Disclosure

14. ADB SPS environmental Policy Principle #6 requires the borrower to "Disclose a draft environmental assessment (including the EMP) in a timely manner, before project appraisal, in an accessible place and in a form and language(s) understandable to affected people and other stakeholders."

507. The executive summary of the IEE and the EMP will be translated to Sindhi and Urdu languages¹⁵¹ for disclosure along with complete existing document (in English). Within 2 weeks after ADB's clearance of the IEE, the summary (including the EMP) in Sindhi and Urdu languages will be disclosed on NTDC's website. The summary will also be placed at main gate of TM Khan Grid Station for public access. During construction phase, complete document along with translated executive summary to Sindhi and Urdu will be kept at main gate of construction camp for access to public.

508. Provincial EPA will also disclose EIA on its website before the public hearing and NOC award. The disclosure on the website with the invitation for participation in public hearings, which is required by the law before approval is granted, will be announced by EPA through public advertisement in the local and national newspapers.

¹⁵¹ Sindhi as a mother tongue is spoken in the Project area. However, Urdu and Punjabi are also spoken. (para. 273 on page 87)

8. Grievance Redress Mechanism

509. NTDC will establish a mechanism to receive and facilitate the resolution of affected peoples' concerns, complaints, and grievances about the project's environmental performance. NTDC at site will be the PMU. The PMU will overall be responsible for executing the work at site. The Executive Engineer/Resident engineer will be in charge of the project. The Executive Engineer will be supported with Sub Divisional Officers and other supporting staff.

510. The GRM will be established at each project location as described below:

511. A grievance mechanism will be available to allow affected persons appealing any disagreeable decision, practice or activity arising from land or other assets compensation. affected persons will be fully informed of their rights and of the procedures for addressing complaints whether verbally or in writing during consultation, survey, and time of compensation.

512. Affected persons/ local community will enter their complaints/ concerns and issues formally including the information of date, name and address of complainant, description of complain. The Assistant Manager (social mobilization) at PMU will maintain a register named as "*community complaint register (CCR)*". The register will include the information such as date, name and address of complainant, description of complaints, and will enter the complaints in a date covering the minimum information of name and address of complaint, description of complaints, action taken, status of redress of complaints and reasons in case issue not resolved.

513. Prior to the contractor's mobilization to the project site NTDC ESIC will assist the affected communities to establish a Grievance Redress Committee (GRC) and identify local representatives to act as Grievance Focal Points (GFP) for that community. GRC will work at field level, while unsettled issues will be referred to the PMU at sub-project level. The field level PMU will inform the affected persons about GRC and its mechanism by passing the information at known places. The GRC will comprise of:

- Executive Engineer (NTDC)
- EHS Manager under ESIC, NTDC
- FMC-IESS, FMC-NESS, and FMC-NEIs
- Representative of Contractor; and
- GFP of relevant community

514. The function of the GRC is to address the project related grievances of the affected parties that are unable to be resolved satisfactorily through the initial stages of the GRM procedure.

515. The GFPs are designated personnel from within the community who will be responsible for: i) acting as community representatives in formal meetings between the project team (contractor, FMC, EHS Manager under ESIC, ESIC and the local community he/she represents and ii) communicating community members' grievances and concerns to the contractor during project implementation.

- (i) A pre-mobilization public consultation meeting will be convened by ESIC and attended by GFPs, contractor, FMC, ESIC representatives and other interested parties (e.g., District level representatives, NGOs). The objectives of the meeting will be as follows: Introduction of key personnel of each stakeholder including roles and responsibilities
- (ii) Presentation of project information of immediate concern to the communities by the contractor (timing and location of specific construction activities, design issues, access constraints etc.). This will include a brief summary of the EMP - its purpose and implementation arrangements

- (iii) Establishment and clarification of the GRM to be implemented during project implementation including routine (proactive) public relations activities proposed by the project team (contractor, FMC, ESIC) to ensure communities are continually advised of project progress and associated constraints throughout project implementation
- (iv) Identification of members of the GRC
- (v) Elicit and address the immediate concerns of the community based on information provided above.

516. Following the pre-mobilization public consultation meeting, environmental complaints associated with the construction activity will be routinely handled through the GRM as explained below and shown schematically in **Figure 8-1**:

- (i) Individuals will lodge their environmental complaint/grievance with their respective community's nominated GFP.
- (ii) The GFP will bring the individual's complaint to the attention of the Contractor.
- (iii) The Contractor will record the complaint in the onsite Environmental Complaints Register (ECR) in the presence of the GFP.
- (iv) The GFP will discuss the complaint with the Contractor and have it resolved.
- (v) If the Contractor does not resolve the complaint within one week, then the GFP will bring the complaint to the attention of the CSC's Environmental Specialist. The SC's Environment Specialist will then be responsible for coordinating with the Contractor in solving the issue.
- (vi) If the Complaint is not resolved within 2 weeks, the GFP will present the complaint to the GRC.
- (vii) The GRC will have to resolve the complaint within a period of 2 weeks and the resolved complaint will have to be communicated back to the community. The Contractor will then record the complaint as resolved and closed in the Environmental Complaints Register.
- (viii) Should the complaint not be resolved through the GRC, the issue will be adjudicated through local legal processes.
- (ix) In parallel to the ECR placed with the Contractor, each GFP will maintain a record of the complaints received and will follow up on their rapid resolution.
- (x) ESIC will also keep track of the status of all complaints through the Monthly Environmental Monitoring Report submitted by the Contractor to the FMC and will ensure that they are resolved in a timely manner.

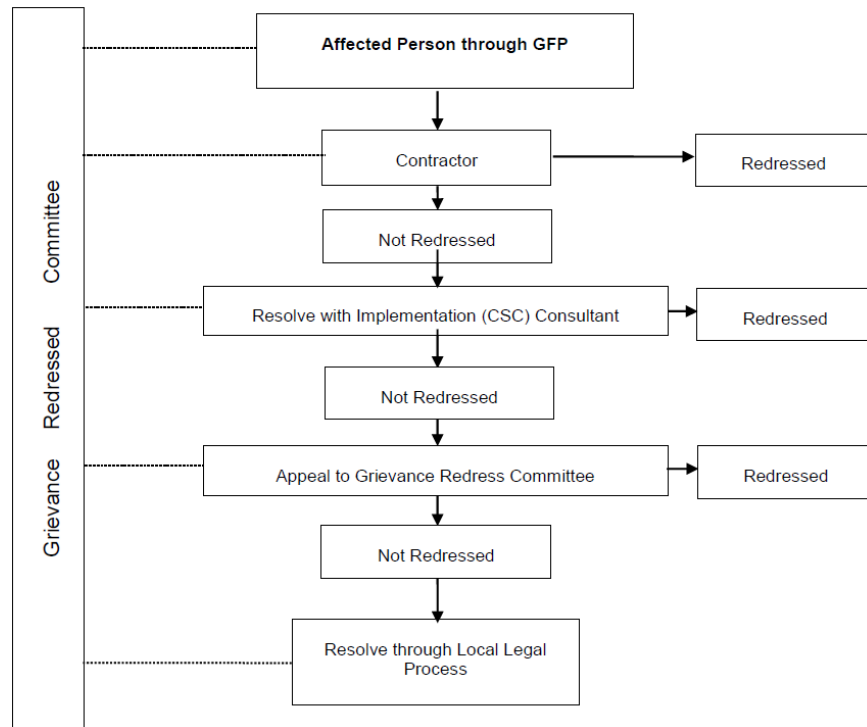


Figure 8-1: Grievance Redress Mechanism

517. An Organogram showing the institutional arrangements has been illustrated through a diagram presented in **Figure 8-2**.

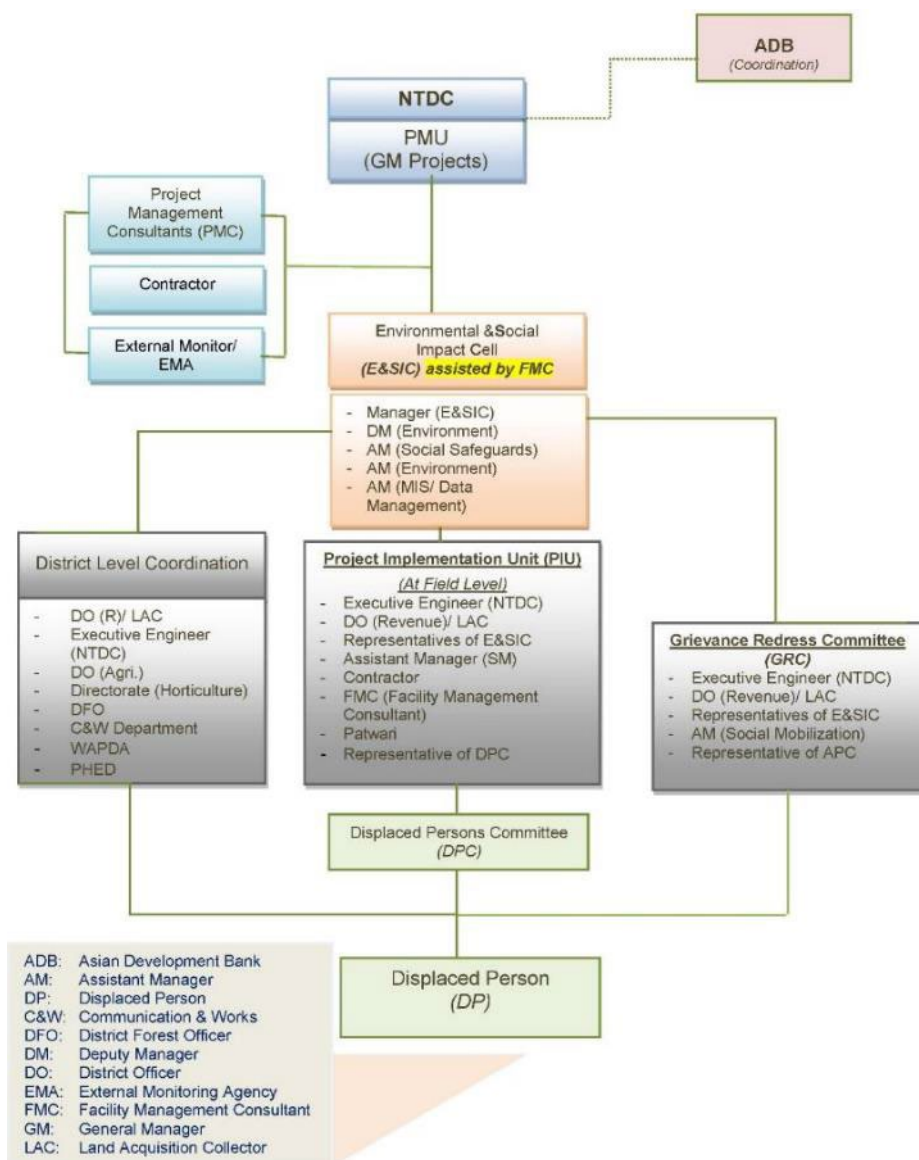


Figure 8-2: Institutional set-up

9. Environmental Management Plan

518. This section provides an overall approach for managing and monitoring the environment-related issues and describes the institutional framework and resource allocations proposed by NTDC to implement the Environmental Management Plan (EMP) for the ETL construction.

519. The bid documents must include the EMP, and its implementation cost must be reflected in the bill of quantity (BoQ).

9.1 General

520. The main objectives of EMP are to:

- Provide the details of the project impacts along with the proposed mitigation measures, and a corresponding implementation schedule.
- Define the responsibilities of the project proponent, contractor, supervisory consultants, and other role players, and effectively communicate environmental issues among them.
- Define a monitoring mechanism, reporting frequency, inspection and identifying monitoring parameters to ensure that all the mitigation measures are completely and effectively implemented.
- Identify the resources required to implement the EMP and outline the corresponding financing arrangements.

9.2 Construction Schedule

521. As mentioned in **Section 3.7**, The Project Proponent (NTDC) plans to have the tranche-4 completed within 2 to 3 years, after completing the necessary arrangements, on the fast track. There will not be any significant land acquisition or compensation process except for the crop compensation of the ETL towers. Designs, power transmission arrangements, access, review of environmental management and construction processes will need to be completed in about three months after Tranche 4 readiness approval by ADB. When the detailed designs are completed, tendering and award of contract will take place over about three to six months. The construction period will follow, and best estimates indicate between eighteen to twenty-four months.

Table 9-1: Implementation Arrangements for Tranche 4

Aspects	Arrangements
Implementation period	January 2023–June 2026
Estimated completion date	30 June 2026
Estimated loan closing date	23 August 2026

9.3 Summary of Impacts and Mitigation Measures

522. The environmental protection and enhancement are achieved in various ways. These approaches should begin right at the embryonic stage i.e., i) project location, ii) design, specifications, and tender/contract documents, iii) construction activities and iv) post completion activities i.e., operation and maintenance stage. Appropriate environmental management measures are required to be exercised in a cascade order by NTDC at each stage of the project.

523. An EMP establishes the linkages between the environmental and social impacts, mitigation strategy and the agencies responsible for execution. Thus, the EMP in **Table 9-2** cover:

- A comprehensive listing of mitigation measures (actions).
- The institution(s)/ person(s) responsible for implementation of specific actions.
- The parameters to be monitored to ensure the effective implementation of the actions.
- A timescale for the implementation of actions has been indicated subject to the project life cycle and indicated as During Construction or During Restoration.
- Set out a basis for preparing SSEMP by the Contractor.

524. The Effects Monitoring Plan for the ongoing activities is presented in **Table 9-2**.

Table 9-2: Environmental Management Plan

Potential Impacts	Mitigation Measures (MM)	Timing to Implement MM	Location to Implement MM	Implementation Responsibility	Monitoring Responsibility
Pre-construction (design) phase					
Lack of Integration of IEE/EMP/EIA Requirements into Construction Bid Documents	<ol style="list-style-type: none"> 1. The ESIC should be assigned the task to check that design and bid documents are responsive to key environmental, social, and safety considerations, and that the proposed method of work reflects the boundaries defined in the EMP. 2. The bid documents must include the EMP, and its implementation cost must be reflected in the bill of quantity (BoQ). 	Bid Preparation	BOQ	NTDC	ESIC, NTDC
Lack of planning in ETL design ¹⁵²	<ol style="list-style-type: none"> 3. Using corridor-sharing with existing ETLs to minimize RoW requirements. 4. Preference will be given to a route with a minimum community displacement and minimum tree cutting requirement 5. Better planning during the selection of RoW will generate fewer negative socioeconomic impacts on the affected persons. 6. Selection and use of the latest available technology for reducing the magnetic field from ETLs. 7. ETLs to be designed for higher resilience to climate change impacts to ensure the transmission network resilient to climate change and natural disaster. 	Well before the commencement of the construction phase	RoW of ETL	NTDC with the design consultant	NTDC

¹⁵² Covering (i) Route Selection, (ii) Transmission, (iii) Structure Design, (iv) Tower Placement Add-ons, and (v) Visual Amenity, (vi) Mechanical Failure of the Overhead Conductors.

Potential Impacts	Mitigation Measures (MM)	Timing to Implement MM	Location to Implement MM	Implementation Responsibility	Monitoring Responsibility
	<p>8. Choosing a ETL tower with aesthetic appeal such as the darker color of oxidized steel structures may blend in better with forested backgrounds.</p> <p>9. Making minor adjustments in tower locations to avoid archeological sites or minimize effects on agricultural operations.</p> <p>10. Adding flight diverters to conductors to minimize bird collisions with the wires.</p> <p>11. Location of high-voltage transmission and distribution lines in less populated areas, where possible, to mitigate the impact on visual amenity and noise. This will also create fewer land acquisition and resettlement issues.</p>				
Improper Location of Camps Leading to Environmental and Social Issues	<p>12. Camp locations at least 200-300 m from the sensitive receptors including settlements and water bodies.</p> <p>13. Development of the campsite plans indicating walkways, car parking, recreational areas, rooms, kitchen, dining, storm run-off, toilets and sewerage lines and treatment, disposal, freshwater storage, and lines, etc.</p>	Well before the commencement of the construction phase	Camps Location	Construction Contractor with FMC	NTDC
Lack of Project environmental safeguards (human resource) capacity	<p>14. The ESIC/PMU to make sure that it is staffed by EHS Manager, Deputy EHS Manager and Assistant EHS Manager in addition to social safeguard staff.</p> <p>15. The ESIC/PMU to ensure, contractor's environmental safeguards capacity before construction starts. Make sure that the Construction Contractor assigns and retains a full-time and qualified ESO and a full-time and qualified HSO.</p>	During bidding and before construction starts	Bid document and contractor human resources	ESIC/ PMU	NTDC

Potential Impacts	Mitigation Measures (MM)	Timing to Implement MM	Location to Implement MM	Implementation Responsibility	Monitoring Responsibility
Removal of vegetation/trees	<p>16. Incorporate technical design measures to minimize the removal of these trees, as far as possible.</p> <p>17. Compensatory planting of ten (10) trees against each fallen tree of similar floral function shall be planted.</p> <p>18. The plantation plan shall prefer the prevalent indigenous species of plants and ensure that there will be no exotic species in the plantation plan with known environmental setbacks.</p>	Well before the commencement of the construction phase	RoW of ETL	NTDC with the design consultant	NTDC
Noise caused by construction equipment	<p>19. Conduct detailed acoustic assessment for all residential buildings, schools, (other sensitive structures) within 50 m of RoW.</p> <p>20. After the assessment, identify the areas where noise barriers are required.</p> <p>21. Also, suggest noise-reducing devices on equipment such as mufflers and silencers.</p> <p>22. The audible noise of the ETL is most severe under wet conditions. During detailed design, it will be ensured that audible noise under wet conditions is within acceptable limits.</p> <p>23. During detail design, it will be ensured that audible noise as per CISPR18-2 "Methods for measurement of RI characteristics of overhead power lines and high voltage equipment" shall be either category-I (which is Interference not audible) or category-II (which is Interference just perceptible).</p>	Well before the commencement of the construction phase	RoW of ETL	Construction Contractor with FMC	NTDC
Land Acquisition	<p>24. NTDC to select the route in a way that minimizes impact on trees and crops occur.</p>	Well before the commencement of the	RoW of ETL	NTDC with the design consultant	NTDC

Potential Impacts	Mitigation Measures (MM)	Timing to Implement MM	Location to Implement MM	Implementation Responsibility	Monitoring Responsibility
	<p>25. Assessment of loss of land, trees, and crops (if any) due to the construction of ETL towers.</p> <p>26. Preparation of land acquisition and resettlement plan (LARP) for the proposed Project before the commencement of construction activities.</p> <p>27. All the impacts identified by the IEE will be incorporated into the project LARP and relevant entitlements will be included in the Entitlement Matrix.</p> <p>28. All the payments/entitlements are paid according to the Entitlement Matrix, prepared according to the LARP.</p>	construction phase			
Waste Generation	<p>29. Identify enough locations for disposal of transformer oils, unsuitable soils, and scrap metal "cradle to grave".</p> <p>30. The unit rates to include in contracts to cover the cost of disposal.</p> <p>31. Designate disposal sites in the contract and cost unit disposal rates accordingly.</p>	Well before commencement of the construction phase	RoW of ETL	NTDC with the design consultant	NTDC
Disruption to Existing Drainage Pathways and Utilities	<p>32. Identify locations where drainage or irrigation crossing, and utilities within RoW may be affected by works.</p> <p>33. Include in protection works contract as a payment milestone(s)</p>	Well before the commencement of the construction phase	RoW of ETL	Construction Contractor with FMC	NTDC
Impacts on Sensitive and High Value Areas	<p>34. Siting the Project facilities away from any residential area.</p>	Well before the commencement of the construction phase	RoW of ETL	Construction Contractor with FMC	NTDC

Potential Impacts	Mitigation Measures (MM)	Timing to Implement MM	Location to Implement MM	Implementation Responsibility	Monitoring Responsibility
	35. If, siting of Project facilities cannot be avoided altogether, the area of disruption should be minimized, and the impacts should be mitigated.				
EMF	<p>36. NTDC's standard operating procedures (SOPs) of a minimum vertical ground clearance for ETL conductor of 7 meters will be ensured.</p> <p>37. Raising conductor height above the ground to 8 m, typically by increasing tower height, will be ideal.</p> <p>38. Reducing conductor spacing.</p> <p>39. Arranging phases so that fields tend to cancel.</p> <p>40. Increasing transmission voltage (since magnetic field intensities are a function of current, and increased voltage, all things being equal, will result in reduced current).</p> <p>41. Reducing loads (and therefore, currents).</p> <p>42. Identification of potential exposure levels in the work area including surveys of exposure levels and establishment of safety zones.</p> <p>43. Safety signs and warning zone shall be highlighted to indicate EMF in the area</p> <p>44. Limit access to properly trained workers and those equipped with appropriate PPE when entering safety zones.</p> <p>45. Increasing right-of-way widths or buffer zone widths, to move people further from ETLs.</p>	Well before the commencement of the construction phase	RoW of ETL	Construction Contractor with FMC	NTDC
Impact on Community Safety due to Structure/ Mechanical	46. Ensure all safety aspects related to the safety of the structure are considered.	Well before the commencement of the	RoW of ETL	Construction Contractor with FMC	NTDC

Potential Impacts	Mitigation Measures (MM)	Timing to Implement MM	Location to Implement MM	Implementation Responsibility	Monitoring Responsibility
Failure of the overhead conductors	<p>47. Ensure seismic design requirements are incorporated in the Project design.</p> <p>48. The ETL will be constructed using very robust design and there is a very low probability of mechanical failure even under extreme weather conditions.</p> <p>49. Nonetheless, following special arrangements will be made in this section to ensure safety in case of mechanical failure of the ETL conductors.</p> <p>50. Installation of special tower/pole structures that would support a long span of up to 500 m so that no tower/pole has to be installed inside the streets.</p> <p>51. Special tower/pole structures will be designed with load safety margin factor of 2.5 instead of generally used 1.5, thus having an extraordinary strength bearing margin to cater for any untoward mechanical hazardous situation.</p> <p>52. Special tower/pole structures will be designed to achieve enhanced vertical ground clearance of 15-20 meters whereas the standard requirement of ground clearance of 220 kV line is 7.1 meter.</p> <p>53. Installation of grounded metallic mesh beneath the lowest conductor to act as fall arrester in case of mechanical failure of the conductor in residential areas.</p>	construction phase			
Construction Phase					
Dust from construction activity and Air emissions from construction equipment and vehicles	<p>1. Water will be sprinkled through a dedicated water-bowser at source, around the construction site and, along the routes used for construction activities to prevent the generation of dust and to minimize the</p>	During Construction	Project-wise facilities and construction sites	Construction Contractor Oversee by FMC	NTDC

Potential Impacts	Mitigation Measures (MM)	Timing to Implement MM	Location to Implement MM	Implementation Responsibility	Monitoring Responsibility
	<p>levels of dust within the vicinity of orchards and fruit farms.</p> <ol style="list-style-type: none"> 2. A speed limit of not more than 30 kilometers per hour (km/h) will be imposed on the vehicles in areas where the potential for dust generation is greater including unpaved roads. 3. Fuel-efficient and well-maintained haulage trucks will be employed to minimize exhaust emissions. 4. Vehicles transporting soil, sand and other construction materials will be covered. 5. The movement of vehicles through densely populated areas will be avoided. 6. Water will be sprayed at bare areas that are prone to high dust emissions. 7. Stockpiled soil and sand will be kept slightly wet before loading, particularly in windy conditions. 8. Dust emissions at the camp and construction sites to be minimized by implementing good housekeeping and sound management practices. 9. All project vehicles and other equipment will be maintained as per SEQS for vehicular emissions. 10. The construction material will be stored in the boundary wall and no disturbance to surrounding areas is expected. The contractor will be, however, required to provide a traffic management plan before the commencement of work at the site. 11. The need for large stockpiles will be minimized by careful planning of the supply of materials from controlled sources. Stockpiles (if required) will not be 				

Potential Impacts	Mitigation Measures (MM)	Timing to Implement MM	Location to Implement MM	Implementation Responsibility	Monitoring Responsibility
	<p>located within 50 m of schools, hospitals, or other public amenities such as wells and pumps and should be covered with tarpaulins when not in use and at the end of the working day to enclose dust.</p> <p>12. Concrete plants will not be located close to any sensitive receptors.</p> <p>13. A check will be kept by the NTDC that no construction will be allowed within 100 m of the ETL.</p>				
Noise from construction vehicles and heavy equipment	<p>14. Noise monitoring will be carried out at edge of RoW or at boundary wall of communities located within 100 m of RoW, if required, to assess compliance with day and nighttime noise limits of 55 dBA and 45 dBA prescribed in the SEQS.</p> <p>15. All heavy equipment and machinery will be maintained as per SEQS for vehicular noise emissions and with effective noise controlling devices in place such as silencers.</p> <p>16. Noise from the construction of Grid Stations is not covered under any regulations however to keep in line with the best international practice, construction will not be allowed during nighttime (10 PM to 6 AM) and will not only be conducted during daytime.</p> <p>17. Vibration from the construction of piles to support pads may be required for some tower construction and maybe a significant impact but this should be for a short duration. Where vibration could become a major consideration (within say 100 m of schools, religious premises, hospitals, or residences) a building condition survey will take place before construction.</p> <p>18. The physical effect of piling will be assessed before construction and measures will be discussed with the</p>	During Construction	Project-wise facilities and construction sites	Construction Contractor Oversee by FMC	NTDC

Potential Impacts	Mitigation Measures (MM)	Timing to Implement MM	Location to Implement MM	Implementation Responsibility	Monitoring Responsibility
	<p>local population as well as the timing of the works to serve as a vehicle for further public consultation at the implementation stage and to assist in public relations.</p> <p>19. At nearby schools, the contractor will discuss with the school principals the agreed time for operating these machines and completely avoid machine use near schools during examination times, if such a need arises.</p> <p>20. The noise level from construction activity can be reduced by regular maintenance of machinery.</p> <p>21. Noise can be controlled through engineering control e.g., hammering actions can be substituted by hydraulic. Ensure that the workers are wearing necessary personal protection equipment (PPE's) such as earplugs, earmuffs, etc. where engineering control is not applicable to reduce the impact of noise.</p> <p>22. Equipment emitting excessive noise in comparison with other similar equipment will not be allowed to operate.</p> <p>23. Equipment under use will be regularly maintained, tuned, and provided with mufflers and speed controls to minimize noise levels.</p> <p>24. Blowing horns on all access roads except under emergency conditions will be prohibited.</p> <p>25. Muffled breakers and silenced diesel generators and compressors will be used to reduce construction noise.</p> <p>26. Contractor will take necessary measures to minimize noise nuisance using acoustic enclosures and barriers.</p>				

Potential Impacts	Mitigation Measures (MM)	Timing to Implement MM	Location to Implement MM	Implementation Responsibility	Monitoring Responsibility
	27. A check will be kept by the NTDC that no construction will be allowed within 100 m of the ETL.				
Sediment run-off from construction sites	<p>28. All construction workers will be provided awareness training on the prevention of waste generation and spill prevention.</p> <p>29. The topsoil can be preserved and used after the restoration of construction campsites and storage areas after the construction period.</p> <p>30. Surplus excavated material will be disposed of at appropriate or designated sites and will be disposed of in a manner that does not disturb the natural and community drainages and tracks.</p> <p>31. Equipment will be maintained properly to minimize oil or fuel leakages from construction machinery. Clean-up will be undertaken in the event of an oil spill larger than half a liter. This will include the removal of contaminated soil and disposal at a proper location.</p> <p>32. A Spill Prevention and Response Plan will be prepared including the induction of staff for spill prevention and management.</p> <p>33. All storage fuel tanks will be marked with their contents and stored in diked areas with an extra 10% of the storage capacity of the fuel tank. The area will be lined with an impervious base.</p> <p>34. Grease traps will be constructed wherever needed, to prevent the flow of oily water into drainage channels or waterbodies.</p> <p>35. Spill cleanup kits (shovels, plastic bags, and absorbent materials) will be available near fuel and oil storage areas. Should any accidental spills occur, the immediate cleanup will be undertaken, and all cleanup materials will be stored in a secure area for</p>	During Construction	Project-wise facilities and construction sites	Construction Contractor with FMC	NTDC

Potential Impacts	Mitigation Measures (MM)	Timing to Implement MM	Location to Implement MM	Implementation Responsibility	Monitoring Responsibility
	<p>further disposal. Disposal of such will be undertaken by a waste management company contracted by the Contractors. The waste management company must have the required licenses to transport and dispose any hazardous waste before any such waste is removed from the site. The Contractors will keep copies of the company's licenses and provide waste transfer manifests at their camp site for routine inspection by the engineer.</p> <p>36. Cleanup kits will be carried in all fuel trucks.</p> <p>37. Fueling of construction vehicles and machinery will take place at designated places or over impermeable surfaces for fixed machinery.</p> <p>38. Hazardous materials will be stored in designated places having impervious linings.</p> <p>39. Schedule works in sensitive areas (e.g., water bodies) for the dry season.</p> <p>40. Temporary erosion control plan one month before the commencement of works.</p> <p>41. Proper installation of TD and EC before works within 50 m of water bodies.</p> <p>42. Cut areas will be treated against flow acceleration while filled areas will be carefully designed to avoid improper drainage.</p> <p>43. Stockpiles will not be formed within such distances behind excavated or natural slopes that would reduce the stability of the slopes.</p> <p>44. In the short-term, either temporary or permanent drainage works will protect all areas susceptible to erosion.</p>				

Potential Impacts	Mitigation Measures (MM)	Timing to Implement MM	Location to Implement MM	Implementation Responsibility	Monitoring Responsibility
	<p>45. Measures will be taken to prevent pounding of surface water and scouring of slopes. Newly eroded channels shall be backfilled and restored to natural contours.</p> <p>46. Contractor will arrange to adopt suitable measures to minimize soil erosion during the construction period. Contractor will consult concerned authorities in the area before deciding mitigation measures.</p> <p>47. Clearing of green surface cover to be minimized during site preparation.</p> <p>48. Replanting trees to be done before the site is vacated and handed back to NTDC with appropriate trees (other vegetation cover as appropriate) to ensure interception of rainwater and the deceleration of surface run-off.</p>				
Impact on Water Resources Quality and Quantity	<p>49. Erosion and sediment flash-control measures will be employed and maintained where necessary.</p> <p>50. Washing vehicles will be allowed only in designated places such as local car wash or a similar facility to be built at the site with the provision of oil-water separators (OWS) and waste collection pits. Further details on the construction of OWS, waste collection pits, and the handling of contaminated waste are included in the Spill Prevention and Waste Generation sections.</p> <p>51. Equipment will be maintained properly to minimize oil or fuel leakages from construction machinery.</p> <p>52. No effluents will be released to the environment untreated,</p> <p>53. All types of solid and liquid wastes will be handled and disposed of as per disposal plan.</p> <p>54. The natural drainages will be restored after completion of civil works of the tower foundations in</p>	During Construction	Project-wise facilities and construction sites	Construction Contractor with FMC	NTDC

Potential Impacts	Mitigation Measures (MM)	Timing to Implement MM	Location to Implement MM	Implementation Responsibility	Monitoring Responsibility
	<p>areas where tower locations fall within the catchment of dry stream beds.</p> <p>55. The source of water for construction from authorized abstraction sources will be agreed between the local communities, local government, and the contractor.</p> <p>56. Water conservation techniques will be developed and implemented by the contractor.</p> <p>57. Access routes of the community to water sources will be kept clear and open so that the community's ability to meet its water requirements are not compromised.</p> <p>58. Care will be exercised while moving heavy machinery to avoid damage or blockage of natural waterways and channels.</p> <p>59. Records will be kept of water usage in all Project activities.</p> <p>60. Construction camp and residential camp will not be built nearby water bodies.</p> <p>61. Consideration of weather conditions when construction activities are undertaken.</p> <p>62. Limitations on excavation depths in use of recharge areas for material exploitation or spoil disposal.</p> <p>63. Use of landscaping as an integrated component of construction activity as an erosion control measure.</p> <p>64. Minimizing the removal of vegetative cover as much as possible and providing for its restoration where construction sites have been cleared of such areas.</p> <p>65. Compile temporary drainage management plan one month before commencement of works.</p> <p>66. Proper installation of Temporary Drainage (TD) and Erosion Control (EC) before works within 50 m of water bodies.</p>				

Potential Impacts	Mitigation Measures (MM)	Timing to Implement MM	Location to Implement MM	Implementation Responsibility	Monitoring Responsibility
	<p>67. Proper construction of TD and EC measures, maintenance and management including training of operators and other workers to avoid pollution of water bodies by the considerate operation of construction machinery and equipment.</p> <p>68. Storage of lubricants, fuels, and other hydrocarbons in self-contained dedicated enclosures >50 m away from water bodies.</p> <p>69. Proper disposal of solid waste from construction activities and labor camps.</p> <p>70. Cover the construction material and spoil stockpiles with a suitable material to reduce material loss and sedimentation and avoid stockpiling near to water bodies.</p> <p>71. Topsoil stripped material will not be stored where natural drainage will be disrupted.</p> <p>72. Borrow sites (if required) will not be close to sources of drinking water.</p>				
Untreated disposal of effluent from worker camps and batching plant(s)	<p>73. Ensure safe storage and handling of fuels, oils, and other hazardous substances according to standard safety practices. Disposal should be carried out through SEPA approved contractors and facilities.</p> <p>74. All efforts will be made for the proper disposal of solid waste, applying principles of reducing waste as far as possible, reusing what is practical and recycling all recyclable materials.</p> <p>75. The solid waste generated during construction and campsites will be safely disposed of in demarcated waste disposal sites and the contractor will provide a proper waste management plan.</p>	During Construction	Project-wise facilities and construction sites	Construction Contractor with FMC	NTDC

Potential Impacts	Mitigation Measures (MM)	Timing to Implement MM	Location to Implement MM	Implementation Responsibility	Monitoring Responsibility
	<p>76. The sewage system for camps will be properly designed (pit latrines or, as required, septic tanks) to receive all sanitary wastewaters.</p> <p>77. The solid residue from the septic tanks will be transported to the nearby municipal sewage disposal site.</p> <p>78. Lined wash areas will be constructed within the campsite or at the site, for the receipt of wash waters from construction machinery; and ensure proper labeling of containers, including the identification and quantity of the contents, hazard contact information, etc.</p> <p>79. Construction workers and supervisory staff will be encouraged and educated to practice waste minimization, reuse, and recycling to reduce the quantity of waste.</p>				
Vibration	<p>80. Construction will not be allowed during nighttime (10 PM to 6 AM) and will only be conducted during daytime.</p> <p>81. Vibration from the construction of piles to support pads may be required for some tower construction and maybe a significant impact but this should be for a short duration. Where vibration could become a major consideration (within say 100 m of schools, religious premises, hospitals, or residences) a building condition survey will take place before construction.</p> <p>82. Use of better equipment with less vibration effects will be used such as Free-Suspended Vibrators (FSV).¹⁵³</p>	During Construction	Project-wise facilities and construction sites	Construction Contractor with FMC	NTDC

¹⁵³ <https://www.vpgroundforce.com/gb/footer-links/useful-links/industry-resources/reducing-ground-vibrations-during-the-piling-proce/>

Potential Impacts	Mitigation Measures (MM)	Timing to Implement MM	Location to Implement MM	Implementation Responsibility	Monitoring Responsibility
	<p>83. The physical effect of piling will be assessed before construction and measures will be discussed with the local population as well as the timing of the works to serve as a vehicle for further public consultation at the implementation stage and to assist in public relations. At nearby schools, the contractor will discuss with the school principals the agreed time for operating these machines and completely avoid machine use near schools during examination times, if such a need arises.</p> <p>84. Ensure that the workers are wearing necessary personal protection equipment (PPE's) such as earplugs, earmuffs, etc. where engineering control is not applicable to reduce the impact of noise.</p> <p>85. Equipment under use will be regularly maintained, tuned, and provided with mufflers and speed controls to minimize noise levels.</p>				
Traffic Congestions	<p>86. Efforts will be made to minimize the use of heavy trucks by preferring transport of equipment and supplies using 4x4 pickups, wherever possible, and,</p> <p>87. A speed limit of not more than 30 km/h will be imposed near settlements, on unpaved roads, and on link roads for reducing traffic accident risks and dust generation.</p> <p>88. A traffic management plan, if required, will be prepared, and submitted to NTDC one month prior to start of works. Vicinity of schools, hospitals, and communities will be considered while preparing plans and will be avoided to the extent feasible.</p> <p>89. Plan of alternate routes for heavy vehicles will be formulated and implemented. Existing roads will be</p>	During Construction	Project-wise facilities and construction sites	Construction Contractor with FMC	NTDC

Potential Impacts	Mitigation Measures (MM)	Timing to Implement MM	Location to Implement MM	Implementation Responsibility	Monitoring Responsibility
	<p>used wherever practical for transportation of materials and a 'no-short-cut' policy will be used.</p> <p>90. While preparing a plan of access routes, existing conditions of roads and bridges will also be considered to see for any requirement of widening and upgrading access paths and roads.</p> <p>91. Traffic warning signs will be installed, and traffic regulations will be enforced during the transportation of materials and equipment, and machinery.</p> <p>92. Nighttime construction traffic will be avoided as much as possible.</p> <p>93. Drivers will be instructed to give way to locals while driving on access tracks, to keep a close watch for wild/domestic animals and children while driving, and to not throw any litter or cigarettes out of the vehicle.</p> <p>94. The use of canal flood protection bunds for the movement of heavy vehicles will be minimized. Wooden/damaged bridges on canal/river/ other crossings will not be used for the movement of heavy vehicles.</p> <p>95. Dry stream beds will not be used as access routes.</p> <p>96. Any damage to access tracks, metaled roads, watercourses, or the canal/river protection bunds, etc., will be appropriately repaired to bring these structures to their pre-construction condition. Any damage, which may cause hardship to the local community or wildlife, will be immediately repaired.</p>				
Disposal of spoils and waste materials	97. Ensure safe storage and handling of fuels, oils, and other hazardous substances according to standard safety practices. Disposal should be carried out through SEPA approved contractors and facilities.	During Construction	Project-wise facilities and construction sites	Construction Contractor with FMC	NTDC

Potential Impacts	Mitigation Measures (MM)	Timing to Implement MM	Location to Implement MM	Implementation Responsibility	Monitoring Responsibility
	<p>98. Management and storage of fuel, waste oil, hazardous waste will be planned in accordance with EHS General Guidelines on Hazardous Materials Management.¹⁵⁴ This includes the use of appropriate secondary containment structures capable of containing the larger of 110 % of the largest tank or 25% of the combined tank volumes in areas with above-ground tanks with a total storage volume equal or greater than 1,000 liters.</p> <p>99. All efforts will be made for the proper disposal of solid waste, applying principles of reducing waste as far as possible, reusing what is practical and recycling all recyclable materials.</p> <p>100. The solid waste generated during construction and campsites will be safely disposed of in demarcated waste disposal sites and the contractor will provide a proper waste management plan as part of SSEMP. A framework waste management plan is attached as Annexure XII.</p> <p>101. The sewage system for camps will be properly designed (pit latrines or, as required, septic tanks) to receive all sanitary wastewaters.</p> <p>102. The solid residue from the septic tanks will be transported to the nearby municipal sewage disposal site.</p> <p>103. Lined wash areas will be constructed within the campsite or at the site, for the receipt of wash waters from construction machinery; and ensure proper labeling of containers, including the identification and quantity of the contents, hazard contact information, etc.</p>				

¹⁵⁴ <https://www.ifc.org/wps/wcm/connect/90231ba8-5bb3-40f4-9255-eaf723d89c32/1-5%2BHazardous%2BMaterials%2BManagement.pdf?MOD=AJPERES&CVID=nPtgwml>

Potential Impacts	Mitigation Measures (MM)	Timing to Implement MM	Location to Implement MM	Implementation Responsibility	Monitoring Responsibility
	104. Construction workers and supervisory staff will be encouraged and educated to practice waste minimization, reuse, and recycling to reduce the quantity of waste.				
Impact on Occupational Health and Safety	<p>105. Provide adequate personal protective equipment (PPE) as per the job requirements and install warning signs at construction sites and camps.</p> <p>106. Allow only trained and certified workers to install electrical equipment with safety and insulation measures in place.</p> <p>107. Test structures for integrity prior to undertaking work.</p> <p>108. Prepare and implement fall protection program that will include training in climbing techniques and use of fall protection measures; inspection, maintenance, and replacement of fall protection equipment; and rescue of fall-arrested workers, among others.</p> <p>109. The fall protection system will be appropriate for the tower structure and necessary movements, including ascent, descent, and moving from point to point and fixtures will be installed, wherever possible, to facilitate the use of fall protection systems.</p> <p>110. Provide adequate work-positioning device system for workers to the extent possible.</p> <p>111. Properly maintained hoist equipment will be used along with properly trained personnel.</p> <p>112. Proper safety belts will be provided. The Safety belts should be of not less than 16 millimeters (mm) (5/8 inch) two-in-one nylon or material of equivalent strength.</p>	During Construction	Project-wise facilities and construction sites	Construction Contractor with FMC	NTDC

Potential Impacts	Mitigation Measures (MM)	Timing to Implement MM	Location to Implement MM	Implementation Responsibility	Monitoring Responsibility
	<p>113. Use a backup safety strap when operating power tools at height.</p> <p>114. Remove signs and other obstructions from poles or structures prior to undertaking work.</p> <p>115. Provide an approved tool bag for raising or lowering tools or materials to workers on structures.</p> <p>116. Prepare and implement EMF safety program to prevented or minimize occupational hazards due to exposure to EMF.</p> <p>117. The contractor will prepare OHSE Management Plan as part of SSEMP. Also include the provision of a safety champion program to be initiated monthly to encourage workers to adhere with H&S requirements.</p> <p>118. The plan will also include impacts and mitigation measures related with COVID-19. COVID-19 control and prevention.</p> <p>119. The plan will also include details related to labor working conditions and details on prohibiting child labor.</p> <p>120. Identify potential exposure levels in the workplace, including surveys of exposure levels in new projects and the use of personal monitors during working activities.</p> <p>121. Train workers in the identification of occupational EMF levels and hazards.</p> <p>122. Establish and identify safety zones to differentiate between work areas with expected elevated EMF levels compared to those acceptable for public exposure, limiting access to properly trained workers. Prepare and implement action plans to reduce adverse impact of EMF and to address occupational exposure. Action plans may include limiting exposure</p>				

Potential Impacts	Mitigation Measures (MM)	Timing to Implement MM	Location to Implement MM	Implementation Responsibility	Monitoring Responsibility
	<p>time through work rotation, increasing the distance between the source and the worker, when feasible, or the use of shielding materials.</p> <p>123. Worker's Accommodation Plan will be prepared in reference to Workers' Accommodation: Processes and Standards¹⁵⁵ as part of SSEMP and implemented.</p>				
Habitat loss and impact on mammals, amphibians, birds, and reptiles	<p>124. If tree cutting is unavoidable for RoW clearance, the contractor will keep a record of cutting trees.</p> <p>125. During plantation, ten-time (1 x 10 times) more plants will be planted.</p> <p>126. Before the plantation campaign, the forest department will be consulted on the selection of local species.</p> <p>127. Provide adequate knowledge to the Project workers on relevant government regulations and punishments for illegal poaching to prevent hunting, trapping and exploitation of wildlife</p> <p>128. Minimize disturbance to, or movement of, soil and vegetation to prevent soil damage and erosion leading to spread of alien invasive plant species.</p> <p>129. Revegetate disturbed areas with native plant species</p> <p>130. Ensure that solid and liquid waste is disposed only at designated locations, to prevent pollution of the water bodies in the AOI and vicinity.</p> <p>131. In addition to this, sprinkle water twice or thrice a day (as per needed) to avoid dispersal of dust on the adjacent flora.</p>	During Construction	Project-wise facilities and construction sites	Construction Contractor with FMC	NTDC

¹⁵⁵ [A guidance note by IFC and the EBRD Workers' Accommodation: Processes and Standards](#) (August 2009)

Potential Impacts	Mitigation Measures (MM)	Timing to Implement MM	Location to Implement MM	Implementation Responsibility	Monitoring Responsibility
	<p>132. Lights used in the camps, during the construction of towers will be kept to the minimum requirement.</p> <p>133. Upward scattering lights will preferably be used.</p> <p>134. Vehicle speed will be controlled to avoid incidental mortality of small mammals and reptiles.</p> <p>135. The contractor's staff and labor will be strictly directed not to damage any vegetation such as trees or bushes.</p> <p>136. Clearing of green surface cover for construction, for borrow for development, and cutting trees and other important vegetation during construction will be minimized.</p>				
Increased Employment Opportunities and Local Economy	<p>137. The contractor and sub-contractors will explain the recruitment process to local communities.</p> <p>138. Local candidates will be given preference for jobs provided they have the required qualifications and skills for the announced positions</p> <p>139. Coordinate efforts to recruit unskilled labor, if any are required under the Project, from the adjacent areas.</p> <p>140. Determine what is 'fair and transparent' in the distribution of jobs between different community groups in consultation with local communities and their leaders.</p> <p>141. As the nearby economy is mostly based on agriculture, it will be ensured that construction activities do not disturb or disrupt agricultural activities in the surrounding areas.</p> <p>142. Local communities will be consulted before the start of work.</p>	During Construction	Project-wise facilities and construction sites	Construction Contractor with FMC	NTDC

Potential Impacts	Mitigation Measures (MM)	Timing to Implement MM	Location to Implement MM	Implementation Responsibility	Monitoring Responsibility
Overburden on Local Resources	<p>143. Construction Contractor will prepare a resource conservation plan as per template given in Annexure XVII.</p> <p>144. The use of water will not disturb public water availability and the source of water will be selected carefully.</p> <p>145. Contractor to source raw material and camp utilities from Hyderabad city to avoid overburden on local resources.</p>	During Construction	Project-wise facilities and construction sites	Construction Contractor with FMC	NTDC
Social Conflicts due to Influx of Workers	<p>146. Require non-locals employed by the Project to adhere to a social 'code of conduct' in terms of relations with local communities including restricting their movement to stay within camping sites.</p> <p>147. Provide employees and visitors with cultural awareness training.</p>	During Construction	Project-wise facilities and construction sites	Construction Contractor with FMC	NTDC
Impact on Community Health and Safety	<p>148. The camping sites of the Project site will be completely fenced off before the commencement of any other construction activities.</p> <p>149. Access to the site will be controlled and unauthorized people will not be allowed to enter. Workers will not allow socializing with local communities.</p> <p>150. Potential for the spread of vector-borne and communicable diseases (such as COVID-19, HIV infection, etc.) from labor camps will be suppressed through worker awareness orientation and appropriate accommodation and sanitation systems.</p> <p>151. Children will not be allowed to enter the site under any circumstances.</p> <p>152. The prescribed vehicle speed limit will be strictly enforced for community and worker safety.</p>	During Construction	Project-wise facilities and construction sites	Construction Contractor with FMC	NTDC

Potential Impacts	Mitigation Measures (MM)	Timing to Implement MM	Location to Implement MM	Implementation Responsibility	Monitoring Responsibility
	<p>153. Dust emissions due to vehicular traffic will be minimized by enforcing the speed limit. Water will be sprinkled on unpaved surfaces where necessary.</p> <p>154. All vehicles used by the project will undergo regular maintenance and will be tuned following the requirements of the SEQS.</p> <p>155. The labor works with different transmittable diseases will be restricted within the construction site.</p> <p>156. Efforts will be made to create awareness about road safety among the drivers operating construction vehicles.</p> <p>157. Timely public notification on planned construction works.</p> <p>158. Close consultation with local communities to identify optimal solutions for diversions to maintain community integrity & social links.</p> <p>159. Seeking cooperation with local educational facilities (schoolteachers) for road safety campaigns.</p> <p>160. Provision of proper safety and diversion signage, particularly at sensitive/accident-prone spots;</p> <p>161. The use of water will not disturb public water availability and the source of water will be selected carefully.</p>				
Impact on Physical Cultural Resources (PCRs)	162. A chance find procedure is presented in Annexure X in case of finding any artifact during construction activities				
Uncontrolled Solid Waste Disposal, Communicable Diseases	163. Maintain proper sanitation around construction sites, access to the nearby public lavatories will be allowed or provision of temporary toilets will be made.	During Construction	Project-wise facilities and construction sites	Construction Contractor with FMC	NTDC

Potential Impacts	Mitigation Measures (MM)	Timing to Implement MM	Location to Implement MM	Implementation Responsibility	Monitoring Responsibility
	<p>164. The construction camp will be provided with toilets with soakage pits or portable lavatories or at least pit latrines.</p> <p>165. Disposal of surplus materials will also be negotiated through local authority approvals before the commencement of construction.</p> <p>166. The Project work will not involve any significant cutting and filling, but minor excavations (down to 4m) and piling may be required to create the foundations for towers (if required).</p> <p>167. It is expected (depending on the mode of contract) that the surface under the towers will need to be scrabbled to remove unstable materials, or to stockpile topsoil.</p> <p>168. If surplus materials arise from the removal of the existing surfaces from specific areas, it will be used elsewhere on the Project before additional soil, rock, gravel, or sand is brought in.</p> <p>169. The use of immediately available material will generally minimize the need for additional rock-based materials extraction from outside.</p> <p>170. Contractual clauses will require the contractor to produce a materials management plan (one month before construction commences) to identify all sources of cement and aggregates and to balance cut and fill.</p> <p>171. The plan will clearly state the methods to be employed before and during the extraction of materials and all the measures to be employed to mitigate nuisances to residents.</p>				

Potential Impacts	Mitigation Measures (MM)	Timing to Implement MM	Location to Implement MM	Implementation Responsibility	Monitoring Responsibility
	<p>172. Financial compensation will not be allowed as mitigation for environmental impacts or environmental nuisance.</p> <p>173. Contractual clauses will require the contractor to produce a solid waste management plan so that the proper disposal of waste can be ensured.</p> <p>174. Claims/complaints of the people on construction nuisance/damages close to RoW will be considered and responded to promptly by the Contractor.</p> <p>175. Temporary and permanent drainage facilities will be designed to facilitate the rapid removal of surface water from all areas and prevent the accumulation of surface water ponds.</p> <p>176. The contractor will organize temporary means of access and make alternative arrangements to avoid access problems to the local community and to avoid such short-term negative impacts.</p> <p>177. Potential for the spread of vector-borne and communicable diseases (such as COVID-19, HIV infection, etc.) from labor camps will be avoided through worker awareness orientation and appropriate sanitation systems.</p>				
Natural Hazard Risks (Flooding, Earthquakes etc.)	<p>178. The structures of the ETL such as tower bases should be built as per the rules of Pakistan Building Code (PBC).</p> <p>179. The tower bases should be built considering the local climatic conditions including flooding.</p> <p>180. Project construction facilities should be built considering climatic conditions such as risk of flash flooding in case on high precipitation events.</p> <p>181. Material testing and tensile strength of conductors must be checked before commencement of works</p>	During design and before construction starts	Project-wise facilities and construction sites	NTDC design, Construction Contractor with FMC	NTDC

Potential Impacts	Mitigation Measures (MM)	Timing to Implement MM	Location to Implement MM	Implementation Responsibility	Monitoring Responsibility
Operation Phase					
Noise	<ol style="list-style-type: none"> 1. The height of ETL and right of way as per NTDC standard for 220 kV ETL discussed in Section 3 will be maintained to avoid audible noise issues. 2. In addition to above, much more robust design for ETL and its ground clearance with much higher levels have been proposed for this project due to the Project passing through settlements in parts of the right of way. 	During operations	Project-wise facilities and construction sites	ESIC	NTDC
Impact of Faulted SF6	<ol style="list-style-type: none"> 3. Do not breathe the vapors environment remaining in a circuit breaker where arcing or corona discharges have occurred in the gas. 4. Evacuate the faulted SF6 gas from the circuit breaker and flush with fresh air before working on the circuit breaker 5. Arc products that do not recombine, or which combine with any oxygen or moisture present, are normally removed by the molecular sieve filter material within the circuit breaker. 	During Operations	RoW of ETL	NTDC	ESIC, NTDC
Electrocution and Collision of birds	<ol style="list-style-type: none"> 6. Maintain 1.5 meter (60-inch) spacing between energized components and grounded hardware or, where spacing is not feasible, covering energized parts and hardware. 7. Install visibility enhancement objects such as marker balls, bird deterrents, or diverters. 8. Make power lines less of an 'obstacle' for birds to collide with. 9. Keep birds away from the power line by making the power lines more visible by placing colorful/fluorescent tape on the towers to make them conspicuous enough to enable birds to see them. 	During Operations	RoW of ETL	NTDC	ESIC, NTDC

Potential Impacts	Mitigation Measures (MM)	Timing to Implement MM	Location to Implement MM	Implementation Responsibility	Monitoring Responsibility
	<p>10. Keep power line cables lower to the ground to the extent feasible as these are better for preventing bird collision.</p> <p>11. Keep vertical separation of cables as less to the extent feasible, as it poses less of an 'obstacle' for birds to collide with.</p> <p>12. Provide horizontal separation of conductors and construct cage box on conductors to prevent birds from sitting or making nests on the towers; and</p> <p>13. Construct self-supporting towers, which do not require stay wires.</p>				
Occupational Health and Safety	<p>14. All associated ETLs will be shut down before conducting any repair and maintenance work as per the NTDC's operation and maintenance procedures.</p> <p>15. Adherence to the standards Occupational Health and Safety Guidelines.</p> <p>16. Allow only trained and certified workers to maintain, or repair electrical equipment with safety and insulation measures in place.</p> <p>17. Deactivate and properly ground the live power distribution prior to performing work on or in proximity to the ETLs.</p> <p>18. Ensure proper use of special safety equipment and procedures when working near or on exposed energized parts of an electrical system.</p> <p>19. Ensure the worker is properly isolated and insulated from the energized part with gloves or other approved insulation and energized part is properly insulated from the worker.</p> <p>20. Test structures for integrity prior to undertaking work.</p>	During Operations	RoW of ETL	NTDC	ESIC, NTDC

Potential Impacts	Mitigation Measures (MM)	Timing to Implement MM	Location to Implement MM	Implementation Responsibility	Monitoring Responsibility
	<p>21. Prepare and implement a fall protection program that will include training in climbing techniques and use of fall protection measures; inspection, maintenance, and replacement of fall protection equipment; and rescue of fall-arrested workers, among others.</p> <p>22. The fall protection system will be appropriate for the tower structure and necessary movements, including ascent, descent, and moving from point to point and fixtures will be installed, wherever possible, to facilitate the use of fall protection systems.</p> <p>23. Provide adequate work-positioning device system for workers to the extent possible.</p> <p>24. Properly maintained hoist equipment will be used along with properly trained personnel.</p> <p>25. Proper safety belts will be provided. The Safety belts should be of not less than 16 millimeters (mm) (5/8 inch) two-in-one nylon or material of equivalent strength.</p> <p>26. Use a backup safety strap when operating power tools at height.</p> <p>27. Remove signs and other obstructions from poles or structures prior to undertaking work.</p> <p>28. Provide an approved tool bag for raising or lowering tools or materials to workers on structures.</p> <p>29. Prepare and implement EMF safety program to prevent or minimize occupational hazards due to exposure to EMF.</p> <p>30. Identify potential exposure levels in the workplace, including surveys of exposure levels in new projects and the use of personal monitors during working activities.</p>				

Potential Impacts	Mitigation Measures (MM)	Timing to Implement MM	Location to Implement MM	Implementation Responsibility	Monitoring Responsibility
	<p>31. Train workers in the identification of occupational EMF levels and hazards.</p> <p>32. Establish and identify safety zones to differentiate between work areas with expected elevated EMF levels compared to those acceptable for public exposure, limiting access to properly trained workers.</p> <p>33. Prepare and implement action plans to reduce adverse impact of EMF and to address occupational exposure. Action plans may include limiting exposure time through work rotation, increasing the distance between the source and the worker, when feasible, or the use of shielding materials.</p> <p>34. Signs and barriers (e.g., locks on doors, use of gates, use of steel posts surrounding transmission towers) will be used.</p>				
Community Health and Safety Risk	<p>35. Signs and barriers (e.g., locks on doors, use of gates, use of steel posts surrounding transmission towers) will be used.</p> <p>36. Conducting objects (e.g., fences or other metallic structures), installed near power lines, will be grounded to prevent shock.</p> <p>37. A vertical clearance, required as per international standards, will also be maintained especially near the populated areas. If required, the application of engineering techniques will be considered to reduce the EMF produced by power lines and Grid Stations such as increasing the height of transmission towers, modifying to size, spacing, and configuration of conductors, and shielding with metal alloys (This is effective for reduction of electric field exposure, but not for reduction of magnetic field exposure.).</p>	During Operations	RoW of ETL	NTDC	ESIC, NTDC

Potential Impacts	Mitigation Measures (MM)	Timing to Implement MM	Location to Implement MM	Implementation Responsibility	Monitoring Responsibility
	<p>38. During the operation stage, a check will be kept by the NTDC that no construction will be allowed within RoW of the ETL.</p> <p>39. Power lines will be designed, with due consideration to landscape views and important environmental and community features.</p> <p>40. Use of noise barriers or noise canceling acoustic devices will be considered as necessary.</p> <p>41. Adherence to regional or national air traffic safety regulations.</p> <p>42. Use of buried lines when installation is required in flight sensitive areas.</p>				
Visual Amenity	<p>43. Impact on visual amenity due to the transmission and distribution facilities to communities may be visually intrusive and undesirable to nearby residents.</p> <p>44. However, it is common practice to create some local hard and soft landscaping and successful planting of fruit trees at such sites. This practice should be encouraged as far as practicable. Other opportunities for enhancements can be assessed before construction and proposed enhancements will be discussed with the local population to serve as a vehicle for further public consultation at the implementation stage and to assist in public relations.</p>	During Operations	RoW of ETL	NTDC	ESIC, NTDC
Aircraft Navigation Safety	<p>45. Use of buried lines when the installation is required in flight sensitive areas.</p> <p>46. Making the power lines more visible by placing colorful/fluorescent tape on the towers and colorful balls on the conductor to make them visible.</p> <p>47. Keep power line cables lower to the ground to the extent feasible</p>	During Design	RoW of ETL	NTDC	ESIC, NTDC

Potential Impacts	Mitigation Measures (MM)	Timing to Implement MM	Location to Implement MM	Implementation Responsibility	Monitoring Responsibility
Cumulative, and Induced impacts	<p>48. NTDC's standard operating procedures (SOPs) of a minimum vertical ground clearance for ETL conductor of 7 meters will be ensured.</p> <p>49. Raising conductor height above the ground to 8 m, typically by increasing tower height, will be ideal.</p> <p>50. Reducing conductor spacing.</p> <p>51. Arranging phases so that fields tend to cancel.</p> <p>52. Increasing transmission voltage (since magnetic field intensities are a function of current, and increased voltage, all things being equal, will result in reduced current).</p> <p>53. Reducing loads (and therefore, currents).</p> <p>54. Identification of potential exposure levels in the work area including surveys of exposure levels and establishment of safety zones.</p> <p>55. Safety signs and warning zone shall be highlighted to indicate EMF in the area</p> <p>56. Limit access to properly trained workers and those equipped with appropriate PPE when entering safety zones.</p> <p>57. Increasing right-of-way widths or buffer zone widths, to move people further from ETLs.</p>	During Construction	Project-wise facilities and construction sites	Construction Contractor with FMC	NTDC

COVID-19= Coronavirus Disease 2019, EMF= Electromagnetic Forces, ESIC = Environment and Social Impact Cell, ETL = Electricity Transmission Line, HIV= human immunodeficiency virus, LARP= Land Acquisition and Resettlement Plan, NTDC =National Transmission and Despatch Company, PMU = Project Management Unit, PPE= Personal Protective Equipment, RoW= Right of Way, SEQS= Sindh Environmental Quality Standards

9.4 Capacity Building and Training

525. Personnel, including Contractors' personnel, working for or on behalf of the Project will receive training to maintain awareness of relevant environmental and social aspects, impacts and risks associated with the Project and corresponding controls. The training will also maintain awareness of the environmental benefits of improved personal performance and the potential consequences of departure from specified procedures.

526. Visitors to Project sites will receive relevant environmental and social awareness training as part of site induction training. Environmental training will help to ensure that the requirements of this IEE and EMP are clearly understood and followed by all Project personnel in the course of the construction phase.

527. The Contractors will have primary responsibility for providing training to all construction personnel in line with the Training Plan presented in **Table 9-3**. The plan will be finalized before the commencement of the training.

Table 9-3: Training Schedule

Target Audience	Trainers	Contents	Schedule
Contractor Supervisors/ Managers	NTDC's ESIC Team/FMC	Induction training per 'Training Plan'	Before the start of construction activities
Selected management staff from contractor	Contractor	Key findings of IEE Mitigation measures EMP	Before the start of construction activities
All site personnel	Contractor	Mitigation measures of EMP and IEE SSEMP Camp rules	Before and during construction activities
Construction crew	Contractor	EMP Waste disposal procedures	Before and during construction activities
Drivers	Contractor	Road safety Defensive driving Road access restrictions Vehicle movement restrictions Waste disposal	Before and during the construction phase
Construction Staff	Contractor	Waste disposal Vehicle movement restrictions	Before and during the construction phase
Camp staff	Contractor	Camp operation Waste disposal Natural resource conservation Housekeeping Camp Rules	Before and during the construction phase

ESIC = Environment and Social Impact Cell, FMC = Facility Management Consultant

9.5 Site-Specific Environmental Management Plan (SSEMP)

528. The EMP and other safeguard requirements (including any conditions stipulated in the EIA approval) will be included in bidding documents and civil works contracts. The bidders will be required to submit, as part of their bids, the expected costs of implementing the EMP to ensure that sufficient resources are allocated for EMP implementation. The Contractor(s) will be required to prepare SSEMP outlining how they intend to implement the EMP. They will describe the precise locations of the required mitigation/monitoring, the persons responsible for the mitigation/monitoring, the schedule and reporting methodology.

529. The SSEMP needs to include COVID-19 health and safety management plan and emergency response plan.¹⁵⁶ These plans will be prepared based on a risk assessment following relevant government regulations, guidelines, and international best practices. The Contractor(s) will be required to submit the SSEMP to ESIC for approval before taking possession of any work site. No access to the site will be allowed until the SSEMP is approved by ESIC. NTDC will have the right to suspend works or payments if the Contractor is in violation of any of his obligations under the EMP and SSEMP. A template for SSEMP is provided as **Annexure XVIII**.

9.6 Equipment Maintenance Details

Construction

530. Equipment during the construction phase includes dump trucks, loader trucks, excavators, cranes, front-end loaders, fuel tankers, water bowser, cars, etc. This equipment and other machinery will only be repaired at designated sites at the warehouse.

Operations

531. Limited vehicle movement by the maintenance team will be required on a need basis.

9.7 Waste Management

532. This section provides the key elements to be included in a waste management plan or operating procedure to be developed by the Contractor that will be employed during the construction activities of the Project. The plan or operating procedure shall be approved by ESIC, NTDC.

533. The Contractor will prepare a detailed Waste Management Plan as part of SSEMP. A framework plan has been provided as **Annexure XII**.

534. Every effort will be made to minimize the waste generated while the project is in progress. The main types of waste that will be generated are:

- Used oils and chemicals
- Garage Waste
- Sewage
- Camp waste

¹⁵⁶ Other subplans to be included in the SSEMP are tree management plan, waste management plan, vibration management plan, traffic management plan, camp management plan, worker accommodation plan, resource conservation plan, spill prevention and response plan, emergency response plan, chance finds procedure, dust management plan, OHSE management plan, fire management and protection plan, construction noise and vibration management plan, and worker accommodation plan.

- Medical waste
- Packing waste
- Excess construction material.

535. The solid and liquid waste to be generated from the project activities and camps is to be disposed of as per measures discussed in **Table 9-2**.

9.8 Worker Accommodation Plan

536. Worker's Accommodation Plan for the Project covers guidelines, the standards, and practices to be used in the design and management of workers accommodation by NTDC, its contractors and subcontractors. The Worker's Accommodation Plan shall largely be implemented by the Contractor. The scope and applicability of the Worker's Accommodation Plan are limited to the design and management of the worker accommodations provided during the construction phase of the Project. NTDC and its contractors will ensure sufficient resources are allocated on an on-going basis to achieve the effective implementation of the worker accommodation plan.

537. Worker accommodations will be located within the Project site and will be provided during the construction phase of the Project. The worker accommodations will encompass areas where it shall not interfere with the construction activities.

538. Alongside the construction planning, the Contractor along with the Project Management Unit (PMU) of NTDC, shall conduct a space assessment of accommodations.

539. Worker's Accommodation Plan will be prepared by contractor as part of SSEMP. A template plan has been provided in **Annexure XVIII**.

540. An emergency response plan and fire management plan will be prepared by contractor as part of SSEMP. The template plans are given in provided in **Annexure XV** and **Annexure XIX**.

9.9 Environmental Monitoring and Reporting

541. Implementation of the EMP during construction will be done by the contractors and supervised by FMC and ESIC.

542. The parameters to be monitored, frequency and duration of monitoring as well as the locations to be monitored will be as per the environmental monitoring plan (EMoP) prepared as part of the EMP (**Table 9-4** and **Table 9-5**).

543. The EMoP identifies environmental monitoring activities to ensure that negative environmental impacts are addressed properly. It identifies environmental parameters to be monitored, frequency of monitoring, applicable standards, agencies, and institutions responsible for monitoring; and provide indicative monitoring costs. The FMC will assist the PMU in this regard. During construction, monitoring will be undertaken by contractors and the FMC. PMU and NTDC ESIC will monitor contractor's environmental performance. During the operation stage, monitoring will be the responsibility of NTDC.

544. The main objectives of the pre-construction and construction phase EMoP will be:

- The compensation for loss of assets will be monitored during the pre-construction activities as per the latest rates announced by the government as every year rates have to be revised by the government. This aspect will be strictly monitored.

- Monitor the actual impact of the construction activities on the project corridor's physical, biological, and socio-economic receptors. This will indicate the adequacy of the IEE.
- Recommend mitigation measures for any unexpected impact or where the impact level exceeds that anticipated in the IEE.
- Ensure compliance with legal and community obligations including safety at construction sites.
- Monitor the impacts on land, water resources, air quality, noise level and cutting of trees in the project area as described in the EMP.

545. The main objectives of EMoP during the operation phase will be to:

- Appraise the adequacy of the IEE concerning the project's predicted long-term impact on the corridor's physical, biological, and socio-economic environment.
- Evaluate the effectiveness of the mitigation measures proposed in the EMP and recommend improvements, if necessary

546. Compile periodic accident data to support the analysis that will help to minimize future risks.

The contractors will report the results and conclusions of EMP implementation and environmental monitoring to the PMU and ESIC NTDC monthly. The budget for environmental monitoring shall be included as part of civil works contracts.

547. NTDC through its PMU will:

- (i) Establish and maintain procedures to monitor the progress of implementation of EMPs;
- (ii) Verify the compliance with environmental measures and their progress toward intended outcomes.
- (iii) Document and disclose monitoring results and identify necessary corrective and preventive actions in the periodic monitoring reports.
- (iv) Follow up on these actions to ensure progress toward the desired outcomes,
- (v) Submit SAEMRs to ADB.

548. PMU through NTDC's ESIC will submit semiannual environmental monitoring reports (SAEMRs), which cover all subprojects under Tranche 4, to ADB for review and disclosure, within 30 days after completion of each monitoring period. SAEMRs will be prepared and submitted to ADB, starting after Tranche 4 becomes effective, until ADB's Project Completion Report (PCR) is issued. Within three months after completion of all civil works, a report on the project's environmental compliance performance (including lessons learned that may help the NTDC in their environmental monitoring of future projects) will also be prepared. This report will be part of the input to the overall PCR.

549. NTDC, with the support of the FMC, will translate the summary of these documents into Sindhi and Urdu languages,¹⁵⁷ and post them on NTDC website with the full reports (in English), within two weeks after ADB's clearance of each document. In case the FMC's liability period ends before ADB's PCR issuance, the NTDC ESIC itself will prepare the SAEMRs. In addition to the above-mentioned reports, in case of any accident related to occupational and community health and safety causing fatality or near-fatal event, NTDC

¹⁵⁷ Sindhi as a mother tongue is spoken in the Project area. However, Urdu and Punjabi are also spoken. (para. 273 on page 87)

will to (i) report to ADB within 24 hours of any fatal or near-fatal event, (ii) prepare and submit to ADB an incident notification form within 48 hours, and (iii) prepare and submit to ADB an incident root cause investigation and corrective action form within 72 hours.

Table 9-4: Environmental Monitoring Plan (EMoP)

Environmental Concern	Performance Indicator	Frequency to Monitor	Timing to Check	Locations to implement	Responsible to implement	Resp supervision
Pre-Construction Phase						
1. Possible encroachment on reserved forests	Route survey to define alternative alignments (Field mapping with Global Positioning System (GPS) Equipment preferable)	1-time survey to finalize design	detailed design	All transmission and Substation and ETL sites	NTDC / PMU through route survey contractor	NTDC
Construction Phase						
2. Dust, equipment emissions, erosion, noise control, and Waste management	Incorporation of appropriate clauses in construction contracts (Field inspections to ensure that appropriate measures are implemented, and facilities are installed)	Once	Before construction	All construction contracts for all ETL sites	NTDC and PMU to include in bidding documents.	NTDC, ESIC
3. Encroachment and Physical Disfiguration	Landscape Conditions, Baseline Environment	Once (update monthly as necessary)	One Month after Construction Work	All NTDC'S alignment	Contractor	NTDC, ESIC
4. Soil Erosion	Soil Compression, Land Clearing, Vegetation Removal	Once (update monthly as necessary)	Before construction. Update monthly	All NTDC'S alignment	Contractor	NTDC, ESIC
5. Soil Contamination	Fuels Spillage, Chemicals Containers	Monthly	During Construction	All NTDC'S alignment	Contractor	NTDC, ESIC
6. Ecological Resources	Land Clearing, Habitat destruction	Monthly	Update monthly	All NTDC'S alignment	Contractor	NTDC, ESIC

7. Loss of Barani Crops	Number of People affected due to unavailability of Opportunistic Agriculture	Once (update monthly as necessary)	During Construction	All NTDC'S alignment	Contractor	NTDC, ESIC
8. Local Community Work Force	Disturbance due to Stringing, Good engineering practices adopted	Once (update monthly as necessary)	Update monthly	All NTDC'S alignment	Contractor	NTDC, ESIC
9. Safety Hazards	Zero near miss, minor, major, and fatal accidents	Monthly	Update monthly	All NTDC'S alignment	Contractor	NTDC, ESIC
Operational Phase						
10. Electric Current	Earthing of the Towers, Safety Plan by the contractor to be followed	Monthly	During Operation	All NTDC'S alignment	Contractor	NTDC, ESIC
11. Breaking of Conductors	Frequency of Conductors Tripping, Complaints reported	Quarterly	Throughout the Project	All NTDC'S alignment	Contractor	NTDC, ESIC
12. Towers Collapse	Soil Geology, Climatic Conditions, Records on displacement (if any)	Six Monthly	During Implementation Phase	All NTDC'S alignment	Contractor	NTDC, ESIC
13. Avifauna Movement	The reported death of Birds, Audit Report by the ESIC cell	Quarterly	After ETL is erected	All NTDC'S alignment	Contractor	NTDC, ESIC

ESIC = Environment and Social Impact Cell, ETL = Electricity Transmission Line, NTDC = National Transmission and Despatch Company, PMU= Project Management Unit

Table 9-5: Instrumental Environmental Monitoring Plan

No	Monitoring Parameter	Monitoring Location	Frequency	Responsibility	Resource Requirement	Criteria for Triggering Action	Documentation
Construction Phase							
1.	Water quality: pH, dissolved oxygen (DO), biochemical oxygen demand (BOD), total suspended solids (TSS), hydrocarbon and PCBs Solid waste generation and disposal	At representative existing wells (if any) within 100 m of the campsite	Every six months	Contractors to implement, PMU staff to provide oversight via regular field inspections	Resources for water sample collection and analysis	Water quality deterioration that can be attributed to the effluents released by the project facsimiles	A complete record of sample collection and analyses.
2.	Ambient Air Quality: Suspended particulate matter (SPM)	<ul style="list-style-type: none"> Campsite Access road Communities within 100 m of RoW, campsite, or access road 	Every six months	Same as above	Resources for monitoring dust generation	To ensure compliance against SEQS for emissions	Records of measured values to be maintained
3.	Noise	<ul style="list-style-type: none"> Campsite Access road Communities within 100 m of RoW, campsite, or access road 	Every six months	Same as above	Noise meter (1-hr concentration levels)	Exceeding World Bank limits (55 dBA during the day, 45 dBA during the night, measured at the receptor; or an increase of 3 dBA if the background noise is higher than the above-specified levels)	Records of measured values to be maintained
4.	Visual check for exhaust	<ul style="list-style-type: none"> Campsite Access road 	Routine visits	Contractor	-	Personal judgment	Records of abnormal emissions.

No	Monitoring Parameter	Monitoring Location	Frequency	Responsibility	Resource Requirement	Criteria for Triggering Action	Documentation
Construction Phase							
	emissions from equipment and vehicles	<ul style="list-style-type: none"> • RoW • Other construction sites 					
5.	Visual check for soil erosion	<ul style="list-style-type: none"> • Campsite • Access road • RoW • Other construction sites 	Routine Visits	Contractor	-	Visible signs of any soil erosion	Photographic record
6.	Grievances of the local communities	<ul style="list-style-type: none"> • Campsite • Access road • RoW • Other construction sites 	During activities field	Contractor	Monitoring register	Complaints	Complete grievance record to be maintained in the social complaint register.
Operation Phase							
7.	Dust, equipment emissions, and erosion control Waste management (Same parameters as during construction period)	<ul style="list-style-type: none"> • All ETLs 	As necessary based on inspections and complaints	NTDC through PMU	Same resource as during construction period	Spot checks based on visual inspections and any complaints as necessary based on inspections and complaints	SAEMRs

ETL = Electricity Transmission Line, NTDC =National Transmission and Despatch Company, PMU = Project Management Unit, RoW = Right of Way, SAEMR = semi-annual environmental monitoring report, SEQS = Sindh Environmental Quality Standards

9.10 Institutional Arrangement

550. The lack of an environmental and social safeguards team and lack of capacity within project proponents and contractors creates implementation issues of project environmental safeguard documents including IEE, EIA, SSEMP, and no objection certificate (NoC). To overcome this, NTDC will ensure institutional arrangements as described below.

551. The NTDC has established a PMU to implement MFF II. The PMU's day-to-day project management includes procurement, project execution, financial management, and monitoring of and reporting on project progress. The PMU of NTDC which already exists and executes other tranches of the MFF II Program will implement environmental safeguard requirement through its dedicated wing, the ESIC. The ESIC is staffed by EHS Manager, Deputy EHS Manager and Assistant EHS Manager in addition to social safeguard staff. Further resources for environmental safeguards management will be provided by FMC.

Table 9-6: Implementation Arrangements for Tranche 4

Aspects	Arrangements
(i) Oversight body	Ministry of Energy (Power Division) Mr. Zafar Abbas (chair) Mr. Hammad Raza (member)
(ii) Executing agency	National Transmission and Despatch Company Limited (NTDC)
(iii) Implementation unit	Program Management Unit (PMU) established in NTDC
Consulting services	NTDC consulting firm National Engineering Services Pakistan (NESPAK), recruited by NTDC from its resources, will provide supervision support to NTDC.

552. Specific roles and responsibilities for environmental monitoring are provided in **Table 9-7**.

553. Institutions responsible for executing and monitoring the environmental aspects of this project are:

9.10.1 National Transmission and Despatch Company Limited (NTDC)

554. NTDC, the proponent of the ETL, is the executing agency of the Project. NTDC will monitor the implementation of the investment program and all tranches under the program.

9.10.2 Project Management Unit (PMU) under NTDC

555. The existing PMU established in NTDC under the first MFF 0007-PAK: Power Transmission Enhancement Investment Program (MFF I)¹⁵⁸ will be responsible for day-to-day project implementation for the physical outputs relating to the transmission system and operation (as defined under their transmission license). PMU will also be responsible for complying with the safeguard's requirements and design and monitoring framework, and loan covenants.

556. EHS Manager of ESIC under PMU will be responsible for environmental and social safeguards requirement implementation during design, construction, and operations of the

¹⁵⁸ [37192-013: MFF - Power Transmission Enhancement Investment Program | Asian Development Bank \(adb.org\)](#)

ETL though Deputy EHS Manager and Assistant EHS Manager in addition to social safeguard staff.

557. The top management of ESIC of PMU will be ultimately responsible to ensure that the SSEMP/EMP is implemented through a monitoring mechanism. For this purpose, ESIC will develop and maintain internal institutional capacity for environmental management.

558. ESIC should be assigned the task to check that design and bid documents are responsive to key environmental, social, and safety considerations, and that the proposed method of work reflects the boundaries defined in the EMP. Further, PMU to ensure, the contractor's environmental safeguards capacity before construction starts.

559. ESIC within the PMU, with the assistance of FMC, will be responsible for:

- Preparing environmental screening checklists and classifying subprojects that have not been yet classified.
- Based on the checklist and as per the requirements of ADB SPS, PEPA 1997 and relevant provincial Environmental Protection Acts, preparing IEEs and EMPs.
- Submitting the checklists and IEE reports to ADB.
- Ensuring that EMPs are included in Tender documents.
- Ensuring that all regulatory clearances are obtained before starting civil works for the subproject.
- Ensuring that the EMPs, including all proposed mitigation measures and monitoring programs are properly implemented.
- Undertaking monitoring of subprojects and preparing SAEMRs every six months, to be delivered to ADB.
- In the case of unpredicted environmental impacts occurring during project implementation, preparing, and implementing a Corrective Action Plan (CAP).
- In the case that a subproject needs to have its siting or alignment changed or its environmental classification reconfirmed, reviewing it to determine whether a supplementary study is required. If so (where unanticipated environmental impacts become apparent), carry out the study and implement any amendments to the original EMP.
- Approving SSEMP to be submitted by each construction contractor.
- Providing awareness training in environmental management for all employees working on the subproject.
- Ensuring that meaningful public consultations (including both men and women) are undertaken with affected groups and local NGOs. The list of people attending the consultation, time and locations, subjects discussed during consultation will be recorded in a systematic manner.
- Sharing information and disclosure of environmental safeguard documents (including any Corrective Action Plans prepared in cases of change to original project design) as required.

9.10.3 Facility Management Consultant (FMC)

560. Overall tranche supervision will be supported by the FMC: National Engineering Services Pakistan (NESPAK) funded by NTDC's own resources. The FMC (NESPAK) will

have following positions for catering environment safeguards requirements of the Project. Person-months indicated here are exclusively for Tranche 4.

- International Environmental Safeguards Specialist (FMC-IESS, 04person-months, intermittent)
- National Environmental Safeguards Specialist (FMC-NESS, 1 Position, 24 person-months full-time)
- National Environmental Inspectors, (FMC-NEIs, 2 Positions, 24 months each full-time)

561. The FMC will be responsible for

- To maintain adequate staff for implementation of IEE and EMP including one FMC-IESS, one FMC-NESS and two FMC-NEIs.
- Supervising the Project's Contractors and ensuring that all the contractual obligations related to the design and construction, as well as environmental and social compliance, are met.
- Ensuring that the day-to-day construction activities are carried out in an environmentally and socially sound and sustainable manner and developing 'good practices' construction guidelines to assist the Contractors and PMU staff in implementing the EMMP
- Assisting the Chief Engineer (EHV-II) in coordinating with the PEPAs, provincial agriculture, forest and Wildlife departments, NGOs/CBOs, and other public/private sector organizations.

9.10.4 Construction Contractor

562. Only one Engineering, Procurement, Construction (EPC) contractor (Construction Contractor) is expected to be mobilized for Subproject 1, while the EPC contractor can hire sub-contractors for timely completion of the Project. The Construction Contractor will assign and retain a full-time and qualified Environmental Safeguards Officer (ESO) and a full-time and qualified Health and Safety Officer (HSO). The contractor is responsible for developing similar arrangement in the subcontractor hierarchy. ESIC of NTDC will make sure the positions are filled with appropriate human resource.

563. The Contractor will be primarily responsible for the implementation of the EMP and SSEMP. Contractor will develop an internal monitoring and reporting mechanism for all activities undertaken.

564. Contractor is also responsible for developing Site-specific EMP (SSEMP) or making necessary changes to the SSEMP if and as required as a result of any changes in design or location, and ongoing reviews and requirements.

Table 9-7: Roles and Responsibilities for Implementation of EMP

Aspect	NTDC's ESIC Responsibilities	Contractor's Responsibilities	Relevant Documentation
Contracting	Ensure that the SSEMP/EMP implementation and internal monitoring and reporting requirements are included in the contract between NTDC and the Contractors.	Understand the requirements and estimate the required resources.	The contract between NTDC and Contractors

Aspect	NTDC's ESIC Responsibilities	Contractor's Responsibilities	Relevant Documentation
SSEMP and subsequent Updates	Review and approve SSEMP.	Preparing SSEMP. Update SSEMP if any changes to design happened	SSEMP Revised SSEMP
Resources	Ensure the availability of resources required for EMP implementation, monitoring of Contractors, and preparing reports to authorities	Ensure the availability of resources required for EMP implementation and internal monitoring throughout the construction duration and reporting to NTDC.	Project SSEMP implementation and monitoring plans and budgets.
Environmental personnel	Assign and retain full-time and qualified EHS Manager, Deputy EHS Manager and Assistant EHS Manager for the Project	Assign and retain a full-time and qualified ESO and a full-time and qualified HSO	Job descriptions.
Monitoring surveys and inspections	Undertake periodic inspections and carry out field measurements, where needed over and above those of Contractor. Review Contractor monitoring.	Systematically observe and collect data on environmental performance, undertake inspections, and carry out surveys	Inspection and survey reports.
Environmental inspections	Conduct periodic internal inspections of the construction sites and commissioning third-party (external) inspections	Conducting periodic internal audits.	Audit reports.
Reporting	Ensure that periodic environmental monitoring reports are received from the Contractors and are reviewed. Prepare reports to authorities if necessary	Generate monthly environmental monitoring reports and disseminating these to the management and appropriate staff members.	Periodic reports.
Corrective actions	Verify that the activities that are carried out comply with the IEE or EIA and EMP and identify corrective actions if needed.	Carry-out the required corrective actions.	Corrective action record.
Maintenance of record	Maintain monitoring data and record of all incidents of environmental significance and related corrective measures.	Maintain monitoring data and record of all incidents of environmental significance and related corrective measures.	Environmental databases.

ESIC = Environment and Social Impact Cell, ESO = Environmental Safeguards Officer, NTDC = National Transmission and Despatch Company, HSO = Health and Safety Officer, SSEMP = Site-specific Environmental Management Plan

9.11 Change Management

565. The Change Management System proposed for the project recognizes three orders of changes in the project design or project area:

566. **First-Order:** A first-order change is one that leads to a significant departure from the project described in IEE and consequently requires a reassessment of its environmental impact. Examples of first-order changes include:

- Shifting of the project area by more than 5 km
- Increasing the total length of RoW by over 50 km
- Using technology that has significantly greater effects
- Increasing the crew size by more than 50%
- Re-routing the RoW through any sensitive wildlife areas.

567. A new environmental assessment will be conducted, and a revised IEE report submitted to the provincial PEPAs for a first-order change in the project.

568. **Second Order:** A second-order change is one that entails project activities not significantly different from those described in the IEE.

569. A second-order change may alter the project's impact, but not its overall magnitude. In case of such changes, the ESIC will be required to reassess the impact of the activity on the environment, specify additional mitigation measures, if necessary, and report the changes to the provincial PEPAs. Examples of such changes include:

- Shifting of the project area by 1 to 5 km
- Increasing the total length of RoW by 10 to 50 km
- Using a different technology that is as disturbing, or less disturbing than that proposed
- Increasing the crew size by more than 10% but less than 50%.

570. **Third Order:** A third-order change or uncertainty is of little consequence to the IEE findings. Where unanticipated environmental impacts become apparent during project implementation, NTDC will update this IEE and EMP or prepare a new IEE and EMP to assess the potential impacts, evaluate the alternatives, and outline mitigation measures and resources to address those impacts.

571. Examples of third-order changes are:

- Shifting of the project area by 1 km or less
- Increasing the total length of RoW by less than 10 km
- Changing the layout of the campsites or construction sites.

572. The examples given above are hypothetical and have been given to illustrate the magnitude of the three types of changes. At this stage, no changes are under consideration. Any change in the project design will be evaluated based on the criteria provided above, and appropriate action will be taken. The record will be maintained in the Change Record Register.

9.12 Environment Management Cost

573. An estimated cost for implementation of mitigation measures prescribed in the Environmental Management Plan (EMP) has been provided in **Table 9-8**, **Table 9-9** and **Table 9-10**.

574. The cost includes the hiring of staff, arrangements for water sprinkling, provision of PPEs to workers, the arrangement of first aid kits at the site and waste management, etc. The budget for tree plantation and landscaping is also included in the given cost where required.

575. The cost does not cover the implementation of mitigation measures prescribed in the Environmental Management Plan (EMP) for the operational phase which will be included as part of NTDC's ongoing environment management program.

Table 9-8: Estimated Cost for Contractor's EMP Implementation¹⁵⁹

Item	Quantity	Unit cost	Estimated cost
SSEMP preparation	Lumpsum	\$7,000	\$7,000
SSEMP implementation (construction mitigation measures)	Lumpsum	\$7,000	\$7,000
Planting of trees	20,000	\$2	\$40,000
Mobile toilets for workers at each construction site	15	\$150	\$2,250
PPEs and safety measures like signages, barricading etc.	Lumpsum	\$8,000	\$8,000
Hazardous Waste Disposal ¹⁶⁰	24 months	\$500	\$12,000
Instrumental Environmental Monitoring			
Water Quality	16 samples ¹⁶¹	\$300	\$4,800
Ambient Air Quality	16 samples ¹⁶²	\$500	\$8,000
Noise Level	16 samples ¹⁶³	\$150	\$2,400
Mobilization of ESO	24 months	\$350	\$8,400
Mobilization of HSO	24 months	\$350	\$8,400
		Total	\$108,250

ESO = Environmental Safeguards Officer, HSO = Health and Safety Officer, SSEMP = site-specific environmental management plan

Table 9-9: Estimated Cost for FMC's EMP Implementation

Item	Quantity	Unit Cost	Estimated Cost
International Environmental Safeguards Specialist (FMC-IESS)	4 months (intermittent)	\$20,000	\$80,000
National Environmental Safeguards Specialist (FMC-NESS)	24 months (full-time)	\$1,200	\$28,800
National Environmental Inspectors (FMC-NEIs)	24 months (full-time) x 2	\$350	\$16,800
Training on EMP and GRM	Lumpsum	\$2,500	\$2,500
		Total	\$128,100

EMP = environmental management plan, GRM = grievance redress mechanism

Note: The cost of FMC represents for complete MMF T-4 Program covering all subprojects

Table 9-10: Estimated Cost for ESIC's EMP Implementation

Item	Quantity	Unit Rate	Estimated Cost
EHS Manager	24 months (full-time)	\$2,000	\$48,000
Deputy EHS Manager	Same as above	\$1,500	\$36,000
Assistant EHS Manager	Same as above	\$1,200	\$28,800
		Total	\$112,800

EMP = environmental management plan, GRM = grievance redress mechanism

¹⁵⁹ The construction period will be between eighteen to twenty-four months. (para. 516 on page 161)

¹⁶⁰ Contaminated soil or residue of sewerage waste, used filters, other)

¹⁶¹ 4 locations (at representative existing wells [if any] within 100 m of the campsite) x 4 times (every six months) (See **Table 8-4**)

¹⁶² 4 locations (Campsite, Access road and Communities within 100 m of RoW, campsite, or access road) x 4 times (every six months) (See **Table 8-4**)

¹⁶³ 4 locations (Campsite, Access road and Communities within 100 m of RoW, campsite, or access road) x 4 times (every six months) (See **Table 8-4**)

Note: The cost of ESIC represents for complete Tranche 4 covering all subprojects

10. Conclusion and Recommendations

10.1 Conclusion

576. The proposed Subproject 1 is the turnkey contract for design, supply, installation, testing and commissioning of approximately 70 km of 220kV double circuit ETL for looping in/out of the proposed Hala Road-Jamshoro single circuit ETL at 220kV Mirpur Khas New Grid Station.

577. An EARF (footnote 2) was prepared for MFF II in May 2016. This EARF is applicable for subprojects under MFF II and Tranche-I, funded by ADB. The EARF outlines the policy, procedures, and institutional requirements for preparing the subprojects. These subprojects need to be processed under ADB SPS.

578. An IEE has been conducted following the EARF to assess the environmental and socioeconomic impact of NTDC's proposed Project following ADB SPS.

579. Key components of the Project, construction materials, transport infrastructure, water requirements, generated emissions and schedule and staffing for the Project are also discussed in the IEE.

580. An EIA report in accordance with the national environmental requirements has been submitted to SEPA for environmental approval or NOC.

581. Alternatives related to the construction method, technology, and ETL RoW were analyzed. The 'No Project Alternative' was also discussed in detail, to ensure that the Project is sufficiently benefitting the local economy and is not unnecessarily degrading the environment.

582. Baseline environmental and socioeconomic information was collected from a variety of sources, including published literature, and field surveys. Baseline studies were conducted on the physical, ecology and socioeconomic environment conditions of the AOI around the Project site.

583. Proposed Project activities were reviewed and their potential impacts on the physical, biological, and socio-economic environment were assessed. Where appropriate, mitigation measures have been proposed to keep potential adverse environmental impacts within acceptable limits.

584. An EMP has been developed in this report to effectively implement the mitigation measures identified in the impact assessment. Contractor will develop SSEMP before construction activities start. The bid documents must include the EMP, and its implementation cost must be reflected in the bill of quantity (BoQ).

585. Therefore, if the Project's construction and operation activities, including the implementation of all proposed mitigation measures, are carried out as described in this document, the anticipated impact of the project on the area's natural and socioeconomic environment shall remain well within acceptable limits.

586. Following requirements of ADB SPS, NTDC will apply pollution prevention and control technologies and practices consistent with international good practice as reflected in internationally recognized standards such as EHS Guidelines (footnotes 22, 23 and 24). When Government regulations differ from these levels and measures, NTDC will achieve whichever is more stringent. If less stringent levels or measures are appropriate in view of specific project circumstances, NTDC will provide full and detailed justification for any proposed alternatives that are consistent with the requirements presented in ADB SPS.

587. This IEE will be updated if unanticipated environmental impacts become apparent and will be submitted to ADB for clearance and disclosure at ADB website.

588. NTDC will have the right to suspend works or payments if the Contractor is in violation of any of his obligations under the EMP and SSEMP.

10.2 Recommendations

589. Comprehensive mitigation measures have been proposed in **Section 5** and **Section 9** of this report to minimize the negative impacts and to enhance the positive impacts of the project. However, major recommended mitigation measures are summarized as follows:

- Temporary labor camps will be developed inside the grid station boundary and will be facilitated with proper drainage facilities.
- Soil erosion and contamination, water contamination, air pollution, and high noise levels will be controlled with the use of good engineering practices.
- The contractor will develop subplans (listed in footnote 156 on page 199 of this IEE) as part of SSEMP before starting the construction activities. No access to the site will be allowed until the SSEMP is approved by the ESIC.
- Fair and negotiated compensation following the prevailing market prices will be made for the loss of crops and trees during the construction activities of the project.
- The contractor will take due care of the local community and its sensitivity towards local customs and traditions.
- EMP proposed in **Section 9** will be implemented in true letter and spirit.

Initial Environmental Examination Annexures

Project Number: 48078-006

Date: October 2022

Pakistan: Second Power Transmission Enhancement Investment Program (Tranche 4)

Subproject 1: Design, supply, installation, testing and commissioning of approximately 70 km of 220kV double circuit transmission line for looping in/out of the proposed Hala Road-Jamshoro single circuit transmission line at 220kV Mirpur Khas New Grid Station

Prepared by the National Transmission and Despatch Company Limited (NTDC) for the Asian Development Bank.

Annexures

Annexure I:	ADB's Rapid Environmental Assessment (REA) Checklist	1
Annexure II:	Field Sampling Plan	9
Annexure III:	Laboratory Provided Analysis Reports	11
Annexure IV:	Sensitive Receptors	35
Annexure V:	IBAT Findings Report	47
Annexure VI:	Consultation Material.....	54
Annexure VII:	Consultation Logs.....	63
Annexure VIII:	Dust Management Plan	83
Annexure IX:	Construction Noise and Vibration Management Plan	85
Annexure X:	Chance Finds Procedure.....	88
Annexure XI:	Traffic Management Plan	89
Annexure XII:	Waste Management Plan	90
Annexure XIII:	COVID-19 Management Plan.....	95
Annexure XIV:	Occupational Health, Safety, and Environment (OHSE) Management Plan	130
Annexure XV:	Emergency Response Plan	131
Annexure XVI:	Tree Plantation Plan.....	136
Annexure XVII:	Resource Conservation Plan.....	137
Annexure XVIII:	Site Specific EMP	139
Annexure XIX:	Worker Accommodation Plan	140
Annexure XX:	Fire Management and Protection Plan	142
Annexure XXI:	Calibration Certificate of Noise and Air Quality Measuring Instruments.....	143

**Annexure I: ADB's Rapid Environmental Assessment
(REA) Checklist**

Rapid Environmental Assessment

Project Name: MFF Power Transmission Enhancement Investment
 Program II Tranche 4

Date: September 2022

Environmental Screening and Categorization Report for
Construction of In/Out of D/C T/L Hala Road Jamshoro at Mirpur Khas (67 km)

Impact Cell of
National Transmission & Despatch Company Limited,
Lahore

REA 220 kV Mirpur Khas TL (67 km)

1. Introduction

1 The Government of Pakistan (GoP) signed a loan agreement with the Asian Development Bank (ADB) for financial support for the construction of the Power Enhancement Projects in Pakistan. The multi-tranche financing facility for the Second Power Transmission Enhancement Investment Program (MFF II or the Program) will expand and reinforce Pakistan's power transmission system, enabling the system to provide a reliable and quality service capable of meeting increasing customer demand and supporting economic growth. MFF II comprises four tranches and Projects located in different areas of the country.

Brief Program Background

2 Under Tranche 4 Readiness, NTDC is planning to construct new 220 kV transmission lines, construct a grid station, the argumentation of nine existing grid stations and procurement of substation equipment. The names of these subprojects are listed hereunder.

- a. Subproject 1: Design, supply, installation, testing, and commissioning of 220kV transmission line for looping in/out of the proposed Hala Road Jamshoro 220kV s/c transmission line at Mirpur Khas New
- b. Subproject 2: Design, manufacture, supply, installation, testing & commissioning of 220kV double circuit transmission line for looping in/out one circuit of the existing Jamshoro T.M. Khan 220kV D/C T/L at Hala Road 220kV Substation
- c. Subproject 3: Addition and augmentation of existing substations for removal of NTDC system constraints
- d. Subproject 4: Construction of 220kV Jamrud Grid Station and the associated 220kV Jamrud-Sheik Muhammadi transmission line
- e. Subproject 5: Interlinking of 220kV Dharki - Rahim Yar Khan and Bahawalpur grid stations
- f. Subproject 6: Procurement of Substation Equipment for Asset Management NTDC

Subproject Background and Work scope

3 Under Subproject 1, the proposed and covers:

- ADB-201A Lot-I: Construction of In/Out of D/C T/L Hala Road Jamshoro at Mirpur Khas (67 km). Hereafter the subproject will call Mirpur Khas TL.

4 The location of the subprojects in Sindh province is shown in **Figure 1**.

2. Salient Features of the Subprojects

5 The subproject Mirpur Khas TL (ADB-201A Lot-I) passes through Three districts namely Hyderabad, Tando Allah Yar, and Mirpur Khas.

6 Within the 100 m of the TL route on each side, the area consists of agricultural land (85%) followed by settlements (8%). The rest of the land is comprised of open areas, roads, and water bodies.

REA 220 kV Mirpur Khas TL (67 km)

7 The construction cost of Mirpur Khas TL (ADB-201A Lot-I) has been estimated to be 15.76 Million USD.

8 No protected area is located within 5 km of the subprojects i.e. Reserved Forest, Game Reserves, National Parks, and Wildlife Sanctuaries, which fall on the transmission line route (Figure 2).¹

9 The proximity analysis was carried out using Integrated Biodiversity Assessment Tool (IBAT) to identify the biodiversity features and species which are located within 10 km of the Project radius.

10 No wetlands were found along the entire transmission line route notified by the GoP.

3. Environmental Categorization

11 There will not be any land acquisition or compensation process per the prevailing law of the country except for the crop compensation of the transmission line towers.

12 Rapid Environmental Assessment (REA) was conducted, followed by the ADB checklist by REA provided in Appendix A.

13 The ADB's Safeguard specialist staff will confirm the categorization of the proposed projects as per ADB SPS 2009 based on the information provided in this document, i.e., sensitive receptor mapping, the scale of the project works with an assessment of the expected impacts also provided in the enclosed.

14 However, based on the information in Section 2, the environmental categorization for the projects has been proposed and provided in Table 1.

15 As far as the host country's approval following national guidelines is concerned, considering the scale of this project and the scale of the works involved, and the capital expenditure to be incurred to develop it, this project falls under Schedule II.

16 The transmission lines (11 kV and above) and distribution projects are included in Schedule II which requires an EIA² under the Sindh Environmental Protection Act, 2014, the Review of Initial Environmental Examination, and Environmental Impact Assessment Regulations (IEE-EIA Regulations 2014).

Table 1: Summary of Proposed Environmental Category

S/No.	Sub-project City	Scoping Findings	Proposed Environment Category
1	Mirpur Khas TL (67 km)	<ul style="list-style-type: none"> Agricultural land (85%) followed by orchards (18%) and settlements (5%). The rest of the land is comprised of open areas/ hilly areas, roads, and water bodies. 1500-2000 Trees falling on the TL route will be cut. No significant number of settlements fall on the TL route 	Category 'B'

¹ The Protected Area in close vicinity of the subprojects was assessed using the data from different sources including BirdLife International, Punjab Wildlife, Fisheries and Forest Departments, IUCN, WWF Pakistan, and World Data Base on Protected Area.

² <https://epasindh.gov.pk/Rules/EIA%20IEE%20Regulations%202014.pdf>

REA 220 kV Mirpur Khas TL (67 km)

		<ul style="list-style-type: none"> No protected area is located within 5 km of the subprojects i.e., Reserved Forest, Game Reserves, National Parks, and Wildlife Sanctuaries, which fall on the transmission line route. No wetlands were found along the entire transmission line route notified by the GoP. No land acquisition is involved. 	
--	--	--	--

REA 220 kV Mirpur Khas TL (67 km)

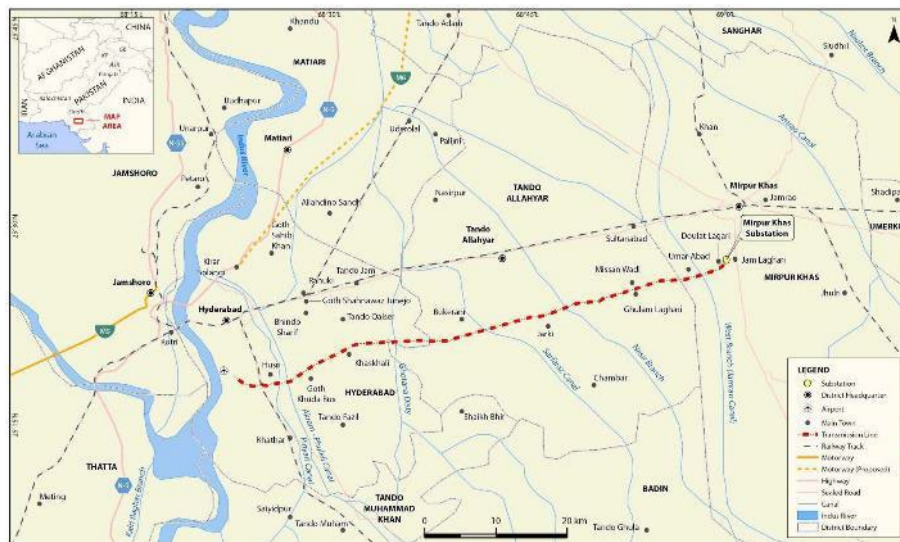


Figure 1: Hala Road Jamshoro - Mirpur Khas TL

REA 220 kV Mirpur Khas TL (67 km)



Figure 2: Transmission Line Location and Protected Areas

REA 220 kV Mirpur Khas TL (67 km)

APPENDIX A: RAPID ENVIRONMENTAL ASSESSMENT (REA) CHECKLIST**Mirpur Khas TL (67 km)****Instructions:**

- (i) The project team completes this checklist to support the environmental classification of a project. It is to be attached to the environmental categorization form and submitted to Environment and Safeguards Division (SDES) for endorsement by Director, SDES and for approval by the Chief Compliance Officer.
- (ii) This checklist focuses on environmental issues and concerns. To ensure that social dimensions are adequately considered, refer also to ADB's (a) checklists on involuntary resettlement and Indigenous Peoples; (b) poverty reduction handbook; (c) staff guide to consultation and participation; and (d) gender checklists.
- (iii) Answer the questions assuming the "without mitigation" case. The purpose is to identify potential impacts. Use the "remarks" section to discuss any anticipated mitigation measures.

Country/Project Title: Pak/ MFF II Tranche 4 Subprojects

Sector Division:

Screening Questions	Yes	No	Remarks
A. Project siting Is the project area adjacent to or within any of the following environmentally sensitive areas?			
▪ Cultural heritage site		No	There are not any such sites within 100 m of the TL route on each side.
▪ Protected area		No	There are not any such sites within 100 m of the TL route on each side.
▪ Wetland		No	There are not any such sites within 100 m of the TL route on each side.
▪ Mangrove		No	There are not any such sites within 100 m of the TL route on each side.
▪ Estuarine		No	There are not any such sites within 100 m of the TL route on each side.
▪ Buffer zone of protected area		No	There are not any such sites within 100 m of the TL route on each side.
▪ Special area for protecting biodiversity		No	There are not any such sites within 100 m of the TL route on each side.
B. Potential environmental impacts Will the project cause...			
▪ encroachment on historical/cultural areas, disfiguration of landscape, and increased waste generation?		No	The TL does not pass or encroach on historical/cultural areas, disfiguration of landscape, and increased waste generation. The spoil/ overburden material will be backfilled after the base construction of the tower then restoring of preserved topsoil cover.

REA 220 kV Mirpur Khas TL (67 km)

Screening Questions	Yes	No	Remarks
			No such acts are anticipated during construction or operations
▪ encroachment on precious ecosystem (e.g. sensitive or protected areas)?		No	No such acts are anticipated during construction or operations
▪ alteration of surface water hydrology of waterways crossed by roads and resulting in increased sediment in streams affected by increased soil erosion at the construction site?		No	Existing public roads will be used for material transport. Local water bodies will be protected during access route construction.
▪ damage to sensitive coastal/marine habitats by construction of submarine cables?		No	No such acts are anticipated during construction or operations
▪ deterioration of surface water quality due to silt runoff, sanitary wastes from worker-based camps and chemicals used in construction?	Yes		Construction camps generate solid and liquid wastes therefore they should be built appropriately and away from settlements.
▪ increased local air pollution due to rock crushing, cutting and filling?		No	There is no such activity involved in the project construction.
▪ risks and vulnerabilities related to occupational health and safety due to physical, chemical, biological, and radiological hazards during project construction and operation?	Yes		Significant occupational health and safety hazards will exist at the construction sites considering the tower erecting, and in operations.
▪ chemical pollution resulting from chemical clearing of vegetation for construction site?		No	No such method will be adopted.
▪ noise and vibration due to blasting and other civil works?	Yes		During the construction phase, significant noise and dust emissions are expected from the movement of construction vehicles and equipment.
▪ dislocation or involuntary resettlement of people?	Yes		Preliminary data shows, that the TL passes over a significant number of houses and therefore resettlement of the displaced may be required.
▪ disproportionate impacts on the poor, women and children, Indigenous Peoples or other vulnerable groups?	Yes		The TL is passing through a suburban densely populated area at connecting side of the TL near Hala Road Substation. Therefore, the TL project may generate disproportionate impacts on the poor, women and children, Indigenous Peoples or other vulnerable groups.
▪ social conflicts relating to inconveniences in living conditions where construction interferes with pre-existing roads?		No	No such impacts are expected
▪ hazardous driving conditions where construction interferes with pre-existing roads?	Yes		The TL project is expected to pass local roads. Hazardous driving conditions may have arisen during the movement of construction machinery and equipment.
▪ creation of temporary breeding habitats for vectors of disease such as mosquitoes and rodents?	Yes		The temporary breeding habitats for vectors of disease such as mosquitoes and rodents can be created at camps sites if sewage waste and surface run off do not handle appropriately.

REA 220 kV Mirpur Khas TL (67 km)

Screening Questions	Yes	No	Remarks
• dislocation and compulsory resettlement of people living in right-of-way of the power transmission lines?	Yes		Preliminary data shows, the TL passes over a significant number of houses and therefore resettlement of the displaced may be required.
• environmental disturbances associated with the maintenance of lines (e.g. routine control of vegetative height under the lines)?	Yes		A significant part of the Mirpur Khas TL passes through mango orchards where a routine control of vegetative height under the lines will be required.
• facilitation of access to protected areas in case corridors traverse protected areas?		No	No protected areas are fall on the TL route.
• disturbances (e.g. noise and chemical pollutants) if herbicides are used to control vegetative height?		No	No such methods will be adopted for control vegetative height.
• large population influx during project construction and operation that cause increased burden on social infrastructure and services (such as water supply and sanitation systems)?		No	No such conflicts are expected since local labor will be utilized as far as possible.
• social conflicts if workers from other regions or countries are hired?		No	No such conflicts are expected since local labor will be utilized as far as possible.
• poor sanitation and solid waste disposal in construction camps and work sites, and possible transmission of communicable diseases from workers to local populations?	Yes		The temporary breeding habitats for vectors of disease such as mosquitoes and rodents can be created at camps sites if sewage waste and surface runoff do not handle appropriately.
• risks to community safety associated with maintenance of lines and related facilities?		No	NTDC applies strict procedures for community safety associated with the maintenance of lines, so the risk is negligible.
• community health hazards due to electromagnetic fields, land subsidence, lowered groundwater table, and salinization?		No	NTDC applies strict procedures for community safety associated with the maintenance of lines, so the risk is negligible.
• risks to community health and safety due to the transport, storage, and use and/or disposal of materials such as explosives, fuel and other chemicals during construction and operation?		No	No such material is envisaged or required during the construction of the TL.
• community safety risks due to both accidental and natural hazards, especially where the structural elements or components of the project (e.g., high voltage wires, and transmission towers and lines) are accessible to members of the affected community or where their failure could result in injury to the community throughout project construction, operation and decommissioning?	Yes		The risks to the community exist, particularly during the operation of the TL, considering the proximity of the site to residential settlements in some areas of the route.

Annexure II: Field Sampling Plan

Fieldwork Schedule for IEE

at

Mirpur Khas TL (67km) and TM Khan TL (24km)

The Government of Pakistan (GoP) signed a loan agreement with the Asian Development Bank (ADB) for financial support for the construction of the Power Enhancement Projects in Pakistan. The multi-tranche financing facility for the Second Power Transmission Enhancement Investment Program (MFF II or the Program) will expand and reinforce Pakistan's power transmission system, enabling the system to provide a reliable and quality service capable of meeting increasing customer demand and supporting economic growth. MFF II comprises four tranches and Projects located in different areas of the country.

Tranche 4 will help evacuate hydro and wind power to load centers in central Pakistan through the construction of 500 & 220 kV transmission lines in Khyber Pakhtunkhwa, Punjab & Sindh and will reduce the existing system constraints through an augmentation of the existing 500/220 kV grid stations in Punjab & Sindh.

This document provides information on the team, and schedule for execution of IEE fieldwork.

Team


The HBP team members are:

	<i>Name</i>	<i>Role</i>	<i>Cell Number/Email</i>
1	Salman Ali	Field Manager	+9231 7 0121830
2	M. Usman (AES)	Field Chemist	+92304 7236982
3	Assistant Field Chemist (AES)		

Tentative Schedule

We are planning to arrive on June 24, 2022, and will be completed in 5 days.

Sampling Locations

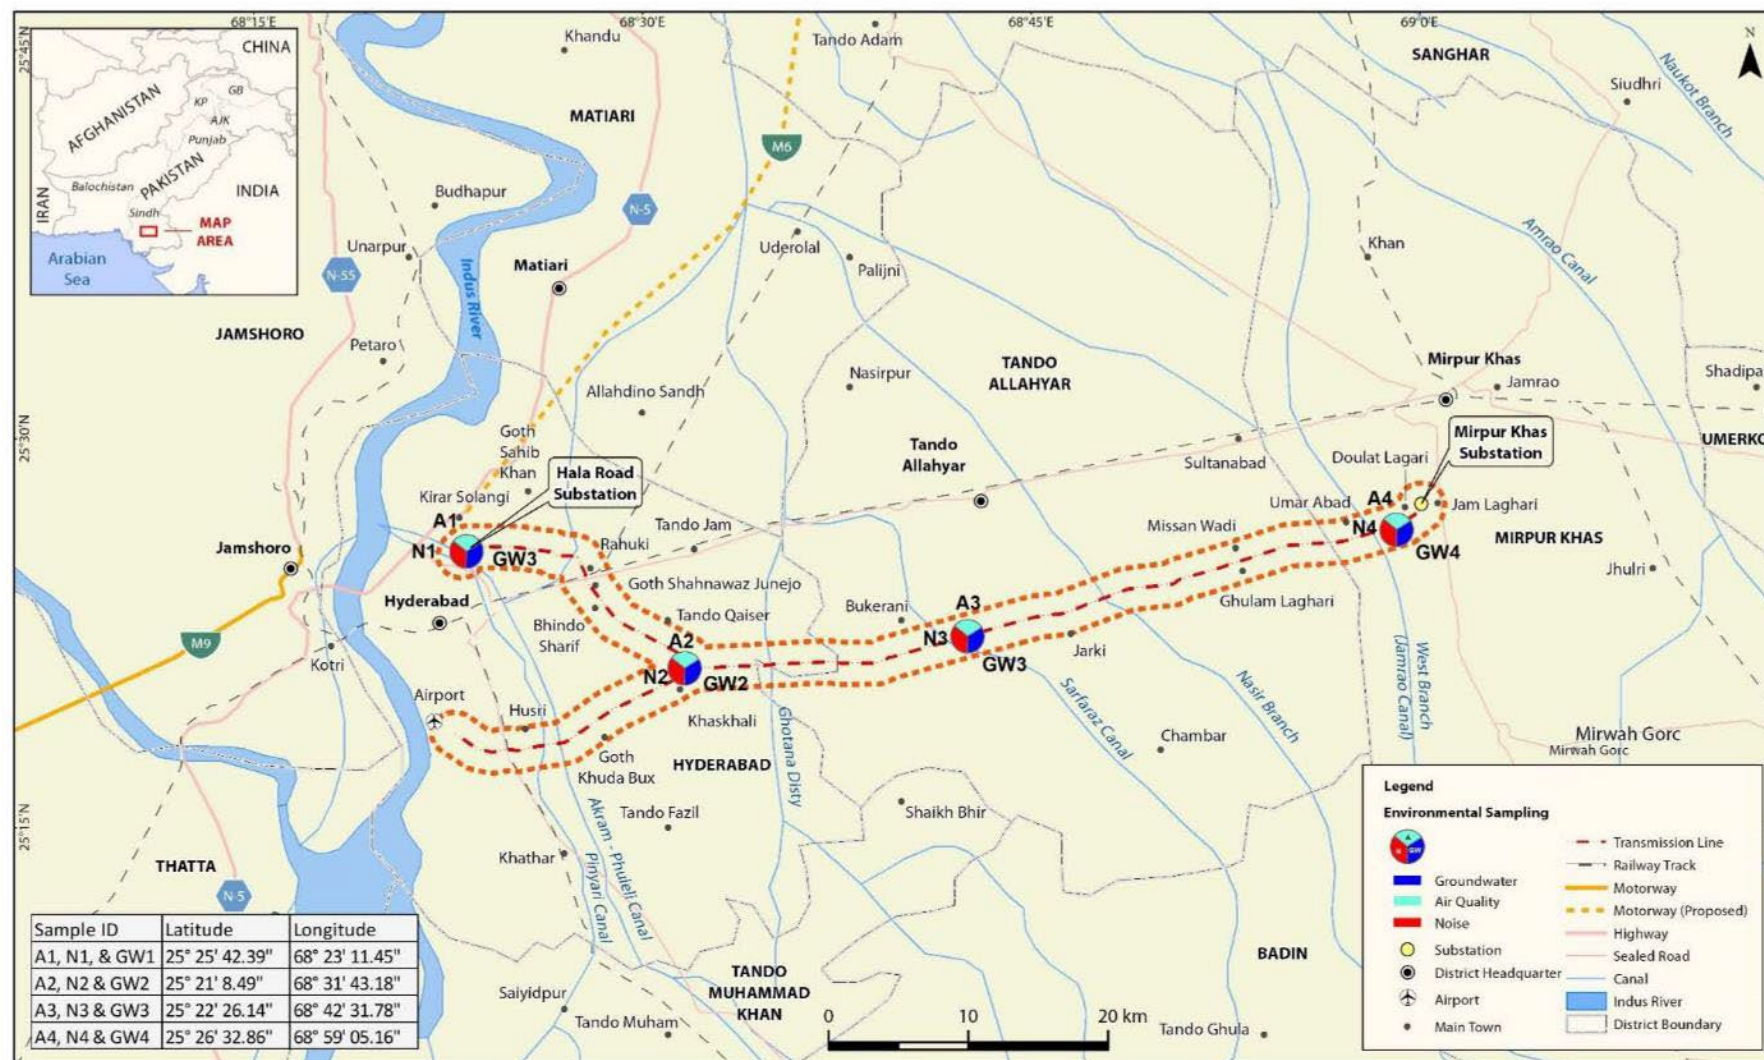

Annexure III: Laboratory Provided Analysis Reports



HSE Services

Health, Safety & Environment Consultants, Laboratories,
Lawyers & Engineering Services



Location for Ambient Air Monitoring 02

OMAIID ALI BURANO

Hyderabad



Page 8 of 26

Karachi:

209-210-B 2nd Floor Phase II, Dhedhi Business Ave,
Plot E-2- State Avenue Road, S.I.T.E Karachi,
Tel: 0301 4000 347, 0309 4000 347, 0324 4000 347
Email: info@hse.com.pk Web: www.hse.com.pk
NTN: 1330725-8

9843

Lahore Office: 1st Floor, 47th Commercial Area,
Cavalry Ground, Lahore Cantt, Pakistan.
Cell: 0300-4000 347, 042-36677188

Lahore Lab: 2nd Floor, 47th Commercial Area,
Cavalry Ground, Lahore Cantt, Pakistan.
Tel: 042-36677188 Ext 108
Registered in Sales Tax Department in All 4 Provinces


HSE Services

 Health, Safety & Environment Consultants, Laboratories,
Lawyers & Engineering Services


Ambient Air Monitoring Report

Monitoring Details
Reference Number HSE-56A-HB/2022-AA-02

Sampling Point Omaid Ali Burano,
Hyderabad.

Date of Monitoring 25-Jun-2022 to 26-Jun-2022

Sampling Coordinates 25°20'55.29" N
68°31'39.46" E

Sr. No.	Time	CO (mg/m ³)	NO (µg/m ³)	NO ₂ (µg/m ³)	NO _x (µg/m ³)	SO ₂ (µg/m ³)
1	21:00	1.06	12.85	23.98	36.79	27.27
2	22:00	0.98	13.83	24.19	37.97	28.29
3	23:00	0.77	14.82	23.79	38.56	28.05
4	00:00	0.92	12.11	23.62	35.68	27.35
5	01:00	0.84	16.26	23.14	39.35	28.45
6	02:00	0.99	15.40	23.73	39.08	27.89
7	03:00	0.91	13.44	23.58	36.98	27.27
8	04:00	0.95	13.01	23.83	36.79	27.83
9	05:00	1.05	14.50	24.06	38.51	28.60
10	06:00	1.01	16.14	24.17	40.26	27.35
11	07:00	0.94	15.87	24.00	39.82	28.31
12	08:00	0.78	14.88	24.56	39.38	28.15
13	09:00	0.76	15.70	23.66	39.31	28.90
14	10:00	0.80	14.96	24.46	39.37	28.68
15	11:00	0.95	16.16	24.17	40.28	28.31
16	12:00	1.01	12.95	24.06	36.96	28.07
17	13:00	0.87	13.25	24.63	37.84	27.35
18	14:00	0.80	13.77	24.19	37.91	28.37
19	15:00	0.84	14.04	23.43	37.42	28.15
20	16:00	0.72	16.24	23.12	39.31	27.86
21	17:00	0.83	17.61	24.21	41.77	28.10
22	18:00	0.97	13.27	23.50	36.72	28.60
23	19:00	0.84	14.11	23.87	37.93	27.89
24	20:00	0.91	15.47	24.17	39.59	27.27
Average Concentration		0.90	14.61	23.92	38.48	28.02

Monitored By

Reviewed By
(TM)

Approved By
(QM)

Page 9 of 26

Karachi:

 # 209-210-B 2nd Floor Phase II, Dhedhi Business Ave,
Plot E-2- State Avenue Road, S.I.T.E Karachi.
Tel: 0301 4000 347, 0309 4000 347, 0324 4000 347
Email: info@hse.com.pk Web: www.hse.com.pk
NTN: 1330725-8

9820

Lahore Office: 1st Floor, 47th Commercial Area,
Cavalry Ground, Lahore Cantt, Pakistan.
Cell: 0300-4000 347, 042-36677188

Lahore Lab: 2nd Floor, 47th Commercial Area,
Cavalry Ground, Lahore Cantt, Pakistan.
Tel: 042-36677188 Ext 108

Registered in Sales Tax Department in All 4 Provinces


HSE Services

 Health, Safety & Environment Consultants, Laboratories,
Lawyers & Engineering Services


Ambient Air Monitoring Report

Monitoring Details

Reference Number	HSE-56A-HB/2022-AA-02	Sampling Point	Omaid Ali Burano, Hyderabad.
Date of Monitoring	25-Jun-2022 to 26-Jun-2022	Sampling Coordinates	25°20'55.29" N 68°31'39.46" E

Parameters	Units	Monitoring Duration	LDL	Average Obtained Concentration	SEQS	Remarks
Nitrogen Dioxide (NO ₂)	µg/m ³	24Hours	1.00	23.92	80.0	Optimal
Nitrogen Oxide (NO)	µg/m ³	24Hours	1.00	14.61	40.0	Optimal
NO _x	µg/m ³	24Hours	1.00	38.48	120.0	Optimal
Sulphur Dioxide (SO ₂)	µg/m ³	24Hours	1.00	28.02	120.0	Optimal
Carbon Monoxide (CO)	mg/m ³	24Hours	0.01	0.90	05.0	Optimal
Particulate Matter (PM ₁₀)	µg/m ³	24Hours	1.00	136.45	150	Optimal
Particulate Matter (PM _{2.5})	µg/m ³	24Hours	1.00	41.18	75	Optimal
Total Particulate Matter (TSP)	µg/m ³	24Hours	1.00	239.61	500	Optimal

Abbreviations:

LDL= Lower Detection Limit

SEQs= Sindh Environmental Quality Standards

 µg/m³ = Micro Gram per Meter Cube

Remarks:

= Compliance with Permissible Range

Marginal = Close to Extreme Edge

High = Exceeds from Permissible Range

Low = Less Than Permissible Range

Monitored By

 Reviewed By
(TM)

 Approved By
(QM)

Page 10 of 26

Karachi:

 # 209-210-B 2nd Floor Phase II, Dhedhi Business Ave,
Plot E-2- State Avenue Road, S.I.T.E Karachi.
Tel: 0301 4000 347, 0309 4000 347, 0324 4000 347
Email: info@hse.com.pk Web: www.hse.com.pk
NTN: 1330725-8

9821

Lahore Office: 1st Floor, 47th Commercial Area,
Cavalry Ground, Lahore Cantt, Pakistan.
Cell: 0300-4000 347, 042-36677188

Lahore Lab: 2nd Floor, 47th Commercial Area,
Cavalry Ground, Lahore Cantt, Pakistan.
Tel: 042-36677188 Ext 108

Registered in Sales Tax Department in All 4 Provinces


HSE Services

 Health, Safety & Environment Consultants, Laboratories,
Lawyers & Engineering Services


Ambient Air Monitoring Report

Monitoring Details

Reference Number: HSE-56A-HB/2022-AA-02
 Date of Monitoring: 25-Jun-2022 to 26-Jun-2022
 Sampling Point: Omaid Ali Burano, Hyderabad.
 Sampling Coordinates: 25°20'55.29" N 68°31'39.46" E

Sr. No.	Time	Ambient Temperature °C	Wind Direction	Wind Velocity m/s	Humidity %	Pressure (mm of Hg)
1	21:00	33	SW	2.5	72	748.2
2	22:00	32	SW	2.4	70	748.3
3	23:00	31	SW	2.1	75	748.4
4	00:00	32	SW	2	74	748.5
5	01:00	31	SW	1.8	71	748.5
6	02:00	32	SW	1.5	68	748.6
7	03:00	30	SW	1.4	67	748.7
8	04:00	30	SW	1.2	65	748.8
9	05:00	30	SW	1	64	748.8
10	06:00	30	SW	1.5	62	748.7
11	07:00	31	SW	0.8	60	748.7
12	08:00	32	SW	0.6	55	748.7
13	09:00	34	SW	0.8	52	748.6
14	10:00	35	SW	0.7	49	748.6
15	11:00	37	SW	1.1	48	748.5
16	12:00	39	SW	1.5	47	748.5
17	13:00	40	SW	1.4	45	748.5
18	14:00	41	SW	1.3	42	748.4
19	15:00	41	SW	1.5	40	748.4
20	16:00	40	SW	1.8	45	748.4
21	17:00	39	SW	1.7	48	748.3
22	18:00	38	SW	2.1	49	748.3
23	19:00	36	SW	2.3	50	748.3
24	20:00	35	SW	1.5	51	748.3

Monitored By

 Reviewed By
(TM)

 Approved By
(QM)

Page 11 of 26

Karachi:

209-210-B 2nd Floor Phase II, Dhedhi Business Ave,
 Plot E-2- State Avenue Road, S.I.T.E Karachi.
 Tel: 0301 4000 347, 0309 4000 347, 0324 4000 347
 Email: info@hse.com.pk Web: www.hse.com.pk
 NTN: 1330725-8

9822

Lahore Office: 1st Floor, 47th Commercial Area,
 Cavalry Ground, Lahore Cantt, Pakistan.
 Cell: 0300-4000 347, 042-36677188

Lahore Lab: 2nd Floor, 47th Commercial Area,
 Cavalry Ground, Lahore Cantt, Pakistan.
 Tel: 042-36677188 Ext 108
 Registered in Sales Tax Department in All 4 Provinces



HSE Services

Health, Safety & Environment Consultants, Laboratories,
Lawyers & Engineering Services



Noise Monitoring Report

Monitoring Details

Reference Number	AES-56A-HB/2022-AA-02	Sampling Point	Omaid Ali Burano, Hyderabad.
Date of Monitoring	25-Jun-2022 to 26-Jun-2022	Sampling Coordinates	25°20'55.29" N 68°31'39.46" E

Sr. No.	Time	Noise dB(A)*	Day Time	Night Time
1	21:00	48		55
2	22:00	45		
3	23:00	43		
4	00:00	42		
5	01:00	45		
6	02:00	40		45
7	03:00	41		
8	04:00	44		
9	05:00	40		
10	06:00	40		
11	07:00	45		
12	08:00	47		
13	09:00	50		
14	10:00	48		
15	11:00	51		
16	12:00	52		
17	13:00	49		
18	14:00	47	Day Time	55
19	15:00	48		
20	16:00	51		
21	17:00	47		
22	18:00	45		
23	19:00	44		
24	20:00	41		

Monitored By

Reviewed By
(TM)

Approved By
(QM)



Karachi Office & Lab:

2nd Floor, Mujahid Arcade, Plot No 6/4, Sector 24, Shan Chowrangli,
Korangi Industrial Area, Karachi.
Tel: 021-3511 0346 Cell: 0321 4000 347, 0301 4000 347,
0317 4000 347, 0320 5000 347
Email: info@hse.com.pk Web: www.hse.com.pk
NTN: 1330725-8, STRN: 0300133072512

Lahore Office: 1st Floor, 47th Commercial Area,
Cavalry Ground, Lahore Cantt, Pakistan
Tel: 042-3667 7186-88, Cell: 0300-4000 347

Lahore Lab: 2nd Floor, 47th Commercial Area,
Cavalry Ground, Lahore Cantt, Pakistan
Tel: 042-3667 7188 Ext. 108

Register in Sales Tax Department in All 4 Provinces


6764





HSE Services

Health, Safety & Environment Consultants, Laboratories,
Lawyers & Engineering Services

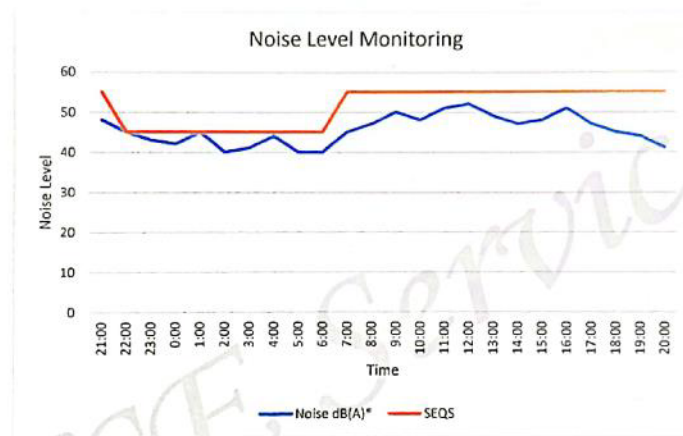

Graph-02; Noise Level Monitoring

Karachi Office & Lab:

2nd Floor, Mujahid Arcade, Plot No 6/4, Sector 24, Shan Chowrangi,
Korangi Industrial Area, Karachi.
Tel: 021-3511 0346 Cell: 0321 4000 347, 0301 4000 347,
0317 4000 347, 0320 5000 347
Email: info@hse.com.pk Web: www.hse.com.pk
NTN: 1330725-8, STRN: 0300133072512

Lahore Office: 1st Floor, 47th Commercial Area,
Cavalry Ground, Lahore Cantt, Pakistan
Tel: 042-3667 7186-88, Cell: 0300-4000 347

Lahore Lab: 2nd Floor, 47th Commercial Area,
Cavalry Ground, Lahore Cantt, Pakistan
Tel: 042-3667 7188 Ext. 108

Register in Sales Tax Department in all provinces





HSE Services

*Health, Safety & Environment Consultants, Laboratories,
Lawyers & Engineering Services*



Location for Ambient Air Monitoring 03
VILLAGE MUHAMMAD URS DARS
Hyderabad

Page 14 of 26

Karachi:

209-210-B 2nd Floor Phase II, Dhedhi Business Ave,
Plot E-2- State Avenue Road, S.I.T.E Karachi.
Tel: 0301 4000 347, 0309 4000 347, 0324 4000 347
Email: info@hse.com.pk Web: www.hse.com.pk
NTN: 1330725-8

9825

Lahore Office: 1st Floor, 47th Commercial Area,
Cavalry Ground, Lahore Cantt, Pakistan.
Cell: 0300-4000 347, 042-36677188

Lahore Lab: 2nd Floor, 47th Commercial Area,
Cavalry Ground, Lahore Cantt, Pakistan.
Tel: 042-36677188 Ext 108

Registered in Sales Tax Department in All 4 Provinces



HSE Services

Health, Safety & Environment Consultants, Laboratories,
Lawyers & Engineering Services



Ambient Air Monitoring Report

Monitoring Details

Reference Number HSE-56A-HB/2022-AA-03

Sampling Point Village Muhammad urs
Dars, Hyderabad.

Date of Monitoring 26-Jun-2022 to 27-Jun-2022

Sampling
Coordinates 25°22'26.33" N
68°42'29.53" E

Sr. No.	Time	CO (mg/m ³)	NO (µg/m ³)	NO ₂ (µg/m ³)	NO _x (µg/m ³)	SO ₂ (µg/m ³)
1	22:00	0.75	12.49	25.90	38.33	27.19
2	23:00	0.73	14.19	25.34	39.48	27.81
3	00:00	0.76	13.96	25.34	39.25	27.57
4	01:00	0.76	16.26	25.09	41.29	25.15
5	02:00	0.75	15.85	24.59	40.40	25.62
6	03:00	0.73	16.14	24.38	40.47	25.49
7	04:00	0.76	12.51	23.73	36.19	26.02
8	05:00	0.79	13.81	23.62	37.38	24.53

Page 15 of 26

Karachi:

209-210-B 2nd Floor Phase II, Dhedhi Business Ave,
Plot E-2- State Avenue Road, S.I.T.E Karachi.
Tel: 0301 4000 347, 0309 4000 347, 0324 4000 347
Email: info@hse.com.pk Web: www.hse.com.pk
NTN: 1330725-8

9845

Lahore Office: 1st Floor, 47th Commercial Area,
Cavalry Ground, Lahore Cantt, Pakistan.
Cell: 0300-4000 347, 042-36677188

Lahore Lab: 2nd Floor, 47th Commercial Area,
Cavalry Ground, Lahore Cantt, Pakistan.
Tel: 042-36677188 Ext 108
Registered in Sales Tax Department in All 4 Provinces



HSE Services

Health, Safety & Environment Consultants, Laboratories,
Lawyers & Engineering Services

CERTIFIED
ISO 9001 - 14001
18001

OHSAS
AMERICAN NATIONAL STANDARDS

9	06:00	0.80	14.88	23.05	37.88	24.27
10	07:00	0.85	13.18	23.43	36.56	24.91
11	08:00	0.95	14.92	24.21	39.08	25.15
12	09:00	0.90	15.32	24.88	40.15	25.31
13	10:00	1.06	17.17	25.34	42.46	26.24
14	11:00	1.02	14.52	25.74	40.21	26.74
15	12:00	0.76	15.51	25.97	41.43	27.25
16	13:00	0.91	12.49	26.14	38.58	27.54
17	14:00	0.98	12.57	26.30	38.81	27.83
18	15:00	0.83	14.96	26.12	41.03	28.15
19	16:00	0.79	13.77	25.53	39.25	28.42
20	17:00	0.90	14.36	25.67	39.98	27.81
21	18:00	0.83	15.87	25.97	41.79	27.99
22	19:00	0.98	17.17	26.09	43.20	29.94
23	20:00	0.93	13.48	25.34	38.77	30.55
24	21:00	0.92	12.47	25.97	38.39	30.97
Average Concentration		0.86	14.49	25.16	39.60	27.02

Monitored By

Reviewed By
(TM)

Approved By
(QM)

Ambient Air Monitoring Report

Monitoring Details						
Reference Number	AES-56A-HB/2022-AA-03			Sampling Point	Village Muhammad urs Dars, Hyderabad.	
Date of Monitoring	26-Jun-2022 to 27-Jun-2022			Sampling Coordinates	25°22'26.33" N 68°42'29.53" E	
Parameters	Units	Monitoring Duration	LDL	Average Obtained Concentration	SEQS	Remarks
Nitrogen Dioxide (NO ₂)	µg/m ³	24Hours	1.00	25.16	80.0	Optimal
Nitrogen Oxide (NO)	µg/m ³	24Hours	1.00	14.49	40.0	Optimal

Page 16 of 26

Karachi:

209-210-B 2nd Floor Phase II, Dhedhi Business Ave,
Plot E-2- State Avenue Road, S.I.T.E Karachi.
Tel: 0301 4000 347, 0309 4000 347, 0324 4000 347
Email: info@hse.com.pk Web: www.hse.com.pk
NTN: 1330725-8

9827

Lahore Office: 1st Floor, 47th Commercial Area,
Cavalry Ground, Lahore Cantt, Pakistan.
Cell: 0300-4000 347, 042-36677188

Lahore Lab: 2nd Floor, 47th Commercial Area,
Cavalry Ground, Lahore Cantt, Pakistan.
Tel: 042-36677188 Ext 108
Registered in Sales Tax Department in All 4 Provinces



HSE Services

Health, Safety & Environment Consultants, Laboratories,
Lawyers & Engineering Services



NO _x	µg/m ³	24Hours	1.00	39.60	120.0	Optimal
Sulphur Dioxide (SO ₂)	µg/m ³	24Hours	1.00	27.02	120.0	Optimal
Carbon Monoxide (CO)	mg/m ³	24Hours	0.01	0.86	05.0	Optimal
Particulate Matter (PM ₁₀)	µg/m ³	24Hours	1.00	136.48	150	Optimal
Particulate Matter (PM _{2.5})	µg/m ³	24Hours	1.00	40.54	75	Optimal
Total Particulate Matter (TSP)	µg/m ³	24Hours	1.00	236.16	500	Optimal

Abbreviations:

LDL= Lower Detection Limit

SEQ= Sindh Environmental Quality Standards

 µg/m³ = Micro Gram per Meter Cube

Remarks:

= Compliance with Permissible Range

Margin = Close to Extreme Edge

High = Exceeds from Permissible Range

Low = Less Than Permissible Range

[Signature]
Monitored By

[Signature]
Reviewed By
(TM)

[Signature]
Approved By
(QM)

Ambient Air Monitoring Report

Monitoring Details

Reference Number	HSE-56A-HB/2022-AA-03	Sampling Point	Village Muhammad urs Dars, Hyderabad.
Date of Monitoring	26-Jun-2022 to 27-Jun-2022	Sampling Coordinates	25°22'26.33" N 68°42'29.53" E

Sr. No.	Time	Ambient Temperature °C	Wind Direction	Wind Velocity m/s	Humidity %	Pressure (mm of Hg)
1	22:00	31	SW	1.3	68	748.3
2	23:00	31	SW	1.4	69	748.4
3	00:00	31	SW	1.9	70	748.5
4	01:00	31	SW	2.1	72	748.6
5	02:00	30	SW	2.2	75	748.6
6	03:00	30	SW	2.5	76	748.6

Page 17 of 26

Karachi:

209-210-B 2nd Floor Phase II, Dhedhi Business Ave,
Plot E-2- State Avenue Road, S.I.T.E Karachi.
Tel: 0301 4000 347, 0309 4000 347, 0324 4000 347
Email: info@hse.com.pk Web: www.hse.com.pk
NTN: 1330725-8

9828

Lahore Office: 1st Floor, 47th Commercial Area,
Cavalry Ground, Lahore Cantt, Pakistan.
Cell: 0300-4000 347, 042-36677188

Lahore Lab: 2nd Floor, 47th Commercial Area,
Cavalry Ground, Lahore Cantt, Pakistan.
Tel: 042-36677188 Ext 108
Registered in Sales Tax Department in All 4 Provinces



HSE Services

Health, Safety & Environment Consultants, Laboratories,
Lawyers & Engineering Services



Noise Monitoring Report


Monitoring Details

Reference Number	AES-56A-HB/2022-AA-03	Sampling Point	Village Muhammad urs Dars, Hyderabad.
Date of Monitoring	26-Jun-2022 to 27-Jun-2022	Sampling Coordinates	25°22'26.33" N 68°42'29.53" E

Sr. No.	Time	Noise dB(A)	
1	22:00	44	
2	23:00	43	
3	00:00	43	
4	01:00	41	
5	02:00	40	Night Time
6	03:00	40	
7	04:00	42	
8	05:00	43	
9	06:00	44	
10	07:00	48	
11	08:00	50	
12	09:00	47	
13	10:00	50	
14	11:00	52	
15	12:00	53	
16	13:00	52	
17	14:00	53	Day Time
18	15:00	50	
19	16:00	54	
20	17:00	52	
21	18:00	50	
22	19:00	48	
23	20:00	48	
24	21:00	45	



Monitored By


Reviewed By
(TM)




Approved By
(QM)

Karachi Office & Lab:

2nd Floor, Mujahid Arcade, Plot No 6/4, Sector 24, Shan Chowrangi,
Korangi Industrial Area, Karachi.
Tel: 021-3511 0346 Cell: 0321 4000 347, 0301 4000 347,
0317 4000 347, 0320 5000 347
Email: info@hse.com.pk Web: www.hse.com.pk
NTN: 1330725-8, STRN: 0300133072512

Lahore Office: 1st Floor, 47th Commercial Area,
Cavalry Ground, Lahore Cantt, Pakistan
Tel: 042-3667 7186-88, Cell: 0300-4000 347

Lahore Lab: 2nd Floor, 47th Commercial Area,
Cavalry Ground, Lahore Cantt, Pakistan
Tel: 042-3667 7188 Ext. 108

Register in Sales Tax Department in All 4 Provinces


6765

CS CamScanner



HSE Services

Health, Safety & Environment Consultants, Laboratories,
Lawyers & Engineering Services

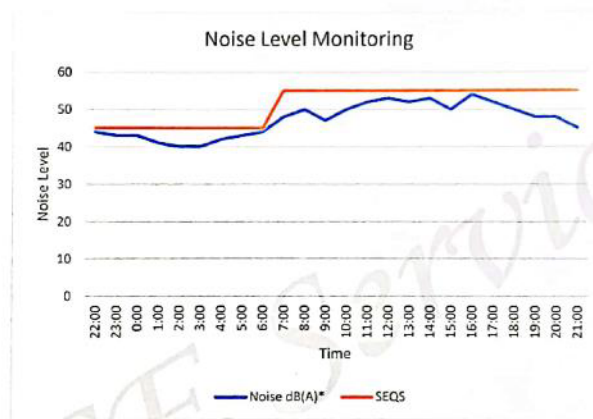

Graph-03; Noise Level Monitoring

Karachi Office & Lab:


2nd Floor, Mujahid Arcade, Plot No 6/4, Sector 24, Shan Chowranghi,
Korangi Industrial Area, Karachi.
Tel: 021-3511 0346 Cell: 0321 4000 347, 0301 4000 347,
0317 4000 347, 0320 5000 347
Email: info@hse.com.pk Web: www.hse.com.pk
NTN: 1330725-8, STRN: 0300133072512

Lahore Office: 1st Floor, 47th Commercial Area,
Cavalry Ground, Lahore Cantt, Pakistan
Tel: 042-3667 7186-88, Cell: 0300-4000 347

Lahore Lab: 2nd Floor, 47th Commercial Area,
Cavalry Ground, Lahore Cantt, Pakistan
Tel: 042-3667 7188 Ext. 108

Register in Sales Tax Department in All 4 Provinces

6768





HSE Services

*Health, Safety & Environment Consultants, Laboratories,
Lawyers & Engineering Services*



Location for Ambient Air Monitoring 04

GOTH AJECT ALI RAJPOOT

Hyderabad



Page 21 of 26

Karachi:

209-210-B 2nd Floor Phase II, Dhedhi Business Ave,
Plot E-2- State Avenue Road, S.I.T.E Karachi.
Tel: 0301 4000 347, 0309 4000 347, 0324 4000 347
Email: info@hse.com.pk Web: www.hse.com.pk
NTN: 1330725-8

9847

Lahore Office: 1st Floor, 47th Commercial Area,
Cavalry Ground, Lahore Cantt, Pakistan.
Cell: 0300-4000 347, 042-36677188

Lahore Lab: 2nd Floor, 47th Commercial Area,
Cavalry Ground, Lahore Cantt, Pakistan.
Tel: 042-36677188 Ext 108

Registered in Sales Tax Department in All 4 Provinces



HSE Services

Health, Safety & Environment Consultants, Laboratories,
Lawyers & Engineering Services

CERTIFIED
ISO 9001 - 14001
18001



Ambient Air Monitoring Report

Monitoring Details

Reference Number HSE-56A-HB/2022-AA-04

Sampling Point Goth Ajeet Ali Rajpoot,
Hyderabad.

Date of Monitoring 27-Jun-2022 to 28-Jun-2022

Sampling Coordinates 25°26'25.45" N 68°59'0.28" E

Sr. No.	Time	CO (mg/m ³)	NO (µg/m ³)	NO ₂ (µg/m ³)	NO _x (µg/m ³)	SO ₂ (µg/m ³)
1	00:00	0.73	12.60	25.74	38.30	28.29
2	01:00	0.79	14.94	25.34	40.22	27.89
3	02:00	0.76	13.54	25.84	39.33	28.07
4	03:00	0.83	15.53	26.30	41.77	27.22
5	04:00	0.87	16.66	26.09	42.69	27.81
6	05:00	0.91	15.47	26.49	41.91	27.19
7	06:00	0.00	15.09	26.16	41.20	27.86
8	07:00	0.99	13.79	26.18	39.92	28.60
9	08:00	1.05	13.39	25.34	38.68	28.42
10	09:00	1.04	12.53	25.28	37.76	28.15
11	10:00	0.97	12.39	26.09	38.43	28.34
12	11:00	1.02	12.28	25.97	38.20	28.18
13	12:00	1.06	12.39	25.74	38.09	28.15
14	13:00	0.97	13.94	26.30	40.19	28.37
15	14:00	1.02	14.31	25.55	39.80	27.62
16	15:00	0.84	16.66	25.36	41.96	27.91
17	16:00	0.76	14.82	26.11	40.87	28.34
18	17:00	0.81	11.95	26.68	38.58	28.87
19	18:00	1.00	12.32	25.72	37.99	27.91
20	19:00	0.94	13.16	26.12	39.23	28.07
21	20:00	0.86	14.34	26.49	40.78	27.35
22	21:00	0.91	15.47	25.95	41.37	28.42
23	22:00	0.99	16.85	25.74	42.54	27.27
24	23:00	0.75	14.21	25.36	39.52	27.89
Average Concentration		0.87	14.11	25.91	39.97	28.01

Monitored By

Reviewed By
(TM)

Approved By
(QM)

Page 22 of 26

Karachi:

209-210-B 2nd Floor Phase II, Dhedhi Business Ave,
Plot E-2- State Avenue Road, S.I.T.E Karachi.
Tel: 0301 4000 347, 0309 4000 347, 0324 4000 347
Email: info@hse.com.pk Web: www.hse.com.pk
NTN: 1330725-8

9833

Lahore Office: 1st Floor, 47th Commercial Area,
Cavalry Ground, Lahore Cantt, Pakistan.
Cell: 0300-4000 347, 042-36677188

Lahore Lab: 2nd Floor, 47th Commercial Area,
Cavalry Ground, Lahore Cantt, Pakistan.
Tel: 042-36677188 Ext 108
Registered in Sales Tax Department in All 4 Provinces


HSE Services

 Health, Safety & Environment Consultants, Laboratories,
Lawyers & Engineering Services


Ambient Air Monitoring Report

Monitoring Details

Reference Number	HSE-56A-HB/2022-AA-04	Sampling Point	Goth Ajeet Ali Rajpoot, Hyderabad.
Date of Monitoring	27-Jun-2022 to 28-Jun-2022	Sampling Coordinates	25°26'25.45" N 68°59'0.28" E

Parameters	Units	Monitoring Duration	LDL	Average Obtained Concentration	SEQS	Remarks
Nitrogen Dioxide (NO ₂)	µg/m ³	24Hours	1.00	25.91	80.0	Optimal
Nitrogen Oxide (NO)	µg/m ³	24Hours	1.00	14.11	40.0	Optimal
NO _x	µg/m ³	24Hours	1.00	39.97	120.0	Optimal
Sulphur Dioxide (SO ₂)	µg/m ³	24Hours	1.00	28.01	120.0	Optimal
Carbon Monoxide (CO)	mg/m ³	24Hours	0.01	0.87	05.0	Optimal
Particulate Matter (PM ₁₀)	µg/m ³	24Hours	1.00	127.56	150	Optimal
Particulate Matter (PM _{2.5})	µg/m ³	24Hours	1.00	42.53	75	Optimal
Total Particulate Matter (TSP)	µg/m ³	24Hours	1.00	231.80	500	Optimal

Abbreviations:

LDL= Lower Detection Limit

SEQs= Sindh Environmental Quality Standards

 µg/m³ = Micro Gram per Meter Cube

Remarks:

= Compliance with Permissible Range

Margin = Close to Extreme Edge

High = Exceeds from Permissible Range

Low = Less Than Permissible Range

Monitored By

 Reviewed By
(TM)

 Approved By
(QM)

Page 23 of 26

Karachi:

 # 209-210-B 2nd Floor Phase II, Dhedhi Business Ave,
Plot E-2- State Avenue Road, S.I.T.E Karachi.
Tel: 0301 4000 347, 0309 4000 347, 0324 4000 347
Email: info@hse.com.pk Web: www.hse.com.pk
NTN: 1330725-8

9834

Lahore Office: 1st Floor, 47th Commercial Area,
Cavalry Ground, Lahore Cantt, Pakistan.
Cell: 0300-4000 347, 042-36677188

Lahore Lab: 2nd Floor, 47th Commercial Area,
Cavalry Ground, Lahore Cantt, Pakistan.
Tel: 042-36677188 Ext 108
Registered in Sales Tax Department in All 4 Provinces


HSE Services

 Health, Safety & Environment Consultants, Laboratories,
Lawyers & Engineering Services


Ambient Air Monitoring Report

Monitoring Details			
Reference Number	HSE-56A-HB/2022-AA-04	Sampling Point	Goth Ajeet Ali Rajpoot, Hyderabad.
Date of Monitoring	27-Jun-2022 to 28-Jun-2022	Sampling Coordinates	25°26'25.45" N 68°59'0.28" E

Sr. No.	Time	Ambient Temperature °C	Wind Direction	Wind Velocity m/s	Humidity %	Pressure (mm of Hg)
1	00:00	33	SW	1.2	71	748.5
2	01:00	32	SW	1.5	72	748.6
3	02:00	32	SW	1.4	74	748.6
4	03:00	31	SW	1.6	74	748.6
5	04:00	31	SW	2.1	75	748.6
6	05:00	30	SW	2.5	74	748.7
7	06:00	30	SW	2.8	70	748.7
8	07:00	31	SW	3.3	68	748.6
9	08:00	33	S	3.5	67	748.6
10	09:00	35	S	3.4	62	748.6
11	10:00	37	S	3.5	60	748.5
12	11:00	38	S	2.8	58	748.5
13	12:00	40	S	1.5	59	748.4
14	13:00	41	S	1.4	56	748.4
15	14:00	42	S	0.8	58	748.4
16	15:00	43	S	0.6	57	748.3
17	16:00	43	S	1.1	59	748.3
18	17:00	42	S	1.5	61	748.3
19	18:00	41	S	1.4	63	748.3
20	19:00	39	S	1.6	65	748.3
21	20:00	38	SW	1.8	65	748.2
22	21:00	36	SW	1.5	68	748.2
23	22:00	34	SW	1.6	69	748.2
24	23:00	33	SW	1.8	64	748.3

Monitored By

 Reviewed By
(TM)

 Approved By
(QM)

Page 24 of 26

Karachi:

 # 209-210-B 2nd Floor Phase II, Dhedhi Business Ave,
Plot E-2- State Avenue Road, S.I.T.E Karachi.
Tel: 0301 4000 347, 0309 4000 347, 0324 4000 347
Email: info@hse.com.pk Web: www.hse.com.pk
NTN: 1330725-8

9835

Lahore Office: 1st Floor, 47th Commercial Area,
Cavalry Ground, Lahore Cantt, Pakistan.
Cell: 0300-4000 347, 042-36677188

Lahore Lab: 2nd Floor, 47th Commercial Area,
Cavalry Ground, Lahore Cantt, Pakistan.
Tel: 042-36677188 Ext 108
Registered in Sales Tax Department in All 4 Provinces



HSE Services

Health, Safety & Environment Consultants, Laboratories,
Lawyers & Engineering Services




Noise Monitoring Report

Monitoring Details


Reference Number	AES-56A-HB/2022-AA-04	Sampling Point	Goth Ajeet Ali Rajpoot, Hyderabad.
Date of Monitoring	27-Jun-2022 to 28-Jun-2022	Sampling Coordinates	25°26'25.45" N 68°59'0.28" E

Sr. No.	Time	Noise dB(A)	Notes
1	00:00	42	
2	01:00	42	
3	02:00	43	
4	03:00	43	Night Time
5	04:00	42	
6	05:00	43	
7	06:00	43	
8	07:00	48	
9	08:00	52	
10	09:00	50	
11	10:00	53	
12	11:00	52	
13	12:00	53	
14	13:00	54	
15	14:00	51	Day Time
16	15:00	53	
17	16:00	50	
18	17:00	45	
19	18:00	47	
20	19:00	43	
21	20:00	43	
22	21:00	40	
23	22:00	42	Night Time
24	23:00	41	


Monitored By


Reviewed By
(TM)




Approved By
(QM)

Karachi Office & Lab:

2nd Floor, Mujahid Arcade, Plot No 6/4, Sector 24, Shan Chowrangi,
Korangi Industrial Area, Karachi.
Tel: 021-3511 0346 Cell: 0321 4000 347, 0301 4000 347,
0317 4000 347, 0320 5000 347
Email: info@hse.com.pk Web: www.hse.com.pk
NTN: 1330725-8, STRN: 0300133072512

Lahore Office: 1st Floor, 47th Commercial Area,
Cavalry Ground, Lahore Cantt, Pakistan
Tel: 042-3667 7186-88, Cell: 0300-4000 347


Lahore Lab: 2nd Floor, 47th Commercial Area,
Cavalry Ground, Lahore Cantt, Pakistan
Tel: 042-3667 7188 Ext. 108

Register in Sales Tax Department in All 4 Provinces



HSE Services

Health, Safety & Environment Consultants, Laboratories,
Lawyers & Engineering Services

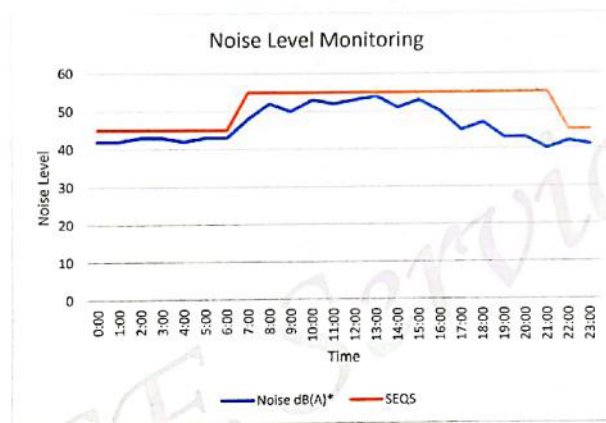

Graph-04; Noise Level Monitoring

Karachi Office & Lab:

2nd Floor, Mujahid Arcade, Plot No 6/4, Sector 24, Shan Chowrangli,
Korangi Industrial Area, Karachi.
Tel: 021-3511 0346 Cell: 0321 4000 347, 0301 4000 347,
0317 4000 347, 0320 5000 347
Email: info@hse.com.pk Web: www.hse.com.pk
NTN: 1330725-8, STRN: 0300133072512

Lahore Office: 1st Floor, 47th Commercial Area,
Cavalry Ground, Lahore Cantt, Pakistan
Tel: 042-3667 7186-88, Cell: 0300-4000 347

Lahore Lab: 2nd Floor, 47th Commercial Area,
Cavalry Ground, Lahore Cantt, Pakistan
Tel: 042-3667 7188 Ext. 108

Register in Sales Tax Department in All 4 Provinces

6766





HSE Services

Health, Safety & Environment Consultants, Laboratories,
Lawyers & Engineering Services



DRINKING WATER ANALYSIS REPORT

Sample Detail

Reference No.	AES-56A-HB/2022-DW-02	Reporting Date	05-07-2022
Nature of Sample	Drinking Water	Sampling Method Reference	AES/LMS/QSP-014
Grab/Composite	Grab	Sample Collected by/Sent By	AES
Sampling Date	25-06-2022	Sample Receiving Date	27-06-2022
Analysis		Lab Temp & Humidity	24.3°C & 52 %
Completion Date	05-07-2022		
Ambient Temperature & Humidity at the Time of Sampling			40 °C & 25 %
Sample ID	AES-DW-206/2022	Sampling Location	Hand Pump Omaid Ali Burano
Client Detail	Mirpur Khas- TM Khan at Hala Road Transmission Line (ADB 201A and ADB-401D)		



Drinking Water Analysis Results						
Parameter	Analysis Method	SEQS	LDL	Result	MU (CL95%)	Remarks
Lab Analysis						
Color	SMWW 2120 C	≤ 15 TCU	1.0	0	N.A.	Optimal
Taste	SMWW 2160 C	Non-Objectionable	-	Salty	N.A.	High
Odor	SMWW 2150 B	Non-Objectionable	-	Non-Objectionable	N.A.	Optimal
Turbidity	SMWW 2130 B	< 5 NTU	1.0	0	N.A.	Optimal
Total Hardness (as CaCO ₃)	SMWW 2340 C	< 500 mg/L	0.5	630	± 0.87	High
Total Dissolved Solids (TDS)	SMWW 2540 C	< 1000 mg/L	5.0	1226	± 0.81	High
pH	SMWW 4500 H+ B	6.5- 8.5	0.1	7.49	± 0.70	Optimal
Aluminum (Al)	SMWW 3111 B	≤ 0.2 mg/L	0.001	0.007	N.A.	Optimal
Antimony (Sb)	SMWW 3114 B	≤ 0.005 mg/L	0.0005	0.006	N.A.	Optimal
Arsenic (As)	SMWW 3114 B	≤ 0.05 mg/L	0.0005	<0.005	N.A.	Optimal
Barium (Ba)	SMWW 3113 B	0.7 mg/L	0.0035	0.0037	N.A.	Optimal
Boron (B)	SMWW 3113 B	0.3 mg/l	0.02	<0.02	N.A.	Optimal
Cadmium (Cd)	SMWW 3113 B	0.01 mg/L	0.00002	<0.006	N.A.	Optimal
Chloride (Cl)	SMWW 4500 Cl- B	< 250 mg/L	0.5	305	± 1.22	High
Chromium (Cr)	SMWW 3113 B	≤ 0.05 mg/L	0.0004	<0.004	N.A.	Optimal
Copper (Cu)	SMWW 3111 B	2.0 mg/L	0.0015	<0.164	N.A.	Optimal
Cyanide (CN)	SMWW 4500 CN- F	≤ 0.05 mg/L	0.1	0	N.A.	Optimal
Fluoride (F)	SMWW 4500 F- D	≤ 1.5 mg/L	0.1	0.18	± 0.71	Optimal
Lead (Pb)	SMWW 3114 B	≤ 0.05 mg/L	0.005	<0.005	N.A.	Optimal
Manganese (Mn)	SMWW 3113 B	≤ 0.5 mg/l	0.015	0.017	N.A.	Optimal
Mercury (Hg)	SMWW 3114 B	≤ 0.001 mg/L	0.001	<0.001	N.A.	Optimal
Nickel (Ni)	SMWW 3113 B	≤ 0.02 mg/L	0.06	<0.02	N.A.	Optimal
Nitrate (NO ₃)	SMWW 4500 NO ₃ - B	≤ 50 mg/L	0.01	6.13	N.A.	Optimal

Page 1 of 2

Karachi: No. AES/LMS/FRM-110, Date of Issue 22 June, 2020, Revision No. 01

209-210-B 2nd Floor Phase II, Dhedhi Business Ave,
Plot E-2- State Avenue Road, S.I.T.E Karachi.
Tel: 0301 4000 347, 0309 4000 347, 0324 4000 347
Email: info@hse.com.pk Web: www.hse.com.pk
NTN: 1330725-8

9891

Lahore Office: 1st Floor, 47th Commercial Area,
Cavalry Ground, Lahore Cantt, Pakistan.
Cell: 0300-4000 347, 042-36677188

Lahore Lab: 2nd Floor, 47th Commercial Area,
Cavalry Ground, Lahore Cantt, Pakistan.
Tel: 042-36677188 Ext 108
Registered in Sales Tax Department in All 4 Provinces



HSE Services

Health, Safety & Environment Consultants, Laboratories,
Lawyers & Engineering Services



DRINKING WATER ANALYSIS REPORT

Sample Detail

Reference No.	AES-56A-HB/2022-DW-02	Reporting Date	05-07-2022
Nature of Sample	Drinking Water	Sampling Method Reference	AES/LMS/QSP-014
Grab/Composite	Grab	Sample Collected by/Sent By	AES
Sampling Date	25-06-2022	Sample Receiving Date	27-06-2022
Analysis	05-07-2022	Lab Temp & Humidity	24.3°C & 52 %
Completion Date	05-07-2022	Ambient Temperature & Humidity at the Time of Sampling	40 °C & 25 %
Sample ID	AES-DW-206/2022	Sampling Location	Hand Pump Omaid Ali Burano
Client Detail	Mirpur Khas- TM Khan at Hala Road Transmission Line (ADB 201A and ADB-401D)		



Drinking Water Analysis Results

Parameter	Analysis Method	SEQS	LDL	Result	MU (CL95%)	Remarks
Nitrite (NO ₂ ⁻)	SMWW 4500 NO ₂ ⁻ B	≤ 3.0 mg/L	0.01	0.003	N.A.	Optimal
Selenium (Se)	SMWW 3114 B	0.01 mg/L	0.005	<0.01	N.A.	Optimal
Residual Chlorine (Cl ₂)	SMWW 4500 Cl ₂ B	0.5 mg/L	0.1	0	N.A.	Optimal
Phenolic Compounds (as Phenols)	SMWW 5530 D	NGVS	0.01	0	N.A.	Optimal
Zinc (Zn)	SMWW 3113 B	5.0 mg/L	0.15	0.054	N.A.	Optimal
Microbiological Analysis						
Total Coliforms*	SMWW 9222 B	0/ 100 mL CFU	-	0	N.A.	Optimal
Fecal Coliforms*	SMWW 9222 D	0/ 100 mL CFU	-	0	N.A.	Optimal

*Parameters with a holding time of 24 hours or less, samples were transported to the testing lab on the same day for analysis such as microbiological samples.

Abbreviations:

SEQS = Sindh Environment Quality Standards
TCU = True Color Unit
NTU = Nephelometric Turbidity Unit

SMWW = Standard Methods for the examination of Water and Wastewater
N.A. = Not Available
MU = Measurement Uncertainty

CFU = Colony forming Unit
NGVS = No Guideline Value Set

Remarks:

Optimal = Compliance with Permissible Range
Low = Less Than Permissible Range

Marginal = Close to Extreme Edge

High = Exceeds from Permissible Range

Report Disclaimer

- The remaining portion of the sample (s) will be disposed off after 15 days after the issuance date of report from the laboratory unless otherwise instructed (Condition Apply).
- This report shall not be reproduced in part/parties.
- The provided results relate only to the sample provided/collected.
- Values reflect the testing results; decision for usage of report totally depends on client.

[Signature]

Analyzed By

[Signature]
Reviewed By
(TM)

[Signature]
Approved By
(QM)

-----End of Report-----

Page 2 of 2

Karachi: No. AES/LMS/FRM-110, Date of Issue 22 June, 2020, Revision No. 01

209-210-B 2nd Floor Phase II, Dhedhi Business Ave,
Plot E-2- State Avenue Road, S.I.T.E Karachi.
Tel: 0301 4000 347, 0309 4000 347, 0324 4000 347
Email: info@hse.com.pk Web: www.hse.com.pk
NTN: 1330725-8

9890

Lahore Office: 1st Floor, 47th Commercial Area,
Cavalry Ground, Lahore Cantt, Pakistan.
Cell: 0300-4000 347, 042-36677188

Lahore Lab: 2nd Floor, 47th Commercial Area,
Cavalry Ground, Lahore Cantt, Pakistan.
Tel: 042-36677188 Ext 108
Registered in Sales Tax Department in All 4 Provinces



HSE Services

Health, Safety & Environment Consultants, Laboratories,
Lawyers & Engineering Services



DRINKING WATER ANALYSIS REPORT

Sample Detail

Reference No.	AES-56A-HB/2022-DW-03	Reporting Date	05-07-2022
Nature of Sample	Drinking Water	Sampling Method Reference	AES/LMS/QSP-014
Grab/Composite	Grab	Sample Collected by/Sent By	AES
Sampling Date	25-06-2022	Sample Receiving Date	27-06-2022
Analysis Completion Date	05-07-2022	Lab Temp & Humidity	24.3°C & 52 %
Ambient Temperature & Humidity at the Time of Sampling	40 °C & 25 %		
Sample ID	AES-DW-207/2022	Sampling Location	Hand Pump Village Muhammad urs Dars
Client Detail	Mirpur Khas- TM Khan at Hala Road Transmission Line (ADB 201A and ADB-401D)		



Drinking Water Analysis Results

Parameter	Analysis Method	SEQS	LDL	Result	MU (CL95%)	Remarks
Lab Analysis						
Color	SMWW 2120 C	≤ 15 TCU	1.0	0	N.A.	Optimal
Taste	SMWW 2160 C	Non-Objectionable	-	Non-Objectionable	N.A.	Optimal
Odor	SMWW 2150 B	Non-Objectionable	-	Non-Objectionable	N.A.	Optimal
Turbidity	SMWW 2130 B	< 5 NTU	1.0	0	N.A.	Optimal
Total Hardness (as CaCO ₃)	SMWW 2340 C	< 500 mg/L	0.5	720	± 0.87	High
Total Dissolved Solids (TDS)	SMWW 2540 C	< 1000 mg/L	5.0	814	± 0.81	Optimal
pH	SMWW 4500 H+ B	6.5- 8.5	0.1	7.48	± 0.70	Optimal
Aluminum (Al)	SMWW 3111 B	≤ 0.2 mg/L	0.001	0.007	N.A.	Optimal
Antimony (Sb)	SMWW 3114 B	≤ 0.005 mg/L	0.0005	0.005	N.A.	Optimal
Arsenic (As)	SMWW 3114 B	≤ 0.05 mg/L	0.0005	<0.005	N.A.	Optimal
Barium (Ba)	SMWW 3113 B	0.7 mg/L	0.0035	0.0035	N.A.	Optimal
Boron (B)	SMWW 3113 B	0.3 mg/L	0.02	<0.02	N.A.	Optimal
Cadmium (Cd)	SMWW 3113 B	0.01 mg/L	0.00002	<0.006	N.A.	Optimal
Chloride (Cl)	SMWW 4500 Cl B	< 250 mg/L	0.5	290	± 1.22	High
Chromium (Cr)	SMWW 3113 B	≤ 0.05 mg/L	0.0004	<0.004	N.A.	Optimal
Copper (Cu)	SMWW 3111 B	2.0 mg/L	0.0015	<0.164	N.A.	Optimal
Cyanide (CN)	SMWW 4500 CN F	≤ 0.05 mg/L	0.1	0	N.A.	Optimal
Fluoride (F)	SMWW 4500 F D	≤ 1.5 mg/L	0.1	0.09	± 0.71	Optimal
Lead (Pb)	SMWW 3114 B	≤ 0.05 mg/L	0.005	<0.005	N.A.	Optimal
Manganese (Mn)	SMWW 3113 B	≤ 0.5 mg/L	0.015	0.015	N.A.	Optimal
Mercury (Hg)	SMWW 3114 B	≤ 0.001 mg/L	0.001	<0.001	N.A.	Optimal
Nickel (Ni)	SMWW 3113 B	≤ 0.02 mg/L	0.06	<0.02	N.A.	Optimal

Page 1 of 2

Karachi: No. AES/LMS/FRM-110, Date of Issue 22 June, 2020, Revision No. 01

209-210-B 2nd Floor Phase II, Dhedhi Business Ave,
Plot E-2- State Avenue Road, S.I.T.E Karachi.
Tel: 0301 4000 347, 0309 4000 347, 0324 4000 347
Email: info@hse.com.pk Web: www.hse.com.pk
NTN: 1330725-8

9889

Lahore Office: 1st Floor, 47th Commercial Area,
Cavalry Ground, Lahore Cantt, Pakistan.
Cell: 0300-4000 347, 042-36677188

Lahore Lab: 2nd Floor, 47th Commercial Area,
Cavalry Ground, Lahore Cantt, Pakistan.
Tel: 042-36677188 Ext 108
Registered in Sales Tax Department in All 4 Provinces



HSE Services

Health, Safety & Environment Consultants, Laboratories,
Lawyers & Engineering Services



DRINKING WATER ANALYSIS REPORT

Sample Detail

Reference No.	AES-56A-HB/2022-DW-03	Reporting Date	05-07-2022
Nature of Sample	Drinking Water	Sampling Method Reference	AES/LMS/QSP-014
Grab/Composite	Grab	Sample Collected by/Sent By	AES
Sampling Date	25-06-2022	Sample Receiving Date	27-06-2022
Analysis Completion Date	05-07-2022	Lab Temp & Humidity	24.3°C & 52 %
Ambient Temperature & Humidity at the Time of Sampling			40 °C & 25 %
Sample ID	AES-DW-207/2022	Sampling Location	Hand Pump Village Muhammad urs Dars
Client Detail	Mirpur Khas- TM Khan at Hala Road Transmission Line (ADB 201A and ADB-401D)		



Drinking Water Analysis Results

Parameter	Analysis Method	SEQS	LDL	Result	MU (CL95%)	Remarks
Nitrate (NO ₃ ⁻)	SMWW 4500 NO ₃ ⁻ B	≤ 50 mg/L	0.01	4.24	N.A.	Optimal
Nitrite (NO ₂ ⁻)	SMWW 4500 NO ₂ ⁻ B	≤ 3.0 mg/L	0.01	0.006	N.A.	Optimal
Selenium (Se)	SMWW 3114 B	0.01 mg/L	0.005	<0.01	N.A.	Optimal
Residual Chlorine (Cl ₂)	SMWW 4500 Cl ₂ B	0.5 mg/L	0.1	0	N.A.	Optimal
Phenolic Compounds (as Phenols)	SMWW 5530 D	NGVS	0.01	0	N.A.	Optimal
Zinc (Zn)	SMWW 3113 B	5.0 mg/L	0.15	0.054	N.A.	Optimal
Microbiological Analysis						
Total Coliforms*	SMWW 9222 B	0/ 100 mL CFU	-	0	N.A.	Optimal
Fecal Coliforms*	SMWW 9222 D	0/ 100 mL CFU	-	0	N.A.	Optimal

*Parameters with a holding time of 24 hours or less, samples were transported to the testing lab on the same day for analysis such as microbiological samples.

Abbreviations:

SEQS = Sindh Environment Quality Standards
TCU = True Color Unit
NTU = Nephelometric Turbidity Unit

SMWW = Standard Methods for the examination of Water and Wastewater
N.A. = Not Available
MU = Measurement Uncertainty

CFU = Colony forming Unit
NGVS = No Guideline Value Set

Remarks:

Optimal = Compliance with Permissible Range
Low = Less Than Permissible Range

Marginal = Close to Extreme Edge

High = Exceeds from Permissible Range

Report Disclaimer

- The remaining portion of the sample (s) will be disposed off after 15 days after the issuance date of report from the laboratory unless otherwise instructed (Condition Apply).
- This report shall not be reproduced in part/parties.
- The provided results relate only to the sample provided/collected.
- Values reflect the testing results; decision for usage of report totally depends on client.

Analyzed By

Reviewed By
(TM)

Approved By
(QM)

-----End of Report-----

Page 2 of 2

Karachi: No. AES/LMS/FRM-110, Date of Issue 22 June, 2020, Revision No. 01

209-210-B 2nd Floor Phase II, Dhedhi Business Ave,
Plot E-2- State Avenue Road, S.I.T.E Karachi.
Tel: 0301 4000 347, 0309 4000 347, 0324 4000 347
Email: info@hse.com.pk Web: www.hse.com.pk
NTN: 1330725-8

9888

Lahore Office: 1st Floor, 47th Commercial Area,
Cavalry Ground, Lahore Cantt, Pakistan.
Cell: 0300-4000 347, 042-36677188

Lahore Lab: 2nd Floor, 47th Commercial Area,
Cavalry Ground, Lahore Cantt, Pakistan.
Tel: 042-36677188 Ext 108
Registered in Sales Tax Department in All 4 Provinces



HSE Services

Health, Safety & Environment Consultants, Laboratories,
Lawyers & Engineering Services



DRINKING WATER ANALYSIS REPORT

Sample Detail

Reference No.	AES-56A-HB/2022-DW-04	Reporting Date	05-07-2022
Nature of Sample	Drinking Water	Sampling Method Reference	AES/LMS/QSP-014
Grab/Composite	Grab	Sample Collected by/Sent By	AES
Sampling Date	25-06-2022	Sample Receiving Date	27-06-2022
Analysis Completion Date	05-07-2022	Lab Temp & Humidity	24.3°C & 52 %
Ambient Temperature & Humidity at the Time of Sampling	40 °C & 25 %		
Sample ID	AES-DW-208/2022	Sampling Location	Hand Pump Goth Ajeet Ali Rajpoot
Client Detail	Mirpur Khas- TM Khan at Hala Road Transmission Line (ADB 201A and ADB-401D)		



Drinking Water Analysis Results						
Parameter	Analysis Method	SEQS	LDL	Result	MU (CL95%)	Remarks
Lab Analysis						
Color	SMWW 2120 C	≤ 15 TCU	1.0	01	N.A.	Optimal
Taste	SMWW 2160 C	Non-Objectionable	-	Salty	N.A.	High
Odor	SMWW 2150 B	Non-Objectionable	-	Non-Objectionable	N.A.	Optimal
Turbidity	SMWW 2130 B	≤ 5 NTU	1.0	51.5	N.A.	High
Total Hardness (as CaCO ₃)	SMWW 2340 C	< 500 mg/L	0.5	640	± 0.87	High
Total Dissolved Solids (TDS)	SMWW 2540 C	< 1000 mg/L	5.0	1650	± 0.81	High
pH	SMWW 4500 H+ B	6.5- 8.5	0.1	7.42	± 0.70	Optimal
Aluminum (Al)	SMWW 3111 B	≤ 0.2 mg/L	0.001	0.007	N.A.	Optimal
Antimony (Sb)	SMWW 3114 B	≤ 0.005 mg/L	0.0005	0.007	N.A.	Optimal
Arsenic (As)	SMWW 3114 B	≤ 0.05 mg/L	0.0005	<0.005	N.A.	Optimal
Barium (Ba)	SMWW 3113 B	0.7 mg/L	0.0035	0.0036	N.A.	Optimal
Boron (B)	SMWW 3113 B	0.3 mg/L	0.02	<0.02	N.A.	Optimal
Cadmium (Cd)	SMWW 3113 B	0.01 mg/L	0.00002	<0.006	N.A.	Optimal
Chloride (Cl)	SMWW 4500 Cl- B	< 250 mg/L	0.5	457	± 1.22	High
Chromium (Cr)	SMWW 3113 B	≤ 0.05 mg/L	0.0004	<0.004	N.A.	Optimal
Copper (Cu)	SMWW 3111 B	2.0 mg/L	0.0015	<0.164	N.A.	Optimal
Cyanide (CN ⁻)	SMWW 4500 CN ⁻ F	≤ 0.05 mg/L	0.1	0	N.A.	Optimal
Fluoride (F ⁻)	SMWW 4500 F ⁻ D	≤ 1.5 mg/L	0.1	0.12	± 0.71	Optimal
Lead (Pb)	SMWW 3114 B	≤ 0.05 mg/L	0.005	<0.005	N.A.	Optimal
Manganese (Mn)	SMWW 3113 B	≤ 0.5 mg/L	0.015	0.016	N.A.	Optimal
Mercury (Hg)	SMWW 3114 B	≤ 0.001 mg/L	0.001	<0.001	N.A.	Optimal
Nickel (Ni)	SMWW 3113 B	≤ 0.02 mg/L	0.06	<0.02	N.A.	Optimal
Nitrate (NO ₃ ⁻)	SMWW 4500 NO ₃ ⁻ B	≤ 50 mg/L	0.01	8.12	N.A.	Optimal

Page 1 of 2

Karachi: No. AES/LMS/FRM-110, Date of Issue 22 June, 2020, Revision No. 01

209-210-B 2nd Floor Phase II, Dhedhi Business Ave,
Plot E-2- State Avenue Road, S.I.T.E Karachi.
Tel: 0301 4000 347, 0309 4000 347, 0324 4000 347
Email: info@hse.com.pk Web: www.hse.com.pk
NTN: 1330725-8

9887

Lahore Office: 1st Floor, 47th Commercial Area,
Cavalry Ground, Lahore Cantt, Pakistan.
Cell: 0300-4000 347, 042-36677188

Lahore Lab: 2nd Floor, 47th Commercial Area,
Cavalry Ground, Lahore Cantt, Pakistan.
Tel: 042-36677188 Ext 108
Registered in Sales Tax Department in All 4 Provinces



HSE Services

Health, Safety & Environment Consultants, Laboratories,
Lawyers & Engineering Services



DRINKING WATER ANALYSIS REPORT

Sample Detail

Reference No.	AES-56A-HB/2022-DW-04	Reporting Date	05-07-2022
Nature of Sample	Drinking Water	Sampling Method Reference	AES/LMS/QSP-014
Grab/Composite	Grab	Sample Collected by/Sent By	AES
Sampling Date	25-06-2022	Sample Receiving Date	27-06-2022
Analysis Completion Date	05-07-2022	Lab Temp & Humidity	24.3°C & 52 %
Ambient Temperature & Humidity at the Time of Sampling		40 °C & 25 %	
Sample ID	AES-DW-208/2022	Sampling Location	Hand Pump Goth Ajeet Ali Rajpoot
Client Detail	Mirpur Khas- TM Khan at Hala Road Transmission Line (ADB 201A and ADB-401D)		



Drinking Water Analysis Results

Parameter	Analysis Method	SEQS	LDL	Result	MU (CL95%)	Remarks
Nitrite (NO ₂ ⁻)	SMWW 4500 NO ₂ ⁻ B	≤ 3.0 mg/L	0.01	0.02	N.A.	Optimal
Selenium (Se)	SMWW 3114 B	0.01 mg/L	0.005	<0.01	N.A.	Optimal
Residual Chlorine (Cl ₂)	SMWW 4500 Cl ₂ B	0.5 mg/L	0.1	0	N.A.	Optimal
Phenolic Compounds (as Phenols)	SMWW 5530 D	NGVS	0.01	0	N.A.	Optimal
Zinc (Zn)	SMWW 3113 B	5.0 mg/L		0.056	N.A.	Optimal
Microbiological Analysis						
Total Coliforms*	SMWW 9222 B	0/ 100 mL CFU	-	0	N.A.	Optimal
Fecal Coliforms*	SMWW 9222 D	0/ 100 mL CFU	-	0	N.A.	Optimal

*Parameters with a holding time of 24 hours or less, samples were transported to the testing lab on the same day for analysis such as microbiological samples.

Abbreviations:

SEQS = Sindh Environment Quality Standards
TCU = True Color Unit
NTU = Nephelometric Turbidity Unit

SMWW = Standard Methods for the examination of Water and Wastewater
N.A. = Not Available
MU = Measurement Uncertainty

CFU = Colony forming Unit
NGVS = No Guideline Value Set

Remarks:

Optimal = Compliance with Permissible Range
Low = Less Than Permissible Range

Marginal = Close to Extreme Edge

High = Exceeds from Permissible Range

Report Disclaimer

- The remaining portion of the sample (s) will be disposed off after 15 days after the issuance date of report from the laboratory unless otherwise instructed (Condition Apply).
- This report shall not be reproduced in part/parties.
- The provided results relate only to the sample provided/collected.
- Values reflect the testing results; decision for usage of report totally depends on client.

Analyzed By

Reviewed By
(TM)

Approved By
(QM)

-----End of Report-----

Page 2 of 2

Karachi: No. AES/LMS/FRM-110, Date of Issue 22 June, 2020, Revision No. 01

209-210-B 2nd Floor Phase II, Dhedhi Business Ave,
Plot E-2- State Avenue Road, S.I.T.E Karachi.
Tel: 0301 4000 347, 0309 4000 347, 0324 4000 347
Email: info@hse.com.pk Web: www.hse.com.pk
NTN: 1330725-8

9886

Lahore Office: 1st Floor, 47th Commercial Area,
Cavalry Ground, Lahore Cantt, Pakistan.
Cell: 0300-4000 347, 042-36677188

Lahore Lab: 2nd Floor, 47th Commercial Area,
Cavalry Ground, Lahore Cantt, Pakistan.
Tel: 042-36677188 Ext 108
Registered in Sales Tax Department in All 4 Provinces

Annexure IV: Sensitive Receptors

Heading: Hyderabad to Mirpur Khas

#	Receptor Name	Receptor Category	Sensitivity	Latitude	Longitude	Distance (m)	Tower
1	Settlement	Small	Medium	25.3108	68.379	0	Crossing
2	Road	Small Blacktop Road	Low	25.3109	68.379	0	Crossing
3	Miscellaneous	Transmission Lines	Low	25.3109	68.379	50	Right
4	Road	Small Blacktop Road	Low	25.2999	68.394	0	Crossing
5	Settlement	Small	Medium	25.3023	68.391	80	Right
6	Settlement	Small	Medium	25.3071	68.385	90	Left
7	Settlement	Small	Medium	25.3002	68.413	100	Right
8	Road	Major Roads	High	25.3002	68.413	0	Crossing
9	Road	Unsealed Road	Low	25.3022	68.432	0	Crossing
10	Miscellaneous	Transmission Lines	Low	25.3001	68.412	0	Crossing
11	Miscellaneous	Transmission Lines	Low	25.2999	68.411	0	Crossing
12	Miscellaneous	Transmission Lines	Low	25.2995	68.42	0	Crossing
13	Miscellaneous	Communication Towers	Low	25.3002	68.415	100	Right
14	Road	Unsealed Road	Low	25.3042	68.447	0	Crossing
15	Agricultural	Cultivated Field	Low	25.3	68.412	0	Crossing
16	Agricultural	Cultivated Field	Low	25.2993	68.408	0	Crossing
17	Agricultural	Cultivated Field	Low	25.3003	68.414	0	Crossing
18	Agricultural	Cultivated Field	Low	25.3	68.417	0	Crossing
19	Agricultural	Orchards	Low	25.2998	68.418	0	Crossing
20	Road	Unsealed Road	Low	25.3071	68.454	0	Crossing
21	Agricultural	Cultivated Field	Low	25.2996	68.42	0	Crossing
22	Railway	Road-Track Crossing	Low	25.3003	68.413	0	Crossing
23	Water Body	Channel/Pond	Medium	25.3	68.422	0	Crossing
24	Road	Small Blacktop Road	Low	25.3	68.422	0	Crossing
25	Miscellaneous	Transmission Lines	Low	25.2997	68.422	0	Crossing

#	Receptor Name	Receptor Category	Sensitivity	Latitude	Longitude	Distance (m)	Tower
26	Miscellaneous	Transmission Lines	Low	25.2997	68.422	0	Crossing
27	Road	Unsealed Road	Low	25.311	68.459	0	Crossing
28	Agricultural	Orchards	Low	25.2997	68.422	50	Right
29	Agricultural	Cultivated Field	Low	25.3004	68.423	0	Crossing
30	Agricultural	Cultivated Field	Low	25.3012	68.426	0	Crossing
31	Road	Small Blacktop Road	Low	25.3012	68.426	0	Crossing
32	Water Body	Channel/Pond	Medium	25.3012	68.426	70	Right
33	Settlement	Small	Medium	25.3012	68.426	50	Right
34	Settlement	Small	Medium	25.3012	68.426	30	Left
35	Road	Unsealed Road	Low	25.3156	68.466	0	Crossing
36	Agricultural	Cultivated Field	Low	25.3017	68.43	0	Crossing
37	Agricultural	Cultivated Field	Low	25.3023	68.433	0	Crossing
38	Water Body	Channel/Pond	Medium	25.3022	68.436	0	Crossing
39	Agricultural	Animal Farm	Low	25.3022	68.436	90	Right
40	Miscellaneous	Transmission Lines	Low	25.3022	68.436	0	Crossing
41	Miscellaneous	Transmission Lines	Low	25.3022	68.436	0	Crossing
42	Road	Small Blacktop Road	Low	25.3022	68.436	0	Crossing
43	Road	Unsealed Road	Low	25.3186	68.47	0	Crossing
44	Agricultural	Cultivated Field	Low	25.3034	68.441	0	Crossing
45	Settlement	Small	Medium	25.3038	68.444	100	Left
46	Agricultural	Cultivated Field	Low	25.3046	68.449	0	Crossing
47	Settlement	Small	Medium	25.3046	68.449	60	Left
48	Agricultural	Cultivated Field	Low	25.3093	68.457	0	Crossing
49	Road	Small Blacktop Road	Low	25.3214	68.474	0	Crossing
50	Settlement	Small	Medium	25.3195	68.472	0	Crossing
51	Agricultural	Cultivated Field	Low	25.3195	68.472	50	Left
52	Road	Unsealed Road	Low	25.3275	68.483	0	Crossing
53	Road	Small Blacktop Road	Low	25.3259	68.481	0	Crossing
54	Agricultural	Cultivated Field	Low	25.3259	68.481	0	Crossing
55	Agricultural	Cultivated Field	Low	25.3301	68.487	0	Crossing

#	Receptor Name	Receptor Category	Sensitivity	Latitude	Longitude	Distance (m)	Tower
56	Road	Unsealed Road	Low	25.3323	68.49	0	Crossing
57	Settlement	Small	Medium	25.3331	68.491	0	Crossing
58	Settlement	Small	Medium	25.3346	68.493	30	Left
59	Agricultural	Orchards	Low	25.3369	68.496	0	Crossing
60	Road	Unsealed Road	Low	25.3378	68.498	0	Crossing
61	Agricultural	Cultivated Field	Low	25.3394	68.501	0	Crossing
62	Road	Unsealed Road	Low	25.3394	68.501	0	Crossing
63	Road	Small Blacktop Road	Low	25.3411	68.508	0	Crossing
64	Agricultural	Orchards	Low	25.3411	68.508	0	Crossing
65	Agricultural	Cultivated Field	Low	25.3411	68.508	0	Crossing
66	Road	Unsealed Road	Low	25.3405	68.505	0	Crossing
67	Agricultural	Orchards	Low	25.3428	68.514	0	Crossing
68	Settlement	Small	Medium	25.3428	68.514	50	Left
69	Road	Unsealed Road	Low	25.3418	68.51	0	Crossing
70	Road	Small Blacktop Road	Low	25.3442	68.518	0	Crossing
71	Agricultural	Orchards	Low	25.3442	68.518	0	Crossing
72	Agricultural	Orchards	Low	25.3442	68.518	0	Crossing
73	Agricultural	Orchards	Low	25.3463	68.522	0	Crossing
74	Agricultural	Cultivated Field	Low	25.3482	68.525	0	Crossing
75	Settlement	Small	Medium	25.3482	68.525	90	Right
76	Road	Unsealed Road	Low	25.3493	68.527	0	Crossing
77	Agricultural	Cultivated Field	Low	25.3502	68.529	0	Crossing
78	Agricultural	Cultivated Field	Low	25.3528	68.528	0	Crossing
79	Agricultural	Orchards	Low	25.3548	68.528	0	Crossing
80	Agricultural	Cultivated Field	Low	25.3567	68.527	0	Crossing
81	Road	Unsealed Road	Low	25.3558	68.528	0	Crossing
82	Agricultural	Orchards	Low	25.3618	68.524	0	Crossing
140	Road	Unsealed Road	Low	25.355	68.586	0	Crossing
159	Agricultural	Orchards	Low	25.3527	68.544	0	Crossing
160	Agricultural	Cultivated Field	Low	25.3527	68.544	0	Crossing

#	Receptor Name	Receptor Category	Sensitivity	Latitude	Longitude	Distance (m)	Tower
161	Road	Unsealed Road	Low	25.3527	68.544	0	Crossing
162	Settlement	Small	Medium	25.3527	68.544	50	Left
163	Settlement	Large	High	25.3531	68.55	90	Left
164	Road	Unsealed Road	Low	25.3531	68.55	0	
165	Road	Small Blacktop Road	Low	25.3531	68.55	0	Crossing
166	Agricultural	Orchards	Low	25.3531	68.55	0	Crossing
167	Agricultural	Cultivated Field	Low	25.3531	68.55	0	Crossing
168	Water Body	Water wells	Low	25.3531	68.55	90	Left
169	Settlement	Small	Medium	25.3534	68.555	50	Left
170	Road	Unsealed Road	Low	25.3534	68.555	0	Crossing
171	Agricultural	Orchards	Low	25.3534	68.555	0	Crossing
172	Agricultural	Cultivated Field	Low	25.3534	68.555	0	Crossing
173	Road	Unsealed Road	Low	25.3537	68.561	0	Crossing
174	Agricultural	Orchards	Low	25.3537	68.561	0	Crossing
175	Agricultural	Cultivated Field	Low	25.3537	68.561	0	Crossing
176	Road	Unsealed Road	Low	25.3541	68.569	0	Crossing
177	Agricultural	Cultivated Field	Low	25.3541	68.569	0	Crossing
178	Agricultural	Animal Farm	Low	25.3541	68.569	90	Left
179	Water Body	Channel/Pond	Medium	25.3541	68.569	0	Crossing
180	Road	Unsealed Road	Low	25.3545	68.577	0	Crossing
181	Agricultural	Cultivated Field	Low	25.3545	68.577	0	Crossing
182	Agricultural	Orchards	Low	25.3545	68.577	0	Crossing
183	Miscellaneous	Transmission Lines	Low	25.3548	68.582	0	Crossing
184	Road	Unsealed Road	Low	25.3548	68.582	0	Crossing
185	Road	Unsealed Road	Low	25.3558	68.65	0	Crossing
186	Agricultural	Orchards	Low	25.3548	68.582	0	Crossing
187	Road	Unsealed Road	Low	25.3553	68.593	0	Crossing
188	Agricultural	Orchards	Low	25.3553	68.593	0	Crossing
189	Water Body	Water wells	Low	25.3553	68.593	90	Right
190	Road	Unsealed Road	Low	25.3612	68.665	0	Crossing

#	Receptor Name	Receptor Category	Sensitivity	Latitude	Longitude	Distance (m)	Tower
191	Agricultural	Orchards	Low	25.3556	68.597	0	Crossing
192	Water Body	Water wells	Low	25.3556	68.597	90	Right
193	Settlement	Small	Medium	25.3556	68.597	90	Right
194	Road	Unsealed Road	Low	25.3556	68.597	0	Crossing
195	Religious/Cultural	Mosque	High	25.3556	68.597	90	Right
196	Road	Unsealed Road	Low	25.3561	68.606	0	Crossing
197	Settlement	Small	Medium	25.3561	68.606	90	Left
198	Agricultural	Orchards	Low	25.3561	68.606	0	Crossing
199	Settlement	Small	Medium	25.3563	68.611	70	Left
200	Agricultural	Orchards	Low	25.3563	68.611	0	Crossing
201	Agricultural	Cultivated Field	Low	25.3567	68.619	0	Crossing
202	Agricultural	Orchards	Low	25.3567	68.619	0	Crossing
203	Agricultural	Orchards	Low	25.3557	68.628	0	Crossing
204	Settlement	Small	Medium	25.3557	68.628	70	Left
205	Agricultural	Cultivated Field	Low	25.3557	68.635	0	Crossing
206	Settlement	Small	Medium	25.3557	68.635	0	Crossing
207	Road	Unsealed Road	Low	25.3557	68.638	0	Crossing
208	Agricultural	Orchards	Low	25.3557	68.638	0	Crossing
209	Road	Unsealed Road	Low	25.3558	68.646	0	Crossing
210	Agricultural	Orchards	Low	25.3558	68.646	0	Crossing
211	Settlement	Small	Medium	25.3584	68.656	100	Left
212	Settlement	Small	Medium	25.3584	68.656	100	Right
213	Road	Unsealed Road	Low	25.3584	68.656	0	Crossing
214	Road	Small Blacktop Road	Low	25.3584	68.656	0	Crossing
215	Agricultural	Orchards	Low	25.3584	68.656	0	Crossing
216	Miscellaneous	Transmission Lines	Low	25.3584	68.656	0	Crossing
217	Water Body	Channel/Pond	Medium	25.3584	68.656	0	Crossing
218	Water Body	Water wells	Low	25.3584	68.656	100	Left
219	Agricultural	Orchards	Low	25.3625	68.67	0	Crossing
220	Road	Small Blacktop Road	Low	25.3647	68.679	0	Crossing

#	Receptor Name	Receptor Category	Sensitivity	Latitude	Longitude	Distance (m)	Tower
221	Water Body	Channel/Pond	Medium	25.3647	68.679	0	Crossing
222	Agricultural	Orchards	Low	25.3647	68.679	0	Crossing
223	Settlement	Medium	High	25.3647	68.679	60	Right
224	Miscellaneous	Transmission Lines	Low	25.3647	68.679	0	Crossing
225	Agricultural	Cultivated Field	Low	25.3691	68.694	0	Crossing
226	Agricultural	Orchards	Low	25.3691	68.694	0	Crossing
227	Settlement	Medium	High	25.3661	68.682	40	Right
228	Agricultural	Orchards	Low	25.3661	68.682	0	Crossing
229	Road	Unsealed Road	Low	25.3661	68.682	0	Crossing
230	Agricultural	Orchards	Low	25.3661	68.682	50	Right
231	Settlement	Small	Medium	25.3726	68.706	50	Right
232	Agricultural	Orchards	Low	25.3726	68.706	0	Crossing
233	Road	Unsealed Road	Low	25.3726	68.706	0	Crossing
234	Agricultural	Cultivated Field	Low	25.3726	68.706	0	Crossing
235	Road	Unsealed Road	Low	25.3751	68.715	0	Crossing
236	Agricultural	Cultivated Field	Low	25.3751	68.715	0	Crossing
237	Agricultural	Orchards	Low	25.3751	68.715	0	Crossing
238	Road	Unsealed Road	Low	25.3759	68.718	0	Crossing
239	Agricultural	Cultivated Field	Low	25.3759	68.718	0	Crossing
240	Agricultural	Orchards	Low	25.3759	68.718	0	Crossing
241	Miscellaneous	Transmission Lines	Low	25.3759	68.718	0	Crossing
242	Water Body	Water wells	Low	25.3759	68.718	100	Left
243	Educational	School	High	25.3759	68.718	100	Left
244	Settlement	Small	Medium	25.3759	68.718	100	Left
245	Road	Unsealed Road	Low	25.3778	68.725	0	Crossing
246	Agricultural	Cultivated Field	Low	25.3778	68.725	0	Crossing
247	Agricultural	Orchards	Low	25.3778	68.725	0	Crossing
248	Road	Unsealed Road	Low	25.38	68.733	0	Crossing
249	Agricultural	Cultivated Field	Low	25.38	68.733	0	Crossing
250	Agricultural	Orchards	Low	25.38	68.733	0	Crossing

#	Receptor Name	Receptor Category	Sensitivity	Latitude	Longitude	Distance (m)	Tower
251	Settlement	Small	Medium	25.38	68.733	100	Left
252	Miscellaneous	Transmission Lines	Low	25.38	68.733	100	Left
253	Water Body	Channel/Pond	Medium	25.38	68.733	100	Left
254	Settlement	Small	Medium	25.3821	68.74	0	Crossing
255	Agricultural	Cultivated Field	Low	25.3821	68.74	0	Crossing
256	Agricultural	Orchards	Low	25.3821	68.74	0	Crossing
257	Settlement	Small	Medium	25.3826	68.742	50	Left
258	Road	Unsealed Road	Low	25.3826	68.742	0	Crossing
259	Settlement	Medium	High	25.3859	68.755	70	Right
260	Road	Small Blacktop Road	Low	25.3859	68.755	0	Crossing
261	Agricultural	Cultivated Field	Low	25.3859	68.755	0	Crossing
262	Agricultural	Orchards	Low	25.3859	68.755	0	Crossing
263	Educational	School	High	25.3859	68.755	80	Right
264	Miscellaneous	Transmission Lines	Low	25.3859	68.755	0	Crossing
265	Settlement	Small	Medium	25.3868	68.763	80	Right
266	Road	Unsealed Road	Low	25.3868	68.763	0	Crossing
267	Agricultural	Cultivated Field	Low	25.3868	68.763	0	Crossing
268	Agricultural	Orchards	Low	25.3868	68.763	0	Crossing
269	Miscellaneous	Transmission Lines	Low	25.3868	68.763	0	Crossing
270	Road	Major Roads	High	25.3878	68.771	0	Crossing
271	Agricultural	Cultivated Field	Low	25.3878	68.771	0	Crossing
272	Agricultural	Orchards	Low	25.3878	68.771	0	Crossing
273	Settlement	Small	Medium	25.3878	68.771	50	Left
274	Miscellaneous	Transmission Lines	Low	25.3878	68.771	0	Crossing
275	Miscellaneous	Transmission Lines	Low	25.3878	68.771	0	Crossing
276	Water Body	Channel/Pond	Medium	25.3878	68.771	0	Crossing
277	Religious/Cultural	Mosque	High	25.3878	68.771	90	Left
278	Agricultural	Orchards	Low	25.3902	68.777	0	Crossing
279	Settlement	Medium	High	25.392	68.782	50	Left
280	Agricultural	Orchards	Low	25.392	68.782	0	Crossing

#	Receptor Name	Receptor Category	Sensitivity	Latitude	Longitude	Distance (m)	Tower
281	Road	Unsealed Road	Low	25.392	68.782	0	Crossing
282	Agricultural	Cultivated Field	Low	25.392	68.782	0	Crossing
283	Road	Unsealed Road	Low	25.385	68.75	0	Crossing
284	Road	Unsealed Road	Low	25.3946	68.789	0	Crossing
285	Water Body	Channel/Pond	Medium	25.3946	68.789	0	Crossing
286	Water Body	Wetlands	Medium	25.3946	68.789	0	Crossing
287	Miscellaneous	Transmission Lines	Low	25.3946	68.789	0	Crossing
288	Religious/Cultural	Shrine	High	25.3946	68.789	70	Left
289	Agricultural	Orchards	Low	25.3946	68.789	0	Crossing
290	Water Body	Channel/Pond	Medium	25.3955	68.792	0	Crossing
291	Miscellaneous	Transmission Lines	Low	25.3955	68.792	0	Crossing
292	Agricultural	Orchards	Low	25.3955	68.792	0	Crossing
293	Road	Unsealed Road	Low	25.3955	68.792	0	Crossing
294	Agricultural	Cultivated Field	Low	25.3955	68.792	0	Crossing
295	Road	Unsealed Road	Low	25.3986	68.799	0	Crossing
296	Agricultural	Cultivated Field	Low	25.3986	68.799	0	Crossing
297	Agricultural	Orchards	Low	25.3986	68.799	0	Crossing
298	Settlement	Small	Medium	25.3986	68.799	70	Left
299	Road	Unsealed Road	Low	25.4004	68.804	0	Crossing
300	Agricultural	Cultivated Field	Low	25.4004	68.804	0	Crossing
301	Miscellaneous	Transmission Lines	Low	25.4004	68.804	0	Crossing
302	Agricultural	Orchards	Low	25.4004	68.804	0	Crossing
303	Settlement	Small	Medium	25.4004	68.804	50	Left
304	Road	Unsealed Road	Low	25.4033	68.813	0	Crossing
305	Agricultural	Cultivated Field	Low	25.4033	68.813	0	Crossing
306	Road	Unsealed Road	Low	25.4043	68.82	0	Crossing
307	Agricultural	Cultivated Field	Low	25.4043	68.82	0	Crossing
308	Agricultural	Orchards	Low	25.4043	68.82	0	Crossing
309	Road	Unsealed Road	Low	25.4047	68.824	0	Crossing
310	Agricultural	Orchards	Low	25.4047	68.824	0	Crossing

#	Receptor Name	Receptor Category	Sensitivity	Latitude	Longitude	Distance (m)	Tower
311	Miscellaneous	Transmission Lines	Low	25.4047	68.824	0	Crossing
312	Agricultural	Animal Farm	Low	25.4047	68.824	90	Left
313	Agricultural	Cultivated Field	Low	25.4047	68.824	0	Crossing
314	Settlement	Small	Medium	25.4047	68.824	90	Left
315	Road	Unsealed Road	Low	25.4052	68.828	0	Crossing
316	Water Body	Water wells	Low	25.4052	68.828	90	Left
317	Agricultural	Animal Farm	Low	25.4052	68.828	0	Crossing
318	Settlement	Small	Medium	25.4066	68.841	100	Right
319	Road	Unsealed Road	Low	25.4066	68.841	0	Crossing
320	Agricultural	Cultivated Field	Low	25.4066	68.841	0	Crossing
321	Religious/Cultural	Mosque	High	25.4066	68.841	100	Left
322	Agricultural	Orchards	Low	25.4066	68.841	0	Crossing
323	Settlement	Medium	High	25.4098	68.846	100	Left
324	Road	Unsealed Road	Low	25.4098	68.846	0	Crossing
325	Agricultural	Cultivated Field	Low	25.4098	68.846	0	Crossing
326	Agricultural	Orchards	Low	25.4098	68.846	0	Crossing
327	Miscellaneous	Transmission Lines	Low	25.4098	68.846	0	Crossing
328	Settlement	Small	Medium	25.4098	68.846	80	Right
329	Miscellaneous	Transmission Lines	Low	25.4118	68.853	0	Crossing
330	Agricultural	Cultivated Field	Low	25.4118	68.853	0	Crossing
331	Road	Major Roads	High	25.4145	68.863	0	Crossing
332	Agricultural	Cultivated Field	Low	25.4145	68.863	0	Crossing
333	Agricultural	Orchards	Low	25.4145	68.863	0	Crossing
334	Settlement	Medium	High	25.4145	68.863	80	Right
335	Settlement	Small	Medium	25.4145	68.863	50	Left
336	Educational	School	High	25.4145	68.863	100	Right
337	Agricultural	Cultivated Field	Low	25.4182	68.875	0	Crossing
338	Agricultural	Orchards	Low	25.4182	68.875	0	Crossing
339	Road	Small Blacktop Road	Low	25.4182	68.875	0	Crossing
340	Water Body	Channel/Pond	Medium	25.4182	68.875	0	Crossing

#	Receptor Name	Receptor Category	Sensitivity	Latitude	Longitude	Distance (m)	Tower
341	Miscellaneous	Transmission Lines	Low	25.4182	68.875	0	Crossing
342	Agricultural	Cultivated Field	Low	25.4239	68.892	0	Crossing
343	Agricultural	Orchards	Low	25.4239	68.892	0	Crossing
344	Road	Unsealed Road	Low	25.4239	68.892	0	Crossing
345	Settlement	Small	Medium	25.4239	68.892	70	Right
346	Agricultural	Cultivated Field	Low	25.4257	68.897	0	Crossing
347	Agricultural	Orchards	Low	25.4257	68.897	0	Crossing
348	Road	Unsealed Road	Low	25.4257	68.897	0	Crossing
349	Settlement	Small	Medium	25.4257	68.897	70	Right
350	Agricultural	Cultivated Field	Low	25.4277	68.904	0	Crossing
351	Agricultural	Orchards	Low	25.4277	68.904	0	Crossing
352	Road	Unsealed Road	Low	25.4277	68.904	0	Crossing
353	Settlement	Small	Medium	25.4277	68.904	100	Right
354	Miscellaneous	Transmission Lines	Low	25.4277	68.904	0	Crossing
355	Religious/Cultural	Mosque	High	25.4277	68.904	100	Right
356	Educational	School	High	25.4277	68.904	100	Right
357	Road	Unsealed Road	Low	25.4304	68.912	0	Crossing
358	Settlement	Small	Medium	25.4304	68.912	50	Right
359	Miscellaneous	Transmission Lines	Low	25.4304	68.912	0	Crossing
360	Religious/Cultural	Mosque	High	25.4304	68.912	50	Right
361	Agricultural	Orchards	Low	25.4304	68.912	0	Crossing
362	Road	Unsealed Road	Low	25.4315	68.916	0	Crossing
363	Settlement	Small	Medium	25.4315	68.916	90	Left
364	Miscellaneous	Transmission Lines	Low	25.4315	68.916	0	Crossing
365	Agricultural	Orchards	Low	25.4315	68.916	0	Crossing
366	Agricultural	Animal Farm	Low	25.4315	68.916	100	Right
367	Agricultural	Cultivated Field	Low	25.4315	68.916	0	Crossing
368	Religious/Cultural	Mosque	High	25.4315	68.916	100	Right
369	Educational	School	High	25.4315	68.916	100	Right
370	Religious/Cultural	Shrine	High	25.4315	68.916	100	Right

#	Receptor Name	Receptor Category	Sensitivity	Latitude	Longitude	Distance (m)	Tower
371	Water Body	Channel/Pond	Medium	25.4315	68.916	0	Crossing
372	Settlement	Small	Medium	25.4329	68.935	80	Left
373	Road	Unsealed Road	Low	25.4329	68.935	0	Crossing
374	Agricultural	Cultivated Field	Low	25.4329	68.935	0	Crossing
375	Water Body	Channel/Pond	Medium	25.4346	68.951	0	Crossing
376	Road	Unsealed Road	Low	25.4346	68.951	0	Crossing
377	Agricultural	Cultivated Field	Low	25.4346	68.951	0	Crossing
378	Settlement	Small	Medium	25.4334	68.943	90	Right
379	Road	Unsealed Road	Low	25.4334	68.943	0	Crossing
380	Agricultural	Cultivated Field	Low	25.4334	68.943	0	Crossing
381	Miscellaneous	Transmission Lines	Low	25.4334	68.943	0	Crossing
382	Road	Unsealed Road	Low	25.4376	68.963	0	Crossing
383	Agricultural	Cultivated Field	Low	25.4376	68.963	0	Crossing
384	Miscellaneous	Transmission Lines	Low	25.4376	68.963	0	Crossing
385	Water Body	Channel/Pond	Medium	25.4376	68.963	0	Crossing
386	Settlement	Small	Medium	25.4376	68.963	100	Left
387	Road	Unsealed Road	Low	25.4419	68.975	0	Crossing
388	Agricultural	Cultivated Field	Low	25.4419	68.975	0	Crossing
389	Miscellaneous	Transmission Lines	Low	25.4419	68.975	0	Crossing
390	Water Body	Channel/Pond	Medium	25.4419	68.975	0	Crossing
391	Road	Unsealed Road	Low	25.4434	68.982	0	Crossing
392	Agricultural	Cultivated Field	Low	25.4434	68.982	0	Crossing
393	Settlement	Small	Medium	25.4434	68.982	80	Right
394	Settlement	Small	Medium	25.4434	68.982	90	Left
395	Miscellaneous	Transmission Lines	Low	25.4434	68.982	0	Crossing
396	Water Body	Channel/Pond	Medium	25.4434	68.982	0	Crossing
397	Settlement	Small	Medium	25.4477	68.992	90	Right
398	Miscellaneous	Transmission Lines	Low	25.4477	68.992	0	Crossing
399	Agricultural	Cultivated Field	Low	25.4477	68.992	0	Crossing
400	Agricultural	Animal Farm	Low	25.4477	68.992	70	Right

#	Receptor Name	Receptor Category	Sensitivity	Latitude	Longitude	Distance (m)	Tower
401	Religious/Cultural	Mosque	High	25.4477	68.992	70	Right
402	Educational	School	High	25.4477	68.992	80	Right
403	Road	Unsealed Road	Low	25.4477	68.992	0	Crossing
404	Agricultural	Cultivated Field	Low	25.4553	69	0	Crossing
405	Agricultural	Animal Farm	Low	25.4553	69	70	Right
406	Educational	School	High	25.4553	69	100	Right
407	Road	Unsealed Road	Low	25.4553	69	0	Crossing
408	Settlement	Small	Medium	25.4553	69	80	Left
409	Miscellaneous	Transmission Lines	Low	25.4553	69	0	Crossing

Annexure V: IBAT Findings Report



Integrated Biodiversity Assessment Tool

PROXIMITY REPORT

PTEIP PAK MF II T4 MIRPURKHASTL

Country: Pakistan

Location: [25.4, 68.7]

Date of analysis: 02 June 2022 (GMT)

Buffers applied: 10 km

IUCN Red List Biomes: Terrestrial

Generated by: Abdul Basit Khan

Organisation: ADB

Overlaps with:

Protected Areas	0
Key Biodiversity Areas	0
IUCN Red List	37



Displaying project location and buffers: 10 km





About this report

This report presents the results of [29327-31283] proximity analysis to identify the biodiversity features and species which are located within the following buffers: 10 km.

This report is one part of a package generated by IBAT on 02 June 2022 (GMT) that includes full list of all species, protected areas, Key Biodiversity Areas in CSV format, maps showing the area of interest in relation to these features, and a 'How to read IBAT reports' document.

WARNING: IBAT aims to provide the most up-to-date and accurate information available at the time of analysis. There is however a possibility of incomplete, incorrect or out-of-date information. All findings in this report must be supported by further desktop review, consultation with experts and/or on-the-ground field assessment. Please consult IBAT for any additional disclaimers or recommendations applicable to the information used to generate this report.

Please note, sensitive species data are currently not included in IBAT reports in line with the [Sensitive Data Access Restrictions Policy for the IUCN Red List](#). This relates to sensitive Threatened species and KBAs triggered by sensitive species.

Data used to generate this report

- UNEP-WCMC and IUCN, 2022. Protected Planet: The World Database on Protected Areas (WDPA)[On-line], Cambridge, UK: UNEP-WCMC and IUCN. Available at: www.protectedplanet.net - June 2022.
- BirdLife International (on behalf of the KBA Partnership), 2022. Key Biodiversity Areas - April 2022.
- IUCN, 2021. IUCN Red List of Threatened Species - December 2021.
- IUCN. The IUCN Red List of Threatened Species. Version 2019-3. (2019). <https://www.iucnredlist.org>
- IUCN. Threats Classification Scheme (Version 3.2). (2019)
- Strassburg, B.B.N., Irribarren, A., Beyer, H.L. et al. Global priority areas for ecosystem restoration. Nature 586, 724–729 (2020). <https://doi.org/10.1038/s41586-020-2784-9>





Protected Areas

The following protected areas are found within 10 km of the area of interest.
For further details please refer to the associated csv file in the report folder.

No protected areas within buffer distance

Key Biodiversity Areas

The following key biodiversity areas are found within 10 km of the area of interest.
For further details please refer to the associated csv file in the report folder.

No KBAs within buffer distance

IUCN Red List of Threatened Species

The following threatened species are potentially found within 50km of the area of interest.

For the full IUCN Red List please refer to the associated csv in the report folder.

Species Name	Common Name	Taxonomic Group	IUCN Category	Population Trend	Biome
Sypheotides indicus	Lesser Florican	AVES	CR	Decreasing	Terrestrial
Vanellus gregarius	Sociable Lapwing	AVES	CR	Decreasing	Terrestrial
Gyps bengalensis	White-rumped Vulture	AVES	CR	Decreasing	Terrestrial
Sarcogyps calvus	Red-headed Vulture	AVES	CR	Decreasing	Terrestrial
Gyps indicus	Indian Vulture	AVES	CR	Decreasing	Terrestrial
Geoclemys hamiltonii	Spotted Pond Turtle	REPTILIA	EN	Decreasing	Terrestrial, Freshwater
Hardella thurjii	Crowned River Turtle	REPTILIA	EN	Decreasing	Terrestrial, Freshwater





Species Name	Common Name	Taxonomic Group	IUCN Category	Population Trend	Biome
Manis crassicaudata	Indian Pangolin	MAMMALIA	EN	Decreasing	Terrestrial
Varanus flavescens	Yellow Monitor	REPTILIA	EN	Decreasing	Terrestrial
Nilssonina gangetica	Indian Softshell Turtle	REPTILIA	EN	Decreasing	Terrestrial, Freshwater
Nilssonina hurum	Indian Peacock Softshell Turtle	REPTILIA	EN	Decreasing	Terrestrial, Freshwater
Axis porcinus	Hog Deer	MAMMALIA	EN	Decreasing	Terrestrial, Freshwater
Oxyura leucocephala	White-headed Duck	AVES	EN	Decreasing	Terrestrial, Freshwater
Rynchops albicollis	Indian Skimmer	AVES	EN	Decreasing	Terrestrial, Freshwater
Sterna acuticauda	Black-bellied Tern	AVES	EN	Decreasing	Terrestrial, Freshwater
Haliaeetus leucoryphus	Pallas's Fish-eagle	AVES	EN	Decreasing	Terrestrial, Freshwater
Neophron percnopterus	Egyptian Vulture	AVES	EN	Decreasing	Terrestrial, Freshwater
Aquila nipalensis	Steppe Eagle	AVES	EN	Decreasing	Terrestrial
Falco cherrug	Saker Falcon	AVES	EN	Decreasing	Terrestrial, Marine, Freshwater
Leptoptilos dubius	Greater Adjutant	AVES	EN	Decreasing	Terrestrial, Freshwater





Species Name	Common Name	Taxonomic Group	IUCN Category	Population Trend	Biome
<i>Crocodylus palustris</i>	Mugger	REPTILIA	VU	Stable	Terrestrial, Freshwater
<i>Lutrogale perspicillata</i>	Smooth-coated Otter	MAMMALIA	VU	Decreasing	Terrestrial, Marine, Freshwater
<i>Panthera pardus</i>	Leopard	MAMMALIA	VU	Decreasing	Terrestrial
<i>Prionailurus viverrinus</i>	Fishing Cat	MAMMALIA	VU	Decreasing	Terrestrial, Freshwater
<i>Ursus thibetanus</i>	Asiatic Black Bear	MAMMALIA	VU	Decreasing	Terrestrial
<i>Pangshura tecta</i>	Indian Roofed Turtle	REPTILIA	VU	Decreasing	Terrestrial, Freshwater
<i>Saara hardwickii</i>	Indian Spiny-tailed Lizard	REPTILIA	VU	Decreasing	Terrestrial
<i>Marmaronetta angustirostris</i>	Marbled Teal	AVES	VU	Decreasing	Terrestrial, Marine, Freshwater
<i>Aythya ferina</i>	Common Pochard	AVES	VU	Decreasing	Terrestrial, Marine, Freshwater
<i>Columba eversmanni</i>	Yellow-eyed Pigeon	AVES	VU	Decreasing	Terrestrial, Freshwater
<i>Sterna aurantia</i>	River Tern	AVES	VU	Decreasing	Terrestrial, Marine, Freshwater
<i>Clanga clanga</i>	Greater Spotted Eagle	AVES	VU	Decreasing	Terrestrial, Freshwater
<i>Aquila rapax</i>	Tawny Eagle	AVES	VU	Decreasing	Terrestrial, Freshwater





Species Name	Common Name	Taxonomic Group	IUCN Category	Population Trend	Biome
<i>Aquila heliaca</i>	Eastern Imperial Eagle	AVES	VU	Decreasing	Terrestrial, Freshwater
<i>Chlamydotis macqueenii</i>	Asian Houbara	AVES	VU	Decreasing	Terrestrial
<i>Ovis vignei</i>	Urial	MAMMALIA	VU	Decreasing	Terrestrial
<i>Lissemys punctata</i>	Indian Flapshell Turtle	REPTILIA	VU	Decreasing	Terrestrial, Freshwater





Recommended citation

IBAT Proximity Report. Generated under licence 29327-31283 from the Integrated Biodiversity Assessment Tool on 02 June 2022 (GMT). www.ibat-alliance.org

How to use this report

This report provides an indication of the potential biodiversity-related features - protected areas, key biodiversity areas and species - close to the specified location. It provides an early indication of potential biodiversity concerns, and can provide valuable guidance in making decisions. For example, this information can be helpful when assessing the potential environmental risk and impact of a site, categorising investments/projects, preparing the terms of reference for an impact assessment, focusing attention on key species of conservation concern and sites of known conservation value, and reviewing the results of an impact assessment.

The report does not provide details of potential indirect, downstream or cumulative impacts. Furthermore, the report should be regarded as a "first-step", providing a set of conservation values sourced from global data sets, and is not a substitute for further investigation and due diligence, especially concerning national and/or local conservation priorities.



Annexure VI: Consultation Material

Background Information Document for IEE Update of 220 kV Mirpur Transmission Line (67 km)

Introduction

The Government of Pakistan (GoP) signed a loan agreement with the Asian Development Bank (ADB) for financial support for the construction of the Power Enhancement Projects in Pakistan.

The overall objective of the project is to increase the power transmission capacity, efficiency and coverage in Pakistan. It is also meant to increase the confidence of commercial financiers in financing long-term transmission and distribution assets in Pakistan. The specific objectives are:

- Improvement in transmission infrastructure and management.
- Improvement in Energy Market Transparency and efficiency

220 kV Mirpur Khas Transmission Line

The scope of work of this sub-project consists of the following sub-components:
In/Out of D/C T/L Hala Road - Jamshoro at Mirpur Khas (67km)

The sub-project is located in the districts of Hyderabad, Tendo Allahyar and Mirpur Khas in Sindh province. The main objective of the sub-project is to enhance the transmission capacity of the NTDC system to meet the growing power demand of HESCO.

The location of the transmission line is provided in **Exhibit 1**.

The layout plan of the substation, which involves various installations of equipment, control room and ancillary facilities are standardized by NTDC. NTDC has developed design parameters for the planning and design of transmission systems in Pakistan. The design parameters are based on standard NTDC's existing specifications and practices for the existing as well as proposed Grid stations and transmission lines.

Approach to IEE

The Project IEE will ensure, the proposed Project are in compliance with the environmental and social safeguards laid out by ADB and international best practices.

The major components of the IEE include:

- comprehensive baseline studies to characterize the existing socioeconomic and biophysical environment.
- a public consultation process to ensure that project stakeholders are informed of the project development plan and have an opportunity to influence it;
- a comprehensive analysis of the environmental and social impacts of the project, both negative and positive; and,

- the development of impact mitigation plans and an environmental management plan.

A brief overview of the conceptual components of an IEE process that meets ADB Environment and Social Safeguards, and international standards is given in **Exhibit 2**.

A preliminary list of the potential environmental and social impacts of the Project that will be investigated during the IEE are provided below.

- Damage to vegetation and wildlife in the area.
- Effluent from the Project impacting the biodiversity and ecological functions.
- Construction-related impacts such as noise and dust.
- Dust, noise, vibration, road congestion, and safety hazard from truck traffic carrying construction materials; and,
- Social and ecological impacts of the construction-related activities.

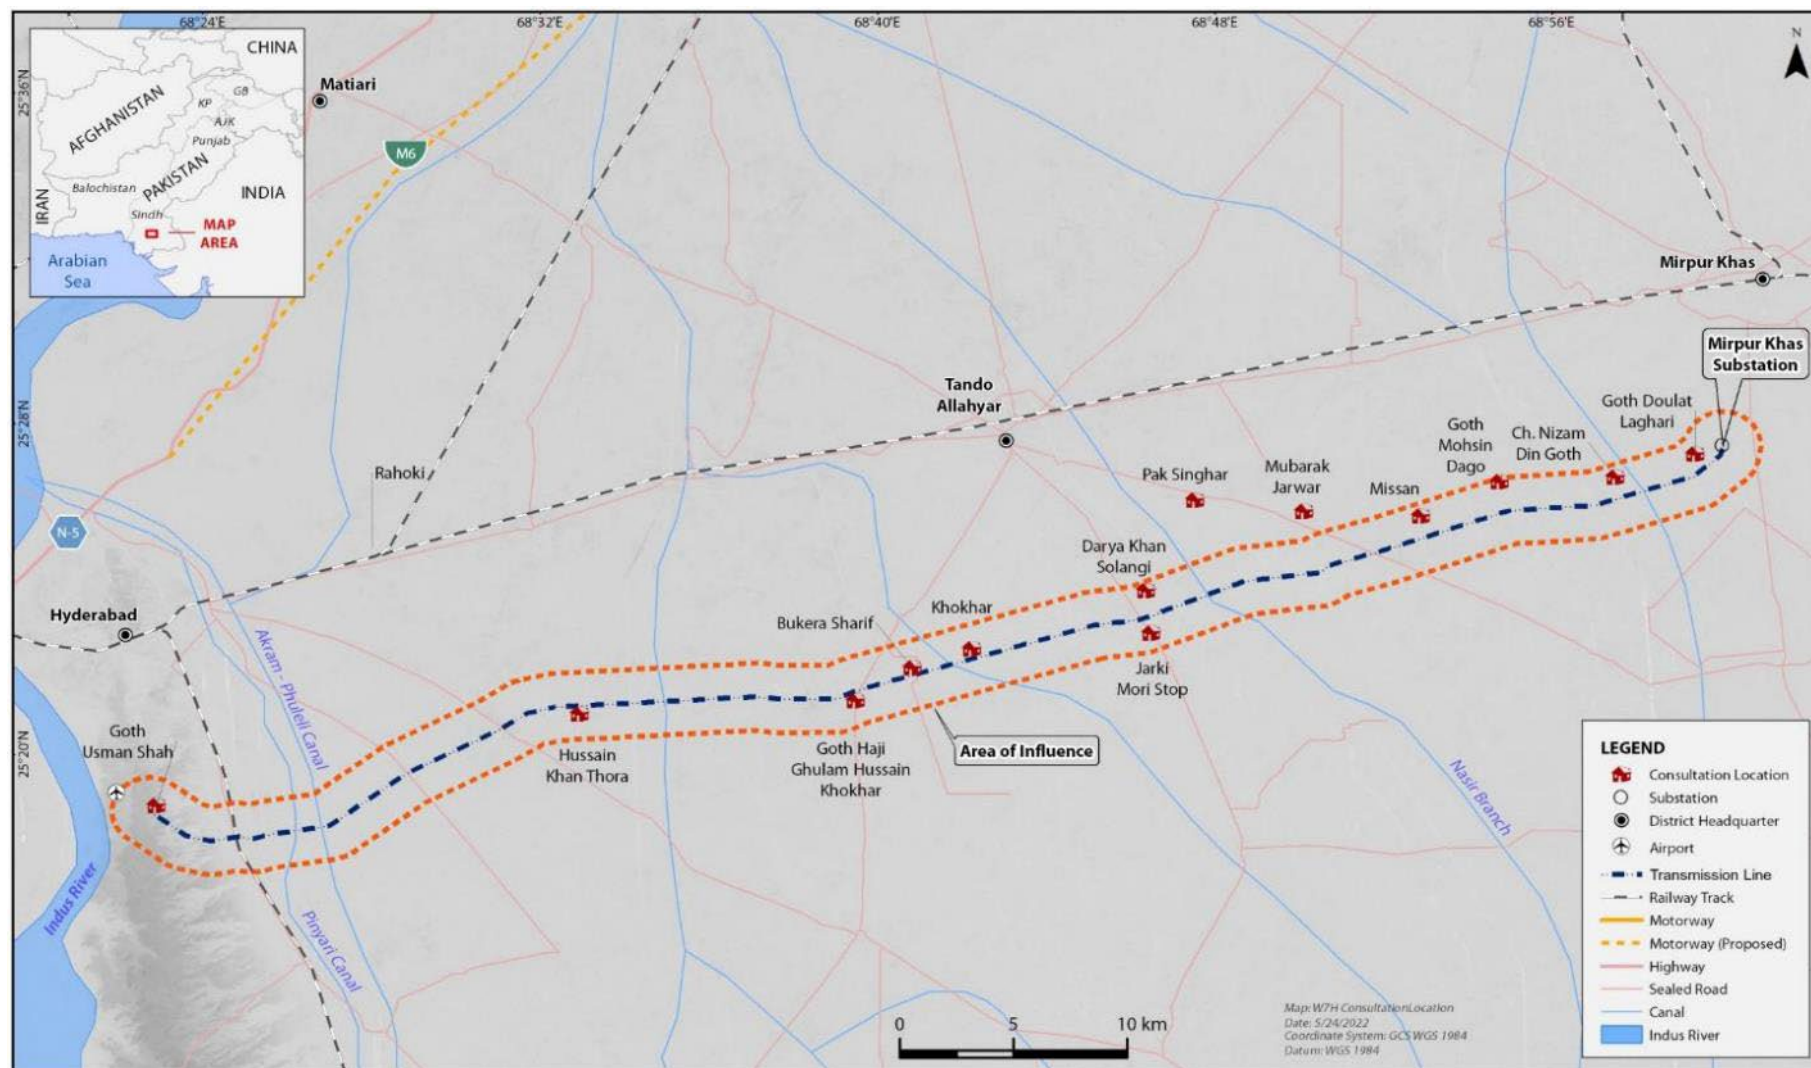


Exhibit 1: Project Location

Exhibit 2: Conceptual Components of an IEE Process

<i>Component</i>	<i>Main purpose</i>	<i>Activities related to Stakeholder Consultations</i>
Scoping	<ul style="list-style-type: none"> Identify the issues on which the IEE should focus. Identify project alternatives that should be evaluated during the course of the IEE. 	<ul style="list-style-type: none"> Identify institutional and community stakeholders Engage stakeholders and record issues raised Provide feedback to the IEE team to incorporate stakeholders' concern in baseline investigations and impact assessment
Baseline investigations	<ul style="list-style-type: none"> Collect background information on the environmental and social setting of the project. 	<ul style="list-style-type: none"> Incorporate additional issues raised during the baseline survey
Impact assessment, studies	<ul style="list-style-type: none"> Define the potential impacts of the project Undertake specialist investigations to predict changes to environment due to the project Determine the significance of the potential impacts Identify measures for the management of the impacts Determine the residual impacts of the project after incorporation of the management measures. Evaluate the overall acceptability of the project (from environmental and social perspectives). 	<ul style="list-style-type: none"> Assess issues raised by stakeholders
Mitigation Measures and management plan	<ul style="list-style-type: none"> Environmental mitigation and monitoring plan will describe the measures proposed to ensure implementation of the mitigation measures identified during the impact assessment. It will include, for example, specific designs and plans, training requirements, resource requirements, monitoring details (sampling locations, methodology, and frequency), review and reporting requirements and budget. 	<ul style="list-style-type: none"> Assess the acceptability and practicability of the proposed mitigation measures
IEE Report Preparation	<ul style="list-style-type: none"> After the studies, the IEE team will pull together the detailed assessment of impacts and mitigation measures. This may involve liaison with various specialists to ensure the correct interpretation of information and compilation of the IEE report. 	<ul style="list-style-type: none"> Compilation of draft report
IEE submittal to ADB for decision making	<ul style="list-style-type: none"> Submittal and review of the IEE report by ADBs and other interested stakeholders. The reviewers will inform about their decision on the acceptability of the Project from environmental and social perspectives and the conditions of approval for the development 	<ul style="list-style-type: none"> respond to the issues and questions raised by ADB and proponent for finalizing the report.

For more information on the IEE contact

For Project Proponents:
 Muhammad Irfan
 Deputy Manager, ESIC, NTDC
 Egerton Rd, Garhi Shahu, Lahore
 Tel: +92 333 574 02306

May 20, 2020

بنيادي معلوماتي دستاويز

براني

220 ڪلو واٽ جي 67 ڪلو ميٽر ميرپورخاص ٽرانسميشن لائن جي لاءِ آئي اي (IEE)

تعارف

حڪومت پاڪستان (GOP) پاڪستان ۾ بجلي جي واڌاري جي منصوبن جي تعمير لاءِ. ايشين ڊولپمنٽ بينڪ سان مالي تعاون جي لاءِ قرض جي معاهدن تي صحيحون ڪيون آهن.

منصوبي جو مجموعي مقصد اهو آهي ته پاڪستان ۾ بجلي جي ٽرانسميشن جي صلاحيت، ڪارڪردگي ۽ ڪوريج کي وڌائجي. انهي جو مقصد اهو پڻ آهي ته پاڪستان ۾ سيڙپ ڪارن ۽ واپارين کي اعتماد ٿئي ۽ ڊگهي عرصي تائين ٽرانسميشن ۽ اثاثن ۾ سيڙپڪاري ڪن.

خاص مقصد هي آهن:

- ٽرانسميشن انفراسٽرڪچر ۽ انتظاميا ۾ بهتري
- توانائي مارڪيٽ ۾ شفافيت ۽ ڪارڪردگي ۾ بهتري

220 ڪلو واٽ جي ميرپورخاص ٽرانسميشن لائن

هن ذيلي منصوبي جي ڪم جو دائرو هيٺين ذيلي اجزاء تي مشتمل آهي:

- سب جز 1: ميرپورخاص کان هالا روڊ- ڄامشورو (70km) D/C T/L جي ان/آؤٽ

هي ذيلي منصوبو صوبي سنڌ جي حيدرآباد، ٽنڊو الھيار ۽ ميرپورخاص ضلعن ۾ واقع آهي. جيڪو راهوڪي ڊسٽري بيوٽري سان گڏ اٺن ڳوٺن ۽ ڪجهه شهري علاقن مان گذرن ٿا، انهي جو بنيادي مقصد اين ٽي ڊي سي NTDC سسٽم کي موجوده ٽرانسميشن جي صلاحيت ۾ اضافو آهي جنهن جيڪو (HESCO) جي وڌندڙ بجلي جي ڊمانڊ کي پورو ڪري سگهجي. ٽرانسميشن لائن جي جڳهه منصوبي جي هنڌ واري **نقشي نمبر 1** ۾ ڏيکاري وئي آهي سب اسٽيشن جو واضح ڪيل پلان، جنهن ۾ آلات، ڪنٽرول روم ۽ ننڍين سهولياتن جي مختلف تنصبيات شامل آهن، انهن کي اين ٽي ڊي سي جي ذريعي معياري بڻايو ويو آهي. اين ٽي ڊي سي پاڪستان ٽرانسميشن سسٽم جي منصوبه بندي ۽ ڊزائن جي لاءِ معياري پيرا ميٽرز طيار ڪيا آهن ڊزائن ڪيل پيرا ميٽرز اين ٽي ڊي سي جي معياري خصوصيتن ۽ طريقن تي مٿار آهن جيڪي موجوده گرڊ اسٽيشنن ۽ ٽرانسميشن لائن سان گڏو گڏ تجويز ڪيل سسٽم جي لاءِ به مفيد آهن

ماحولياتي ۽ سماجي تجزيي جي حڪمت عملي

منصوبي جي ماحولياتي تجزيي ۾ انهي ڳالهه کي يقيني بڻايو ويندو ته هي رپورٽ ۽ ان ۾ تجويز ڪيل حفاظتي اقدامات سنڌ ماحولياتي تحفظ جي


ايجنسي، نيشنل ۽ انٽر نيشنل ماحولياتي قانون جي معيار جي مطابق هوندا.
ماحولياتي اثرن بابت جائزي جا اهم جز

- موجوده معاشي ۽ بايو فزيڪل ماحول جي خصوصيت جي جامع بنيادي مطالعو
- عوامي مشاورت جي عمل کي يقيني بنائڻ ته جئين منصوبي جي اسٽيڪ هولڊرن کي منصوبي جي ڊولپمنٽ پلان بابت آگاهي ملي ۽ ان ۾ شموليت جو موقعو ملي سگهي
- منصوبي جي ماحولياتي ۽ سماجي حوالي سان منفي ۽ مثبت اثرات جو جامع تجزيو.
- اثرات کي گهٽ ڪرڻ ۽ ماحولياتي انتظامي پلان ٺاهڻ.

آئي اي اي (IEE) جي نظرياتي نقطن جو هڪ مختصر جائزو جيڪو پاڪستان ۽ بين الاقوامي، ٻنهي جي معيار تي پورا لهن انهي کي نقشه نمبر 2 ۾ ڏيکاريو ويو آهي.

انهي منصوبي جي ممڪنه ماحولياتي ۽ معاشرتي اثرات جي هڪ ابتدائي فهرست جنهن جي جانچ اي آئي اي جي دوران ڪئي ويندي جيڪي هيٺ ڏنل آهن

- علاقي ۾ ٻوٽن ۽ جهنگلي جيوت کي پهچندڙ نقصان
- منصوبي جي ڪري بايو ڊائيورسٽي ۽ ايڪولوجيڪل فنڪشنز تي اثرات
- تعميراتي ڪم جي دوران گوڙ ۽ دڙ جهڙا عناصر
- تعميراتي ڪم جي دوران سامان کڻڻ ۽ گاڏين جي وجهه جي ڪري دڙ، گوڙ، وائبريشن، رستي جي رش ۽ حفاظتي خطرات
- تعمير جي ڪم جي وجهه جي ڪري معاشي ۽ اڪالوجيڪل اثرات

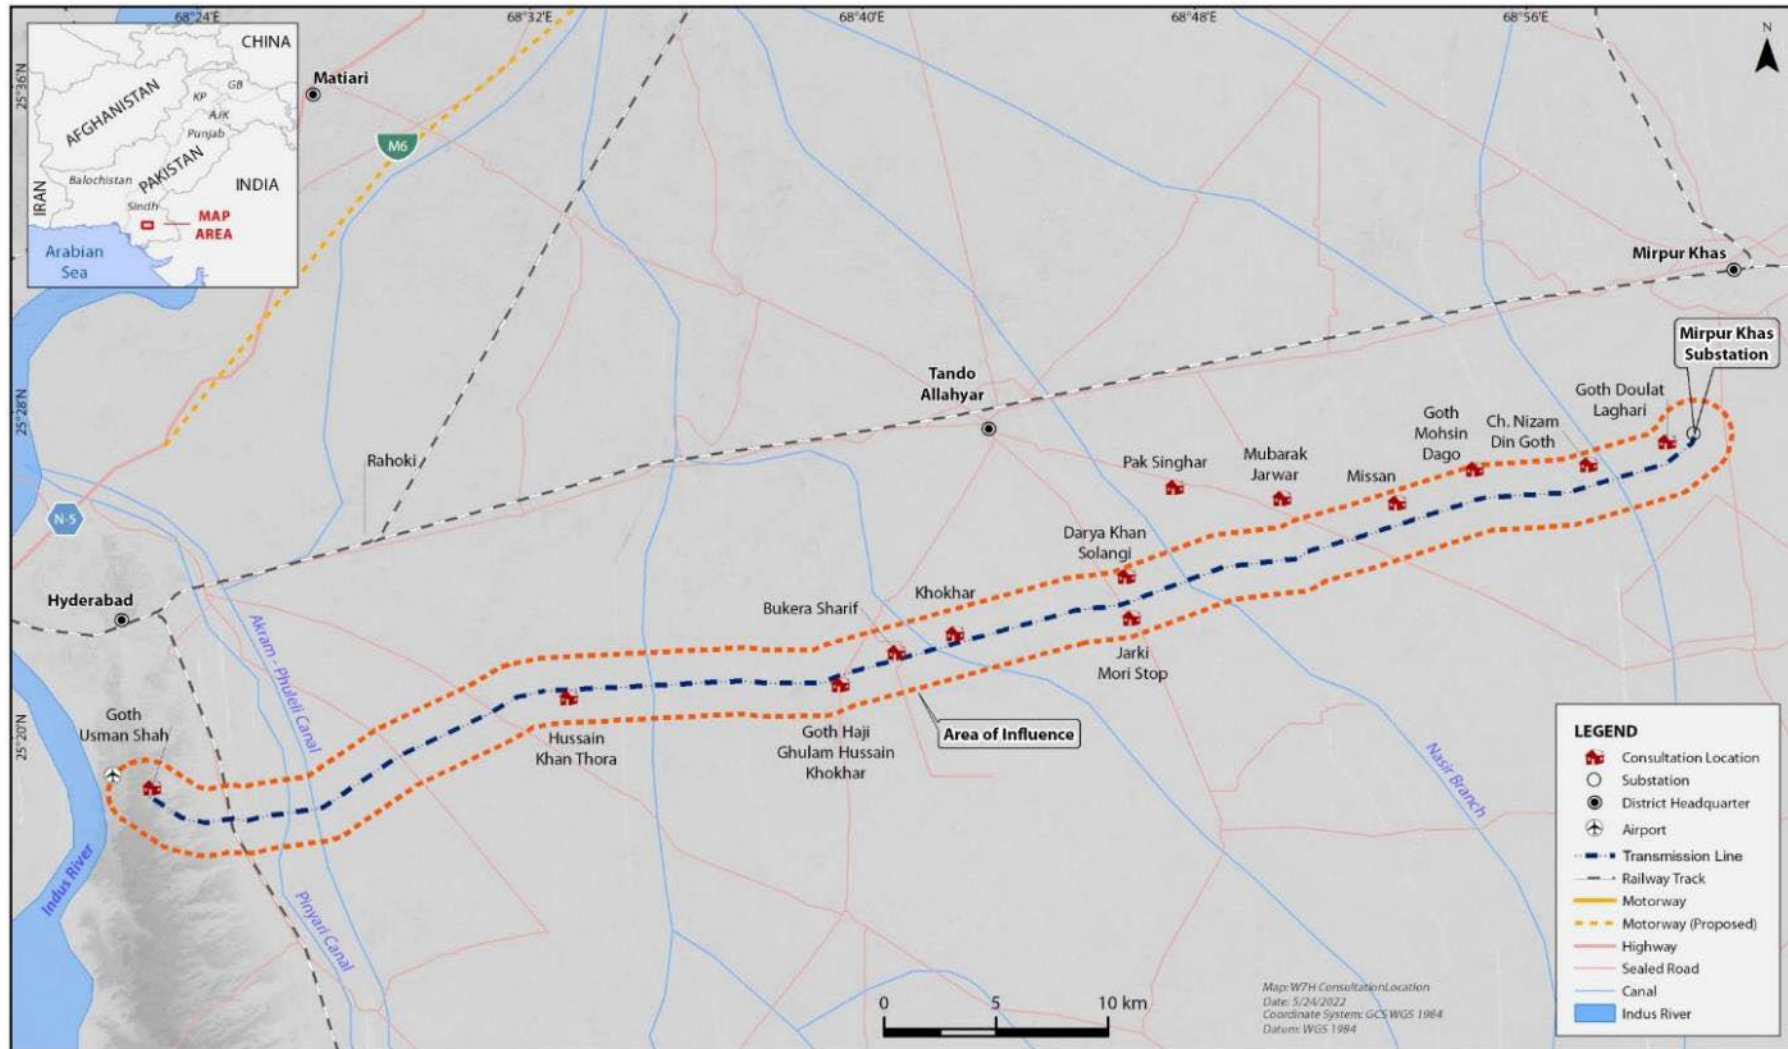

نقشو

نمبر 1- منصوبي جي جڳهه

نقشو نمبر 2: ماحولياتي ۽ سماجي اثرن بابت جائزي جي اڀياس وارو عمل

جڙ	مقصد	شراڪتدارن جي مشاورت سان لاڳاپيل سرگرمي
اسڪوپنگ يا وسعت	<ul style="list-style-type: none"> اهڙن معاملن جي نشاندهي ڪرڻ جن تي آءِ اي اي کي تيان ڏيڻ گهرجي سموري منصوبي جا اهڙا متبادل ڳولڻ جن جو پڻ آءِ اي اي دوران جائزو ورتو وڃي ۽ انهن کي پرکيو وڃي 	<ul style="list-style-type: none"> ادارتي ۽ معاشرتي شراڪتدارن جي سڃاڻپ شراڪتدارن سان لهه وچڙ ۾ اچڻ ۽ انهن سان ٿيل سموريون ڳالهائون محفوظ ڪرڻ آءِ اي اي جي عملي سان ان حوالي سان رايو وٺڻ ته جيئن اهي پنهنجي بنيادي ڄاڻ واري تحقيقات ۽ اثرن واري جائزي ۾ اهي ڳالهائون به شامل رکن
بنيادي ڄاڻ واري تحقيقات	<ul style="list-style-type: none"> منصوبي جي ماحولياتي ۽ سماجي ترتيب جي پس منظر بابت ڄاڻ حاصل ڪرڻ 	<ul style="list-style-type: none"> بنيادي ڄاڻ واري سروي دوران جيڪي اضافي مسئلا ڄاڻايا ويا انهن کي به شامل ڪرڻ
اثرن جي جائزي لاءِ اڀياس	<ul style="list-style-type: none"> منصوبي جي امڪاناتي اثرن کي بيان ڪرڻ ماهرن جي مدد سان منصوبي جي نتيجي ۾ پيدا ٿيندڙ تبديلين جي تحقيقات ڪرڻ امڪاني اثرن جي اهميت دريافت ڪرڻ اثرن جي انتظام بابت طريقو دريافت ڪرڻ انتظامي طريقي جي شموليت کانپوءِ منصوبي جي نتيجي ۾ پوندر اثر دريافت ڪرڻ منصوبي جي مجموعي قبوليت جو اندازو لڳائڻ (سماجي توڙي ماحولياتي نقطئه نظر کان) 	<ul style="list-style-type: none"> شراڪتدارن پاران ڄاڻ ۾ آندل مسئلن جو جائزو
جائزي جا مجموعي اثر	<ul style="list-style-type: none"> علائقي ۾ ٻين ترقياتي ڪمن جي نشاندهي منصوبي تي مجموعي ڪم جي حوالي سان امڪاني اثرن جي نشاندهي منصوبي جي جائزي دوران سماجي ۽ ماحولياتي انتظامن جي حوالي سان قدم کڻڻ، جيئن ڪم دوران ڪاميابي سان عملدرآمد کي يقيني بنائي سگهجي. مانيٽرنگ پلان تيار ڪرڻ، جيئن هلندڙ ڪم جي بنياد تي عمل درآمد کي يقيني بنائي سگهجي، 	<ul style="list-style-type: none"> سموري ڪم جو مجموعي جائزو وٺڻ تجويز ڪيل تخفيف وارن طريقن جي قبوليت جو جائزو ۽ ان ڳالهه جو جائزو ته انهن طريقن تي ڪيتري قدر عمل درآمد ڪري سگهجي ٿو.
آءِ اي اي رپورٽ جي	<ul style="list-style-type: none"> آءِ اي اي رپورٽ جي تياري ۾ هيئن جن جو 	<ul style="list-style-type: none"> شراڪتدارن کي آءِ اي اي

جڙ	مقصد	شراڪتدارن جي مشاورت سان لاڳاپيل سرگرمي
تياري	جائزو وٺي انهن کي رپورٽ ۾ شامل ڪيو ويندو آهي، پاليسي، قانون، انتظامي فريم ورڪ، منصوبي جي وضاحت ماحولياتي وضاحت، امڪاني ماحولياتي اثر، تخفيفي قدم، متبادل قدامت جو جائزو، معلومات کي ظاهر ڪرڻ، خدشن جي خاتمي جو طريقي ڪار، ماحولياتي ۽ سماجي انتظامي پلان، اختتام ۽ سفارشون. غير فني ايگزيڪيوٽو سمري يا خلاصو تيار ڪرڻ	جي حوالي سان رابن کان آگاهه ڪرڻ. خاص طور تي انهن کي اهو ٻڌائڻ ته منصوبو هلائڻ وارا انهن شراڪتدارن پاران ڄاڻايل مسئلن کي حل ڪرڻ لاءِ ڪهڙيون تجويزون ڏين ٿا.
آءِ اي پاران لاڳاپيل اختيارين تائين ڄاڻ پهچائڻ ۽ فيصلا سازي	آءِ اي پاران پنهنجي رپورٽ لاڳاپيل اختيارين کي جمع ڪرائڻ ۽ اختيارين توڙي دلچسپي رکندڙ شراڪتدارن پاران رپورٽ جو جائزو وٺڻ. ان کان پوءِ رپورٽ جو جائزو وٺندڙ ٽريون منصوبي جي ماحولياتي ۽ سماجي نقطئه نظر کان قبوليت بابت پنهنجو فيصلو ٻڌائينديون ۽ منصوبي جي منظوري جي حوالي سان پنهنجا شرط پڻ آڏو رکنديون.	عوامي گڏجاڻين ۾ شرڪت ڪرڻ ۽ انهن گڏجاڻين دوران اٿاريل سوالن جا جواب ڏيڻ

منصوبي مطعلق مزيد معلومات لاءِ رابطو ڪري سگهو ٿا

پراجيڪٽ پروپونٽ جي لاء :
<p>محمد عرفان</p> <p>ڊپٽي مينجر اي ايس آئي سي ،</p> <p>اين ٽي ڊي سي ايجر ٽن روڊ گڙهي</p> <p>شاهو لاهور</p> <p>ٽيليفون: 740 2306 (92 335 +)</p>

Annexure VII: Consultation Logs

Record of the Consultation Meeting

Stakeholder/s	Community/ Village Maqbool Memon (Bukera Sharif)	
Consultation	Community Consultation	
Date	May 28, 2022	
Time	10:00 Am	
Meeting venue	Village Maqbool Memon (Bukera Sharif)	
Attended by and contact details	Madho Mal Manager	03003241912
	Choudri Yoseen	NA
	Radhoo Mal Kolhi	NA
	Versi Mal Kachi	NA
	M Aslam	0308345372
	Shahid Ali Shah s/o Pir Ashraf	0303 3003879
	Alli Dino s/o Sawan	NA
Conducted by	Jan Muhammad	
Recorded by	Jan Muhammad	
Reviewed by		
Language	Sindhi	
Preamble	Team briefed the objective of the consultation and shared information on the proposed Project, its activities and location followed by the recording of opinion expressed by the department.	
Picture		
No.	Issues, Concerns and Suggestions	
1	Ensure minimum wastage of crops & orchids. Avoid construction during the peak cropping season i.e. July to Sep	
2	Dust and noise should be minimum near the residential areas	
3	Agricultural land should not be polluted as it affects soil productivity and crop yield.	
4	Fair & timely compensation of crops should be provided to the affected people	
6	Company workers should take care of the local culture during the installation of T/L During the construction phase, labor and general workers should be inducted from the adjoining villages/areas.	
7	Employment should be given to local community with priority to those directly affected by the Project activities	

Record of the Consultation Meeting

Stakeholder/s	Community/ Village Pak Singaar	
Consultation	Community Consultation	
Date	May 28, 2022	
Time	11:50 Am	
Meeting venue	Village Pak Singaar	
Attended by and contact details	Ali Nawaz	0344-36537682
	Shah Nawaz	0310-033435
	M Hanif Palah	NA
	Ali Akbar Palah	0346-2520630
	M Yousif Kalro	0346-0235758
	Preem Kumar	0313-3518361
	Muhammad Ali Palah	NA
	Ghulam Muhammad	0301-3620351
Conducted by	Jan Muhammad	
Recorded by	Jan Muhammad	
Reviewed by		
Language	Sindhi	
Preamble	Team briefed the objective of the consultation and shared information on the proposed Project, its activities and location, followed by the recording of opinion expressed by the department.	
Picture		
No.	Issues, Concerns and Suggestions	
1	Employment should be given to local community	
2	Company workers should take care of the local culture during the installation of T/L During the construction phase, labor and general workers should be inducted from the adjoining villages/areas.	
3	Fair & timely compensation of crops should be provided to the affected people	
4	The project should offer jobs to the affected people and compensations should be provided according to damages to crops	
5	Dust and noise should be minimum near the residential areas	

Record of the Consultation Meeting

Stakeholder/s	Community/ Village Mubarak Jarwar	
Consultation	Community Consultation	
Date	May 28, 2022	
Time	02:00 Pm	
Meeting venue	Village Mubarak Jarwar	
Attended by and contact details	M Ishaque Jarwar	0300-3319259
	Shahid Iqbal	0313-3633851
	M Ameen Jarwar	NA
	Abdul Razaq s/o Haji Sindino	NA
	Misri s/o Ahmad Khan	NA
	Faisal Karim s/o Karam Dad	0333- 4119505
	M Ishaque Jarwar	03003319259
Conducted by	Jan Muhammad	
Recorded by	Jan Muhammad	
Reviewed by		
Language	Sindhi	
Preamble	Team briefed the objective of the consultation and shared information on the proposed Project, its activities and location followed by the recording of opinion expressed by the department.	
Picture		
No.	Issues, Concerns and Suggestions	
1	Dust and noise should be minimum near the residential areas	
2	Agricultural land should not be polluted as it affects soil productivity and crop yield.	
3	Fair & timely compensation of crops should be provided to the affected people	
4	The project should offer jobs to the affected people	
5	Company workers should take care of the local culture during the installation of T/L During the construction phase, labor and general workers should be inducted from the adjoining villages/areas.	
6	Employment should be given to local community	

Record of the Consultation Meeting

Stakeholder/s	Community/ Village Missan	
Consultation	Community Consultation	
Date	May 30, 2022	
Time	10:00 Am	
Meeting venue	Village Missan	
Attended by and contact details	Sadam Hussain	0314-2932127
	Mansoor Ul Hoq	0313-3571734
	Mumtaz Hussain	0314-2873751
	Abdul Karim Kunbhar	NA
	Mumtaz Ali Shoro	NA
Conducted by	Jan Muhammad	
Recorded by	Jan Muhammad	
Reviewed by		
Language	Sindhi	
Preamble	Team briefed the objective of the consultation and shared information on the proposed Project, its activities and location followed by the recording of opinion expressed by the department.	
Picture		
No.	Issues, Concerns and Suggestions	
1	Employment should be given to local community with priority to those directly affected by the Project activities.	
2	Company workers should take care of the local culture during the installation of T/L During the construction phase, labor and general workers should be inducted from the adjoining villages/areas.	
3	Early information should be provided before the starting construction	
4	Company activities should not disturb the local people during their agricultural activities	
5	Timely compensation should be provided to farmers according to crops damages	
6	Dust and noise should be minimum near the residential areas	

Record of the Consultation Meeting

Stakeholder/s	Community/ Village Dolat Laghari	
Consultation	Community Consultation	
Date	May 30, 2022	
Time	11:40 Am	
Meeting venue	Village Dolat Laghari	
Attended by and contact details	Nabi Buksh Lighari	0300-3314619
	Haji Majon s/o Sher Mohammad	NA
	Shafi Mohammad s/o Haji Sobat	NA
	Abdul Shakoor Lighari	NA
	Bhagwano Mal	NA
Conducted by	Jan Muhammad	
Recorded by	Jan Muhammad	
Reviewed by		
Language	Sindhi	
Preamble	Team briefed the objective of the consultation and shared information on the proposed Project, its activities and location followed by the recording of opinion expressed by the department.	
Picture		
No.	Issues, Concerns and Suggestions	
1	Employment should be given to local community with priority to those directly affected by the Project activities.	
2	Company workers should take care of the local culture during the installation of T/L During the construction phase, labor and general workers should be inducted from the adjoining villages/areas.	
3	Early information should be provided before the starting construction	
4	Company activities should not disturb the local people during their agricultural activities	
5	Timely compensation should be provided to farmers according to crops damages	
6	Dust and noise should be minimum near the residential areas	

Record of the Consultation Meeting

Stakeholder/s	Community/ Village Haji Moosa Shoro	
Consultation	Community Consultation	
Date	May 31, 2022	
Time	10:00 Am	
Meeting venue	Village Village Haji Moosa Shoro	
Attended by and contact details	Mujeeb u Rahman Shoro	
	Gulam Mujtaba	0306-3003676
	Abdul Wahid Shoro	0306-3574132
	Ali Muhammad	0308-3453884
	Muhammad Nadeem Shoro	0346-3911273
	Gulam Murtaza	NA
Conducted by	Jan Muhammad	
Recorded by	Jan Muhammad	
Reviewed by		
Language	Sindhi	
Preamble	Team briefed the objective of the consultation and shared information on the proposed Project, its activities and location followed by the recording of opinion expressed by the department.	
Picture		
No.	Issues, Concerns and Suggestions	
1	Ensure minimum wastage of crops & orchids. Avoid construction during the peak cropping season i.e. July to Sep	
2	Dust and noise should be minimum near the residential areas	
3	Agricultural land should not be polluted as it affects soil productivity and crop yield.	
4	Fair & timely compensation of crops should be provided to the affected people	
6	Company workers should take care of the local culture during the installation of T/L During the construction phase, labor and general workers should be inducted from the adjoining villages/areas.	
7	Employment should be given to local community with priority to those directly affected by the Project activities.	

Record of the Consultation Meeting

Stakeholder/s	Community/ Village Ch. Nizam Din Goth	
Consultation	Community Consultation	
Date	May 30, 2022	
Time	03:00 pm	
Meeting venue	Village Ch. Nizam Din	
Attended by and contact details	M Sarwar Arain	0333-2993449
	Ahtisham Sarwar	0300-3441556
	Mataro Jatt	NA
	Bhoro Bheel	NA
	Lalchand	0343-2166465
	Heero Mal Bheel	NA
	Mohan Das Bheel	NA
Conducted by	Jan Muhammad	
Recorded by	Jan Muhammad	
Reviewed by		
Language	Sindhi	
Preamble	Team briefed the objective of the consultation and shared information on the proposed Project, its activities and location followed by the recording of opinion expressed by the department.	
Picture		
No.	Issues, Concerns and Suggestions	
1	Ensure minimum wastage of crops & orchids. Avoid construction during the peak cropping season i.e. July to Sep	
2	Dust and noise should be minimum near the residential areas	
3	Agricultural land should not be polluted as it affects soil productivity and crop yield.	
4	Fair & timely compensation of crops should be provided to the affected people	
6	Company workers should take care of the local culture during the installation of T/L During the construction phase, labor and general workers should be inducted from the adjoining villages/areas.	
7	Employment should be given to local community with priority to those directly affected by the Project activities	

Record of the Consultation Meeting

Stakeholder/s	Community/ Village Mohsin Dago	
Consultation	Community Consultation	
Date	May 31, 2022	
Time	01:00 pm	
Meeting venue	Village Mohsin Dago	
Attended by and contact details	Haji Habib Dagoo	03003316439
	Faiz Muhammad Dago	NA
	Haji Muhammad Dago	NA
	Rameesh Kumr	NA
	Haji Habib Dagoo	0300-3316439
	Faiz Muhammad Dago	
Conducted by	Jan Muhammad	
Recorded by	Jan Muhammad	
Reviewed by		
Language	Sindhi	
Preamble	Team briefed the objective of the consultation and shared information on the proposed Project, its activities and location followed by the recording of opinion expressed by the department.	
Picture		
No.	Issues, Concerns and Suggestions	
1	Employment should be given to local community with priority to those directly affected by the Project activities	
2	Dust and noise should be minimum near the residential areas	
3	Agricultural land should not be polluted as it affects soil productivity and crop yield.	
4	Timely compensation should be provided according to damages to crops.	
5	Company workers should take care of the local culture during the installation of T/L During the construction phase, labor and general workers should be inducted from the adjoining villages/areas.	

Record of the Consultation Meeting

Stakeholder/s	Community/ Village Darya Khan Solangi	
Consultation	Community Consultation	
Date	May 31, 2022	
Time	05:00 pm	
Meeting venue	Village Darya Khan Solangi	
Attended by and contact details	Hakim Solanghi	0300-1002753
	Ali Gull Machi	0300-1002753
	Ibraheem Solanghi	NA
	Darya Khan Solanghi	NA
	Muhammad Ali	NA
	Nadir Solanghi	0318-0136110
	Muhammad Khan	
Conducted by	Jan Muhammad	
Recorded by	Jan Muhammad	
Reviewed by		
Language	Sindhi	
Preamble	Team briefed the objective of the consultation and shared information on the proposed Project, its activities and location followed by the recording of opinion expressed by the department.	
Picture		
No.	Issues, Concerns and Suggestions	
1	Ensure minimum wastage of crops & orchids. Avoid construction during the peak cropping season i.e. July to Sep	
2	Dust and noise should be minimum near the residential areas	
3	Agricultural land should not be polluted as it affects soil productivity and crop yield.	
4	Timely compensation of crops to the affected farmers	
5	Employment should be given to local community with priority to those directly affected by the Project activities	
6	Company workers should take care of the local culture during the installation of T/L During the construction phase, labor and general workers should be inducted from the adjoining villages/areas.	

Record of the Consultation Meeting from February 2020

takeholder/s:	Agriculture Department Mirpur Khas	
Consultation:	Stakeholder Consultation for 220 kV Mirpur khas Substation and associated transmission lines at ADB-201A	
Date:	February 28,2020	
Time:	10:30pm	
Meeting Venue:	Director General Agriculture Office, Mirpur Khas	
Attended By:		
Name	Designation	Contact #
Chetan Mal	Director Agriculture	0233 9290045-46
Ali Akbar Pawar	Additional Director Agriculture	
Goharam Baloch	Assistant Director Agriculture	
HBP Representatives:	Muhammad Wajahat (MW), Muhammad Maqsoom (MM)	
Stakeholder Representatives:	Chetan Mal	
Conducted by:	MW, MM	
Recorded by:	MW	
Language:	English, Urdu	
Preamble:	MW briefed the objective of the consultation and shared information on the proposed Project its activities and location followed by the recording of opinion expressed by the department.	
Issues, Concerns and Suggestions		
Major crops in the area include wheat, sugarcane, rice, etc.		
Orchards of lemon, guava, jojo (Bair), cheeku, and vegetables such as chilli, tomato, okra and maize are majorly present in the area.		
The area where the stubs of the tower will be constructed will be of no use i.e. no trees or crop can be grown or cultivated.		
Soil fertility will be affected in the construction phase as the topsoil will be disturbed.		
Study should be carried out on the crops cultivated under the already installed transmission lines comparing the crop yield with those away from the wires. This will reveal the effect of electromagnetic force (EMF) on the crop yield.		
Transmission lines should not be located near or cross the residential areas. If it is unavoidable, there should be no land use under the high voltage wires. Preventive measures must be taken to remediate such issues		
Earthing wires of the towers can be dangerous for domestic animals and farmers during rainy seasons as some cases have been reported of getting electrocuted from the earthing wires.		
EMF from high voltage wires may affect pollination, which in turn causes low crop and fruit yields		
Mango trees can have maximum height of 45 feet will be affected, majorly the buds of the trees may be damaged.		

Proper laws should be prepared regarding the passing of transmission lines from the agricultural fields and orchids.

Record of the Consultation Meeting

Stakeholder/s:	Agriculture Department Hyderabad	
Consultation:	Stakeholder Consultation for 220 kV Mirpur Khas Substation and associated transmission lines at ADB-201A	
Date:	February 26,2020	
Time:	11:00am	
Meeting Venue:	Additional Director, Agriculture Office Hyderabad	
Attended By:		
Name	Designation	Contact #
Dr. Muhammad Usman	Additional Director, Agriculture	0300-5916640
Saleem Soomro	Office Assistant	022-9200193
HBP Representatives:	Muhammad Wajahat Saeed (MW), Muhammad Maqsoom (MM)	
Stakeholder Representatives:	Dr. Muhammad Usman	
Conducted by:	MW, MM	
Recorded by:	MW	
Language:	English, Urdu	
Preamble:	MW briefed the objective of the consultation and shared information on the proposed Project its activities and location followed by the recording of opinion expressed by the department.	
Issues, Concerns and Suggestions		
People living in the area nearby the proposed transmission line are aggressive. The contractor should motivate the locals by giving them job opportunities.		
Those landowners/farmers that may/will be affected by the construction activities should be given fair compensation.		
Construction process should be carried in such a way that in excavation or foundation phase the topsoil should be saved separately.		
The major crops and orchards mainly produced in the area include sugarcane, wheat, banana, guava, and vegetables like onions.		
The contractor should minimize the cutting down of the orchards and trees on as minimum as possible basis.		
After installation of towers, tractors will not be able to cross under the towers and farmers have to manually plough the area.		
3-time payments should be made i.e. during the construction of foundations, erection and stringing as there will be damage to crops during all of these phases.		
Rates of compensation of crops/trees should be latest and local rates and proper recordkeeping of the payments should be maintained.		

Record of the Consultation Meeting

Stakeholder/s:	Agriculture Department Tando Allah Yar	
Consultation:	Stakeholder Consultation for 220 kV Mirpur Khas Substation and associated transmission lines at ADB-201A	
Date:	February 27,2020	
Time:	10:30am	
Meeting Venue:	Additional Director, Agriculture Office Tando Allah Yar	
Attended By:		
Name	Designation	Contact #
Lucky Buzdar	Additional Director, Agriculture	0300-3084929
HBP Representatives:	Muhammad Wajahat Saeed (MW), Muhammad Maqsoom (MM)	
Stakeholder Representatives:	Lucky Buzdar	
Conducted by:	MW, MM	
Recorded by:	MW	
Language:	English, Urdu	
Preamble:	MW briefed the objective of the consultation and shared information on the proposed Project its activities and location followed by the recording of opinion expressed by the department.	
Issues, Concerns and Suggestions		
Major crops and orchards in the surrounding of the proposed transmission line are mostly Banana, Mango, Sugarcane, Cotton, and vegetables.		
Revenue department should be engaged for compensation against the damage to crops.		
The contractor should promote local employment for skilled as well as non-skilled tasks.		
Most of the people in the region are farmers, the contractor should train them for non-skilled jobs and hire them.		
Construction activities should not disturb the existing facilities such as gas or sewage water pipeline facilities.		
Compensation against the loss of the crops/trees should be paid effectively and timel. The revenue department should be consulted for compensation of damaged as per local rates.		

Record of the Consultation Meeting

Stakeholder/s:	Environment Department, Hyderabad	
Consultation:	Stakeholder Consultation for 220 kV Mirpur Khas Substation and associated transmission lines at ADB-201A	
Date:	February 26,2020	
Time:	02:00pm	
Meeting Venue:	Environmental Protection Agency Office Hyderabad	
Attended By:		
Name	Designation	Contact #
Mr. Abdul Rauf	Deputy Director Environment	0315-2409618
HBP Representatives:	Muhammad Wajahat Saeed (MW), Muhammad Maqsoom (MM)	
Stakeholder Representatives:	Mr. Abdul Rauf	
Conducted by:	MW, MM	
Recorded by:	MW	
Language:	English, Urdu	
Preamble:	MW briefed the objective of the consultation and shared information on the proposed Project its activities and location followed by the recording of opinion expressed by the department.	
Issues, Concerns and Suggestions		
3 major canals will cross the transmission line. Precautionary measures to be adopted to avoiding any damage to the surface water channels and associated fauna.		
Government institutions need to be contacted for stakeholder consultations such as Agriculture, Wildlife, Board of Revenue and Irrigation Department.		
Mention the flora and fauna of the areas affected and also prepare a mitigation plan for the protection of the identified species.		
Develop a Grievance Redress Mechanism (GRM) to resolve community reservations and issues.		
Soil analysis must be carried out before the project execution.		
Local hiring should be done During the construction phase of the project.		
Residential areas in the Right of Way (RoW) should be identified and the EIA report should incorporate relevant impacts and mitigation measures.		

Record of the Consultation Meeting

Stakeholder/s:	Environment Department Mirpur Khas	
Consultation:	Stakeholder Consultation for 220 kV Mirpur khas Substation and associated transmission lines at ADB-201A	
Date:	February 28,2020	
Time:	12:00pm	
Meeting Venue:	Environmental Protection Agency Office, Mirpur Khas	
Attended By:		
Name	Designation	Contact #
Ali Muhammad	Assistant Director Environment	0333-2609547
Ali Shahbaz	Office Superintendent	
HBP Representatives:	Muhammad Wajahat (MW), Muhammad Maqsoom (MM)	
Stakeholder Representatives:	Ali Muhammad	
Conducted by:	MW, MM	
Recorded by:	MW	
Language:	English, Urdu	
Preamble:	MW briefed the objective of the consultation and shared information on the proposed Project its activities and location followed by the recording of opinion expressed by the department.	
Issues, Concerns and Suggestions		
Institutional consultations with wildlife, forest, and agriculture department are important in updating EIA for the project.		
A public hearing should be conducted at a venue where all the potential stakeholders of the project can participate easily.		
The contractor should promote local employment for skilled as well as non-skilled tasks.		
The construction waste should not be left unattended. There should be wastewater and solid waste management plan for domestic and hazardous waste disposal.		
Proper and timely compensations should be paid to the landowners whose crops will be damaged. Also keep record of the payments.		

Record of the Consultation Meeting

Stakeholder/s:	Forest Department Hyderabad	
Consultation:	Stakeholder Consultation for 220 kV Mirpur khas Substation and associated transmission lines at ADB-201A	
Date:	February 26,2020	
Time:	05:15 pm	
Meeting Venue:	Regional Forest Office Hyderabad	
Attended By:		
Name	Designation	Contact #
Gul Jurejo	Divisional Forest Officer Hyderabad	0306-3310750
HBP Representatives:	Muhammad Maqsoom (MM)	
Stakeholder Representatives:	Gul Jurejo	
Conducted by:	MM	
Recorded by:	MM	
Language:	English, Urdu	
Preamble:	MM briefed the objective of the consultation and shared information on the proposed Project its activities and location followed by the recording of opinion expressed by the department.	
Issues, Concerns and Suggestions		
Kathro Forest near Husri might be 1200 meters from the transmission line which may be affected. The contractor should take measures to avoid any negative impact to the forest. However, no major reserved forest is located near the surroundings of TL.		
avoid construction activities in major cropping season to minimize the loss of the crops.		
Construction should be carried in such a way that in excavation or foundation phase the topsoil should be persevered separately for later use.		
Orchards should be avoided. Mango trees has maximum height of 15-20 meters should not be affect by the transmission lines in construction and operation phase.		

Record of the Consultation Meeting

Stakeholder/s:	Forest Department Mirpur Khas	
Consultation:	Stakeholder Consultation for 220 kV Mirpur Khas Substation and associated transmission lines at ADB-201A	
Date:	February 28,2020	
Time:	4:30pm	
Meeting Venue:	Divisional forest office, Hyderabad	
Attended By:		
Name	Designation	Contact #
Mehboob Ali Bhatti	District Forest Officer (DFO)	0331-2866655
HBP Representatives:	Muhammad Wajahat (MW)	
Stakeholder Representatives:	Mehboob Ali Bhatti	
Conducted by:	MW	
Recorded by:	MW	
Language:	English, Urdu	
Preamble:	MW briefed the objective of the consultation and shared information on the proposed Project its activities and location followed by the recording of opinion expressed by the department.	
Issues, Concerns and Suggestions		
There is no reserved forest of Mirpur Khas District near the proposed route of the Transmission Line.		
Major crops and trees of the area include Conocarpus, babul and a wide range of vegetables.		
Orchards and big trees must be avoided from the cutting. Minimum trees should be cut and for each tree cut plantation should be done.		
Hunting of local fauna must be prohibited by the contractor during the construction phase. Training on ecological preservation should be delivered to contractor staff.		
Tree plantation drive must be carried out in the affected areas of project facilities and also promote landscaping to enhance the aesthetic beauty of the area.		
The privacy of the locals should not be disturbed during the construction activities. The contractor camp should be located away from residential areas.		

Record of the Consultation Meeting

Stakeholder/s:	Forest Department Tando Allah Yar	
Consultation:	Stakeholder Consultation for 220 kV Mirpur Khas Substation and associated transmission lines at ADB-201A	
Date:	February 27,2020	
Time:	5:30pm	
Meeting Venue:	Divisional forest office, Hyderabad	
Attended By:		
Name	Designation	Contact #
Jan Muhammad	District Forest Officer (DFO)	0316-6229999
HBP Representatives:	Muhammad Maqsoom (MM)	
Stakeholder Representatives:	Jan Muhammad	
Conducted by:	MM	
Recorded by:	MM	
Language:	English, Urdu	
Preamble:	MM briefed the objective of the consultation and shared information on the proposed Project its activities and location followed by the recording of opinion expressed by the department.	
Issues, Concerns and Suggestions		
There is no reserved forest of Tando Allah Yar district Near the proposed Transmission Line.		
The construction activities may affect the route of migratory birds. Construction activities to be minimized in the migratory season of birds, especially from the resting areas of these birds.		
Minimize dust pollution so that the migratory birds find no hindrance during migratory season. Dust may also disturb the locals of the area.		
Avoid cutting trees especially large canopy shady trees during construction activities.		
Route for heavy machinery and equipment should be planned and to avoid traffic congestion and damage to orchards while going offroad.		
Locals should be not be disturbed or their privacy should be respected during construction activities.		
The contractor should ensure no hunting policy during the whole construction phase of the project.		

Record of the Consultation Meeting

Stakeholder/s:	Mehran University of Engineering and Technology Sindh, Jamshoro	
Consultation:	Stakeholder Consultation for 220 kV Mirpur Khas Substation and associated transmission lines at ADB-201A	
Date:	February 26,2020	
Time:	03:00pm	
Meeting Venue:	Institute of Environmental Engineering and Management, Mehran University of Engineering and Technology Sindh, Jamshoro	
Attended By:		
Name	Designation	Contact #
Dr. Engineer Sheraz Ahmad Memon	Associate Professor/Head of Department	022-2771182 Ext.7303
HBP Representatives:	Muhammad Wajahat Saeed (MW), Muhammad Maqsoom (MM)	
Stakeholder Representatives:	Dr. Engineer Sheraz Ahmad Memon	
Conducted by:	MW, MM	
Recorded by:	MW	
Language:	English, Urdu	
Preamble:	MW briefed the objective of the consultation and shared information on the proposed Project its activities and location followed by the recording of opinion expressed by the department.	
Issues, Concerns and Suggestions		
A combined stakeholder meeting should be arranged during the initial phase of the Environmental Impact Assessment (EIA) to document and address the technical issues raised by all the stakeholders. Consulting the stakeholders individually is not much effective and also time-consuming.		
The proponent should conduct stakeholder meetings with locals of the project area. Technical stakeholders relating to the proposed project should also be consulted to evaluate the technicalities of the project.		
Involve local students of environmental engineering or sciences in the project- activities to help them getting exposure to the field.		
Environmental Impact Report (EIA) for any project should be easily accessible to the students pursuing their careers in environmental engineering for better knowledge and understanding.		

Record of the Consultation Meeting

Stakeholder/s:	Wildlife Department Hyderabad	
Consultation:	Stakeholder Consultation for 220 kV Mirpur Khas Substation and associated transmission lines at ADB-201A	
Date:	February 26,2020	
Time:	11:30am	
Meeting Venue:	Wildlife Complex, Hyderabad	
Attended By:		
Name	Designation	Contact #
Wajid Ali Sheikh	Deputy Conservator Wildlife	0300-9370634
Ashfaq Ali Memon	Field Officer	0333-5259513
HBP Representatives:	Muhammad Wajahat Saeed (MW), Muhammad Maqsoom (MM)	
Stakeholder Representatives:	Wajid Ali Sheikh	
Conducted by:	MW, MM	
Recorded by:	MW	
Language:	English, Urdu	
Preamble:	MW briefed the objective of the consultation and shared information on the proposed Project its activities and location followed by the recording of opinion expressed by the department.	
Issues, Concerns and Suggestions		
The land on sides of the Hyderabad – Mirpur Khas Highway was declared as Ramsar site in 1972, any area in Ramsar site should be avoided for any construction activites.		
Migratory birds such as Partridges and Geese should not be interrupted in migratory season, also breeding shelters for the birds should be undisturbed.		
Wildlife species in the project surrounding such as reptiles, Indian pangolin, snakes and lizards, should be of major concern.		
Worker camps construction should be made away from residential areas and resting areas of animals and birds.		

Annexure VIII: Dust Management Plan

Every effort to minimize dust pollution on the site must be undertaken. The contractor must implement the following measures with regards to the management of dust on site:

The most important dust control measure is achieved by maintaining as much of the vegetative cover as possible (the method of securing panels with minimal excavations supports this measure).

The recommendations made with regards to the demarcation of no-go areas are important in this regard.

- Construction vehicles must adhere to speed limits and minimization of haul roads must be implemented
- During dry, dusty periods haul roads should be kept dampened to prevent excess dust. No potable water may be used for damping haul roads
- All vehicles used to deliver or remove loose material (sand, soil, gravel etc.) to and from site must be covered with a 60% shade cloth to avoid dust blowing from the vehicle
- As an alternative, products such as Road Environment Dust Suppressants (REDS) would be recommended in order to minimize the use of water to control dust pollution. This is to be determined by the contractor during construction as required, and
- Exposed stockpile materials must be adequately protected against wind (covered), and should be sited in consideration of the prevailing wind conditions.

Apart from those measures detailed above, the following additional measures must be implemented:

- Dust nuisances shall comply with the applicable standards according to the Occupational Health and Safety plan. The contractor shall be solely responsible for the control of dust arising from the contractor's operations and for any costs against the Employer for damages resulting from dust
- The contractor shall take all reasonable measures to minimize the generation of dust as a result of construction activities to the satisfaction of the Client)
- Removal of vegetation shall be avoided until such time as soil stripping is required and similarly exposed surfaces shall be re-vegetated or stabilized as soon as is practically possible
- Excavation, handling and transport of erodible materials shall be avoided under high wind conditions or when a visible dust plume is present
- During high wind conditions the site manager, with input from the contractor, must evaluate the situation and make recommendations as to whether dust damping measures are adequate, or whether work should cease altogether until the wind speed drops to an acceptable level
- Where possible, soil stockpiles shall be located in sheltered areas where they are not exposed to the erosive effects of the wind. Where erosion of stockpiles

becomes a problem, erosion control measures shall be implemented at the discretion of the site manager

- Vehicle speeds shall not exceed 40km/h along dust roads or 20km/h when traversing unconsolidated and non-vegetated areas
- Appropriate dust suppression measures shall be used when dust generation is unavoidable, e.g. dampening with water or use of REDS, particularly during prolonged periods of dry weather in summer. Such measures shall also include the use of temporary stabilizing measures (e.g. chemical soil binders, straw, brush packs, clipping etc.)
- Straw stabilization shall be applied at a rate of one bale per 10m² and harrowed into the top 100mm of top material for all completed earthworks (i.e. all those areas that are not hard surfaced as part of the Solar Facility). This is only relevant to areas disturbed through the construction activities (such as cable trenches) and not areas where vegetation remains intact, and
- Should water be used for dust suppression on gravel roads, it must be of a quality compliant with the General Special Effluent Standards (31/03/2009): Temperature: max.25°C, pH: between 5.5 & 7.5 and conductivity: not be increased more than 15% above the intake water & not exceed 250 milliSiemens per meter (determined at 25°C). The water used for dust suppression must be sourced from a licensed resource.

Annexure IX: Construction Noise and Vibration Management Plan

Objective

This management plan defines the measures to control and limit noise emissions and vibration levels, at residential properties and other sensitive receptors in the vicinity of the Project.

General Requirements

Best Practicable Means (BPM) of noise control will be applied during construction works to minimize noise (including vibration) at neighboring residential properties and other sensitive receptors arising from construction activities

The general principles of noise management are given below:

Control at source:

- Equipment – noise emissions limits for equipment brought to site.
- Equipment – method of directly controlling noise e.g. by retrofitting controls to plant and machinery.
- Equipment - indirect method of controlling noise e.g. acoustic screens.
- Equipment - indirect method of controlling noise e.g. benefits and practicality of using alternative construction methodology to achieve the objective e.g. vibratory piling techniques or hydro-demolition as opposed to more conventional but noisier techniques; selection of quieter tools/machines; application of quieter processes.

Control across site by:

- Administrative and legislative control,
- Control of working hours,
- Control of delivery areas and times,
- Careful choice of compound location,
- Physically screening site,
- Control of noise via Contract specification of limits,
- Noise Monitoring, to check compliance with noise level limits, and cessation of works until alternative method is found.
- Many of the activities which generate noise can be mitigated to some degree by careful operation of machinery and use of tools. This may best be addressed by tool box talks and site inductions.

The maintenance of good community relations is vital. Experience shows that construction noise has the potential to cause disturbance but can be tolerated if prior warning and explanation has been given to residents. In particular advice regarding the nature of construction works, the duration of the works and mitigation measures to be implemented can help to reduce people's reaction to noise.

Contractors will consult local residents/communities regarding works and to give them details of a responsible appointed person on site who will be able to deal with queries.

Construction working hours should be carefully managed. All works should take place between normal working hours 07:30 and 18:30, Monday to Friday with the exception of restricted works.

Noise and Vibration Control Measures

In addition to specific requirements of the Local Authority, the Contractor will be required to adopt the following more specific measures:

Control measures

Without prejudice to the other requirements of this section, the Contractor shall comply with the recommendations set out in BS5228:2009 and in particular with the following requirements:

- Vehicles and mechanical plant will be maintained in a good and effective working order and operated in a manner to minimise noise emissions. The contractor will ensure that all plant complies with the relevant statutory requirements;
- HGV and site vehicles will be equipped with broadband, non-tonal reversing alarms;
- Compressor, generator and engine compartment doors will be kept closed and plant turned off when not in use;
- All pneumatic tools will be fitted with silencers/mufflers;
- Care would be taken when unloading vehicles to avoid un-necessary noise;
- The use of particularly noisy plant will be limited, i.e. avoiding use of particularly noisy plant early in the morning;
- Restrict the number of plant items in use at any one time;
- Plant maintenance operations will be undertaken at distance from noise-sensitive receptors;
- Reduce the speed of vehicle movements;
- Ensure that operations are designed to be undertaken with any directional noise emissions pointing away from noise-sensitive receptors;
- When replacing older plant, ensure that the quietest plant available is considered;
- Drop heights will be minimised when loading vehicles with rubble;
- Vehicles should be prohibited from waiting within the site with their engines running or alternatively, located in waiting areas away from sensitive receptors;
- Local hoarding, screens or barriers should be erected to shield particularly noisy activities;

Piling will be carried out with the method that minimises both noise and the transmission of vibration to sensitive receptors

Vibration Mitigation

Vibration levels due to percussive piling are predicted to be approximately 1.0 mm/s Peak Particle Velocity (PPV) at the nearest residential properties on Wyberton Low Road which falls at the threshold of effects significant adverse effect due to vibration. Comparatively, piles installed using a vibratory piling rig are predicted to result in vibration levels exceeding 1.5mm/s PPV at the same location.

Press piling shall therefore be adopted by the contractor to minimise vibration levels during Piling along the right bank in conjunction with pre-auguring and jetting dependant on ground conditions. Vibration levels at properties due to press piling including pre auguring are predicted to be less than 0.2mm/s at 23m. Vibration levels due to the use of vibratory rollers at 10 m from the works are predicted to be approximately 1.5 mm/s PPV.

Noise and vibration monitoring

A regular programme of noise and vibration monitoring shall be implemented as a minimum in accordance with Appendix C of this document.

The Contractor will submit the proposed method, the frequency and the location of monitoring site to the Planning Authority for agreement prior to commencing works. Proposed monitoring requirements and locations are detailed in Appendix C. Noise baseline levels will be agreed prior to commencement of construction.

Reference:

<https://proaccionaau.blob.core.windows.net/media/4gbpg4vk/ctp-noise-and-vibration-management-plan.pdf>.

Annexure X: Chance Finds Procedure

CHANCE FIND PROCEDURES

The proposed project may involve deep excavation. Therefore the possibility of chance find is not ignorable. In case of any chance find, the contractor will immediately report through Supervision Consultant to Directorate General (DG) of Archeological Department, Punjab to take further suitable action to preserve those antiques or sensitive remains. Representative of the DG will visit the site and observed the significance of the antique, artifact and Cultural (religious) properties and significance of the project. The report will be prepared by representative and will be given to the DG. The documentation will be completed and if required suitable action will be taken to preserve those antiques and sensitive remains.

In case any artifact, antiques and sensitive remains are discovered, chance find procedures should be adopted by contractor(s) as follows:

- Stop the construction activities in the areas of chance find;
- Delineate the discovered site or area;
- Consult with the local community and provincial Archeological Department;
- The suggestion of the local communities and the concerned authorities will be suitably incorporated during taking the preventive measures to conserve the antique, artifact and cultural (religious) properties;
- Secure the site to prevent any damage or loss of removable objects. In case of removable antiquities or sensitive remain, a night guard should be arranged until the responsible local authorities take over; and
- After stopping work, the contractor(s) must immediately report the discovery to the Resident Engineer.

Annexure XI: Traffic Management Plan

The Construction Contractor will develop a traffic management plan covering following headings.:

Table of Contents	
1	Overview
1.1	Introduction
1.2	Purpose of this Plan
1.3	Legislative Requirements
2	Project Overview
2.1	Works Overview
3	Location of Works
3.1	Road Occupancy Approval
4	Existing Conditions
4.1	<add area/location/event>
5	Project Impacts to Traffic & Transport
5.1	Work Hours
5.2	Operating Conditions
5.3	Impact on Traffic Flow
5.4	Impacts on Transport
5.5	Parking
5.6	Emergency Services
5.7	Pedestrians
5.8	Cyclists
5.9	Heavy Vehicles
5.10	Resident/Business Impacts
5.11	Construction Site Entry/Exit
6	Traffic Control Devices
6.1	Signage and Infrastructure
6.2	Line Marking
6.3	Speed Zoning
6.4	Intelligent Transport System (ITS) Devices
6.4.1	Traffic Signal Modifications
6.4.2	Temporary Traffic Signals
6.4.3	Variable Message Signs (VMS)
6.4.4	Radar Activated Speed Sign
6.4.5	Live Tracking Resources
6.3	Incident Response / Management
7	Risk Assessment
8	Communications Strategy
8.1	Worksite Communications
8.2	Stakeholder Works Notifications
8.3	Emergency Services Notification
9	Contact Details
9.1	Key Contacts
9.2	Onsite Contacts
10	References
11	Abbreviations & Definitions
12	Appendices
	Appendix 1 – Traffic Plans
	Appendix 2 – Detour Map
	Appendix 3 – Road Closure Map
	Appendix 4 – Parking Restriction Map
	Appendix 5 – Heavy Vehicle Detour Map
	Appendix 6 – Pedestrian Detour Map

Annexure XII: Waste Management Plan

CONSTRUCTION WASTE MANAGEMENT PLAN

Construction waste material consists mainly of concrete, masonry, limestone, sandstone, metal, and wood, depending on the construction type. In building waste, a larger percentage of paper, plastic, etc. is expected due to packaging materials and the wood retired from formwork and scaffolding. This is in addition to significant amounts of concrete, masonry and metal materials.

1.0 Origins and Causes of Construction Waste

Origins of waste	Causes of waste
Contractual	<ul style="list-style-type: none"> Errors in contract documents Contract documents incomplete at commencement of construction
Design	<ul style="list-style-type: none"> Design changes Design and detailing complexity Design and construction detail errors Unclear/unsuitable specification Poor coordination and communication (late information, last minute client requirements, slow drawing revision and distribution)
Procurement	<ul style="list-style-type: none"> Ordering errors (i.e., ordering items not in compliance with specification) Over allowances (i.e., difficulties to order small quantities) Supplier errors
Transportation	<ul style="list-style-type: none"> Damage during transportation Difficulties for delivery vehicles accessing construction sites Insufficient protection during unloading Inefficient methods of unloading
On-site Management and Planning	<ul style="list-style-type: none"> Lack of on-site waste management plans Improper planning for required quantities Delays in passing information on types and sizes of materials and components to be used Lack of on-site material control Lack of supervision
Material storage	<ul style="list-style-type: none"> Inappropriate site storage space leading to damage or deterioration

Origins of waste	Causes of waste
	<ul style="list-style-type: none"> ▪ Improper storing methods ▪ Materials stored far away from point of application
Material handling	<ul style="list-style-type: none"> ▪ Materials supplied in loose form ▪ On-site transportation methods from storage to the point of application ▪ Inadequate material handling
Site operation	<ul style="list-style-type: none"> ▪ Accidents due to negligence ▪ Unused materials and products ▪ Equipment malfunction ▪ Poor craftsmanship ▪ Use of wrong materials resulting in their disposal ▪ Time pressure ▪ Poor work ethics
Residual	<ul style="list-style-type: none"> ▪ Waste from application processes (i.e., over preparation of mortar) ▪ Off-cuts from cutting materials to length ▪ Waste from cutting uneconomical shapes ▪ Packaging
Other	<ul style="list-style-type: none"> ▪ Weather ▪ Vandalism ▪ Theft

2.0 Construction Waste Management Plan

1) Waste Management Goals

To establish that this project shall generate at least 50% less waste into landfills and the processes shall be employed to ensure that this goal is met. These shall include prevention of damage to materials to be incorporated into the work due to mishandling, improper storage, contamination, inadequate protection or other factors as well as minimizing poor quantity estimation, as well as through building design.

2) Responsibility

- The Project Director shall be responsible for the implementation of the administrative portions of this program, including the notification of subcontractor management, the training of the site supervisor and the onsite posting of this plan.
- The site supervisor will be responsible for the implementation of the onsite portions of this program including the training of subcontractor personnel.

3) Waste Prevention Planning

- In addition to other requirements specified herein it is a requirement for the work of this project that the contractor comply with the applicable city waste disposal requirements.
- Of the inevitable waste that is generated, the waste materials designated in this specification shall be salvaged for reuse and or recycling where practical and possible.
- Project Construction Documents: The General Contractor will contractually require all subcontractors to comply with these recycling guidelines. A copy of this "Construction Waste Management Plan" will accompany all subcontractor agreements and require subcontractor participation.
- The "Construction Waste Management Plan" shall be implemented and executed as follows and as on the chart:
 - Salvageable materials will be diverted from disposal where feasible.
 - There will be a designated area on the construction site reserved for materials that can be recycled.
 - Areas shall be marked to designate what recycle materials are to be stored there.
 - Hazardous waste will be managed by a licensed hazardous waste vendor.

4) Communication & Education Plan

- This Construction Waste Management Plan will be posted onsite.
- Each subcontractor will be made aware of the intent of this project with respect to reduction of waste and recycling.
- Onsite recycling containers and/or areas will be plainly marked.
- The subcontractor will be expected to make sure all their crews comply with the Waste Management Plan.
- All recycling containers/areas will be clearly marked.
- Lists of acceptable/unacceptable materials will be posted at the site.
- All subcontractors will be informed in writing of the importance of non-contamination with other materials or trash.

5) Motivation Plan

The General Contractor will conduct a pre-award meeting for subcontractors. Subcontractors under consideration will be required to attend the meeting to review project goals and requirements with the project team. Attendance will be a prerequisite for award of subcontracts. This document will be an attachment to every subcontract. Copies of the attachment will be posted prominently at the job site.

6) Expected Project Waste, Disposal, and Handling

The following chart identifies waste materials expected on this project, their expected disposal methods and handling procedures. New items may be added as needed.

Material	Quantity	Disposal Method	Handling Procedure
Land clearing debris		Keep separate for reuse and or wood sale. Separate topsoil and rock for future landscaping use.	Keep separated in designated areas onsite.
Clean dimensional wood and palette wood		Keep separate for reuse by on-site construction or by site employees for either heating stoves or reuse in home projects. May be offered to public.	Keep separated in designated areas onsite.
Plywood, OSB, particle board		Reuse onsite when possible, landfill or recycle off site.	Keep separated in designated areas onsite. Place in "Trash" container.
Painted or treated wood		Reuse, off site recycle, landfill.	Keep separated in designated areas onsite. Place in "Trash" container.
Concrete		Recycle when possible.	
Concrete Masonry Units		Keep separate for re-use by on-site construction or by site employees.	Keep separated in designated areas onsite.
Metals		Recycle off site when possible. Separate copper wire when possible.	Keep separated in designated areas onsite. Place in "Metals" container.
Paint		Reuse onsite.	Keep separated in designated areas onsite
Insulation		Reuse, landfill.	
Flooring		Reuse, landfill.	
Carpet and pad		Reuse or recycle with carpet manufacturer	
Glass		Glass Bottles: recycle locally.	Keep separated in designated areas onsite.

Material	Quantity	Disposal Method	Handling Procedure
Plastics		Plastic Bottles: recycle locally; be aware of plastics that are acceptable to recycle facility.	Keep separated in designated areas onsite.
Beverage		Recycle locally	Keep separated in designated areas onsite.
Cardboard		Recycle locally	Keep separated in designated areas onsite.
Paper and newsprint		Recycle locally	Keep separated in designated areas onsite.

7) Waste Disposal Company

To be determined

a) Contact:

8) Recycle Hauler

To be determined

b) Contact:

c) Some or all recycle may be hauled by the builder.

9) Possible recycle locations and acceptable materials

- i) Coordinate with companies which are registered with local Municipality that accept materials for recycle; and
- ii) Using the above as a resource, a list will be kept indicating local opportunities for recycle of expected materials. New locations should be added as needed.

Annexure XIII: COVID-19 Management Plan

COVID-19 Health and Safety Management Plan

Project Name _____

Table of Contents

1.	Introduction	1
1.1	Coronaviruses (CoV), COVID-19, and How It Spread?	1
1.2	Purpose, Scope, and Applicability of COVID-19 H&S Plan	1
1.3	Frequency	2
1.4	Distribution and Actions	2
2.	Workplace Risk Assessment.....	3
3.	Procedures and Guidelines – Managing Risk	5
3.1	Communication and Awareness	5
3.2	Personal Hygiene and Respiratory Etiquette.....	7
3.3	Personal Protective Equipment.....	7
3.4	Access and Movement to/from Construction Site.....	8
3.5	Compartmentalization.....	8
3.6	Site Operation.....	8
3.7	Meetings and Travelling.....	10
3.8	Equipment Cleaning and Sanitizing	11
3.9	Working Remotely	11
3.10	Cleaning Protocol	12
3.10.1	Cleaning/disinfection	12
3.10.2	On Entering the Room.....	12
3.10.3	Cleaning of Communal Areas and Staff Workspaces	13
6.6.4	Cleaning and disinfection of reusable equipment	13
4.	Detection and Response Measures	14
4.1	Screening at the Entry of Construction Site	14
4.2	Response Measures.....	14
4.3	Health Monitoring.....	15
5.	Responsibilities.....	16
5.1	Contractors and Subcontractors Management.....	16
5.2	EHS Team/ Site Managers	16

COVID-19 Health and Safety Plan

5.3	Employees.....	17
5.4	Corrective Actions and Response Strategy.....	18
6.	SOP Auditing and Training.....	19
7.	Key Rules during Travel and Stop Overs	20
8.	References.....	22

Forms:

Form A:	Information to Include in Leaflet
Form B:	Hand-Washing Guide
Form C:	Guidelines on Worker Accommodation
Form D:	Daily Temperature Checklist for Employees
Form E:	Daily Temperature Checklist for Visitors
Form F:	Cleaning and Disinfecting Checklist
Form G:	Nearby Covid-19 Facilities

01/04/22

Table of Contents
iii

1. Introduction

1.1 Coronaviruses (CoV), COVID-19, and How It Spread?

1. A large family of viruses that cause a variety of illnesses including the common cold, Middle East Respiratory Syndrome (MERS-CoV), and Severe Acute Respiratory Syndrome (SARS-CoV).¹
2. In late 2019, a new coronavirus – not seen previously in humans – was identified as the cause of human illness in China and given the name 2019-nCoV. By late January 2020, the outbreak declared a public health emergency of international concern by the World Health Organization (WHO).²
3. The Coronavirus Disease of 2019 is called COVID-19.³
4. The CoV spread by human-to-human transmission via respiratory droplets. The median incubation period from exposure to symptoms onset is 4–5 days.⁴

1.2 Purpose, Scope, and Applicability of COVID-19 H&S Plan

5. The purpose of COVID-19 Health and Safety Plan (COVID-19 H&S Plan) is to guide contractors and their staff and implement procedures to slow and stop transmission, prevent outbreaks and delay spread; to minimize the impact of epidemic diseases on health systems and project operations. This SOP has been tailored considering the recent coronavirus (COVID-19) outbreak.
6. The COVID-19 H&S Plan is a guidelines document providing standard operating procedures(SOP) for undertaking construction activities at the active and plan subprojects under Second Power Transmission Enhancement Investment Program.
7. The COVID-19 H&S Plan must be adhered to by all contractors, subcontractors, and its employees, its visitors, and any person that interacts with employees.
8. This Plan applies to all epidemic diseases. The World Health Organization has now confirmed the coronavirus as a pandemic; however, this SOP will be applicable for

¹ https://relief.unboundmedicine.com/relief/view/Coronavirus-Guidelines/2355000/all/Coronavirus_Disease_2019_COVID_19_#1

² Ibid

³ Ibid

⁴ Ibid

all epidemic outbreaks due to its greater scope and applicability in the prevention of disease transmission.

1.3 Frequency

9. The SOP in this plan must always be followed until an outbreak is no longer considered a public health emergency by WHO.

1.4 Distribution and Actions

10. The COVID-19 H&S Plan will be made part of the respective health and safety plans (HSP) and emergency response plans (ERP) of the contractors and subcontractors.

11. The HSP and ERP are standard elements of the environmental management plan (EMP), and now these need to be updated addressing COVID-19 health risks.

12. Broadly, the steps in this process include:

- The contractor's HSP and ERP should be aligned with this COVID-19 H&S Plan.
- The contractors' HSP and ERP should be reviewed by the PMU.
- The recommendation of the review (i.e. approval of the updated HSP and ERP or additional strengthening required etc.) will be forwarded to PMU for clearance.
- The PMU will then advise the Construction Contractors and also ADB Project Officer to be informed.

2. Workplace Risk Assessment

13. The risk of work-related exposure to COVID-19 depends on the probability of coming into close (less than 1 metre) or frequent contact with people who may be infected with COVID-19 and through contact with contaminated surfaces and objects.

14. The following risk levels may be useful in carrying out a workplace risk assessment for exposure to COVID-19 and planning for preventive measures in non-healthcare workplaces.

15. Low exposure risk – jobs or work tasks without frequent, close contact with the general public and other co-workers, visitors, clients or customers, or contractors, and that do not require contact with people known to be or suspected of being infected with COVID-19. Workers in this category have minimal occupational contact with the public and other co-workers.

16. Medium exposure risk – jobs or work tasks with close, frequent contact with the general public, or other co-workers, visitors, clients or customers, or contractors, but that do not require contact with people known to be or suspected of being infected with COVID-19. In areas where COVID-19 cases continue to be reported, this risk level may be applicable to workers who have work-related frequent and close contact with the general public, visitors, or customers in high-population-density work environments (e.g. food markets, bus stations, public transport, and other work activities where physical distancing of at least 1 metre may be difficult to observe), or work tasks that require close and frequent contact between co-workers. In areas without community transmission of COVID-19, this scenario may include frequent contact with persons returning from areas with community transmission.

17. High exposure risk – jobs or work tasks with high potential for close contact with people who are known or suspected of having COVID-19, as well as contact with objects and surfaces possibly contaminated with the virus. Examples of such exposure scenarios outside of health facilities include the transportation of persons known or suspected to have COVID-19 in enclosed vehicles without separation between the driver and the passenger, providing domestic services or home care for people with COVID-19, and contact with dead bodies of persons who were known or suspected of having COVID-19 at the time of their death.

18. In the same work setting there may be jobs with different levels of risk, and different jobs or work tasks may have similar levels of exposure. Therefore, the risk assessment should be carried out for each specific work setting and each job or group of jobs. For each risk assessment, it is prudent to consider the environment, the task, the threat, if any (e.g. for frontline staff), and resources available, such as personal protective equipment.

19. Some workers may be at higher risk of developing severe COVID-19 illness because of age or pre-existing medical conditions; this should be considered in the risk assessment for individuals. Essential public services, such as security and police, food retail, accommodation, public transport, deliveries, water and sanitation, and frontline workers may be at an increased risk of exposure to occupational hazards for health and safety.

20. Employers, managers and EHS staff, in consultation with workers, should carry out and regularly update the risk assessment for work-related exposure to COVID-19, preferably with support of occupational health services.

3. Procedures and Guidelines – Managing Risk

21. Health measures can slow the transmission and spread of infectious diseases. These measures can take the form of personal protective equipment, social distancing, and travel-related interventions.

22. The following areas should be given consideration:

- Communication and Awareness
- Personal Hygiene and Respiratory Etiquette
- Personal Protective Equipment (PPE)
- Access and Movement to/from Construction Site
- Compartmentalization
- Site Operation
- Meeting and Traveling
- Environmental Cleaning
- Working Remotely

3.1 Communication and Awareness

23. Clear signage is posted at entry points on the construction site and outline the commitment of the contractor to maintain health and safety measures during the COVID-19 crisis.

24. A display board at entry points of construction site showing daily statistics of COVID-19 in the locality, province, and in Pakistan using government official updates from appropriate jurisdictions' public health authorities.

25. Worksite policies as they relate to the COVID-19 crisis are communicated to workers and made available on site.

26. A clear signboard to show: All workers exercise the following recommended practices for reducing the risk of transmission:

- Avoid touching eyes, nose and mouth with unwashed hands;

- When coughing or sneezing:
 - Cough or sneeze into a tissue or the bend of your arm, not your hand;
 - Dispose of any tissues you have used as soon as possible in a lined wastebasket and wash your hands afterward;
 - Use face mask all time
 - Clean and disinfect frequently touched objects and surfaces, including all reusable personal protective equipment (PPE).
 - Do not share personal items or supplies such as phones, pens, notebooks, tools, PPE, etc.;
 - Use and remove PPE with care, being mindful of which surfaces may be contaminated. Individuals must clean their hands after handling any used PPE;
 - Avoid common physical greetings, such as handshakes;
 - Maintain a minimum physical distance of two meters from others; and
 - Wash hands often with soap and water for at least 20 seconds after using the washroom, before handling food, after blowing the nose, coughing, or sneezing, and before smoking. If hands are not visibly soiled, and soap and water are unavailable, alcohol-based hand sanitizer can be used.
27. Additional sanitary measures are implemented on-site: handwashing stations with a posted hand washing protocol, hand sanitizer stations, provision of disinfectant wiping products. These types of facilities are made available at site entries, exits, washrooms, eating areas, offices, and any other areas with commonly touched surfaces.

28. The EHS team can develop informative handouts about COVID-19 Risk Management and distribute it among the employees and visitors (**Form A**).

Uniform signage for workers to provide clear messaging



3.2 Personal Hygiene and Respiratory Etiquette

29. Every employee must follow a certain standard of self-hygiene and precaution, especially when in company premises or busy areas.

30. It is the responsibility of the Employee to inform EHS Manager in case they have come in contact with a person traveling from an infected area.

31. Every employee must use hand sanitizer whenever entering office premises. These and tissue boxes can be found in numerous locations

32. Employees must use the hand sanitizer before using the biometric device.

33. Frequent and thorough hand washing is recommended and better illustrated in **Form B**.

3.3 Personal Protective Equipment

34. Face masks are required for all staff and those in their vicinity. Please see Govt of Pakistan's Guidelines for Mandatory use of facemask, document 17-06, 13-June-2020 on how to use mask properly.

35. [https://covid.gov.pk/new_guidelines/14June2020_20200613_Guidelines_for_Mandatory_use_of_face_mask_\(urdu\)_1704.pdf](https://covid.gov.pk/new_guidelines/14June2020_20200613_Guidelines_for_Mandatory_use_of_face_mask_(urdu)_1704.pdf)

36. Providing disposable gloves for service staff is mandatory at all construction sites, camps and field offices.

37. The persons who showing any symptoms include soreness of the throat, sneezing, runny nose, coughing, body aches, frequent headaches, and fever should not be allowed to go to work or public places such as kitchen, dining area, mosque, etc.

3.4 Access and Movement to/from Construction Site

38. Wherever possible, workers travel to site using individual modes of transportation (e.g., personal vehicle or bicycle). Additional parking arrangements are made as required.

39. Entry and exiting of the worksite is monitored and controlled to ensure that the minimum physical distancing is not broken when shifts begin and end.

40. All non-essential individuals are not permitted access to the site.

3.5 Compartmentalization

41. The construction site is to be segregated to the extent possible in zones or other methods to keep different crews/trades physically separated at all time. This promotes physical distancing and supports the containment of propagation should it arise.

42. Eating is restricted to clearly identified dedicated eating areas with handwashing stations, cleaning and disinfectant materials, and adequate space to maintain minimum physical distancing.

43. Upper limits are put on the number of people allowed in each zone and in facilities like washrooms, trailers, and eating areas at once to allow for the recommended minimum physical distancing.

44. One-way staircases are established wherever practical to minimize worker contact.

45. Freight elevators are operated/occupied by only one individual at a time or where feasible, by respecting the minimum physical distancing guidelines.

46. At residential camp sites, accommodation for workers should be provided as per the guidelines in Workers Accommodation Plan (Form C).

3.6 Site Operation

47. The number of in-person meetings is minimized. If required, meetings should involve only necessary individuals and include six people or fewer. Minimum physical distancing is maintained, and meetings are held in open spaces when possible.

48. The worksite is rearranged to reduce high-traffic areas and allow for the minimum physical distancing.
49. Site teams are encouraged to put forward split/alternating shifts to avoid extensive intermingling. Voluntary shift offset and implementing time gaps between shifts are highly encouraged.
50. Alternate arrangements are made as necessary to ensure workers avoid breaking the minimum physical distance with others for prolonged periods. When this is not feasible, plans are made to minimize the duration of the task. For any work that ultimately must be done in close-proximity, a procedure is formalized outlining the required PPE and all steps to be taken to minimize risk.
51. Where work is done in crews, the work is planned to minimize or eliminate the crossover of workers between crews.
52. Project teams stagger break and lunch schedules to minimize the number of people in close proximity to one another. Enclosed lunchrooms are only made available during inclement weather.
53. Work schedules are adjusted to provide time for proper cleaning and disinfecting as required.
54. Delivery zones are clearly identified and limited to receivers and deliverers only.
55. When possible, nothing is passed between the deliverer and the receiver (e.g. shipment documents and pens for signatures). Deliveries are unloaded solely by receivers using proper PPE, while deliverers remain in their vehicles.
56. When working in spaces currently occupied (e.g. private residences), the minimum physical distancing with any occupants is strictly enforced. Where possible, workers and occupants are segregated in different rooms.
57. Non-emergency work should not be done in any occupied spaces where an occupant is suspected to have contracted COVID-19 or is under self-isolation (per the directions of the applicable authorities). Emergency work can be carried out provided workers are equipped with nitrile gloves, Tyvek suits or coveralls, and facial/ respiratory protection.

58. Hands and tools are thoroughly cleaned before entering the workplace and after leaving, and any surfaces or equipment in the occupied space are disinfected before work is done on them.

3.7 Meetings and Travelling

59. Any unnecessary meetings and traveling should be avoided. Using alternatives such as online meetings is recommended and employees should refrain from interacting with people who have been recently traveling to vulnerable areas.

60. Similarly, the travel of staff for meetings to vulnerable areas should be postponed.

61. All workers and employees are advised to maintain a minimum 1.5-meter distance from one another.

62. Workers and employees should also refrain from shaking hands or hugging anyone.

63. Dining breaks shall be rescheduled at different times, in smaller groups to avoid crowding in the dining areas.

64. It is encouraged that you keep your own mug/glass with you throughout the day and use only that.

65. See **Section 7** for more details on traveling protocols.



Social distancing during meetings outdoors

- ☐ Only absolutely necessary participants should physically attend meetings and should maintain social distancing guidelines (2m, or 1m with risk mitigation where 2m is not viable, is acceptable).
- ☐ Avoiding transmission during meetings, for example, avoid sharing pens, documents and or other objects.
- ☐ Providing hand sanitiser in meeting rooms.
- ☐ Holding meetings outdoors or in well-ventilated rooms whenever possible.
- ☐ For areas where regular meetings take place, use floor signage to help people maintain social distancing.

3.8 Equipment Cleaning and Sanitizing

66. The concern will be provided rubbing alcohol, or a suitable disinfectant as well as sterile gloves to wipe down equipment and commonly touched surfaces and objects every morning.

67. All door handles, railings, ladders, switches, controls, eating surfaces, shared tools and equipment, taps, toilets, and personal workstation areas are wiped down at least twice a day with a disinfectant, such as disinfectant wipes. Individuals are responsible for cleaning and disinfecting their workstations.

68. The implementation of cleaning procedures, safety prevention measures must be conducted twice a day to prevent any contamination. This will but is not limited to the following areas:

- Commonly touched surfaces such as vehicle's steering, vehicles' gear, and door handles, tools, chairs, tables, etc.
- , Workstations including keyboards, mice, telephones, desk surfaces
- Biometric devices
- Metal surfaces including door handles, knobs in and outside the office (includes main/rear exit)
- Kitchen surfaces
- Kitchen cutlery and utensils (before washing)
- Washrooms including the soap dispenser, hand dryer dryer, and other commonly touched surfaces
- Staplers, hole punchers, remotes, headphones, and other shared equipment.

69. Additional sanitary measures are implemented on-site: handwashing stations with a posted hand washing protocol, hand sanitizer stations, provision of disinfectant wiping products. These types of facilities are made available at site entries, exits, washrooms, eating areas, offices, and any other areas with commonly touched surfaces.

3.9 Working Remotely


70. Where practical, all office employees supporting a project work remotely.

71. Meetings are held through teleconferencing or videoconferencing.

3.10 Cleaning Protocol

3.10.1 Cleaning/disinfection

72. Housekeeping staff undertaking the cleaning with detergent and disinfectant.
73. Perform hand hygiene then put on a plastic glove before and cleaning disinfection task
74. Dispose of used gloves in designated place/bin only.

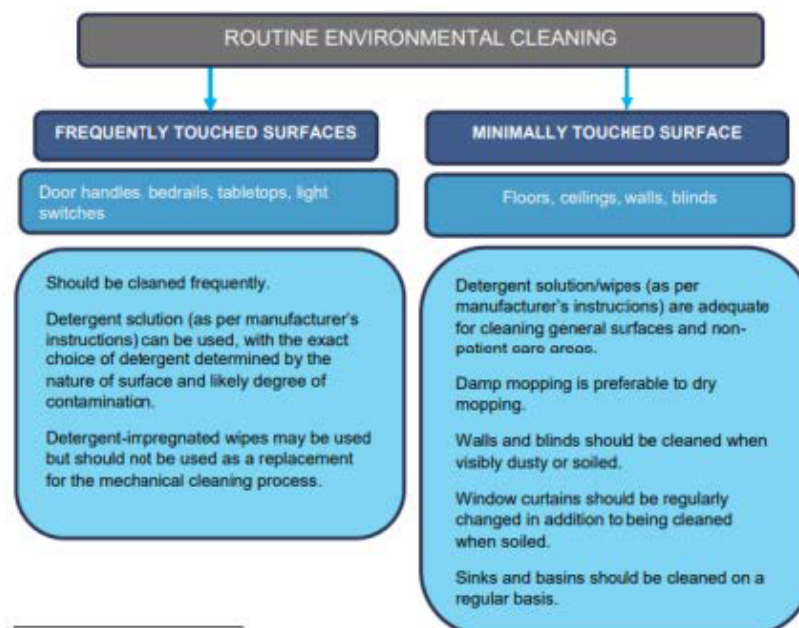

3.10.2 On Entering the Room

75. Keep the door closed when using detergent and disinfection products, you may open a window if required.
76. All other personal items such as papers, pens, picture frames, etc. should be kept in drawers.

3.10.3 Cleaning of Communal Areas and Staff Workspaces

77. Wipe the surfaces with either a combined detergent disinfectant solution at a dilution of 1000 parts per million (ppm or 1 m/l) which is equal to one-quarter teaspoon of chlorine per 4 glasses of water.

78. Commercially available chlorine or alcohol-based disinfectant spray can be used as an alternative. This applies to benchtops and chairs.

79. For equipment, disinfect with commercial alcohol-based cleaners safe for computer surfaces.

80. Use disposable cloths, paper rolls, or disposable mop heads to clean and disinfect all hard surfaces, floors, chairs, door handles, or reusable non-invasive care equipment or sanitary fittings in the room, following one of the 2 options below:

- Use a combined detergent disinfectant solution at a dilution of 1m/l as described above or a commercial disinfectant spray.
- Follow the manufacturer's instructions for dilution, application, and contact times for all detergents and disinfectants.

**6.6.4 Cleaning and disinfection of reusable equipment**

81. Clean and disinfect any reusable non-invasive care equipment, such as Punch machines, staplers, pens, etc., that are in the room before their removal. Clean all reusable equipment systematically.

4. Detection and Response Measures

4.1 Screening at the Entry of Construction Site

82. Before entering the site, individuals must confirm that:

- They are not currently exhibiting flu-like symptoms such as fever, tiredness, coughing, or congestion;
- They have not returned from outside of Pakistan within the past 14 days;
- To the best of their knowledge, they have not been in contact with someone with a confirmed or probable case of COVID-19; and
- They have not been working on a site that was shut down due to the virus.

Responses are to be kept private and treated as sensitive medical information.

83. Individuals who are at increased risk of serious illness (due to age, pregnancy or other medical condition) are not to be permitted on site.

84. Workers who are not authorized to access the site are to be safely transported directly back home, or to a preferred location of self-isolation. When unable to do so themselves, a vehicle and driver will be arranged for them.

85. When transporting a potentially ill individual, both driver and passenger are to be given masks and nitrile gloves. The passenger is to sit in the backseat, and the driver is to open and close the doors for them.

4.2 Response Measures

86. Possible Case of COVID-19

- Individuals who have been potentially exposed to the virus, or who are exhibiting flu-like symptoms such as fever, tiredness, coughing, or congestion are instructed to:
 - Not come to work;
 - Contact their supervisor and/or human resources department;
 - Stay at home and self-isolate; and
 - Contact local health authorities for further direction.
- Such individuals are required to follow the directions of the local health

authority and may not return to work until given approval by the proper health authorities.

- Individuals who begin to display flu-like symptoms on site are instructed to avoid touching anything, take extra care to contain coughs and sneezes, and return home immediately to undergo self-isolation as directed by the local health authority..
- All areas on-site potentially infected by a confirmed or probable case are barricaded to keep individuals two meters away until the area is properly cleaned and disinfected.

4.3 Health Monitoring

87. An infrared thermometer should be made available, and temperatures of all people entering the offices, work areas, premises will be checked and recorded in a log every day (Form D).

88. A separate log will be kept for staff and visitors (Form E).

89. Employees should proactively communicate any concerns or symptoms they may be experiencing and not rely on the company to identify and prevent the transmission of infectious diseases.

5. Responsibilities

5.1 Contractors and Subcontractors Management

90. Make sure resources including financial resources required for the implementation of the plan available
91. Must also ensure adequate stock of hand sanitizers and face masks are present for all offices, camps, and construction sites.

5.2 EHS Team/ Site Managers

92. Responsible for ensuring housekeeping inspections are completed following this SOP.
93. This includes making sure the inspection checklist is completed daily (Form F).
94. The team is also responsible for supervising housekeeping staff and making sure all equipment and areas are routinely disinfected.
95. Every construction project shall make proper arrangements for uninterrupted building services including but not restricted to, electricity, fuel, water supply, water disposal and sanitation, communication links, washrooms with hand hygiene and shower facility and with proper and adequate supply of soaps and disinfectants.
96. Workers should not use biometric attendance machines or crowd during attendance, entry or exit to the premises of the construction site.
97. Ensure the availability of the thermal gun at the entry and exit of the construction site and no worker should be allowed without getting his/her temperature checked.
98. Site manager must maintain a register of all contact details with NID number and addresses of all present at the site in case a follow up or tracing and tracking of contacts is required at a later stage.
99. Develop the employee roster to decrease the number of people on the site very day.
100. Split the shifts of the workers in morning and evening with limit of each shift to 8 working hours.

101. Every worker must change into standard working attire at the time of commencement of duty and change back to their regular dress after taking shower when their duty hours end.
102. Non-essential work trainings must be postponed avoiding gathering of people.
103. Ensure the physical distance by creating more than one route of entry and exit to the site.
104. Instruct the workers to inform the EHS manager (or authorities) if,
105. They develop any symptoms of cough, flu or fever.
106. They have been exposed to someone suspected or confirmed with COVID 19.
107. They have met someone who has a travel history of COVID 19 endemic country.
108. They have travelled in last couple of days or plan to travel soon
109. Do not allow any worker at the construction site who has the symptoms.
110. The lunch breaks and stretch breaks of the workers must be staggered to avoid the clustering of workers. Workers must not sit at less than 2 meters distance while having meals and while any other activity requiring interpersonal communications.
111. In the wake of current restrictions on transportations site managers will ensure safe transport arrangements for worker which should not be crowded and should have social distancing in place during the entire process from pickups till drops at destination.
112. A list of COVID-19 medical facilities should be kept update along the contact information in **Form G**.
113. For more details please visit Govt of Pakistan's Guidelines for Health & Safety of Building & Construction Workers during COVID-19 Outbreak, Document 11-01, 11-April-2020.
https://covid.gov.pk/new_guidelines/01June2020_20200411_Guidelines_for_the_health_and_safety_of_building_and_construction_workers_1101.pdf.

5.3 Employees

114. To follow the procedures and preventative guidelines in this SOP and to maintain a certain level of precaution.

- 115. Employees must monitor their health, wear face masks if showing signs of a compromised immune system.
- 116. Disinfect equipment underuse and living areas routinely.
- 117. Report any symptoms immediately to EHS Team.

5.4 Corrective Actions and Response Strategy

- 118. If the EHS team determines that the cleaning does not pass the examination, the cleaning procedure and inspections are repeated.
- 119. Upon daily temperature recordings (**Form D and Form E**), the following response strategy will be implemented (With consideration of a ~0.5 Degree Celsius uncertainty of measurements):
 - 120. Employees who have symptoms of acute respiratory illness are recommended to stay room/ home and not come to work until they are free of fever. The signs of a fever, and any other symptoms for at least 24 hours, without the use of fever-reducing or other symptom-altering medicines (e.g. cough suppressants).
 - 121. Employees should notify their supervisor and stay home if they are sick.
 - 122. Ensure that contractor and subcontractor sick leave policies are flexible and consistent with public health guidance and that employees are aware of these policies.
 - 123. Do not require a healthcare provider's note for employees who are sick with acute respiratory illness to validate their illness or to return to work, as healthcare provider offices and medical facilities may be extremely busy and not able to provide such documentation in a timely way.
 - 124. Contractors and subcontractors should maintain flexible policies that permit employees to stay home to care for a sick family member.
 - 125. The contractor and subcontractor should be aware that more employees may need to stay at home to care for sick children or other sick family members than is usual.
 - 126. Work from home for 2-3 days, and address fever and any other symptoms till status is more evident or symptoms subside.
 - 127. Consult with and update the EHS team regarding your bill of health. Take medical leave; get examined by a doctor and tested for the virus.

6. SOP Auditing and Training

128. Contractors are to conduct periodic audits (frequency to be determined based on a project scale and scope) to verify that the appropriate measures have been implemented and are maintained.

129. EHS Team should arrange frequent awareness training sessions for employees and maintain a record.

130. Competence evaluations and repetition of training will be conducted as necessary to ensure the protection and continuance of this SOP.

7. Key Rules during Travel and Stop Overs

- 131. Avoid travelling if you have cough, fever/ flu like symptoms.
- 132. Persons having co morbidities (Diabetes, Heart conditions, Asthma), and persons older than 50 years of age should not travel unless very necessary.
- 133. Be sure to cover the mouth and nose with a mask (N-95) if not readily available, use a face mask.
- 134. Wash your hands often with soap and water for at least 20 seconds especially after you have been in a public place, or after blowing your nose, coughing, or sneezing.
- 135. Make sure distance of 2 meters between individuals.
- 136. Avoid mass gatherings
- 137. Avoid handshakes.
- 138. Avoid touching surfaces that may be frequently touched by other passengers, e.g. handles, seatback latches, seat belt buckles. Once touched, use a sanitizer to clean your hands as above.
- 139. Try using online check-in before moving.
- 140. Avoid touching surface, cards, machines; once touched, use a hand sanitizer to clean your hands.
- 141. Safety protocols should be followed at luggage check-in to ensure the safety of staff and passengers.
- 142. Avoid hugs and greeting styles which make you unnecessary close to each other.
- 143. Keep an alcohol-based hand rub in the car all time. Regularly and thoroughly clean your hands with an alcohol-based hand rub or wash them with soap and water.
- 144. Avoid touching surfaces such as door handle, shelf, tools, equipment, etc. unnecessarily and use disinfectant before having any food and drinks.
- 145. Make sure you and the people around you, follow good respiratory hygiene. This means covering your mouth and nose with your bent elbow or tissue when you cough or sneeze. Then dispose of the used tissue immediately.
- 146. Try to dedicate separate pairs of clothes for fieldwork.

147. Choose a hotel room which is well ventilated and well cleaned.
148. Ask the hotel services to replace the covers and blankets on arrival.
149. Try to take your towels and wipes during field visits.
150. Disinfect the doorknobs and side tables after entering the room every time.
151. Take good care of hygiene in your room and surroundings.
152. Avoid allowing any hotel staff for any room services during the stay.
153. Keep minimum interaction with other guests or staff during the stay.
154. Regularly and thoroughly clean your hands with an alcohol-based hand rub or wash them with soap and water.
155. Regularly disinfect the area of stay and your frequently used stuff like keys, door handles, etc.
156. Avoid touching surfaces such as door handle, shelf, tools, equipment, etc. unnecessarily and use disinfectant before having any food and drinks.
157. Stay informed on the latest developments about COVID-19. Follow the advice given by your healthcare provider, your national and local public health authority, or your employer on how to protect yourself and others from COVID-19.
158. Ensuring availability of disposable cups, glasses, and plates for drinks and meals and their disposable after one-time-use.
159. More details, see Govt of Pakistan's Guidelines for Health Guidelines for Domestic Air Travel During COVID 19 Outbreak, document 29-03, 30-August-2020. https://covid.gov.pk/new_guidelines/31August2020_20200830_Guidelines_for_Domestic_Air_Travel_2903.pdf

8. References

- COVID-19 - Standardized Protocols for All Canadian Construction Sites, Version 4, April 16, 2020 (<https://www.cca-acc.com/wp-content/uploads/2020/04/CCA-COVID-19-Standardized-Protocols-for-All-Canadian-Construction-Sites-04-16-20.pdf>).
- World Health Organization. 2020. Considerations for public health and social measures in the workplace in the context of COVID-19. Geneva. (<https://www.who.int/publications-detail/considerations-for-public-health-and-social-measures-in-the-workplace-in-the-context-of-covid-19>)
- Working safely during COVID-19 in construction and other outdoor work. Guidance for employers, employees, and the self-employed. (<https://assets.publishing.service.gov.uk/media/5eb961bfe90e070834b6675f/working-safely-during-covid-19-construction-outdoors-110520.pdf>)
- Govt of Pakistan's Guidelines Social Distancing during COVID 19 Outbreak, document 06/01, March 26, 2020. https://covid.gov.pk/new_guidelines/01June2020_20200326_Guidelines_for_Soial_Distancing_0601.pdf
- Govt of Pakistan's Guidelines for Mandatory use of facemask, document 17-06, 13-June-2020. [https://covid.gov.pk/new_guidelines/14June2020_20200613_Guidelines_for_Mandatory_use_of_face_mask_\(urdu\)_1704.pdf](https://covid.gov.pk/new_guidelines/14June2020_20200613_Guidelines_for_Mandatory_use_of_face_mask_(urdu)_1704.pdf)
- Govt of Pakistan's Guidelines for Cleaning & Disinfection of Environmental Surfaces in Wake of COVID-19, document 02-04, 24-July-2020. https://covid.gov.pk/new_guidelines/26July2020_20200724_Guidelines_for_Cleaning__Disinfection_of_Environmental_Surfaces_0204.pdf
- Govt of Pakistan's Guidelines for Health Guidelines for Domestic Air Travel During COVID 19 Outbreak, document 29-03, 30-August-2020. https://covid.gov.pk/new_guidelines/31August2020_20200830_Guidelines_for_Domestic_Air_Travel_2903.pdf
- Govt of Pakistan's Guidelines for Health & Safety of Building & Construction

COVID-19 Health and Safety Plan

Workers during COVID-19 Outbreak, Document 11-01, 11-April-2020.
https://covid.gov.pk/new_guidelines/01June2020_20200411_Guidelines_for_the_health_and_safety_of_building_and_construction_workers_1101.pdf

Form A: Information to Include in Leaflet

1. Wear Mask at Project Sites or busy areas.

When working at the project site and moving outside, be sure to cover the mouth and nose with a mask.

2. Avoid Shaking Hands.

Try to avoid unnecessary handshakes especially with strangers.

3. No Hugs.

Avoid hugs and greeting styles that make you unnecessarily close to each other.

4. Maintain Social Distancing (at least 2 meters/6 feet)

Maintain at least a 2-meter distance between yourself and other personnel during unavoidable meetings and gatherings. Maintain 2 meters from anyone who is coughing or sneezing.

5. Avoid Social Gathering.

Avoid social gatherings of a small and large group for example meetings, family festivals, wedding ceremonies, political, religious and social gatherings, etc. Chances of spreading viruses in such gatherings are much higher.

6. Wash Hands Frequently.

Regularly and thoroughly clean your hands with an alcohol-based hand rub or wash them with soap and water thoroughly.

7. Reduce outdoor/outgoing Activities.

Reduce everyday routine activities with friends, also teach your family members and close friends these safety measures to take care of meeting outside people, especially if someone came from the virus affected city/area or country.

8. Do Proper Disinfection.

Regularly disinfect the area of your office and home as well as your frequently used stuff like keys, door handles, etc.

9. Avoid Touching Stuff in Public Places Unnecessarily.

Avoid touching surfaces such as door handle, shelf, tools, equipment etc. unnecessarily and use disinfectant before having any food and drinks.

10. Practice Respiratory Hygiene.

Make sure you and the people around you, follow good respiratory hygiene. This means covering your mouth and nose with your bent elbow or tissue when you cough or sneeze. Then dispose of the used tissue immediately.

11. Seek Medical Care Early.

Stay home if you feel unwell. If you have a fever, cough, and difficulty breathing, seek medical attention, and call in advance. Follow the directions of your local health authority.


12. Stay Informed.

Stay informed on the latest developments about COVID-19. Follow the advice given by your healthcare provider, your national and local public health authority, or your employer on how to protect yourself and others from COVID-19.


Form B: Hand-Washing Guide




Wet hands with water



apply enough soap to cover all hand surfaces.




Rub hands palm to palm




right palm over left dorsum with interlaced fingers and vice versa



palm to palm with fingers interlaced



backs of fingers to opposing palms with fingers interlocked



rotational rubbing of left thumb clasped in right palm and vice versa




rotational rubbing, backwards and forwards with clasped fingers of right hand in left palm and vice versa.




Rinse hands with water



dry thoroughly with a single use towel



use towel to turn off faucet



...and your hands are safe.

Form C: Guidelines on Worker Accommodation

This document contains Worker Accommodation Plan (WAP) for the Project which covers guidelines, the standards and practices to be used in the design and management of workers accommodation by NTDC, its contractors and subcontractors.

The WAP shall largely be implemented by the Construction Contractor and sub-contractors

The scope and applicability of the WAP is limited to the design and management of the worker accommodations provided during the construction phase of the Project.

NTDC and its contractors shall ensure sufficient resources are allocated on an on-going basis to achieve the effective implementation of the worker accommodation plan.

Regulatory Requirements for WAP

Laws applicable to the WAP include the following:

- Constitution of Pakistan that provides for humane conditions of work (Article 37(e)).
- Factories Act 1934 requirements for occupational health and safety at the workplace:
- Building Code of Pakistan. The Building Code of Pakistan (2008) provides the requirements for safety to be included in the design of buildings in Pakistan. The Building Code of Pakistan – Fire Safety Provisions (2016) provide the requirements for fire prevention, life safety in relation to fire and fire protection of buildings and building-like structures.

Accommodation Planning and Arrangement

Worker accommodations will be located within the Project site and will be provided during the construction phase of the Project. The worker accommodations will encompass areas where it shall not interfere with the construction activities.

Alongside the construction planning, the Construction Contractor (CC) along with the Project Management Unit (PMU) of NTDC, shall conduct a space assessment of accommodations.

Average minimum space of usual standards ranges from 10 to 12.5 cubic meters (volume) or 4 to 5.5 square meters (surface) per person will be provided throughout the construction period. Minimum ceiling height of 2.1 meters shall be provided.

Other specifications including building construction standards and fire safety will be managed according to the Building Code of Pakistan.

Drinking water complying with the provincial Environmental Quality Standards shall be provided at the worker accommodations.

Sewage and waste disposal system will be provided residential facilities in accordance with the regulatory requirements. As septic tanks will be constructed for management of sewage from the residential area and grease traps will be constructed to manage sewage from kitchen/mess.

Health and hygiene facilities will be provided against cold, heat, damp, biological hazards (disease-carrying animals), noise, vibration, food security and fire.

Washing facilities are will be provided as required. For sanitation septic tanks will be constructed on the campsite as per guidelines.

Employees will be provided with first aid training to cope up with emergency situations at the camp, in addition to emergency response at the workplace. Basic health care facility at the Project site and ambulance services shall be available.

If required, the project site during construction shall be encompassed by walls to limit impact on communities and ensure camp security.

All workers will be provided with an employee identity card and no person will be allowed to enter in the worker accommodations area without identification, or prior approval through security for visitors and other employees.

Standby generators to be located away from the communities towards the backside of Project site and also away from Worker Accommodation.

Inspection

A standard checklist on the workers' accommodation should be developed by the CC on cleanliness of the rooms, kitchen, toilets, open areas and disposal sites. The checklist will be used for the daily compliance of the cleanliness condition.

COVID-19 Health and Safety Plan

Project Manager of the CC will conduct an ongoing assessment of the accommodation requirement and the residual requirements for upcoming staffing.

The responsible staff of HSE of the CC will prepare monthly inspection report based on the inspection checklists and keep records and submissions along with other submissions to NTDC.

HBP Employee Temperature (°C) Checklist

[illegible]

01/04/22

30

COVID-19 Health and Safety Plan

Use this checklist on daily basis to determine the temperature in °C of any visitors and the corrective actions required.

Inspected by:				Date: dd/mm/yy
No	Name	Time	Temperature Recorded °C	Follow-up Action
1.				
2.				
3.				
4.				
5.				
6.				
7.				
8.				
9.				
10.				
11.				
12.				
13.				
14.				
15.				
16.				
17.				

01/04/22

31

Form F: Cleaning and Disinfecting Checklist

Month:						Inspected by:															Signature:										
S #	Activity	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30
1	Sweep and wash all hard surface flooring																														
2	Spot clean all interior glass																														
3	Clean and sanitize open desk surfaces																														
4	Clean and sanitize keyboard, mouse, and telephone																														
5	Dust computer monitors																														
6	Spot clean walls																														
7	Clean and sanitize all touchpoints																														
8	Empty and reline waste receptacles																														
9	Spot clean receptacles inside and out																														
10	Recycle paper waste																														
11	Detail floor edges, corners, and under desk																														
12	Dust all vertical surfaces																														
13	Dust window coverings																														
14	Clean all walls and glass																														
15	Clean between walls and furniture																														
16	Signature/Initial																														

COVID-19 Health and Safety Plan

Form G: Nearby Covid-19 Facilities

To be updated by Contractor's EHS Manager/ Site Managers.

01/04/22

33

Annexure XIV: Occupational Health, Safety, and Environment (OHSE) Management Plan

The Construction Contractor will develop a OSHE plan covering following headings.:

1. Introduction
 - 1.1 Purpose of the Plan
 - 1.2 Applicability
 - 1.3 Leadership Commitment
 - 1.4 Project HSSE Objectives and Targets
2. Project Description
 - 2.1 Scope of Work
3. Key Personnel and Health and Safety Responsibilities
 - 3.1 General
 - 3.2 Specific Roles and Responsibilities
4. Risk and Hazard Analysis and Control Measures
5. HSSE Requirements
 - 5.1 General HSSE Requirements
 - 5.2 General Standard Operating Procedures
 - 5.3 Forms and checklists
 - 5.4 Toolbox Talk
 - 5.5 Documentation
6. Personal Protective Equipment
7. HSSE Training
8. Internal and External Communication
 - 8.1 Communication Procedures
9. Emergency Preparedness and Response
 - 9.1 Field Team
 - 9.2 Hospital/ Clinics
 - 9.3 Emergency Contact
 - 9.4 Emergency Response Equipment
 - 9.5 Emergency Response Procedure

Annexure XV: Emergency Response Plan

Emergency Response Plan

1. Introduction

Emergency management can be defined as the organization, coordination and implementation of a range of measures to prevent, mitigate, respond to, overcome and recover from the consequences of emergency events affecting the community, its assets and the environment.

2. Purpose of Plan

This plan intends to provide a framework for safety and security to infrastructure, people and vehicles. It assigns responsibility to organizations and individuals for carrying out specific actions at projected times and places in an emergency situation that exceeds the capability or routine responsibility of any one agency.

The emergency response plan provides guidance to:

- Prevent any potential sources causing hazard to the resources during all stages of the project;
- Coordinate between various organizations to take actions in case of emergencies;
- Protect people and property in emergencies and disasters;
- Develop procedures to respond to the emergencies efficiently;
- Identify and ensure availability of personnel, equipment, facilities, supplies, and other resources for use in order to provide timely and efficient response and recovery operations; and
- Confirm that measures taken in an incident are adequate to recover the affected resources or further improvements are needed.

3. Planning

i. Emergency Response Team

A group/team shall be dedicated to identify and control potential emergencies during the construction and operation of the project. The roles and responsibilities of the group members shall be clearly defined.

The primary responsibilities of the group are described below:

- Identify the potential hazard or risk sources that can lead to emergency situations; Ensure availability of adequate resources, procedures and communication system to deal with the identified emergency situations;
- Ensure awareness and training of the staff to facilitate implementation of the emergency response plan;
- Maintaining the records of any previous incidents; and
- Post-event analysis to bridge the gaps of the existing risk prevention procedures.
- The emergency response team shall include but not limited to the following;
 1. Team Leader
 2. Safety Engineer
 3. Reporting officer/Inspector

Team Leader

- Approve/ modify devised measures to prevent or mitigate the risks associated with the identified risk sources
- Arrange resources for dealing with potential emergencies including, financial, equipments and personnel required to deal with emergencies.
- Assure that the Emergency Response plan is adequate, effective and can be implemented practically.


Safety Engineer

- Analyze the Identified risk sources and devise measures to prevent or mitigate the risks in close consultation with the Team Leader;
- Develop and implement the Emergency Response Procedures, in case of the possible emergencies arise;
- Ensure effective internal and external communication; and
- Provide regular trainings and arrange drills to make people aware of dealing with emergencies.

Reporting officer/Inspector

- Regular inspections of the site, to identify potential risks associated with equipments, materials and work practices;
- Anybody from the site can notify the reporting officer about potential risk and/or near misses on the site;
- Record any identified risks and mitigation measures to control the identified risk; and
- Notify the issue and control measures taken thereby to the safety engineer.

The designation, roles and responsibilities of each member shall be clearly defined and communicated to the employees. An outline of the framework of responsibilities is presented in the following organizational chart:

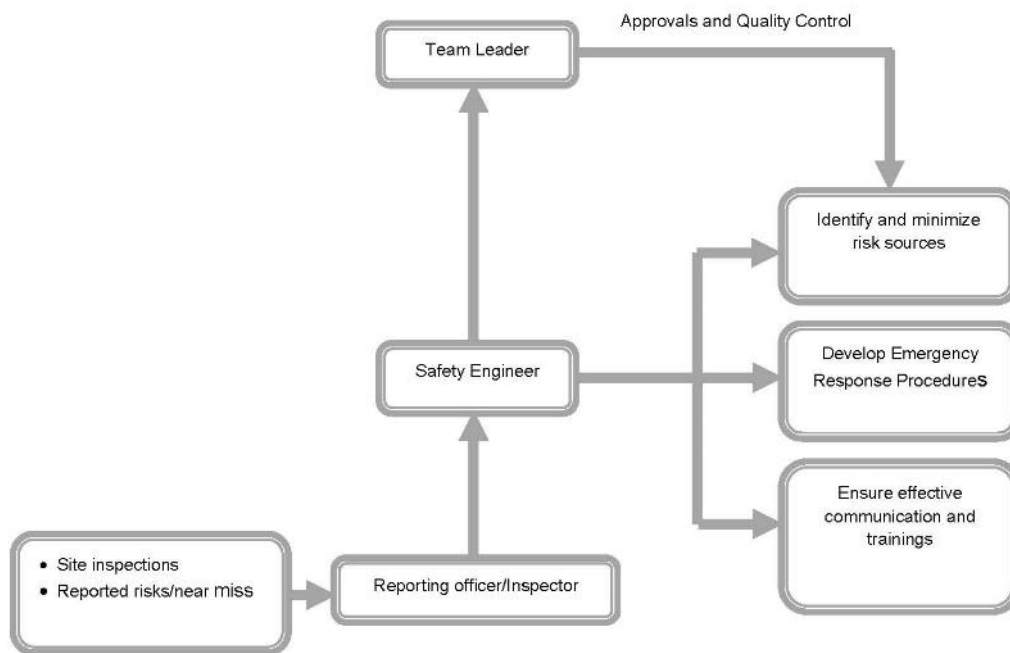**ii. Hazard Identification**

A comprehensive identification and evaluation of the hazards/risks likely to cause an emergency shall be done by Emergency Response Team (ERT). Major potential emergencies identified in road projects are as follows:

- Structural failure
- Disruption of Utility (Power, Water, Telecommunications, Gas, etc)
- Accidents
- Vehicle accident
- Fog
- Smoke
- Power/equipment failure or Vandalism
- Fire
- Earthquake
- Terrorism including bombing
- Disease Outbreak

iii. **Prevention and Mitigation**

The ERT shall work to eliminate or reduce the impact of identified emergencies and increasing the resilience of an affected community to recover from the consequences of such events. These activities include:

- Design considerations to control flooding, earthquakes and adequate lightening for fog etc.;
- Regular inspection and maintenance of construction machinery and the structural integrity;
- Review of work schedules based on weather updates; and
- Security controls based on political situations.

4. **Emergency Preparedness**

The ERT shall be prepared with all necessary resources and the personnel's shall be trained regularly

i. **Resources**

Finance and administration

The financial resources shall be reserved for dealing with any emergencies arising on site during construction and operation. Responsibilities of the person managing the resources in case of emergencies shall be clearly defined and the required resources shall be adequate and updated regularly.

Equipment

All the necessary equipment needed in an event of emergencies shall be made available, as a minimum, the equipment needed include;

- Personal Protective Equipment
- Alarms/ Warnings
- Fire extinguishers
- Crowd control, flashlights, signs, barricades
- First Aid Facility
- Detection instruments, e.g; personal alarm kits; smoke detection instruments
- Tools to fix minor vandalism

Communication

All external and internal communication systems shall be made available. Local emergency numbers shall be clearly posted and communicated to the personnel involved in construction and during operation.

The local emergency numbers are given below, which shall be regularly updated.

Emergency Numbers

Services

- 1 Edhi Ambulance
- 2 Emergency Police
- 3 Bomb Disposal

- 4 Rescue
- 5 Fire Brigade Center
- 6 Hospital Civil(casualties)

Trainings

Personnel shall be made aware of the importance of safety, potential emergencies and how to respond in case of emergencies. One day training and mock exercise shall be done to prepare, the personnel to deal with emergencies.

5. Emergency Response

Response includes actions taken to reduce the impacts of an emergency event, and to limit the threat to life, property and the environment.

The emergencies can be dealt with:

- On-Site Management of the situation
- Off-site coordination to arrange necessary resources to support the on-site management
- Providing advice and reports of the situation to stakeholders

i. Emergency Response Procedure:

Any person can report about an emergency, an on-site worker, an outside agency, or the public. Circumstances change during the course of an emergency in different events, thus, the procedure will vary as per the specific situation on ground. However, a basic action plan to be followed in an emergency is discussed below. This order of response is applicable to almost any emergency and should be followed in sequence.

Assess the situation:

The most important thing to do in case of emergency is to stay calm and avoid panic. Assess the situation, the cause and most immediate requirement to control, limit and/or manage the immediate, ongoing, or further damage.

Immediate control:

The most senior person on the scene should take control and contact, or delegate someone to contact emergency services as posted and communicated by ERT and inform the reporting officer of ERT and explain the situation. The area of emergency shall be restricted by barricades, tapes and adequate signage, if and as required.

Protection from further losses:

1. Once the site is restricted, to provide protection and reduce further losses, the source causing the emergency shall be controlled including equipments, materials, environment and accident scene from continuing damage or further hazards to the area and people. e.g: suppress fire, prevent objects from falling, shut down equipment or utilities, and take other necessary measures as required depending upon the type of emergency
2. Provide first aid if required or in doing so.
3. Designate people to emergency duties. e.g: assign personnel to guide emergency services on arrival.
4. Headcount People/personnel to identify any missing persons.
5. People/ personnel shall be directed to safe location.
6. Arrange diversions for the traffic to reduce disturbance to the flow of traffic, if and as far as possible.
7. Preserve the accident scene until experts mark it safe; only disturb what is essential to maintain life or relieve human suffering and prevent immediate or further losses.

ii. Communication:

Emergency service providers:

The emergency service providers' needs to be kept informed of the situation. On site, personnel from the emergency services shall be guided towards the emergency scene, brief about the event, ongoing and potential hazards and cause(s), if known.

Emergency Response Team and Management:

Members of ERT shall be immediately informed and the management shall also be kept informed.

Public:

Timely notifications to public shall be disseminated through electronic and print media depending upon the requirement and urgency of the emergency so that they can adopt alternate routes and avoid the hazards associated with the emergency encountered.

Utilities:

In case of disruption of utilities, the utility control authorities shall be immediately contacted to control the situation.

6. Recovery:

Emergency affected individuals, communities and infrastructure shall be restored in terms of emotional, economic, and physical well-being including the following as a minimum:

- A detailed analysis and assessment of causes of emergency , extent of damage and gaps if any, in managing the emergency;
- Recovery/replacement of the assets and infrastructure;
- Reinstatement of disrupted services;
- Road and bridge repairs;
- Updation of safety arrangements and Emergency response procedures to ensure better safety and security in any other arising emergencies.

Annexure XVI: Tree Plantation Plan

The Construction Contractor will develop a Tree Plantation Plan in consultation with the district office of the Forest and Wildlife Department of Sindh. A total of _____ trees will be planted in lieu of the expected _____ affected trees.

The Plan should cover the following:

1. The tree plantation sites, were chosen in consultation with local Forest Offices.
2. The size of the tree and specie, as directed by the local Forest Offices.

Trees Recommended

The recommended trees from Forest Department should be mentioned in the following details.

#	Local Name	Scientific Name	Recommended Number and Size	Per Unit Cost	Total Cost (PKR)
1					
2					
3					

Project Implementation Period

The Construction of the Transmission Line Project Will be Completed in _____ Years.

Tree Plantation Plan

1. First Year

Total _____ number of Trees will be planted in first year of project implementation.

2. First Year

Total _____ number of Trees will be planted in second year of implementation.

3. First Year

Total _____ number of Trees will be planted in second year of implementation.

4. Rehabilitation Year

Total _____ number of Trees will be planted during demobilization and rehabilitation period of the project implementation.

Measures for Maintenance of the Planted Trees

Finally, the Construction Contractor has to list the measures taken for the maintenance of the planted trees including regular watering and protection from animals, and removal by locals.

Annexure XVII: Resource Conservation Plan

RESOURCE CONSERVATION PLAN

1. INTRODUCTION

The most of the resources in this world are finite and non-renewable in nature. We are completely dependent on these resources to fulfill all our daily requirements. Therefore, sustainable development calls for the need to conserve resources in a way that meet our needs of present generation as well as future generation, especially the non-renewable resources.

2. OBJECTIVE OF THE PLAN

The Resource Conservation Plan is intended to make an effort towards achieving sustainable development. The objective of the resource conservation plan is to:

- Minimize the use of natural resources; and
- Mitigate and prevent pollution contaminating the natural resources.

3. PLANNING

Careful estimations of quantities of material, fuel, water and energy required directly or indirectly shall be done to avoid excessive or unnecessary wastage of these materials. In addition to this, pollution prevention strategies shall also be devised to prevent contamination of resources.

- The estimations include the following:
 - Estimation of construction material required for the project;
 - Estimation of fuel consumption for construction machinery, construction vehicles and generators;
 - Estimations of the energy requirements during all the stages of the project; and
 - Estimations of water consumption for construction activities and construction camp sites.
- Strategies shall be planned to reduce loads on the identified resources to be consumed;
- Best management practices shall be devised to control or reduce pollution resulting from the activities during different stages of the project; and
- An inspector shall be assigned responsibility to oversee the ongoing activities to check the compliance of the planned strategies.

4. EXECUTION OF THE PLAN

The planned strategies shall be implemented to conserve the natural resources including but not limited to the following:

Material

- Material supplied shall be in conformance with the estimated quantities and excess material shall be returned to the supplier;
- Material wastage shall be avoided by using best management practices;
- Waste produced during the project execution shall be disposed off safely to the designated disposal sites through approved contractors; and
- Reuse of the materials shall be appreciated.

Energy

- Reduce trips and optimize routes to and from the construction site for all kinds of activities;
- Regular maintenance of equipment and vehicles to avoid leaks and sustain efficient fuel consumption;
- Switch off idle equipment and vehicles to avoid wastage of fuel;
- Minimize warm up time, unnecessary acceleration and deceleration of the construction equipment and vehicles;
- Avoid unnecessary burning of fuel for cooking in construction camps;

- Avoid unnecessary use of heating and cooling systems during extreme weather events;
- Construction shall start in early hours of the day to avoid heat in summers and utilization of day light; and
- Alternate energy sources shall be considered for electricity generations during construction and operation to conserve fossil fuel as it is non-renewable resource.

Water

- Avoid using potable water for sprinkling, curing and washing of equipment and vehicles. Surface water or treated effluent can be used instead;
- Wastage of water should be controlled through providing proper valves and through controlling pressure of the water;
- Unnecessary equipment washings should be avoided;
- Awareness amongst workers shall be raised to conserve water and immediately report for any leaks detected; and
- Ensure protection of canal water from contamination resulting from construction activities.

Pollution

- Emissions shall be reduced and controlled as far as possible and direct discharges to air shall be avoided by strictly adhering to the mitigation measures outlined in EIA report;
- Waste water shall not be discharged directly and must be managed as per the recommendations presented in EIA; and
- Construction and demolition waste, and municipal solid waste shall not be dumped and burnt openly, and shall be handled according to the preventative measure given in EIA study.

5. CHECKING AND CORRECTIVE ACTIONS

C & W shall bind the construction contractor through contract agreement to comply with the strategies outlined in the Resource Conservation Plan. The Environmental Committee shall also appoint an Inspector who shall monitor the daily onsite activities and shall report any issues and concerns raised in relation to Resource Conservation Plan. The inspector shall recommend adequate corrective actions to mitigate the issues raised.

Annexure XVIII: Site Specific EMP

The Construction Contractor will develop a SSEMP covering following headings.:

INTRODUCTION

- 1.1 Background
- 1.2 Site-Specific Environmental Management Plan
- 1.3 Project Management Unit (PMU)
- 1.5 Purpose and Applicability
- 1.6 Project Implementation
- 1.7 Environmental Assessment And Approvals
- 2. SECTION 1 - DEFINITION OF BOUNDARIES
- 3. SECTION 2 - ENVIRONMENTAL VALUES & SENSITIVE RECEPTORS
- 3.1 Sensitive Receptors and Environmental Values
- 4. SECTION 3 - CONSTRUCTION ACTIVITIES
- 5. SECTION 4 & 5 - RISK ASSESSMENT AND ENVIRONMENTAL MANAGEMENT

MEASURES

- 6. SECTION 6 - SITE PLANS
- 7. SECTION 7 - ENVIRONMENTAL WORK PLANS
- 7.1 Environmental Training
- 7.2 Environmental Mitigation Plan
- 7.3 Worker Accommodation Plan
- 7.3.1 Regulatory Requirements for WAP
- 7.3.2 Accommodation Planning and Arrangement
- 7.4 Waste Management
- 8. SECTION 8 - MONITORING
- 8.1 Responsibilities
- 8.2 Review And Reporting
- 8.2.1 Monitoring and Reporting
- 8.2.2 Updates
- 9. CHANGE MANAGEMENT

Appendices

- Appendix A: Project IEE
- Appendix B: Sensitive Receptors & Environmental Values
- Appendix C: Photographs from the Site Visit

Annexure XIX: Worker Accommodation Plan

Worker Accommodation Plan (WAP) for the Project covers guidelines, the standards and practices to be used in the design and management of workers accommodation by Proponent, its contractors and subcontractors. The WAP shall largely be implemented by the CC. The scope and applicability of the WAP are limited to the design and management of the worker accommodations provided during the construction phase of the Project. Proponent and its contractors will ensure sufficient resources are allocated on an on-going basis to achieve the effective implementation of the worker accommodation plan.

Accommodation Planning and Arrangement

Worker accommodations will be located within the Project site and will be provided during the construction phase of the Project. The worker accommodations will encompass areas where it shall not interfere with the construction activities. Alongside the construction planning, the CC along with the Project Management Unit (PMU) of Proponent, shall conduct a space assessment of accommodations.

- The average minimum space of usual standards ranges from 10 to 12.5 cubic meters (volume) or 4 to 5.5 square meters (surface) per person will be provided throughout the construction period. Minimum ceiling height of 2.1 meters shall be provided.
- Other specifications including building construction standards and fire safety will be managed according to the Building Code of Pakistan.
- Drinking water complying with the provincial Environmental Quality Standards shall be provided at the worker accommodations.
- The sewage and waste disposal system will be provided in residential facilities following the regulatory requirements. As septic tanks will be constructed for management of sewage from the residential area and grease traps will be constructed to manage sewage from kitchen/mess.
- Health and hygiene facilities will be provided against cold, heat, damp, biological hazards (disease-carrying animals), noise, vibration, food security, and fire.
- Washing facilities are will be provided as required. For sanitation, septic tanks will be constructed on the campsite as per guidelines.
- Employees will be provided with first aid training to cope with emergencies at the camp, in addition to emergency response at the workplace. Basic health care facilities at the Project site and ambulance services will be available.
- If required, the project site during construction may be encompassed by walls to limit the impact on communities and ensure camp security.
- All workers will be provided with an employee identity card and no person will be allowed to enter in the worker accommodations area without identification, or prior approval through security for visitors and other employees.

- Standby generators to be located away from the communities towards the backside of the Project site and away from Worker Accommodation.

Inspection

A standard checklist on the workers' accommodation should be developed by the CC on the cleanliness of the rooms, kitchen, toilets, open areas and disposal sites. The checklist will be used for the daily compliance of the cleanliness condition.

Project Manager of the CC will conduct an ongoing assessment of the accommodation requirement and the residual requirements for upcoming staffing.

The responsible staff of HSE of the CC will prepare monthly inspection report based on the inspection checklists and keep records and submissions along with other submissions to Proponent.

Annexure XX: Fire Management and Protection Plan


- Step 1: Designate a Responsible Person:
- Step 2: Action on Discovering Fire
- Step 3: Designate Exit Routes:
- Step 4: Designate the Assembly Area:
- Step 5: Designate Additional Duties:
- Reporting emergencies:
- Accounting for staff:
- First Aid:
- Step 6: Training:
- Step 7: Periodic review:
- How and When to Use a Fire Extinguisher?

Annexure XXI: Calibration Certificate of Noise and Air Quality Measuring Instruments

CERTIFICATE OF CALIBRATION

ISSUED BY ASIAN CALIBRATION LAB

Document No. ACS/LMS/FRM-110 Date of Issue. 01-04-2019 Revision No.00
Certificate No. AES/021/025/01



ASIAN
CALIBRATION
SERVICES

www.asiancalibration.com

Client Asian Environment Services

Location Asian Calibration Lab

Equipment Detail Noise Level Meter

Model/Type WS2310CA

Manufacturer mi.sol

Serial No. 112828

Code ACS-WS-01

Job No. ACS-025-AES/21

Data Sheet No. AES/026-01

Inspection Date Nov 22, 2021

Due Date (Where Required) Nov 21, 2022

Laboratory Temperature 26 ± 3°C

Laboratory Humidity 40% ± 20% RH

Calibrated By Engr. Bilal Khalid


Inspection Checks & Results:


Range: 10 – 99 % Resolution: 1 Source: Humidity


Set value Ref. Std. Unit: %	Measured Value (IUT)* Unit: %	Deviation/Error Unit: %
20	21	1
30	30	0
40	40	0
50	51	1
60	61	1


Range: 0 – 50 mps Resolution: 0.1 Source: Speed

Set value Ref. Std. Unit: mps	Measured Value (IUT)* Unit: mps	Deviation/Error Unit: mps
0.4	0.3	-0.1
1.3	1.2	-0.1
2.2	2.1	-0.1
4.1	4.0	-0.1
8.7	8.7	0
19.5	19.2	-0.3
27.8	27.3	-0.5
36.3	35.5	-0.8
45.7	45.9	-0.2



 Calibrated by.
(DM)


 Reviewed by.
(TM)


 Approved by.
(QM)



Head Office:
Basement, C-3, Jhelum Block, Green Forts-II, Lahore - Pakistan
Phones: +92 42 35450914-15, Fax: +92 42 35450916,
Email: info@asiancalibration.com



CERTIFICATE OF CALIBRATION

ISSUED BY ASIAN CALIBRATION LAB

Document No. ACS/LMS/FRM-110 Date of Issue: 01-04-2019 Revision No.00
Certificate No. AES/021/025/01



Wind Direction speed (wind tunnel speed at 20mps)

True Direction	Indicated (*)
N	359
E	088
S	176
W	268

Range: 35 – 1300 hPa Resolution: 0.1 Source: Pressure

Set value Ref. Std. Unit: hPa	Measured Value (IUT)* Unit: hPa	Deviation/Error Unit: hPa
1100	1100.4	0.4
1000	1000.4	0.4
950	950.4	0.4
800	800.4	0.4
300	300.3	0.3
200	200.2	0.2
100	100.1	0.1
50	50.1	0.1

Range: 0 – 60 °C Resolution: 0.1 Source: Temperature

Set value Ref. Std. Unit: °C	Measured Value (IUT)* Unit: °C	Deviation/Error Unit: °C
3.3	3.4	0.1
14.3	14.4	0.1
25.4	25.4	0
35.2	35.3	0.1
45.0	45.2	0.2
55.0	55.1	0.1

Calibrated by.
(DM)

Reviewed by.
(TM)

Approved by.
(QM)



Head Office:

Basement, C-3, Jhelum Block, Green Forts-II, Lahore - Pakistan
Phones: +92 42 35450914-15, Fax: +92 42 35450916,
Email: info@asiancalibration.com



CERTIFICATE OF CALIBRATION

ISSUED BY ASIAN CALIBRATION LAB

Document No. ACS/LMS/FRM-110 Date of Issue. 01-04-2019 Revision No.00
Certificate No. AES/021/025/01



Instrument Under Test

- Instrument was new and good in condition.
- Adjustment is carried out and measurement in this certificate are as obtained figures.
- The above instrument has been calibrated against the standards maintained in the instrument's division of ACS lab.
- Observed correction for anemometer are indicated above (acceptable limits of tolerance ± 0.1 mps upto 5.5 mps and $\pm 2\%$ beyond.

Reference / Calibration Standard

The weather station has been calibrated against thermocouple calibrator make GE Druck DPI821, Digital pressure indicator Sr no 51501374 of Druck Uk make, Digital thermometer & Digital Hygrometer make Extech /445814, which are traceable to certificates No. APCIC/PL (361)/ILO#938/29.05.19, APCIC/TL (907)/ILO#938/29.05.19, APCIC/TL (064)/ILO#764/24.12.19 and APCIC/TL (066)/ILO#764/24.12.19 of PCSIR Laboratory Pakistan.

Note(s):

- This certificate provides traceability of measurements to recognised international/national standard and to units of measurements realizes to recognised international/national standard laboratories.
- This certificate may not be reproduced, except in full, without prior written approval of the laboratory

Calibrated by.
(DM)

Reviewed by.
(TM)

Approved by.
(QM)

-----End of Certificate-----



Head Office:

Basement, C-3, Jhelum Block, Green Forts-II, Lahore - Pakistan
Phones: +92 42 35450914-15, Fax: +92 42 35450916,
Email: info@asiancalibration.com



CERTIFICATE OF CALIBRATION

ISSUED BY ASIAN CALIBRATION LAB

Document No. ACS/LMS/FRM-110 Date of Issue: 01-04-2019 Revision No.00

Certificate No. AES/020/027/12



Client	Asian Enviro Services.	Job No.	ACS-027-AES/20
Location	Asian Enviro Services Lab	Data Sheet No.	AES/027-12
Equipment Detail	Air Quality monitor	Calibration Date	Oct 2, 2021
Model/type	AF22E/ Sulfur Dioxide Analyzer	Due Date (Where Required)	Oct 1, 2022
Manufacturer	Environment SA	Laboratory Temperature	26 ± 3°C
Serial No.	313AS	Laboratory Humidity	40% ± 20% RH
Code	ACS-AES-12	Calibrated By	Engr. Bilal Khalid

Calibration Results:

Range: 0-20.002 ppm Resolution: 0.001

Calibration Point (%FS)	Set value Ref. Std. Unit: ppm	Measured Value (IUT)* Unit: ppm	Deviation/Error Unit: ppm
0.0	0.000	0.000	0.00
20.0	5.418	5.418	0.00
40.0	8.837	8.838	0.01
60.0	15.255	15.251	-0.01
80.0	20.673	20.673	-0.12

Instrument Under Test

- Instrument was used and good in condition.
- Adjustment is carried out and measurement in this certificate are as obtained figures.

Reference / Calibration Standard

The air quality monitor O342e e has been calibrated against reference standard id ID#ACS-INST-12 which is traceable to certificates No. APCIC/TL (20)/ILO#98/47.10.20 of PCSIR Laboratory Pakistan.

Note(s):

- This certificate provides traceability of measurements to recognised international/national standard and to units of measurements realizes to recognised international/national standard laboratories.
- This certificate may not be reproduced, except in full, without prior written approval of the laboratory.

Calibrated by.
(DM)

Reviewed by.
(TM)

Approved by.
(GM)

-----End of Certificate-----

**Head Office:**

Basement, C-3, Jhelum Block, Green Forts-II, Lahore - Pakistan
Phones: +92 42 35450914-15, Fax: +92 42 35450916,
Email: info@asiancalibration.com



Page 1 of 1

CERTIFICATE OF CALIBRATION

ISSUED BY ASIAN CALIBRATION LAB

Document No. ACS/LMS/FRM-110 Date of Issue. 01-04-2019 Revision No.00

Certificate No. AES/020/027/06



Client Asian Enviro Services.
 Location Asian Enviro Services Lab
 Equipment Detail Air Quality monitor
 Model/type CO12e
 Manufacturer Environment SA
 Serial No. 269SA
 Code ACS-AES-06

Job No. ACS-027-AES/20
 Data Sheet No. AES/027-06
 Calibration Date Oct 2, 2021
 Due Date (Where Required) Oct 1, 2022
 Laboratory Temperature $26 \pm 3^{\circ}\text{C}$
 Laboratory Humidity $40\% \pm 20\% \text{ RH}$
 Calibrated By Engr. Bilal Khalid

Calibration Results:

Range: 0-42.092 ppm Resolution: 0.0001

Calibration Point (%FS)	Set value Ref. Std. Unit: ppm	Measured Value (IUT)* Unit: ppm	Deviation/Error Unit: ppm
0.0	0.000	0.000	0.00
20.0	8.418	8.547	0.19
40.0	16.837	16.847	0.11
60.0	25.255	25.257	-0.02
80.0	33.673	33.651	-0.12
100.0	42.092	42.095	0.01

Instrument Under Test

- Instrument was used and good in condition.
- Adjustment is carried out and measurement in this certificate are as obtained figures.

Reference / Calibration Standard

The air quality monitor Q842e has been calibrated against reference standard id ID#ACS-INST-44 which is traceable to certificates No. APCIC/ML (44)/ILO#98/47.10.20 of PCSIR Laboratory Pakistan.

Note(s):

- This certificate provides traceability of measurements to recognised international/national standard and to units of measurements realizes to recognised international/national standard laboratories.
- This certificate may not be reproduced, except in full, without prior written approval of the laboratory.

Calibrated by.
 (DM)

Reviewed by.
 (RM)

Approved by.
 (QM)

-----End of Certificate-----

**Head Office:**

Basement, C-3, Jhelum Block, Green Forts-II, Lahore - Pakistan
 Phones: +92 42 35450914-15, Fax: +92 42 35450916.
 Email: info@asiancalibration.com



Page 1 of 1

CERTIFICATE OF CALIBRATION

ISSUED BY ASIAN CALIBRATION LAB

Document No. ACS/LMS/FRM-110 Date of Issue. 01-04-2019 Revision No.00

Certificate No. AES/020/027/05



Client	Asian Enviro Services.	Job No.	ACS-027-AES/20
Location	Asian Enviro Services Lab	Data Sheet No.	AES/027-05
Equipment Detail	Air Quality monitor	Calibration Date	Oct 2, 2021
Model/type	AC32e	Due Date (Where Required)	Oct 1, 2022
Manufacturer	Environment SA	Laboratory Temperature	26 ± 3°C
Serial No.	389SA	Laboratory Humidity	40% ± 20% RH
Code	ACS-AES-05	Calibrated By	Engr. Bilal Khalid

Calibration Results:

Range: 0-0.3895 ppm Resolution: 0.0001

Calibration Point (%FS)	Set value Ref. Std. Unit: ppm	Measured Value (IUT)* Unit: ppm	Deviation/Error Unit: ppm
0.0	0.0000	0.0000	0.18
20.0	0.0779	0.0799	0.24
40.0	0.1558	0.1560	0.19
60.0	0.2337	0.2387	0.18
100.0	0.3895	0.3848	-0.02

Instrument Under Test

- Instrument was used and good in condition.
- Adjustment is carried out and measurement in this certificate are as obtained figures.

Reference / Calibration Standard

The air quality monitor AC32 e has been calibrated against reference standard id ID#ACS-INST-17 which is traceable to certificates No. APCIC/TL (78)/ILO#32/13.10.20 of PCSIR Laboratory Pakistan.

Note(s):

- This certificate provides traceability of measurements to recognised international/national standard and to units of measurements realizes to recognised international/national standard laboratories.
- This certificate may not be reproduced, except in full, with prior written approval of the laboratory.

Calibrated by.
(DM)

Reviewed by.
(TM)

Approved by.
(QM)

-----End of Certificate-----

**Head Office:**

Basement, C-3, Jhelum Block, Green Forts-II, Lahore - Pakistan
Phones: +92 42 35450914-15, Fax: +92 42 35450916,
Email: info@asiancalibration.com



Page 1 of 1

CERTIFICATE OF CALIBRATION

ISSUED BY ASIAN CALIBRATION LAB

Document No. ACS/LMS/FRM-110 Date of Issue: 01-04-2019 Revision No.00

Certificate No. AES/020/027/04



Client	Asian Enviro Services.	Job No.	ACS-027-AES/20
Location	Asian Enviro Services Lab	Data Sheet No.	AES/027-04
Equipment Detail	Air Quality monitor	Calibration Date	Oct 2, 2021
Model/type	Mp101M	Due Date (Where Required)	Oct 1, 2022
Manufacturer	Environment SA	Laboratory Temperature	26 ± 3°C
Serial No.	362SA	Laboratory Humidity	40% ± 20% RH
Code	ACS-AES-04	Calibrated By	Engr. Bilal Khalid

Calibration Results:

Range: 10000 µg/m³ Resolution: 0.0001 Source: PM 10, PM 2.5

Calibration Point (%FS)	Set value Ref. Std. Unit: µg/m³	Measured Value (IUT)* Unit: µg/m³	Deviation/Error Unit: µg/m³
0.0 from HEPA filter	0.0000	-0.0001	-0.03

Instrument Under Test

- Instrument was used and good in condition.
- Adjustment is carried out and measurement in this certificate are as obtained figures.


Reference / Calibration Standard

The air quality monitor Mp101M has been calibrated against reference standard id ID#ACS-INST-021 which is traceable to certificates No. APCIC/DL (62N)/ILO#64/24.12.19 of PCSIR Laboratory Pakistan.

Note(s):

- This certificate provides traceability of measurements to recognised international/national standard and to units of measurements realizes to recognised international/national standard laboratories.
- This certificate may not be reproduced, except in full, without prior written approval of the laboratory.


Calibrated by.
(DM)


Reviewed by.
(TM)


Approved by.
(QM)

-----End of Certificate-----

**Head Office:**

Basement, C-3, Jhelum Block, Green Forts-II, Lahore - Pakistan
Phones: +92 42 35450914-15, Fax: +92 42 35450916,
Email: info@asiancalibration.com



Page 1 of 1

CERTIFICATE OF CALIBRATION

ISSUED BY ASIAN CALIBRATION LAB

Document No. ACS/LMS/FRM-110 Date of Issue: 01-04-2019 Revision No.00

Certificate No. AES/021/027/07



Client	Asian Enviro Services.	Job No.	ACS-027-AES/21
Location	Asian Enviro Services Lab	Data Sheet No.	AES/027-07
Equipment Detail	Stack Emission Analyser	Calibration Date	Sep 2, 2021
Model/type	340	Due Date (Where Required)	Sep 1, 2022
Manufacturer	Testo	Laboratory Temperature	26 ± 3°C
Serial No.	6164345	Laboratory Humidity	40% ± 20% RH
Code	ACS-AES-07	Calibrated By	Engr. Bilal Khalid

Calibration Results:

Range: 100 °C Resolution: 0.1 Source Ambient Air Temperature

Set value Ref. Std. Unit: °C	Measured Value (IUT)* Unit: °C	Deviation/Error Unit: °C
100.0	100.0	±0.0

Range: 100 °C Resolution: 0.1 Source Flue Gas Temperature

Set value Ref. Std. Unit: °C	Measured Value (IUT)* Unit: °C	Deviation/Error Unit: °C
100.0	100.0	±0.0


Range: 8 hPa Resolution: 0.1 Source Pressure


Set value Ref. Std. Unit: hPa	Measured Value (IUT)* Unit: hPa	Deviation/Error Unit: hPa
8.00	7.98	-0.02

Range: 0 - 5% Resolution: 0.01 Source O₂

Set value Ref. Std. Unit: %	Measured Value (IUT)* Unit: %	Deviation/Error Unit: %
0.0	0.00	0
2.51	2.55	+0.04
5.01	5.02	+0.01


Calibrated by.
(DM)


Reviewed by.
(TM)


Approved by.
(QM)

**Head Office:**

Basement, C-3, Jhelum Block, Green Forts-II, Lahore - Pakistan
Phones: +92 42 35450914-15, Fax: +92 42 35450916,
Email: info@asiancalibration.com



Page 1 of 2

CERTIFICATE OF CALIBRATION

ISSUED BY ASIAN CALIBRATION LAB

Document No. ACS/LMS/FRM-110 Date of Issue: 01-04-2019 Revision No.00
Certificate No. AES/021/027/07



Calibration Results:

Range: 100-700 ppm Resolution: 1 Source CO

Set value Ref. Std. Unit: ppm	Measured Value (IUT)* Unit: ppm	Deviation/Error Unit: ppm
100	102	+2
401	399	-2
701	702	+1

Range: 100-1000 ppm Resolution: 1 Source SO₂

Set value Ref. Std. Unit: ppm	Measured Value (IUT)* Unit: ppm	Deviation/Error Unit: ppm
100	96	-4
1000	979	-21

Instrument Under Test

- Instrument was used and good in condition.
- Adjustment is carried out and measurement in this certificate are as obtained figures.

Reference / Calibration Standard

The stack emission analyser has been calibrated against reference standard id ID#ACS-INST-39 which is traceable to certificates No. APCIC/ML (40)/ILO#98/47.10.20 of PCSIR Laboratory Pakistan.

Note(s):

- This certificate provides traceability of measurements to recognised international/national standard and to units of measurement realizes to recognised international/national standard laboratories.
- This certificate may not be reproduced, except in full, without prior written approval of the laborato

Calibrated by
(DM)

Reviewed by
(TM)

(QM)

-----End of Certificate-----



Head Office:

Basement, C-3, Jhelum Block, Green Forts-II, Lahore - Pakistan
Phones: +92 42 35450914-15, Fax: +92 42 35450916,
Email: info@asiancalibration.com



Page 2 of 2

CERTIFICATE OF CALIBRATION

ISSUED BY ASIAN CALIBRATION LAB

Document No. ACS/LMS/FRM-110 Date of Issue: 01-04-2019 Revision No.00
Certificate No. AES/020/027/04



Client	Asian Enviro Services.	Job No.	ACS-027-AES/20
Location	Asian Enviro Services Lab	Data Sheet No.	AES/027-04
Equipment Detail	Air Quality monitor	Calibration Date	Oct 4, 2021
Model/type	Mp101M	Due Date (Where Required)	Oct 3, 2022
Manufacturer	Environment SA	Laboratory Temperature	26 ± 3°C
Serial No.	362SA	Laboratory Humidity	40% ± 20% RH
Code	ACS-AES-04	Calibrated By	Engr. Bilal Khalid

Calibration Results:

Range: 10000 µg/m³ **Resolution:** 0.0001 **Source:** PM 10, PM 2.5

Calibration Point (%FS)	Set value Ref. Std. Unit: µg/m³	Measured Value (IUT)* Unit: µg/m³	Deviation/Error Unit: µg/m³
0.0 from HEPA filter	0.0000	-0.0001	-0.03

Instrument Under Test

- Instrument was used and good in condition.
- Adjustment is carried out and measurement in this certificate are as obtained figures.

Reference / Calibration Standard

The air quality monitor Mp101M has been calibrated against reference standard id ID#ACS-INST-021 which is traceable to certificates No. APCIC/DL (62N)/ILO#64/24.12.19 of PCSIR Laboratory Pakistan.

Note(s):

- This certificate provides traceability of measurements to recognised international/national standard and to units of measurements realizes to recognised international/national standard laboratories.
- This certificate may not be reproduced, except in full, without prior written approval of the laboratory.

Calibrated by.
(DM)

Reviewed by.
(TM)

Approved by.
(QM)

-----End of Certificate-----



Head Office:

Basement, C-3, Jhelum Block, Green Forts-II, Lahore - Pakistan
Phones: +92 42 35450914-15, Fax: +92 42 35450916,
Email: info@asiancalibration.com



Page 1 of 1

CERTIFICATE OF CALIBRATION

ISSUED BY ASIAN CALIBRATION LAB

Document No. ACS/LMS/FRM-110 Date of Issue: 01-04-2019 Revision No.00

Certificate No. AES/021/028/07



Client	Asian Enviro Services.	Job No.	ACS-027-AES/21
Location	Asian Enviro Services Lab	Data Sheet No.	AES/028-07
Equipment Detail	SO2 Gas Detector	Calibration Date	Nov 22, 2021
Model/type	QC-904	Due Date (Where Required)	Nov 21, 2022
Manufacturer	Oceanus	Laboratory Temperature	26 ± 3°C
Serial No.	190805002001	Laboratory Humidity	40% ± 20% RH
Code	ACS-AES-07	Calibrated By	Engr. Bilal Khalid

Calibration Results:

Range: 0-20 ppm Resolution: 0.1

Calibration Point (ppm)	Set value Ref. Std. Unit: ppm	Measured Value (IUT)* Unit: ppm	Deviation/Error Unit: ppm
0.0	0.0	0.0	0.0
2.0	2.0	1.9	0.1

Instrument Under Test

- Instrument was used and good in condition.
- Adjustment is carried out and measurement in this certificate are as obtained figures.

Reference / Calibration Standard

The Indoor Air Monitor (SO2 Gas Detector) has been calibrated against reference standard id ID#ACS-INST-44 which is traceable to certificates No. APCIC/ML (44)/ILO#98/47.10.20 of PCSIR Laboratory Pakistan.

Note(s):

- This certificate provides traceability of measurements to recognised international/national standard and to units of measurements realizes to recognised international/national standard laboratories.
- This certificate may not be reproduced, except in full, without prior written approval of the laboratory.

Calibrated by.
(DM)

Reviewed by.
(TM)

Approved by.
(QM)

-----End of Certificate-----

**Head Office:**

Basement, C-3, Jhelum Block, Green Forts-II, Lahore - Pakistan
Phones: +92 42 35450914-15, Fax: +92 42 35450916,
Email: info@asiancalibration.com



Page 1 of 1

CERTIFICATE OF CALIBRATION

ISSUED BY ASIAN CALIBRATION LAB

Document No. ACS/LMS/FRM-110 Date of Issue. 01-04-2019 Revision No.00

Certificate No. AES/021/025/01



Client	Asian Environment Services	Job No.	ACS-025-AES/21
Location	Asian Calibration Lab	Data Sheet No.	AES/026-01
Equipment Detail	Noise Level Meter	Inspection Date	Nov 22, 2021
Model/type	BSWA 308	Due Date (Where Required)	Nov 21, 2022
Manufacturer	BSWA TECH	Laboratory Temperature	26 ± 3°C
Serial No.	580036	Laboratory Humidity	40% ± 20% RH
Code	ACS-NM-01	Calibrated By	Engr. Bilal Khalid

Inspection Checks & Results:

Range: 93.8 dB Resolution: 0.1 Source: Sound

Set value Ref. Std. Unit: dB	Measured Value (IUT)* Unit: dB	Deviation/Error Unit: dB
93.8	93.8	0.0
93.8	93.8	0.0
93.8	93.8	0.0

Level Linearity

Range: 20 – 134 dB Resolution: 0.1 Source: Electrical

Set value Ref. Std. Unit: dB	Measured Value (IUT)* Unit: dB	Deviation/Error Unit: dB
20	20.2	0.2
21	21.1	0.1
22	22.2	0.2
23	23.2	0.2
24	24.1	0.1
25	25.1	0.1
30	30.2	0.2
40	40.0	0.0
50	50.0	0.0

Calibrated by.
(DM)

Reviewed by.
(TM)

Approved by.
(QM)

**Head Office:**

Basement, C-3, Jhelum Block, Green Forts-II, Lahore - Pakistan
 Phones: +92 42 35450914-15, Fax: +92 42 35450916,
 Email: info@asiancalibration.com



CERTIFICATE OF CALIBRATION

ISSUED BY ASIAN CALIBRATION LAB

Document No. ACS/LMS/FRM-110 Date of Issue. 01-04-2019 Revision No.00

Certificate No. AES/021/025/01



Range: 20 – 134 dB Resolution: 0.1 Source: Electrical

Set value Ref. Std. Unit: dB	Measured Value (IUT)* Unit: dB	Deviation/Error Unit: dB
60	60.0	0.0
70	70.0	0.0
80	80.0	0.0
89	89.0	0.0
90	90.0	0.0
91	91.0	0.0
92	92.0	0.0
93	93.0	0.0
94	94.0	0.0
95	95.0	0.0
96	96.0	0.0
97	97.0	0.0
98	98.0	0.0
99	99.0	0.0
100	100.0	0.0
110	110.0	0.0
120	120.0	0.0
130	130.0	0.0
131	131.0	0.0
132	132.0	0.0
133	133.0	0.0
134	134.0	0.0


Calibrated by.
(DM)


Reviewed by.
(TM)


Approved by.
(QM)

**Head Office:**

Basement, C-3, Jhelum Block, Green Forts-II, Lahore - Pakistan
Phones: +92 42 35450914-15, Fax: +92 42 35450916,
Email: info@asiancalibration.com



<h2 style="margin: 0;">CERTIFICATE OF CALIBRATION</h2> <p style="margin: 0;">ISSUED BY ASIAN CALIBRATION LAB</p> <p style="margin: 0;">Document No. ACS/LMS/FRM-110 Date of Issue. 01-04-2019 Revision No.00</p> <p style="margin: 0;">Certificate No. AES/021/025/01</p>	 <p style="margin: 0;">ASIAN CALIBRATION SERVICES <small>PTY. LTD.</small></p> <p style="margin: 0;">www.asiancalibration.com</p>
---	---

- Instrument was new and good in condition.
- Adjustment is carried out and measurement in this certificate are as obtained figures.
- The above instrument has been calibrated against the standards maintained in the instrument's division of ACS lab.

Reference / Calibration Standard

The Noise Level Meter has been calibrated against Noise calibrator make BSWA BK4231 which is traceable to certificates No. APCIC/PL (361)/ILO#938, of PCSIR Laboratory Pakistan.

Note(s):

- This certificate provides traceability of measurements to recognised international/national standard and to units of measurements realizes to recognised international/national standard laboratories.
- This certificate may not be reproduced, except in full, without prior written approval of the laboratory.

 <hr style="width: 100px; margin: 0 auto;"/> <p>Calibrated by. (DM)</p>	 <hr style="width: 100px; margin: 0 auto;"/> <p>Reviewed by. (TM)</p>	 <hr style="width: 100px; margin: 0 auto;"/> <p>Approved by. (QM)</p>
--	---	--

-----End of Certificate-----



Head Office:
 Basement, C-3, Jhelum Block, Green Forts-II, Lahore - Pakistan
 Phones: +92 42 35450914-15, Fax: +92 42 35450916,
 Email: info@asiancalibration.com






CERTIFICATE OF CALIBRATION

ISSUED BY ASIAN CALIBRATION LAB

Document No. ACS/LMS/FRM-110 Date of Issue. 01-04-2019 Revision No.00

Certificate No. AES/021/030/09



www.asiancalibration.com

Client	Asian Enviro Services.	Job No.	ACS-027-AES/21
Location	ACS Lab	Data Sheet No.	AES/030-09
Equipment Detail	LUX meter	Calibration Date	Nov 22, 2021
Model/type	LM-200LED	Due Date (Where Required)	Nov 21, 2022
Manufacturer	AMPROBE	Site Temperature	23.8 °C ± 3°C
Serial No.	18050461	Site Humidity	50% ± 20% RH
Code	ACS-AES-09	Calibrated By	Engr. Abdur Rehman

Calibration Results:

Range: 540 - 2586 LUX Resolution: 50.0 Source: LUX

Set value Ref. Std. Unit: LUX	Measured Value (IUT)* Unit: LUX	Deviation/Error Unit: LUX
540	542	2.0
845	850	5.0
1241	1250	9.0
2037	2050	13.0
2586	2600	14.0

Instrument Under Test


- Instrument was used and good in condition.
- Adjustment are carried out and measurement in this certificate are as obtained figures.

Reference / Calibration Standard


The LUX Meter has been calibrated against Master LUX Meter which is traceable to the certificate no. ACS/LMS/FRM-LUX.M-01 of ACS.

Note(s):


- This certificate provides traceability of measurements to recognised international/national standard and to units of measurements realizes to recognised international/national standard laboratories.
- This certificate may not be reproduced, except in full, without prior written approval of the laboratory.



 Calibrated by.
(DM)




 Reviewed by.
(TM)






 Approved by.
(QM)

-----End of Certificate-----



Head Office:
 Basement, C-3, Jhelum Block, Green Forts-II, Lahore - Pakistan
 Phones: +92 42 35450914-15, Fax: +92 42 35450916,
 Email: info@asiancalibration.com

Page 1 of 1

CERTIFICATE OF CALIBRATION

ISSUED BY ASIAN CALIBRATION LAB

Document No. ACS/LMS/FRM-110 Date of Issue: 01-04-2019 Revision No.00

Certificate No. AES/021/029/08



Client	Asian Enviro Services.	Job No.	ACS-027-AES/21
Location	Asian Enviro Services Lab	Data Sheet No.	AES/029-08
Equipment Detail	NO2 Gas Detector	Calibration Date	Nov 22, 2021
Model/type	QC-904	Due Date (Where Required)	Nov 21, 2022
Manufacturer	Oceanus	Laboratory Temperature	26 ± 3°C
Serial No.	190805002002	Laboratory Humidity	40% ± 20% RH
Code	ACS-AES-08	Calibrated By	Engr. Bilal Khalid

Calibration Results:

Range: 0-20 ppm Resolution: 0.1

Calibration Point (ppm)	Set value Ref. Std. Unit: ppm	Measured Value (IUT)* Unit: ppm	Deviation/Error Unit: ppm
0.0	0.0	0.0	0.0
1.3	1.3	1.3	0.0

Instrument Under Test

- Instrument was used and good in condition.
- Adjustment is carried out and measurement in this certificate are as obtained figures.

Reference / Calibration Standard

The Indoor Air Monitor (NO2 Gas Detector) has been calibrated against reference standard id ID# ACS-INST-45 which is traceable to Certificates No. APCIC/ML (45)/ILO#98/47.10.20 of PCSIR Laboratory Pakistan.

Note(s):

- This certificate provides traceability of measurements to recognised international/national standard and to units of measurements realizes to recognised international/national standard laboratories.
- This certificate may not be reproduced, except in full, without prior written approval of the laboratory.

Calibrated by.
(DM)

Reviewed by.
(TM)

Approved by.
(QM)

-----End of Certificate-----

**Head Office:**

Basement, C-3, Jhelum Block, Green Forts-II, Lahore - Pakistan
Phones: +92 42 35450914-15, Fax: +92 42 35450916,
Email: info@asiancalibration.com



Page 1 of 1