# **Initial Environmental Examination**

October 2022

# Pakistan: Second Power Transmission Enhancement Investment Program (Tranche 4)

Subproject 4: Procurement of goods for the construction of a new 220kV Jamrud grid station and approximately 20 km of the associated 220kV Jamrud-Sheikh Muhammadi transmission line in the south-western area of Pakistan

Prepared by the National Transmission and Despatch Company Limited (NTDC) for the Asian Development Bank.

# **Initial Environmental Examination**

Project Number: 48078-006

Date: October 2022

# Pakistan: Second Power Transmission Enhancement Investment Program (Tranche 4)

Subproject 4: Procurement of goods for the construction of a new 220kV Jamrud grid station and approximately 20 km of the associated 220kV Jamrud-Sheikh Muhammadi transmission line in the south-western area of Pakistan

Prepared by the National Transmission and Despatch Company Limited (NTDC) for the Asian Development Bank.

#### **CURRENCY EQUIVALENTS**

As of 1 October 2022

Currency Unit – Pak Rupees (Pak Rs.)

Pak Rs 1.00 = \$ 0.0044 US\$1.00 = Pak Rs. 228.08

#### **ABBREVIATIONS**

AC Alternating Current

ADB Asian Development Bank

AOI Area of Influence

EARF Environmental Assessment and Review Framework

EIA Environmental Impact Assessment'

EHS Guidelines The World Bank Group's Environmental, Health and Safety Guidelines

EHS Manager Environmental, Health, and Safety Manager (under ESIC)

EMF electromagnetic field

EMP Environmental Management Plan
EPA Environment Protection Agency

ESIC Environment and Social Impact Cell

ETL Electricity Transmission Line

FMC Facility Management Consultant

FMC-IESS FMC's International Environmental Safeguards Specialist

FMC-NESS FMC's National Environmental Safeguards Specialist

FMC-NEI FMC's National Environmental Inspector

GSHAP Global Seismic Hazard Assessment Program

HSE Health, Safety and Environment

HTLS high-temperature low sag

IBAT Integrated Biodiversity Assessment Tool

ICNIRP International Commission on Non-Ionizing Radiation Protection

IEE Initial Environmental Examination
IFC International Finance Corporation

IUCN International Union for Conservation of Nature

KP-Act Khyber Pakhtunkhwa Environment Protection Act (2014)
KP-EPA Khyber Pakhtunkhwa Environment Protection Agency
KP-EQS Khyber Pakhtunkhwa Environmental Quality Standards

LARP Land Acquisition and Resettlement Plan

LBOD Left Bank Outfall Drain

MFF Multi Tranche Financing Facility

NEQS National Environmental Quality Standards

NOC No Objection Certificate

NTDC National Transmission and Despatch Company

PBC Pakistan Building Code

Pak-Act Pakistan Environment Protection Act (1997)
PEPA Pakistan Environmental Protection Agency

PM Particulate Matter

PMU Project Management Unit

PPE Personal Protective Equipment

RoW Right of Way

SPS Safeguard Policy Statement (2009)

SSEMP Site-specific EMP UNOSAT UN Satellite Centre

USEPA Environmental Protection Agency in the United States of America

WAPDA Water & Power Development Authority

WHO World Health Organization

#### **WEIGHTS AND MEASURES**

μg/m<sup>3</sup> Microgram per cubic meter

amsl Above mean sea level dB(A) decibels (A-weighted)

km Kilometer

km2 square kilometer

m Meter

m3/sec Cubic meter per second

#### **CONVERSIONS**

1 meter = 3.28 feet 1 hectare = 2.47 acre

# **NOTES**

In this report, "\$" refers to US dollars.

This initial environmental examination is a document of the borrower. The views expressed herein do not necessarily represent those of ADB's Board of Directors, Management, or staff, and may be preliminary in nature. Your attention is directed to the <u>"terms of use"</u> section on ADB's website.

In preparing any country program or strategy, financing any project, or by making any designation of or reference to a particular territory or geographic area in this document, the Asian Development Bank does not intend to make any judgments as to the legal or other status of any territory or area.

# **Table of Contents**

Exec	utive Su	ımmary	i
Legal	and Pol	icy Framework	ii
Proje	ct Descr	iption	ii
Desc	ription of	Environment	ii
	Physic	cal Environment	ii
		and Flora	
		economic Environment	
		ıl Management Plan	
		isclosure	
Conc	lusion ar	nd Recommendations	V
1.	Introd	uction	7
1.1	Projec	t and Background	7
1.2	Enviro	nmental Category	8
1.3	Projec	t Proponent and Study Consultants	8
1.4	Appro	ach to the IEE	8
	1.4.1	Phase 1 – Scoping	
	1.4.2	Phase 2 – Baseline Studies	
	1.4.3	Phase 3 – Stakeholder Consultation	
	1.4.4 1.4.5	Phase 4 – Impact Assessment Methodology  Phase 5 – Documentation	
1.5	_	t Benefits	
	•	ization of the Report	
1.6	Ū	·	
2.	_	r, Legal, and Administrative Framework	
2.1	Histori	cal and Constitutional Context	13
2.2	Khybe	r Pakhtunkhwa Legislative and Regulatory Framework	14
2.3	Khybe	r Pakhtunkhwa Environmental Protection Act (KP-Acct, 2014)	
	2.3.1	The Khyber Pakhtunkhwa Environmental Assessment Rules, 2021	
2.4		tional Framework	
	2.4.1	Environmental Protection Agency	
	2.4.2	Environmental Protection Council	
2.5		rements for Environmental Assessment	
2.6		al Environmental Quality Standards	
2.7		istrative Framework on Environmental Issues	
2.8		Applicable Laws	
2.9		Development Bank Policies and Guidelines	
	2.9.1	ADB's Safeguard Policy Statement 2009	
	2.9.2	Social Protection Requirements	∠ხ

	2.9.3 2.9.4	Access to Information Policy (2018)  Climate Change Risk Management Framework	
2.10	IFC P	erformance Standards	27
2.11		orld Bank Group Environmental, Health and Safety Guidelines (EHS)	28
2.12	Interna	ational Treaties and Agreements	28
2.13	Electri	c and Magnetic Field (EMF) Exposure Guidelines	32
3.	Descr	iption of the Project	33
3.1	Projec	t Detail	33
3.2	Locati	on and the Layout	33
3.3	Land l	Jse in the Project Area	33
3.4	Road	Access	33
3.5	Veget	ation Features of the Project Site	33
3.6	Cost a	and Magnitude of the Operations	33
3.7	Sched	lule of Implementation	34
3.8	Projec	et Design	34
	3.8.1	Project Alignment	34
	3.8.2	Width of Right of Way (RoW)	34
	3.8.3	Design Standards for Transmission Line	
	3.8.4	Climatic Consideration	
	3.8.5	Civil Works and Other Facilities	
	3.8.6 3.8.7	Equipment & Machinery  Tower Structures for Transmission Line	
3.9		Parameters	
3.9	3.9.1	System Safety	
	3.9.2	Public Safety	
		Conductor to Ground Clearance	
3.10	Tower	Erection and Scale of the Project	40
3.11	Assoc	iated Facilities	40
	3.11.1	Access Tracks	40
	3.11.2	Construction Camps	40
		Batching Plants	
	3.11.4	Material and Human Resource Usage	41
3.12	Resto	ration and Rehabilitation Plans	41
3.13	Other	Government Department Approvals	41
4.		iption of the Environment (Baseline Data)	
4.1	Projec	t Area of Influence	42
4.2	Physic	cal Environment	
	4.2.1	11-3-11-37	
	4.2.2	Land Use	43

	4.2.3	Seismicity	48
	4.2.4	Climate	50
	4.2.5	Water Resources	52
	4.2.6	Water Quality	54
	4.2.7	Air Quality	59
	4.2.8	Noise	64
	4.2.9	Environmental Sensitive Receptors	71
4.3	Ecolog	jy	
	4.3.1	Terrestrial Sampling Locations	
	4.3.2	Survey Methodology	73
	4.3.3	Terrestrial Ecological Resources	78
	4.3.4	Mammals	
	4.3.5	Herpetofauna	88
	4.3.6	Critical Habitat Assessment	
	4.3.7	Integrated Biodiversity Assessment Tool (IBAT) Assessment	
4.4		economic Environment	
	4.4.1	Administrative Setting	
	4.4.2	Demographics	
	4.4.3	Social Infrastructure	
	4.4.4	Physical Infrastructure	
	4.4.5	Sources of Income and Livelihood	
	4.4.6	Archaeological Sites	.100
5.	Potent	tial Environmental Impacts and Mitigation Measures	.103
5.1	Metho	dology for Impact Assessment	.103
	5.1.1	Evaluation of Significance of Potential Impacts	.103
5.2	Pre-co	nstruction (design) phase Impacts	.104
	5.2.1		Bid
	5.2.2	Lack of Planning in ETL Design	.106
	5.2.3	Improper Location of Camps Leading to Environmental and Social Issues	.107
	5.2.4	Lack of Project environmental safeguards (human resource) capacity	.107
	5.2.5	Removal of vegetation/trees	
	5.2.6	Noise caused by construction equipment	.108
	5.2.7	Land Acquisition	.108
	5.2.8	Waste Generation	.109
	5.2.9	Disruption to Existing Drainage Pathways and Utilities	.109
	5.2.10	Impacts on Sensitive and High Value Areas	.109
	5.2.11	Electromagnetic field (EMF)	.110
	5.2.12	Impact on Community Safety due to Structure/ Mechanical Failure of overhead conductors	the .113
5.3	Constr	ruction Phase Impacts	.114
	5.3.1	Physical Environment	
	5.3.2	Ecological Environment	
	0.0.=		

	5.3.3 Socioeconomic Environment	130
5.4	Operation Phase	134
	5.4.1 Physical Environment	136
	5.4.2 Ecological Environment	
	5.4.3 Socioeconomic Environment	138
5.5	Cumulative, and Induced impacts	141
6.	Analysis of Alternatives	142
6.1	No Project Alternative	142
6.2	Alternative Construction Methods	142
6.3	Design/Technology Alternatives	142
6.4	Alternative Alignments for Transmission Line	142
6.5	Economic Alternatives	143
7.	Information Disclosure, Consultation, and Participation	144
7.1	Consultation Methodology	144
	7.1.1 Consultation Material	
	7.1.2 Community Consultation Mechanism	
	7.1.3 Institutional Consultation Mechanism	149
7.2	Summary of Concerns Raised by Stakeholders	150
7.3	Information Disclosure	156
8.	Grievance Redress Mechanism	156
9.	Environmental Management Plan	160
9.1	General	160
9.2	Construction Schedule	160
9.3	Summary of Impacts and Mitigation Measures	160
9.4	Capacity Building and Training	193
9.5	Site-Specific Environmental Management Plan (SSEMP)	193
9.6	Equipment Maintenance Details	194
9.7	Waste Management	194
9.8	Worker Accommodation Plan	194
9.9	Environmental Monitoring and Reporting	195
9.10	Institutional Arrangement	201
	9.10.1 National Transmission and Despatch Company Limited (NTDC)	201
	9.10.2 Project Management Unit (PMU) under NTDC	201
	9.10.3 Facility Management Consultant (FMC)	202
	9.10.4 Construction Contractor	203
9.11	Change Management	204
9.12	Environment Management Cost	205

10.	Conclusion and Recommendations	.207
10.1	Conclusion	.207
10.2	Recommendations	.208

#### **List of Annexures**

Annexure I: ADB's Rapid Environmental Assessment (REA) Checklist

Annexure II: Field Sampling Plan (Physical Environment)

Annexure III: Laboratory Provided Analysis Reports

Annexure IV: Sensitive Receptors

Annexure V: Integrated Biodiversity Assessment Tool (IBAT) Findings Report

Annexure VI: Consultation Material
Annexure VII: Consultation Logs

Annexure VIII: Dust Management Plan
Annexure IX: Chance Finds Procedure
Annexure X: Traffic Management Plan
Annexure XI: Waste Management Plan

Annexure XII: Occupational Health, Safety, and Environment (OHSE) Management Plan

Annexure XIII: COVID-19 health and safety management plan

Annexure XIV: Tree Plantation Plan

Annexure XV: Resource Conservation Plan

Annexure XVI: Site-Specific Environmental Management Plan (SSEMP)

Annexure XVII: Worker Accommodation Plan
Annexure XVIII: Emergency Response Plan

Annexure XIX: Fire Management and Protection Plan

Annexure XX: Construction Noise and Vibration Management Plan

Annexure XXI: Calibration Certificate of Noise and Air Quality Measuring Instruments

# List of Figures

Figure 1-1: Project Location	12
Figure 3-1: Inverted 'T' Type Tower Foundation	36
Figure 3-2: Proposed Elevation of Strain Tower	37
Figure 3-3: Proposed Elevation of Suspension Tower	38
Figure 4-1: Project Area of Influence	44
Figure 4-2: Topography	45
Figure 4-3: Geology of the Subproject Area	46
Figure 4-4: Land Use in Aol	47
Figure 4-5: Seismic Hazard Map	49
Figure 4-6: Historic Rainfall Pattern of the Area	51
Figure 4-7: Water Quality Sampling Locations	56
Figure 4-8: Air Quality Sampling Locations	61
Figure 4-9: Noise Sampling Locations	66
Figure 4-10: Hourly Noise Measurement Values and Standards	69
Figure 4-11: Sensitive Receptors in Area of Influence	72
Figure 4-12: Terrestrial Project area	76
Figure 4-13 Sampling Locations for Terrestrial Flora and Fauna	77
Figure 4-14: Asian Migratory Birds Flyways	87
Figure 4-15: Gender Ratio	94
Figure 4-16: Rural and Urban Population Ratio	
Figure 4-17: Prevalence of Diseases	97
Figure 5-1: Electromagnetic Spectrum	111
Figure 5-2: Magnetic Strength from Overhead Transmission Lines	111
Figure 7-1: Locations of Community Consultations	147
Figure 8-1: Grievance Redress Mechanism	158
Figure 8-2: Institutional set-up	159

# **List of Tables**

Table 2-1: National Environmental Quality Standards (NEQS) for Ambient Air Qualit	y 17
Table 2-2: Comparison of Local and International Standards	17
Table 2-3 National Environmental Quality Standards (NEQS) and International Stand	
Table 2-4: National Environmental Quality Standards (NEQS) and International Stan on Drinking Water Quality	
Table 2-5: National Environmental Quality Standards (NEQS) for Noise	21
Table 2-6 : Comparison of Local and International Standards	21
Table 2-7 : Laws Relevant to the Project	22
Table 2-8: IFC Performance Standards	27
Table 2-9: International Environmental Treaties Endorsed by Pakistan	29
Table 2-10: Electric and magnetic fields (EMF) General Public Exposure Limits	32
Table 2-11: Electric and magnetic fields (EMF) Occupational Exposure Limits	32
Table 3-1: Permissible Conductor Clearance	34
Table 3-2: List of Jamrud Grid Station Equipment	35
Table 3-3: List of 220 kV D/C Transmission Line Equipment	36
Table 4-1: Land Use in the Aol	43
Table 4-2: Seismic Zone Categorization, PBC 2007	48
Table 4-3: Seismic Zone Categorization, PBC 1986	48
Table 4-4: Project Area Temperature Data	50
31. Table 4-5: Monthly Mean Rainfall in Project Area	52
Table 4-6: Current Year Meteorological Data	52
Table 4-7: Specifications of Canal System	54
Table 4-8: Description of Water Quality Sampling Location	54
Table 4-9: Water Quality Sampling Results	57
Table 4-10: Details of Air Quality Sampling Locations	59
Table 4-11: Methodology and Duration of Sampling	60
Table 4-12: Results of Ambient Air Quality Sampling	63
Table 4-13: Noise Sampling Locations	65
Table 4-14: Noise Measurement Levels	68
Table 4-15: Hourly Noise Measurement Values	70
Table 4-16: Sensitivity Risk Scale	
Table 4-17: Sensitive Receptors and Environmental Values	71
Table 4-18: Habitat Types for the Terrestrial Sampling Locations	78
Table 4-19: Habitat Vegetation Cover, Plant Count, and Diversity by Habitat Type	80
Table 4-20: Phytosociological Attributes of Plant Species in Habitats	81
Table 4-21: Mammal Signs and Sightings in the Aol	84
Table 4-22: Total Birds Sightings, Density, and Diversity by Habitat Type	86
Table 4-23: Herpetofauna Sightings in the Project Area	89
Table 4-24: Statistics of Educational Facilities in Khyber District	97

Table 5-1: Evaluation of Impact Significance Matrix (Likelihood Scale)	103
Table 5-2: Evaluation of Impact Significance Matrix (Consequence Scale)	104
Table 5-3: Evaluation of Impact Significance Matrix (Risk Score Table)	104
Table 5-4: Screening of Potential Impacts at Pre-construction (design) phase	105
Table 5-5: Magnetic Fields Observed for Overhead Transmission Lines	112
Table 5-6: Safety Distances for 220 kV Transmission Line	112
Table 5-7: Potential Impacts at Construction Phase	115
Table 5-8: Construction Equipment Noise Ranges, dB (A)	119
Table 5-9: Construction Equipment Vibration Level	
Table 5-10: Predicted Minimum Separation between Piling Operations and Se	
Buildings	
Table 5-11: Potential Impacts at Operation Phase	
Table 7-1: List of Communities Consulted	
Table 7-2: Participant of the Community Consultations	
Table 7-3: List of Institutional Stakeholders	
Table 7-4: Summary of the Concerns Raised by Community	
Table 7-5: Summary of the Concerns Raised by Institutions	
Table 9-1: Implementation Arrangements for Tranche 4	160
Table 9-2: Environmental Management Plan (EMP)	162
Table 9-3: Training Schedule	
Table 9-4: Environmental Monitoring Plan (EMoP)	197
Table 9-5: Instrumental Environmental Monitoring Plan	
Table 9-6: Implementation Arrangements for Tranche 4	201
Table 9-7: Roles and Responsibilities for Implementation of EMP	203
Table 9-8: Estimated Cost for Contractor's EMP Implementation	206
Table 9-9: Estimated Cost for FMC's EMP Implementation	206
Table 9-10: Estimated Cost for ESIC's EMP Implementation	206

## **Executive Summary**

- 1. The Government of Pakistan signed a loan agreement with the Asian Development Bank (ADB) for financial support for the construction of the Power Enhancement Projects in Pakistan. The multi-tranche financing facility for the Second Power Transmission Enhancement Investment Program (Multi Tranche Financing Facility [MFF] II or the Program)1 expands and reinforces Pakistan's power transmission system, enabling the system to provide a reliable and quality service capable of meeting increasing customer demand and supporting economic growth. MFF II comprises four tranches.
- Environmental Assessment and Review Framework (EARF)2 was prepared for MFF II in May 2016. This EARF is applicable for subprojects under MFF II and Tranche-I, funded by ADB. The EARF outlines the policy, procedures, and institutional requirements for preparing the subprojects. These subprojects need to be processed under ADB Safeguards Policy Statement (2009) (SPS).
- 3. Under Tranche 4 Readiness, National Transmission and Despatch Company Limited (NTDC) is planning to construct new 220 kV ETLs, construction of a grid station, augmentation of 10 existing grid stations and procurement of grid station equipment, through 6 Subprojects listed hereunder:
  - Subproject 1 is the turnkey contract for design, supply, installation, testing and commissioning of approximately 70 km of 220kV double circuit transmission line for looping in/out of the proposed Hala Road -Jamshoro single circuit transmission line at 220kV Mirpur Khas New Grid Station
  - 2) Subproject 2 is the turnkey contract for design, manufacture, supply, installation, testing and commissioning of approximately 20 km of 220kV double circuit transmission line for looping in/out one circuit of the existing 220kV Jamshoro T.M. Khan double circuit transmission line at Hala Road 220kV Grid Station
  - 3) Subproject 3 involves procurement of goods for the addition and augmentation of the six existing grid stations to remove NTDC system constraints (500kV Dadu grid station, 500kV Faisalabad West grid station, 500kV Lahore (Sheikhpura) grid station, 500kV New Multan grid station, 500kV Rahim Yar, 220kV Guddu grid station
  - 4) Subproject 4 involves procurement of goods for the construction of a new 220kV Jamrud grid station and approximately 20 km of the associated 220kV Jamrud-Sheikh Muhammadi transmission line in the south-western area of Pakistan.
  - 5) Subproject 5 involves procurement of goods for the construction of about 105 km of 220kV Daharki Rahim Yar and about 150 km of 220kV Rahim Yar Bahawalpur transmission lines and extension of 220kV Daharki and 220kV Bahawalpur grid stations for interlinking of 220kV Daharki Rahim Yar Khan and Bahawalpur grid stations in the south-eastern area of Pakistan
  - 6) Subproject 6 involves procurement of goods for operation and maintenance of NTDC assets to reduce the grid stations breakouts (550kV, 245kV, and 145kV circuit breakers and replacement of one 500/220 kV, 450 MVA Auto Transformer Bank (ATB) at the existing 500 kV Rawat Grid Station.

<sup>1</sup> 48078-002: Second Power Transmission Enhancement Investment Program | Asian Development Bank (adb.org)

i

<sup>&</sup>lt;sup>2</sup> Second Power Transmission Enhancement Investment Program: Environmental Assessment and Review Framework

[ Asian Development Bank (adb.org)

4. This document is the Initial Environmental Examination (IEE) for the proposed Subproject 4 (referred to as "the Project" collectively in this study). The Project passes through two districts namely Peshawar and Khyber, both in Khyber Pakhtunkhwa province.

# **Legal and Policy Framework**

- 5. Khyber Pakhtunkhwa Environmental Protection Act (KP-Act, 2014) is the basic legislative tool empowering the government to frame regulations for the protection of the environment in Khyber Pakhtunkhwa province. Khyber Pakhtunkhwa Environment Protection Agency (KP-EPA) is responsible to implement the provisions of KP-Act (2014). Under the KP-Act (2014), the federal IEE Environmental Impact Assessment (EIA) Regulations (2000)<sup>3</sup> and the Khyber Pakhtunkhwa Environmental Assessment Rules (2021) provide the necessary details on the preparation, submission, and review of the IEE and the EIA. The categorization of projects for IEE and EIA is one of the main components of the federal IEE-EIA Regulations (2000). The ETL Projects with 11 kV or higher are kept in Schedule II of the regulations and thus an EIA is required for such projects.
- 6. Environmental approval or no objection certificate (NOC) for the Project must be obtained from KP-EPA by submitting an EIA before start of construction activities. NTDC will prepare an EIA and submit to KP-EPA for obtaining NOC before commencement of any civil works.
- 7. After filing an EIA to KP-EPA, the applicable law binds the Agency (KP-EPA) to inform the proponent (NTDC in this case) on the approval in four months from the date of filing EIA and acceptance, failing which the EIA shall be deemed to have been approved as per paragraph 16 of the federal IEE-EIA Regulations (2000), to the extent to which it does not contravene the provisions of the Regulations.
- 8. According to ADB's Safeguard Policy Statement (2009) (SPS), Tranche 4 is classified as Category B for environment, therefore requires an IEE. IEEs are prepared, following the EARF (footnote 2) prepared for MFF II, respectively for Subprojects 1, 2, 4 and 5, while environmental audit report (of existing facility) was prepared for Subprojects 3 and 6.
- 9. This IEE covers Subproject 4.

# **Project Description**

- 10. Subproject 4 involves procurement of goods for the construction of a new 220kV Jamrud grid station and approximately 20 km of the associated 220kV Jamrud-Sheikh Muhammadi transmission line in the south-western area of Pakistan. The Project passes through two districts namely Peshawar and Khyber.
- 11. The Project proponent (NTDC) plans to have the tranche-4 completed within 2 to 3 years, after completing the necessary arrangements, on the fast track.

# **Description of Environment**

12. Summary of existing environmental condition of the Project area is presented below.

# **Physical Environment**

13. Several alternatives, including no project alternative, layout, and design alternatives, alternative alignment, and economic alternatives were considered for the proposed Project.

<sup>&</sup>lt;sup>3</sup> https://environment.gov.pk/SiteImage/Misc/files/Regulations/IEE%20EIA%20Regulation%202000.pdf

- 14. The topography in the Project area, passing through the districts of Peshawar and Khyber is a hilly terrain with piedmont plains, rough broken land, and gullied land. The land elevation in the area varies from 356 m, msl (mean sea level) (Peshawar district) to 1,089 m msl (Khyber district).
- 15. The land use of the Project Area of Influence (AOI) comprises majorly of agricultural land (36%), barren land (24.1%), hills/mountains (19.3%) and built-up area (14.3%). The remaining land consists of scrub forest (3.1%) and roads (2.1%).
- 16. According to these classifications of the Pakistan Building Code (PBC), the Project is in Zone 2B in PBC 2007 classification which is for moderate risk zone.
- 17. The climate of Project area is semi-arid, consisting of a very hot summer from the months of May to September and a cold winter from November to March. Rainfall is received both in summer and winters, with a total annual rainfall of about 420 mm.
- 18. The Project area is dependent on both groundwater and river water to meet its domestic and agricultural needs respectively. The surface water of the Peshawar District comes from the Kabul River, Bara River and the streams draining from mountain sides. The agricultural land of the Peshawar District is irrigated by five canals, which take water from the Kabul River. These canals are the Kabul River canal, Hazar Khani canal, Warsak Gravity Lift canal, and Joe Sheikh canal.
- 19. All the water quality parameters of analyzed groundwater samples were found within the World Health Organization (WHO) Standards for drinking water and the National Environmental Quality Standards (NEQS) drinking water limits. However, in the groundwater sample, only the amount of Antimony was exceeding the limits of NEQS and WHO guidelines.
- 20. At all the four sampling locations in the AoI, Sulfur Dioxide (SO<sub>2</sub>) and Nitrogen Oxide (NO) were within the WHO and NEQS limits. The measured values of Particulate Matter (PM2.5 and PM10) at all locations were within the NEQS limits.
- 21. The noise measurement values in the AoI were found within the NEQS (N-1, N-2, N-3, and N-4) for both daytimes as well as for nighttime readings. Measures noise levels were also within IFC guideline values for both, daytime, and nighttime.

#### Fauna and Flora

i auria ariu i iore

22. Due to the proposed subproject, 250-300 trees of varying species and sizes, may be affected by the project. Compensatory planting of ten (10) trees against each fallen tree of similar floral function will be planted.

- 23. In the available literature, thirty-four (34) plant species, belonging to 21 families and 30 genera were recorded from the Landi kotal area including Lamiaceae and Solanaceae were the dominant species. Other families documented were Asteraceae, Asclepiadaceae, Chenopodiaceae, Mimosaceae, Moraceae, Oleaceae, Apocynaceae, Cannabaceae, Celastraceae, Colchicaceae, Elaeagnaceae, Fumariaceae, Liliaceae, Meliaceae, Papillionaceae, Salicaceae, Sapindaceae, Simaroubaceae, and Zygophyllaceae.<sup>4</sup>
- 24. During current survey found that the Project area is dominated by plant species such as Prosopis juliflora, Parthenium hysterophorus, Arundo donax, Rhazya stricta, Justicia adhatoda, Zizyphus spp., and Calotropis procera. Among plant species, the large size plant

<sup>&</sup>lt;sup>4</sup> Ullah, S., Ullah, A., & Rashid, A. Utilization of plant natural resources by the local communities in Landi Kotal Valley Khyber Agency, Pakistan. *International Journal of Biology and Biotechnology (Pakistan)*.

- species were observed in both types of habitats. The highest number of plant species was observed at sampling location SP-9 where a total of nine plant species were observed.
- 25. In the area, the invasive species, Parthenium hystrophorus is widely distributed and mostly present in Agriculture Fields and along roads side. Lantana camara was observed mostly along the roadside near settlements. Prosopis juliflora is the most abundant and widely distributed invasive plant species in the area. Prosopis juliflora is a nitrogen-fixing, perennial, evergreen plant, found both as a bush and medium size tree with a sizeable crown and an open canopy growing to an average height of 5-10 m.
- 26. None of the species observed in the AoI or surroundings were found to be globally/nationally threatened species, endemic species, or protected species.
- 27. Mammals species found in the wider area of the Project area include Golden Jackal Canis aureus, Red Fox Vulpes, Small Indian Mongoose Herpestes javanicus, Jungle Cat Felis chaus, Indian Crested Porcupine Hystrix indica, Wild Boar Sus scrofa, Cape Hare Lepus capensis, Afghan Hedgehog Hemiechinus auritus megalotis, Black Rat Rattus, House Shrew Suncus murinus, and Indian Field Mouse Mus booduga.<sup>5</sup>
- 28. Based on the IUCN Red List Criteria none of the documented species from the wider area of the Project area are listed as threatened globally.
- 29. In the present survey, signs and sightings of four mammalian species were confirmed in the Project area. The Five Striped Palm Squirrel was the most abundant mammalian species in the Project area.
- 30. For birds, the conservational important bird species found in the wider area are included White-rumped Vulture Gyps bengalensis and Sociable Lapwing Vanellus gregarious which are globally listed as Critically Endangered. The Endangered species found in the wider area of the project are included Indian Skimmer Rynchops albicollis, Pallas's Fish Eagle Haliaeetus leucoryphus, White-headed Duck Oxyura leucocephala, Saker Falcon Falco cherrug, Steppe Eagle Aquila nipalensi, and Egyptian Vulture Neophron percnopterus. Eastern Imperial Eagle Aquila heliacal, Greater Spotted Eagle Clanga, Common Pochard Aythya ferina, and Marbled Teal Marmaronetta angustirostris are listed as Vulnerable on IUCN Red Data Book.

#### Socioeconomic Environment

- 31. The current estimated population of the Khyber district is 1,102,351 and Peshawar district is 4,779,258. 51% of the population are male and 48% are female.
- 32. The major of the population are Pakhtun in the Project area. The main tribes in this area include *Afridi*, Shinwari, Mullagori and Shilmani. Pashto is the predominant language spoken by 98.83% of the population. However, Urdu and Hindko are also spoken, and all the affected people understand Urdu. Urdu reading and writing are easier for them than Pashtu, because Pashtu script is not commonly available/ used in the province.
- 33. *Natural* gas (or Sui Gas) is available to 63.7% of the household in the project area. Data reveals that many people are using compressed gas cylinders and in rural areas people use locally available wood and animal dung for cooking purposes.
- 34. Electricity is provided by the Peshawar Electric Supply Company (PESCO). The electricity supply is *available* to most of the villages and settlements along the line route. According to the statistics of 2017, 90% of households in the district Peshawar while 50% of households are supplied with electricity.

<sup>&</sup>lt;sup>5</sup> Roberts, T.J. and Bernhard (principe d'Olanda.), 1977. The mammals of Pakistan.

- 35. Potable drinking water supply is available to 50% of the houses and people are only relying on the groundwater, extracted either manually through hand pumps or electrically through the electric pump.
- 36. The major livelihood sources of the Project area include employment in government and private sector, agriculture, wage labor, operating own business such as shopkeepers, running fuel station, traders, and workshops. As the region is located near international border therefore, income related to the transportation industry (operation of different vehicles especially trucks and trailers) also account of the source of livelihood for many people. Some households also receive foreign remittances from family members mostly working as laborers in Gulf Countries.

# **Environmental Management Plan**

- 37. An environmental management plan (EMP), which establishes the linkages between the environmental and social impacts, mitigation strategy and the agencies responsible for execution. The EMP covers:
  - A comprehensive listing of mitigation measures (actions).
  - The institution(s)/ person(s) responsible for implementation of specific actions.
  - The parameters to be monitored to ensure the effective implementation of the actions.
  - A timescale for the implementation of actions has been indicated subject to the project life cycle.
  - A plan for impact mitigation and monitoring for the construction and operation activities.
- 38. Proposed Project activities were reviewed and their potential impacts on the physical, biological, and socio-economic environment were assessed. Where appropriate, mitigation measures have been proposed to keep potential adverse environmental impacts within acceptable limits.
- 39. An EMP has been developed in this report to effectively implement the mitigation measures identified in the impact assessment. Contractor will develop Site-specific EMP (SSEMP) based on the EMP before construction activities start. No access to the site will be allowed until the SSEMP is approved by the Environment and Social Impact Cell (ESIC; Project Management Unit [PMU] of NTDC).

#### Information Disclosure

40. The executive summary of the IEE and the EMP will be translated to Urdu language<sup>6</sup> for disclosure along with complete existing document (in English). Within 2 weeks after ADB's clearance of the IEE, the summary (including the EMP) in Urdu language will be disclose on NTDC's website. The summary will also be placed at main gate of TM Khan Grid Station for public access.

#### **Conclusion and Recommendations**

41. if the Project construction and operation activities, including the implementation of all proposed mitigation measures, are carried out as described in this document, the anticipated

<sup>&</sup>lt;sup>6</sup> Pashto is the predominant language spoken by 98.83% of the population. However, Urdu and Hindko are also spoken, and all the affected people understand Urdu. Urdu reading and writing are easier for them than Pashtu, because Pashtu script is not commonly available/ used in the province. (para. 20732 on page 95 of this IEE)

impact of the project on the area's natural and socioeconomic environment shall remain well within acceptable limits.

- 42. The major proposed mitigation measures are summarized as follows:
  - Temporary labor camps will be developed inside the grid station boundary and will be facilitated with proper drainage facilities.
  - Soil erosion and contamination, water contamination, air pollution, and high noise levels will be controlled with the use of good engineering practices.
  - The contractor will develop subplans (listed in footnote 92 on page 194 of this IEE) as part of SSEMP before starting the construction activities. No access to the site will be allowed until the SSEMP is approved by the ESIC.
  - Fair and negotiated compensation following the prevailing market prices will be made for the loss of crops and trees during the construction activities of the project.
  - The contractor will take due care of the local community and its sensitivity towards local customs and traditions.
- 43. Following requirements of ADB SPS, NTDC will apply pollution prevention and control technologies and practices consistent with international good practice as reflected in internationally recognized standards such as EHS Guidelines (footnotes 20, 21 and 22 of this IEE). When Government regulations differ from these levels and measures, NTDC will achieve whichever is more stringent. If less stringent levels or measures are appropriate in view of specific project circumstances, NTDC will provide full and detailed justification for any proposed alternatives that are consistent with the requirements presented in ADB SPS.
- 44. This IEE will be updated if unanticipated environmental impacts become apparent and will be submitted to ADB for clearance and disclosure at ADB website.
- 45. NTDC will have the right to suspend works or payments if the Contractor is in violation of any of his obligations under the EMP and SSEMP.

#### 1. Introduction

- 1. The Government of Pakistan signed a loan agreement with the Asian Development Bank (ADB) for financial support for the construction of the Power Enhancement Projects in Pakistan. The multi-tranche financing facility for the Second Power Transmission Enhancement Investment Program (MFF II or the Program) will expand and reinforce Pakistan's power transmission system, enabling the system to provide a reliable and quality service capable of meeting increasing customer demand and supporting economic growth. MFF II comprises four tranches and Projects located in different areas of the country.
- 2. Under Tranche 4 Readiness, NTDC is planning to construct new 220 kV electrical transmission lines (ETL), construction of a grid station, argumentation of 10 existing grid stations and procurement of grid station equipment. The name of these subprojects is listed hereunder:
  - 1) Subproject 1 is the turnkey contract for design, supply, installation, testing and commissioning of approximately 70 km of 220kV double circuit transmission line for looping in/out of the proposed Hala Road -Jamshoro single circuit transmission line at 220kV Mirpur Khas New Grid Station
  - 2) Subproject 2 is the turnkey contract for design, manufacture, supply, installation, testing and commissioning of approximately 20 km of 220kV double circuit transmission line for looping in/out one circuit of the existing 220kV Jamshoro T.M. Khan double circuit transmission line at Hala Road 220kV Grid Station
  - 3) Subproject 3 involves procurement of goods for the addition and augmentation of the six existing grid stations to remove NTDC system constraints (500kV Dadu grid station, 500kV Faisalabad West grid station, 500kV Lahore (Sheikhpura) grid station, 500kV New Multan grid station, 500kV Rahim Yar, 220kV Guddu grid station
  - 4) Subproject 4 involves procurement of goods for the construction of a new 220kV Jamrud grid station and approximately 20 km of the associated 220kV Jamrud-Sheikh Muhammadi transmission line in the south-western area of Pakistan.
  - 5) Subproject 5 involves procurement of goods for the construction of about 105 km of 220kV Daharki Rahim Yar and about 150 km of 220kV Rahim Yar Bahawalpur transmission lines and extension of 220kV Daharki and 220kV Bahawalpur grid stations for interlinking of 220kV Daharki Rahim Yar Khan and Bahawalpur grid stations in the south-eastern area of Pakistan
  - 6) Subproject 6 involves procurement of goods for operation and maintenance of NTDC assets to reduce the grid stations breakouts (550kV, 245kV, and 145kV circuit breakers and replacement of one 500/220 kV, 450 MVA Auto Transformer Bank (ATB) at the existing 500 kV Rawat Grid Station.
- 3. This document is the Initial Environmental Examination (IEE) for the proposed Subproject 4 (referred to as "the Project" collectively in this study).

# 1.1 Project and Background

4. Subproject 4 involves procurement of goods for the construction of a new 220kV Jamrud grid station and approximately 20 km of the associated 220kV Jamrud-Sheikh Muhammadi transmission line in the south-western area of Pakistan. The Project passes through two districts namely Peshawar and Khyber.

5. The Project (Jamrud grid station and associated ETL) lies in the Peshawar District and Khyber District of the Khyber Pakhtunkhwa Province is shown in **Figure 1-1**.

# 1.2 Environmental Category

6. According to ADB's Safeguard Policy Statement (2009) (SPS), Tranche 4 is classified as Category B for environment, therefore requires an IEE. IEEs are prepared, following the EARF (footnote 2) prepared for MFF II, respectively for Subprojects 1, 2, 4 and 5, while environmental audit report (of existing facility) was prepared for Subprojects 3 and 6. This IEE covers Subproject 4.

# 1.3 Project Proponent and Study Consultants

7. The Proponent of the proposed Project is NTDC. NTDC was incorporated on 6 November 1998 and took over all the properties, rights and assets obligations and liabilities of the network of 220 kV and 500 kV Grid Stations and ETLs owned by Pakistan Water and Power Development Authority (WAPDA).<sup>7</sup>

# 1.4 Approach to the IEE

- 1. An EARF (footnote 2) was prepared for MFF II in May 2016. This EARF is applicable for subprojects under MFF II and Tranche-I, funded by ADB. The EARF outlines the policy, procedures, and institutional requirements for preparing the subprojects. These subprojects need to be processed under ADB SPS.
- 8. The IEE was performed in five main phases described below and was prepared following the EARF.

# 1.4.1 Phase 1 - Scoping

- 9. The activities included in this phase are:
  - Project Data Compilation: A generic description of the proposed Project activities was compiled.
  - Published Literature Review: Secondary data on physical, ecology and the socioeconomic environment was compiled.
  - Legislative Review: Information on relevant legislation, regulations, guidelines, and standards were compiled including those of Asian Development Bank (ADB)'s policies and guidelines.
  - Evaluation of Project Activities: Based on available information on Project activities including land requirement according to Project options, construction, operations, and maintenance.
  - An impact assessment methodology was defined by identifying significance of impact through both the consequence and the likelihood of occurrence of the impact.
  - Identification of Potential Impact: The information collected in the above steps was reviewed, and potential environmental and socio-economic issues were identified with impact significance in the Project Area of Influence (AOI).

#### 1.4.2 Phase 2 - Baseline Studies

10. Following the scoping exercise, the AoI of the Project was surveyed to collect primary data during the field visit conducted between 26 August 2022, and 12 September 2022.

# 1.4.3 Phase 3 – Stakeholder Consultation

-

<sup>&</sup>lt;sup>7</sup> http://www.ntdc.com.pk

11. Local communities were identified in AoI as the major stakeholder, which can affect the Project or be affected by the Project. The socioeconomic team conducted community consultations to establish community perception of the proposed development. The institutions that may have an interest in the proposed Project were also consulted.

# 1.4.4 Phase 4 – Impact Assessment Methodology

- 12. The baseline studies conducted for the Project and the available Project description was used to assess the potential environmental impact of the proposed Project. The significance of impact was determined.
- 13. Significance of the potential impacts can be determined by considering both the consequence and the likelihood of occurrence of the impact. The consequence of the proposed activity is evaluated by comparing it against recognized significance criteria, such as institutional recognition, technical recognition, scientific or technical knowledge, or judgment of recognized experts, public recognition, and professional and experience-based interpretation of the evaluator.
- 14. The issues studied included potential Project impacts on:
  - Geomorphology and Soils
  - Surface and groundwater
  - Ambient air quality
  - Noise and traffic
  - Ecology of the area, including aquatic ecology and terrestrial flora and fauna
- Socioeconomic environment of the area
- Community health and safety including electric and magnetic fields (EMF) impacts during operations
- 15. Mitigation measures were identified to address these impacts. The mitigation measures are designed to reduce the potential adverse impact to acceptable levels and wherever feasible to further reduce it as far as possible.
- 16. After implementation of the mitigation measures, the identification of the residual impact significance is evaluated.

# 1.4.5 Phase 5 – Documentation

17. Finally, this IEE report has been prepared according to the relevant environmental legislation. The report includes the findings of the assessment, identifies the Project impacts, and suggests mitigation measures to be implemented during the execution and operations.

# 1.5 Project Benefits

- 18. The benefits associated with the proposed sub-project mainly include:
  - Improvement in power supply position at/around 220 kV Jamrud and Peshawar Grid Stations.
  - Improvement in voltage profile of existing 132 kV grid stations in the vicinity of 220 kV Jamrud Grid Station.
  - Increase in the system capacity to meet future load demand of PESCO
  - Reduction in loading of 220/132 kV Transformers at Peshawar & Shahi Bagh Grid Stations
  - Reduction in the loading of 132 kV ETLs in the vicinity of proposed 220 kV Jamrud.

- Improvement in reliability of NTDC and PESCO system networks.
- Increase in the available system capacity to meet future load growth at/around proposed project.
- The project will help to provide an uninterrupted power supply to underdeveloped areas of Khyber Pakhtunkhwa province.
- Implementation of the Project will help to uplift the social life of the area, creation of new jobs and business opportunities
- Additional revenue to government exchequer from the levy of taxes on finished goods, electricity duty due to additional sale of power & associated government taxes.
- Reduction in transmission system losses.
- 19. The other benefits of the proposed Project are as follows:
  - Increase in the available system capacity to meet future load growth at/around the proposed project.
  - Improvement in the reliability of NTDC and local Distribution Company (DISCO) system networks.
  - Serve 220 kV source of power to feed the local DISCO load center.
  - Improvement in the power supply position of local DISCO.
- 20. Envisaged social benefits of the Project are:
  - Provision of a more reliable supply of electricity to the consumers.
  - Fulfillment of power demand for rural electrification program etc.
  - Improvement in living standards of the local communities.
  - Creation of small business services.
  - Creation of new job opportunities for local communities.
  - Development of new accommodation facilities and the local people will be exposed to new income generation opportunities.
  - Socio-economic uplifts of the community such as improved production, incomes, and market activities.
  - Tube wells electrification which will provide additional water for irrigation, increase cropped areas and production.
- The development of new industries in the area will create gainful employment for the increasing workforce.
- Additional revenues to Government exchequer from the levy of taxes on finished goods, electricity duty due to additional sale of power and associated taxes, etc.
- In the overall analysis, the improvement in ecological environments coupled with higher production is envisaged to bring out substantial economic gains for the people living in the Project area.

# 1.6 Organization of the Report

- 21. Section 1 (Introduction) provides an introduction of the Project and outlines the objectives of the IEE.
- 22. Section 2 (Policy, Legal, and Administrative Framework) presents the legislative requirements that need to be followed while conducting an IEE study.

- 23. Section 3 (Description) contains information about the key features of the proposed Project and describes the proposed Project activities.
- 24. Section 4 (Description of the Environment (Baseline Data)) documents in detail the existing physical, ecological and socioeconomic conditions around the Project site.
- 25. Section 5 (Potential Environmental Impacts and Mitigation Measures) presents an assessment of the Project's impact to the physical, biological, and socioeconomic environment, as well as proposed mitigation measures. The section also discusses the alternatives of the proposed Project that were considered.
- 26. Section 6 (Analysis of Alternatives) discusses the alternatives of the proposed Project that were considered.
- 27. Section 7 (Information Disclosure, Consultation, and Participation) presents the objectives and outcomes of the public consultation that were conducted during the IEE study. The section also covers the information disclosure steps and grievance redress mechanism (GRM) prepared for this project.
- 28. Section 9 (Environmental Management Plan) facilitates the implementation and monitoring of the mitigation measures identified in the IEE.

Section 10 (Conclusion and Recommendations) summarizes the findings and recommendations of this IEE study and concludes the report.

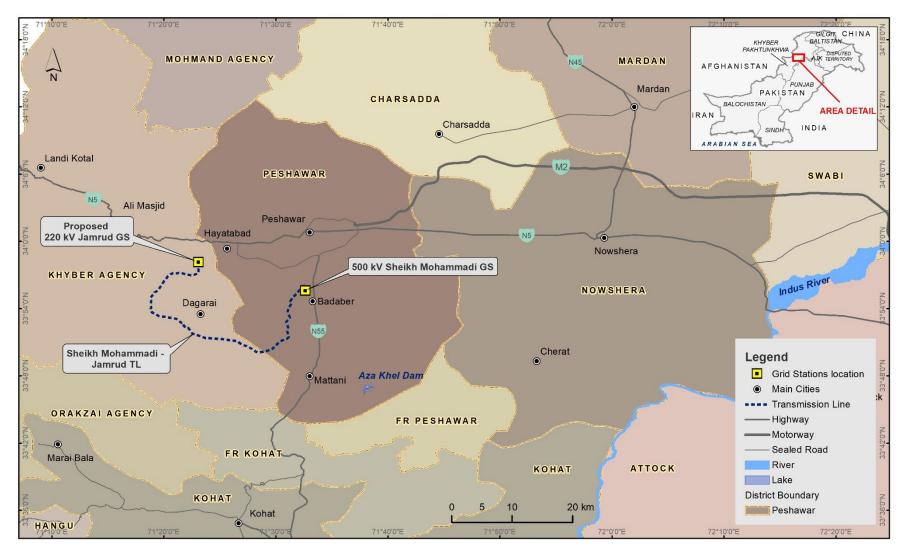


Figure 1-1: Project Location

# 2. Policy, Legal, and Administrative Framework

- 29. This section outlines the project category, environmental and social legislation, standards, and codes of practice governing the IEE and the Project.
- 30. Since, this Project lies in the jurisdiction of the Khyber Pakhtunkhwa Province; therefore, the legislations of Khyber Pakhtunkhwa along with national and international legislation will be considered throughout the Project planning and implementation process.

# 2.1 Historical and Constitutional Context

- 31. The development of statutory and other instruments for environmental management has steadily gained priority in Pakistan since the late 1970s. The Pakistan Environmental Protection Ordinance, 1983 was the first piece of legislation designed specifically for the protection of the environment. The promulgation of this ordinance was followed, in 1984, by the establishment of the Pakistan Environmental Protection Agency (Pak-EPA), the primary government institution at that time dealing with environmental issues. Significant work on developing the environmental policy was carried out in the late 1980s, which culminated in the drafting of the Pakistan National Conservation Strategy. Provincial environmental protection agencies were also established at about the same time. The NEQS was established in 1993. In 1997, Pak-Act (1997) was enacted to replace the 1930 Ordinance. PEPA conferred broad-based enforcement powers to the environmental protection agencies. This was followed by the publication of the Pakistan Environmental Protection Agency Review of Initial Environmental Examination and Environmental Impact Assessment Regulations 2000 which provided the necessary details on the preparation, submission, and review of initial environmental examinations (IEE) and environmental impact assessments (EIA).
- 32. Before the 18<sup>th</sup> Amendment to the Constitution of Pakistan in 2010, the legislative powers were distributed between the federal and provincial governments through two 'lists' attached to the Constitution as Schedules. The Federal list covered the subjects over which the federal government had exclusive legislative power, while the 'Concurrent List' contained subjects regarding which both the federal and provincial governments could enact laws. The subject of 'environmental pollution and ecology' was included in the Concurrent List and hence allowed both the national and provincial governments to enact laws on the subject. However, as a result of the 18<sup>th</sup> Amendment, this subject is now in the exclusive domain of the provincial government. The main consequences of this change were as follows:
  - The Ministry of Environment at the federal level was abolished. Its functions related to national environmental management were transferred to the provinces. To manage international obligations in the context of the environment, a new ministry—the Ministry of Climate Change—was created at the federal level.
  - Pak-Act (1997) was technically no longer applicable to the provinces. The provinces were required to enact their own legislation for environmental protection. However, to ensure legal continuity Pak-Act (1997) continued to be the legal instrument for environmental protection in the provinces till the enactment of the provincial law.
- 33. All four provinces have enacted their environmental protection laws. These provincial laws are largely based on Pak-Act (1997) and, hence, provide the same level of environmental protection as the parent law.

# 2.2 Khyber Pakhtunkhwa Legislative and Regulatory Framework

34. In this respect KP-Act, enforced in 2014, is the relevant environmental act that will apply to this Project. Under the Act, all decisions made under Pak-Act (1997) are protected and applicable (Section 40 (2)). Hence the environmental approval and conditions of approval which were conferred before the enforcement of this Act are fully valid and applicable and refer to the same regulations for determining whether projects require an IEE or an EIA.

# 2.3 Khyber Pakhtunkhwa Environmental Protection Act (KP-Acct, 2014)

- 35. KP-Act (2014) is applicable to a broad range of issues and extends to air, water, industrial liquid effluent, and noise pollution, as well as to the handling of hazardous wastes. The articles of KP-Act (2014) that have a direct bearing on the proposed Project are listed below and discussed further in the following sections:
- 36. Article 11 that deals with the Khyber Pakhtunkhwa Environmental Quality Standards (KP-EQS) and their application.
  - Article 11 that deals with discharges, emissions, and waste disposal
  - Article 13 that deals with the IEE and EIA review and approval process
  - Article 14 that prohibits import of hazardous waste
  - Article 15 that provides rules for handling of hazardous substances
  - Article 15 that provides regulation on motor vehicles
  - Article 16 that relates to various acts detrimental to the environment.
- 2.3.1 The Khyber Pakhtunkhwa Environmental Assessment Rules, 2021
- 37. The Government of Khyber Pakhtunkhwa formulated 'The Khyber Pakhtunkhwa Environmental Assessment Rules, 2021', which provides details on requirements of environmental assessment project screening and scoping, EIA/IEE preparation guidelines and classification.
- 38. Project types included in Schedule II of the regulations those that are likely to have a potentially significant impact on the environment and thus an EIA is required for such projects, whereas those included in Schedule I as having potentially less adverse effects and therefore require an IEE.
- 39. According to this Rule, grid station and ETLs (11 kV and above) are under Schedule II which are required to conduct an EIA.

#### 2.4 Institutional Framework

40. The success of environmental assessments—as a means for ensuring that development projects are environmentally sound and sustainable—depends in large measure on the capability of regulatory institutions for ensuring compliant environmental management. The relevant institutional framework for decision-making and policy formulation on environmental and conservation issues is described briefly below.

# 2.4.1 Environmental Protection Agency

41. Under KP-Act (2014), KP EPA is an autonomous agency, is primarily responsible for administering the provisions of KP-Act (2014) in the Khyber Pakhtunkhwa province. The KP-EPA was established in 1989. It is a monitoring and regulating agency with the following main functions:

- Administer and implement KP-Act (2014) and its rules and regulations
- Review IEEs and EIAs, including preparation of procedures and guidelines
- Prepare, revise, and enforce NEQS (industries, municipalities, and vehicular emissions)
- Establish, maintain, and certify laboratories, for conducting tests and analyses
- Assist local councils/authorities and government agencies in the execution of projects
- Establish a system for surveys, monitoring, examination, and inspection to combat pollution
- Conduct training of government functionaries and industrial management
- Provide information and education to the public on environmental issues
- Publish an annual 'State of the Environment' report; survey qualitative and quantitative data on air, soil, water, industrial/municipal and traffic emissions, and
- Take measures to promote environment-related research and development activities.

#### 2.4.2 Environmental Protection Council

- 42. The Pakistan Environmental Protection Council, established in 1984, does not have regulatory power over Khyber Pakhtunkhwa. Following enactment of the Khyber Pakhtunkhwa environmental protection law, a provincial-level environmental protection council has yet to be established. Once created, it will be the highest inter-ministerial statutory body in the province and will be responsible for:
  - Formulating provincial environmental policies
  - Overseeing enforcement of environmental law in the province
  - Approving KP-EQS
  - Incorporating environmental considerations into provincial development plans and policies.

# 2.5 Requirements for Environmental Assessment

- 43. The articles of KP-Act (2014) that have a direct bearing on the environmental assessment of the proposed Project are:
- Article 13(1): 'No proponent of a project shall commence construction or operation unless he has filed with the Agency<sup>8</sup> an initial environmental examination or an environmental impact assessment and has obtained from the Agency approval in respect thereof.'
- Article 13(3): 'Every review of an environmental impact assessment shall be carried out with public participation...'
- 44. The Khyber Pakhtunkhwa IEE-EIA Regulations are still to be formulated and so the federal IEE-EIA Regulations (2000, footnote 3) are still valid in the province, provides the necessary details on the preparation, submission, and review of the IEE and the EIA. The categorization of projects for IEE and EIA is one of the main components of the federal IEE-EIA Regulations (2000). Projects have been classified based on the expected degree of adverse environmental impact. Project types included in Schedule II of the regulations include those that are likely to have a potentially significant impact on the environment and thus an EIA is required for such projects, whereas those included in Schedule I are listed as having potentially less adverse effects and therefore require an IEE. The ETL Projects with 11 kV or higher are kept in Schedule II of the regulations and thus an EIA is required for such projects.

<sup>&</sup>lt;sup>8</sup> The term 'Agency' refers to the KP-EPA.

- 45. Article 13(4) of the KP-Act (2014) binds the KP-EPA to 'communicate its approval or otherwise within four months from the date, the environmental impact assessment is filed complete in all respects following the regulations, failing which the environmental impact assessment shall be deemed to have been approved, to the extent to which it does not contravene the provisions of this Act and the rules and regulations'.
- 46. Under the KP-Act (2014), the federal IEE Environmental Impact Assessment (EIA) Regulations (2000, footnote 3) and the Khyber Pakhtunkhwa Environmental Assessment Rules (2021) provide the necessary details on the preparation, submission, and review of the IEE and the EIA. The categorization of projects for IEE and EIA is one of the main components of the federal IEE-EIA Regulations (2000). The ETL Projects with 11 kV or higher are kept in Schedule II of the regulations and thus an EIA is required for such projects.
- 47. Environmental approval or no objection certificate (NOC) for the Project must be obtained from KP-EPA by submitting an EIA before start of construction activities. NTDC will prepare an EIA and submit to KP-EPA for obtaining NOC before commencement of any civil works.
- 48. After filing an EIA to KP-EPA, the applicable law binds the Agency (KP-EPA) to inform the proponent (NTDC in this case) on the approval in four months from the date of filing EIA and acceptance, failing which the EIA shall be deemed to have been approved as per paragraph 16 of the federal IEE-EIA Regulations (2000), to the extent to which it does not contravene the provisions of the Regulations. The approval once granted is valid for 3 years from the date of issue. If the construction work does not start or complete within the 3 years an application required to submit with the Agency for extension to maximum another 3 years period.

# 2.6 National Environmental Quality Standards

- 49. KP-EPA has yet to formulate KP-EQS, as per Article 6 (v) of KP-Act (2014). The NEQS will therefore be applicable to the Project. Article 11(1) of Pak-Act (1997) states that:
  - "Subject to the provisions of this Act and the rules and regulations made thereunder, no person shall discharge or emit or allow the discharge or emission of any effluent or waste or air pollutant or noise in an amount, concentration or level which is in excess of the NEQS."
- 50. NEQS have been established for gaseous emission, liquid effluent, ambient air quality, noise and drinking water. From the date of enforcement of the NEQS, all projects, whether in operation on the date or constructed later, are required to comply with these standards.
- 51. The Project needs to comply with all applicable standards, and Project proponents and contractors should ensure that no activity will result in the emission of pollutants and effluents exceeding limits as prescribed in the NEQS.

## 2.7 Administrative Framework on Environmental Issues

- 52. The proposed project is legally required to comply with the NEQS. The environmental standards applicable in Khyber Pakhtunkhwa are NEQS as developed by Pakistan Environmental Protection Agency before the 18<sup>th</sup> Amendment.
- 53. NEQS for air quality are presented in **Table 2-1**. **Table 2-2** provides a comparison of NEQS with international standards and guideline values.
- 54. NEQS for effluent water and drinking water are presented in **Table 2-3** to **Table 2-4**.
- 55. **Table 2-5** provides local noise standards and a comparison of these (local standards) with international standards is presented in **Table 2-6**.

Table 2-1: National Environmental Quality Standards (NEQS) for Ambient Air Quality

Pollutants	Time-weighted Average	NEQS (μg/m³)
Sulfur Dioxide (SO <sub>2</sub> )	Annual*	80
	24 hours**	120
Oxide of Nitrogen as (NO)	Annual	40
	24 hours	40
Oxide of Nitrogen as (NO <sub>2</sub> )	Annual	40
	24 hours	80
Ozone (O <sub>3</sub> )	1 hour	130
Suspended Particulate Matter (SPM)	Annual	360
	24 hours**	500
Respirable particulate Matter. PM <sub>10</sub>	Annual	120
	24 hours**	150
Respirable Particulate Matter. PM <sub>2.5</sub>	Annual	15
	24 hours **	35
Lead (Pb)	Annual Average	1
	24 hours	1.5
Carbon Monoxide (CO)	8 hours	5,000
	1 hour	10,000

<sup>\*</sup>Annual arithmetic means of minimum 104 measurements in a year taken twice a week, hourly and uniform interval \*\*24 hourly/8 hourly values should be met 98% in a year, 2% of the time. It may exceed but not on two consecutive days.

Table 2-2: Comparison of Local and International Standards

Pollutant	National Environmental Quality Standards (NEQS)		WHO Global Air Quality Guidelines	
	Avg. Time	Standards	Avg. Time	Standards
SO <sub>2</sub>	Annual Mean 24 hours	80 μg/m³ 120 μg/m³	24 hours 10 Minutes	40 μg/m³ 500 μg/m³
СО	8 hours 1 hour	5 mg/m <sup>3</sup> 10 mg/m <sup>3</sup>	24 hours 8 hours 15 minutes	4 μg/m³ 10 μg/m³ 100 μg/m³
NO <sub>2</sub>	Annual Mean 24 hours	40 μg/m³ 80 μg/m³	1 Year 24 hours 1 hour	10 μg/m³ 25 μg/m³ 200 μg/m³
O <sub>3</sub>	1 hour	130 μg/m³	8 hours Peak season	100 μg/m³ 60 μg/m³
TSP	24 hours	500 μg/m <sup>3</sup>		
PM <sub>10</sub>	24 hours	150 µg/m³	1 Year 24 Hours	15 μg/m³ 45 μg/m³

<sup>\*\*\*</sup>Annual Average limit of 40  $\mu$ g/m³ or background annual average concentration plus the allowable allowance of 9  $\mu$ g/m³, whichever is lower.

PM <sub>2.5</sub>	24 hours	35 μg/m³	1 Year	5 μg/m³
			24 Hours	15 μg/m³

Note: The standards highlighted in green for each pollutant are the most stringent based on a comparison between local and international regulations and thus shall be applicable for the proposed project

Table 2-3 National Environmental Quality Standards (NEQS) and International Standards for Effluents

(mg/l, unless otherwise defined)

Parameter	NEQS (Into Inland Waters)	NEQS (Sewage Treatment)	IFC9
Temperature increase*	40°C or increase less than 3°C	40°C or increase less than 3°C	< 3°C
pH value	6 to 9	6 to 9	6 to 9
Five–day biochemical oxygen demand (BOD) at 20°C	80	250	50
Chemical oxygen demand (COD)	150	400	250
Total suspended solids (TSS)	200	400	50
Total dissolved solids (TDS)	3500	3500	
Oil and Grease	10	10	10
Phenolic compounds (as phenol)	0.1	0.3	0.5
Chlorides (as Cl')	1000	1000	
Fluorides (as F')	10	10	
Cyanide total (as CN')	1.0	1.0	
Anionic detergents (as MBAS)	20	20	
Sulfates (SO <sub>4</sub> <sup>2-</sup> )	600	1000	
Sulfides (S <sup>2-</sup> )	1.0	1.0	1.0
Ammonia (NH₃)	40	4.0	10
Pesticides	0.15	0.15	
Cadmium	0.1	0.1	0.1
Chromium (trivalent and hexavalent)	1.0	1.0	0.1
Copper	1.0	1.0	0.5
Lead	0.5	0.5	0.1
Mercury	0.01	0.01	0.01
Selenium	0.5	0.5	0.1
Nickel	1.0	1.0	0.5
Silver	1.0	1.0	0.5
Total toxic metals	2.0	2.0	10
Zinc	5.0	5.0	2.0

\_

<sup>&</sup>lt;sup>9</sup> Limits for Process Wastewater, Domestic Sewage, and Contaminated Stormwater Discharged to Surface Waters, for General Application. Notes: The standards highlighted in green for each pollutant are the most stringent based on a comparison between local and international regulations and thus shall be applicable for the proposed project.

Parameter	NEQS (Into Inland Waters)	NEQS (Sewage Treatment)	IFC9
Arsenic	1.0	1.0	0.1
Barium	1.5	1.5	
Iron	8.0	8.0	3.5
Manganese	1.5	1.5	
Boron	6.0	6.0	
Chlorine	1.0	1.0	0.2

<sup>\*</sup>The effluent should not result in a temperature increase of more than 3oC at the edge of the zone where initial mixing and dilution take place in the receiving body. In case the zone is not defined, use 100 meters from the point of discharge.

Notes: The standards highlighted in green for each pollutant are the most stringent based on a comparison between local and international regulations and thus shall be applicable for the proposed project.

Table 2-4: National Environmental Quality Standards (NEQS) and International Standards on Drinking Water Quality

Parameter	Unit	NEQS	WHO Guidelines
Physical			
Temperature	°C	NGVS	
Odor		Non- Objectionable	Non
Color	TCU	≤ 15	≤ 15
Taste		Non- Objectionable	Non
рН		6.5-8.5	6.5-8.5
Total Hardness (as CaCO3)	mg/l	< 500	< 500
Total dissolved solids (TDS)	mg/l	< 1000	< 600
Turbidity	NTU	< 5	<4
Chemicals			
Aluminum (AI)	mg/l	≤ 0.2	≤ 0.2
Antimony (Sb)	mg/l	≤ 0.005	≤ 0.02
Arsenic (As)	mg/l	≤ 0.05	≤ 0.01
Barium (Ba)	mg/l	≤ 0.7	≤1.3
Boron (B)	mg/l	≤ 0.3	≤ 2.4
Cadmium (Cd)	mg/l	≤ 0.01	≤ 0.003
Chloride (CI)	mg/l	< 250	-
Chromium (Cr)	mg/l	≤ 0.05	≤ 0.05
Copper (Cu)	mg/l	≤ 2.0	≤ 2.0
Cyanide (CN-)	mg/l	≤ 0.05	-
Fluoride (F-)	mg/l	≤ 1.5	≤ 1.5
Lead (Pb)	mg/l	≤ 0.05	≤ 0.009
Manganese (Mn)	mg/l	≤ 0.5	≤ 0.08
Mercury (Hg)	mg/l	≤ 0.001	≤ 0.006
Nickel (Ni)	mg/l	≤0.02	≤0.07
Nitrate (NO3-)	mg/l	≤ 0.50	≤ 50
Nitrite (NO2-)	mg/l	≤ 3.0	≤ 3.0
Selenium (Se)	mg/l	≤ 0.01	≤ 0.04
Residual Chlorine	mg/l	≤ 0.5	-
Zinc (Zn)	mg/l	≤ 5.0	≤ 0.05

Parameter Parame	Unit	NEQS	WHO Guidelines
Biological			
Total Coliforms	mL CFU	0/ 100	0
Fecal Coliforms	mL CFU	0/ 100	0
Biological			
Phenolic Compounds (as Phenols)	mg/l	<0.002	<0.02
Pesticides	mg/l	NGVS	
Polynuclear Aromatic Hydrocarbons (as	g/l	0.01 (By GC/MS	≤ 0.00007 mg/l
PAH)		method)	

Note:

TCU True color unit NGVS No Guideline Value Set CFU Colony Forming Unit NTU Nephelometric Turbidity Unit

**Note:** The standards highlighted in green for each pollutant are the most stringent based on a comparison between local and international regulations and thus shall be applicable for the proposed project.

Table 2-5: National Environmental Quality Standards (NEQS) for Noise

No.	Category of Area/Zone	Effective from 1st July 2010			n 1st January 115
		Limit in dB(A) Leq*			
		Day Time	Nighttime	Day Time	Nighttime
1.	Residential area (A)	65	50	55	45
2.	Commercial area (B)	70	60	65	55
3.	Industrial area (C)	80	75	75	65
4.	Silence zone (D)	55	45	50	45

#### Note:

- 1. Day time hours: 6 .00 am to 10.00 pm
- 2. Nighttime hours: 10.00 pm to 6.00 am
- 3. Silence zone: Zones which are declared as such by the competent authority. An area comprising not less than 100 meters around hospitals, educational institutions and courts, and courts.
- 4. Mixed categories of areas may be declared as one of the four above-mentioned categories by the competent authority.
- 5. \*dB(A) Leq: a time-weighted average of the level of sound in decibels on scale A which is relatable to human hearing.

Table 2-6: Comparison of Local and International Standards

Category of	Limit in dB(A) Leq			
Area/Zone	National Environmental Quality Standards (NEQS)		WHO/ IFC	
	Nighttime (22:00-06:00)	Daytime (06:00-22:00)	Nighttime (22:00-07:00)	Daytime (07:00- 22:00)
Residential area (A)	45	55	45	55
Commercial area (B)	55	65	70	70
Industrial area (C)	65	75	70	70
Silence zone (D)	45	50	45	55

Note: The standards highlighted in green for each respective Area/Zone are the most stringent based on a comparison between local and international regulations and thus shall be applicable for the proposed project.

# 2.8 Other Applicable Laws

56. There are several other laws in the statute books of Pakistan which have a bearing on the environmental performance of the Project. These are listed in **Table 2-7**.

**Table 2-7: Laws Relevant to the Project** 

Law	Description	Applicability to the Project
Khyber Pakhtunkhwa Forest Ordinance, 2002 <sup>10</sup>	Authorizes provincial forest departments to establish forest reserves and protected forests. The ordinance prohibits any person from setting fires in the forest; quarrying stone; removing any forest produce; or causing any damage to the forest by cutting trees or clearing areas for cultivation or any other purpose without the express permission of the relevant provincial forest department.	The Project area does not include any forest reserve or protected forests established by the provincial forest department. Therefore, this law is not relevant to the Project.
NWFP Wildlife Protection, Preservation, Conservation and Management Act, 1975 (NWFP Act No. V of 1975)	This law was enacted to protect the province's wildlife resources directly and other natural habitats indirectly. It classifies wildlife by degree of protection, i.e., animals that may be hunted on a permit or special license, and species that are protected and cannot be hunted under any circumstances. The Act specifies restrictions on hunting and trade in animals, trophies, or parts. The Act also defines various categories of wildlife-protected areas, i.e., National Parks, Wildlife Sanctuaries, and Game Reserves.	The Project area does not include any protected wildlife species; therefore, this law is not relevant to the Project.
Fisheries West Pakistan. Ordinance XXX of 1961 Amended Vide NWFP Fisheries (Amendment) Ordinance, 1982	This law prohibits destruction of fish by explosives, poisoning water, and the hunting of protected fish species. The law also forbids the use of net or fixed engine traps without a permit or license. The law grants power to the Director General Fisheries to issue fishing permits. The ordinance protects fish against destruction of fish by explosives and by poisoning of waters.	The law shall apply to Project where there is a construction activity near water bodies such as a river or canal
Land Acquisition Act, 1894	The Act empowers the government to acquire land for public interests (including for projects of national importance whether in the public or private sector). The law sets out procedures for land acquisition, valuation of land, payment of compensation to landowners, including any damage caused to their properties, crops, and trees by a Project.	The law will be applicable only if the state decides to acquire private land for the Project and transfer to the Proponent. In case, the land is acquired directly through private negotiations, this law has no implications.
Road Transport Workers Ordinance, 1961	This law sets conditions for the driver of a vehicle and imposes driving time limits.	The law shall apply to all Project vehicles and drivers, including those of contractors.

<sup>&</sup>lt;sup>10</sup>http://kpcode.kp.gov.pk/homepage/lawdetails/1221 (accessed 11 July 2017).

22

\_

Law	Description	Applicability to the Project
Motor Vehicle Ordinance, 1965 (MVO 1965)	This law sets rules for driving license, registration, permits, speed limits, size of vehicle and axle weight.	The law shall apply to all project vehicles and drivers, including those of contractors.
National Highway Safety Ordinance, 2000 (NHSO 2000)	This law is similar to MVO 1965 and applicable to the national highway and motorway network.	The law shall apply to all Project vehicles and drivers, including those of contractors.
Factories Act 1934	Requirements for occupational health and safety at the workplace	Applicable to workers' accommodation and rights during construction and operations
The Building Code of Pakistan (2008)	Requirements for safety to be included in the design of buildings in Pakistan. The Building Code of Pakistan – Fire Safety Provisions (2016) provide the requirements for fire prevention, life safety about fire and fire protection of buildings and building-like structures.	Applicable on both construction and operations phases of the Project.
The Antiquities Act of 1975	The Act ensures the protection of Pakistan's cultural resources. The Act defines 'antiquities' as ancient products of human activity, historical sites, or sites of anthropological or cultural interest, national monuments, etc.	Not applicable as no archeological or cultural-historical site was found on the RoW of the Project.

# 2.9 Asian Development Bank Policies and Guidelines

- 57. ADB SPS builds upon the three previous safeguard policies on the environment, involuntary resettlement, and indigenous peoples, and brings them into one single policy that enhances consistency and coherence, and more comprehensively addresses environmental and social impacts and risks. ADB SPS aims to promote sustainability of Project outcomes by protecting the environment and people from Project's potential adverse impacts by avoiding adverse impacts of projects on the environment and affected people, where possible; minimizing, mitigating, and/or compensating for adverse project impacts on the environment and affected people when avoidance is not possible; and helping borrowers/clients to strengthen their safeguard systems and develop the capacity to manage environmental and social risks.
- 58. The following ADB policies and guidelines may apply to the proposed Project:
  - ADB SPS Safeguards Requirement (SR) 1 on Environment, SR2 on Involuntary Resettlement (IR), and SR 3 on Indigenous Peoples (IP)
  - ADB Social Protection Strategy (2001)
  - ADB Gender and Development Policy (1998)
  - Access to Information Policy (2018);<sup>11</sup> and

<sup>&</sup>lt;sup>11</sup>Asian Development Bank (ADB), September 2018, Access to Information Policy, Available at <a href="https://www.adb.org/sites/default/files/institutional-document/450636/access-information-policy.pdf">https://www.adb.org/sites/default/files/institutional-document/450636/access-information-policy.pdf</a>. Accessed on 18 June 2019.

- Relevant ADB Operations Manual (OM) such as OMF1 for ADB SPS, OML3 for Access to Information Policy<sup>12</sup>, OMD10 for Non-sovereign Operations, OMC3 for Incorporation of Social Dimensions into ADB Operations, OMC2 for Gender and Development;<sup>13</sup>
- ADB's Accountability Mechanism Policy (2012)<sup>14</sup>
- 59. ADB's environmental policy is grounded in its Poverty Reduction Strategy and its Long-Terms Strategic Framework. To ensure the reduction of poverty through environmentally sustainable development, the ADB's Environment Policy contains five main elements: (i) promoting environment and natural resource management interventions to reduce poverty directly, (ii) assisting developing member countries to mainstream environmental considerations in economic growth, (iii) helping maintain global and regional life support systems that underpin future development prospects, (iv) building partnerships to maximize the impact of ADB lending and non-lending activities, and (v) integrating environmental considerations across all ADB operations.
- 60. Under the last element, the ADB pledges to address the environmental aspects of its operations through the systematic application of procedures for (i) environmental analysis for country strategy and programming; (ii) environmental assessment of project loans, program loans, sector loans, loans involving financial intermediaries, and private sector loans; (iii) monitoring and evaluation of compliance with environmental requirements of loans; and (iv) implementation of procedures for environmentally responsible procurement. In the context of policy-based lending and policy dialogue, the ADB will identify opportunities to introduce policy reforms that provide incentives to improve environmental quality and enhance the sustainability of natural resource management.
- 61. ADB classifies projects into category A (with potentially significant environmental impact); category B (with potentially less significant environmental impact); or, category C (unlikely to have a significant environmental impact). An IEE is required for category B projects and an EIA, requiring greater depth of analysis, for category A projects. No environmental assessment is required for category C projects although their environmental implications nevertheless need to be reviewed. The proposed Project has been classified as a category B project for the environment.
- 62. The ADB requires public consultation and access to information in the environmental assessment process. It specifies the need for meaningful consultation, which involves two-way communication between the borrower/client and the affected communities and stakeholders. It also involves the active participation of affected communities and stakeholders in various stages in the project design and implementation. The following principles apply to meaningful consultations:<sup>16</sup>
- begins early and is carried out on an ongoing basis throughout the project cycle,
- ensures timely disclosure of relevant information,

---

<sup>&</sup>lt;sup>12</sup>Asian Development Bank (ADB), January 2019, Access to Information Policy Operations Manual, Available at <a href="https://www.adb.org/sites/default/files/institutional-document/31483/om-l3.pdf">https://www.adb.org/sites/default/files/institutional-document/31483/om-l3.pdf</a>.

<sup>&</sup>lt;sup>13</sup>Asian Development Bank (ADB), September 2016, Operations Manual, Institutional Document, ADB, Available at <a href="https://www.adb.org/documents/operations-manual">https://www.adb.org/documents/operations-manual</a>.

<sup>&</sup>lt;sup>14</sup>Asian Development Bank (ADB), 2012, Accountability Mechanism Policy, ADB Available at https://www.adb.org/sites/default/files/institutional-document/33440/files/accountability-mechanism-policy-2012.pdf.

<sup>&</sup>lt;sup>15</sup>A fourth category, FI (credit line for subprojects through a financial intermediary, or equity investment in a financial intermediary), requires that an appropriate environmental management system should be developed and assessment carried out.

<sup>&</sup>lt;sup>16</sup>Asian Development Bank (ADB), Environmental Safeguards: A Good Practice Sourcebook Draft Working Document, December 2012.

- is free of intimidation or coercion,
- is gender-inclusive and responsive, and tailored to the needs of disadvantaged and vulnerable groups, and
- incorporates relevant views of affected people and other stakeholders into project design and decision-making.

# 2.9.1 ADB's Safeguard Policy Statement 2009

- 63. ADB SPS framework consists of three operational policies on the environment, indigenous peoples, and involuntary resettlement. A brief detail of all three operational policies has been mentioned below:
  - Environmental Safeguard: This safeguard is meant to ensure the environmental soundness and sustainability of projects and to support the integration of environmental considerations into the project decision-making process. The requirements apply to all ADB-financed and/or ADB-administered sovereign and non-sovereign projects, and their components regardless of the source of financing, including investment projects funded by a loan; and/or a grant; and/or other means, such as equity and/or guarantees (hereafter broadly referred to as projects). This policy and its requirements about environmental assessment, baseline, and impact assessment will apply to this project and the EIA will be undertaken to ensure that the Project is designed to comply with the policy.
  - Involuntary Resettlement Safeguard: This safeguard has been placed to avoid involuntary
    resettlement whenever possible; to minimize involuntary resettlement by exploring project and
    design alternatives; to enhance, or at least restore, the livelihoods of all displaced persons in
    real terms relative to pre-project levels; and to improve the standards of living of the displaced
    poor and other vulnerable groups. This policy and its requirements will apply to this project and
    the EIA and LARP will be undertaken to ensure that the Project is designed to comply with the
    policy.
  - Indigenous Peoples Safeguard: This safeguard looks at designing and implementing projects
    in a way that fosters full respect for Indigenous Peoples' identity, dignity, human rights,
    livelihood systems, and cultural uniqueness as defined by the Indigenous Peoples themselves
    so that they receive culturally appropriate social and economic benefits; do not suffer adverse
    impacts as a result of projects; and participate actively in projects that affect them. Based on
    the available information no indigenous people live in the project area. However, this will be
    further confirmed during the study.
  - Information, Consultation, and Disclosure: Consultation and participation are essential in achieving the safeguard policy objectives. This implies that there is a need for prior and informed consultation with affected persons and communities in the context of safeguard planning and for continued consultation during project implementation to identify and help address safeguard issues that may arise. The consultation process begins early in the project preparation stage and is carried out on an ongoing basis throughout the project cycle. It provides timely disclosure of relevant and adequate information that is understandable and readily accessible to affected people and is undertaken in an atmosphere free of intimidation or coercion. Also, it is gender-inclusive and responsive and tailored to the needs of disadvantaged and vulnerable groups and enables the incorporation of all relevant views of affected people and other stakeholders into decision-making. ADB requires the borrowers/clients to engage with communities, groups or people affected by proposed projects and with civil society through information disclosure, consultation, and informed participation in a manner commensurate with the risks to and impacts on affected communities. For projects with significant adverse environmental, involuntary resettlement or Indigenous Peoples impacts, ADB project teams will participate in consultation activities to understand the concerns

of affected people and ensure that such concerns are addressed in project design and safeguard plans.

64. Following requirements of ADB SPS, NTDC will apply pollution prevention and control technologies and practices consistent with international good practice as reflected in internationally recognized standards such as EHS Guidelines (footnotes 20, 21 and 22 on page 28 of this IEE). When Government regulations differ from these levels and measures, NTDC will achieve whichever is more stringent. If less stringent levels or measures are appropriate in view of specific project circumstances, NTDC will provide full and detailed justification for any proposed alternatives that are consistent with the requirements presented in ADB SPS.

### 2.9.2 Social Protection Requirements

- 65. ADB SPS requires the Borrower to comply with applicable labor laws concerning the Project, and take the following measures to comply with the core labor standards<sup>17</sup> for the ADB financed portion of the Project:
  - carry out its activities consistent with the intent of ensuring legally permissible equal opportunity, fair treatment and non-discrimination about recruitment and hiring, compensation, working conditions and terms of employment for its workers (including prohibiting any form of discrimination against women during the hiring and providing equal work for equal pay for men and women engaged by the Borrower)
  - not restrict its workers from developing a legally permissible means of expressing their grievances and protecting their rights regarding working conditions and terms of employment
  - engage contractors and other providers of goods and services:
  - who do not employ child labor<sup>18</sup> or forced labor<sup>19</sup>;
  - who have appropriate management systems that will allow them to operate in a manner which
    is consistent with the intent of (A) ensuring legally permissible equal opportunity and fair
    treatment and non-discrimination for their workers, and (B) not restricting their workers from
    developing a legally permissible means of expressing their grievances and protecting their
    rights regarding working conditions and terms of employment; and
  - whose subcontracts contain provisions which are consistent with paragraphs (i) and (ii) above.

### 2.9.3 Access to Information Policy (2018)

66. The objective of The Access to Information Policy (2018) is to promote stakeholder trust in ADB and to increase the development impact of ADB activities. The policy reflects ADB's commitment to transparency, accountability, and participation by stakeholders in ADB-supported development activities in Asia and the Pacific. It also recognizes the right of people to seek, receive, and impart information about ADB's operations.

67. The policy applies to documents and information that ADB produces, requires to be produced by its borrowers or clients, or is produced and provided to ADB by other parties in the course of ADB operations.

<sup>17</sup>The core labor standards are the elimination of all forms of forced or compulsory labor; the abolition of child labor; elimination of discrimination in respect of employment and occupation; and freedom of association and the effective recognition of the right to collective bargaining, as per the relevant conventions of the International Labor Organization

<sup>&</sup>lt;sup>18</sup> Child labor means the employment of children whose age is below the statutory minimum age of employment in the relevant country, or employment of children in contravention of International Labor Organization Convention No. 138 'Minimum Age Convention" (www.ioo.org)

<sup>&</sup>lt;sup>19</sup> Forced labor means all work or services not voluntarily performed, that is, extracted from individuals under threat of force or penalty.

# 2.9.4 Climate Change Risk Management Framework

- 68. The climate risk management approach of the ADB aims to reduce risks resulting from climate change to investment projects in Asia and the Pacific. ADB's framework identifies climate change risks to project performance in the early stages of project development and incorporates adaptation measures in the design of projects at risk. ADB climate risk management framework comprises the following steps:
  - context-sensitive climate risk screening at the concept development stage to identify projects that may be at medium or high risk
  - climate change risk and vulnerability assessment during the preparation of projects at risk
  - a technical and economic evaluation of adaptation options
  - identification of adaptation options in project design; and
  - monitoring and reporting of the level of risk and climate-proofing measures.

#### 2.10 IFC Performance Standards

- 69. The IFC Performance Standards were published in April 2006 and revised in 2012. Information on the IFC standard and applicability for the Project is provided in **Table 2-8**.
- 70. PS 1 establishes the importance of integrated assessment to identify the social and environmental impacts, risks and opportunities of projects, effective community engagement through disclosure of Project-related information and consultation with local communities on matters that directly affect them, and management of social and environmental performance throughout the life of the project.
- 71. PS 2 through 8 establishes requirements to avoid, reduce, mitigate, or compensate for impacts on people and the environment, and to improve conditions where appropriate.

**Table 2-8: IFC Performance Standards** 

IFC Performance Standards	Applicability
Performance Standard 1: Assessment and Management of Environmental and Social Risks and Impacts	Applicable to the IEE process.
<b>Performance Standard 2:</b> Labor and Working Conditions	Applicable to employment and labor policies of the Project.
<b>Performance Standard 3:</b> Pollution Prevention and Abatement	Applicable to the Project's pollution prevention and abatement options.
<b>Performance Standard 4:</b> Community Health, Safety, and Security	Applicable to the potential community health and safety risk and the security system of the Project.
Performance Standard 5: Land Acquisition and Involuntary Resettlement	Applicable to the land acquired for the Project.
Performance Standard 6: Biodiversity Conservation and Sustainable Management of Living Natural Resources	Not likely to be applicable. However, part of biodiversity conservation will be covered in ecological assessment in the IEE process under PS1.
Performance Standard 7: Indigenous Peoples	Not applicable.
Performance Standard 8: Cultural Heritage	Not applicable.

# 2.11 The World Bank Group Environmental, Health and Safety Guidelines (EHS Guidelines)

- 72. EHS Guidelines<sup>20</sup> were initially published in 2007 and 2008.
- 73. The EHS Guidelines are technical reference documents with general and industry-specific examples of Good International Industry Practice, as defined in IFC's Performance Standard 3 on Pollution Prevention and Abatement.
- 74. The General EHS Guidelines<sup>21</sup> and EHS Guidelines for Electric Power Transmission and Distribution<sup>22</sup> will be applied to the Project.

# 2.12 International Treaties and Agreements

75. **Table 2-9** lists important international environmental treaties that have been signed by Pakistan and may have relevance to the Project. They concern climate change and depletion of the ozone layer; biological diversity and trade in wild flora and fauna; desertification; waste and pollution; and cultural heritage.

21 https://www.ifc.org/wps/wcm/connect/29f5137d-6e17-4660-b1f9-02bf561935e5/Final%2B-%2BGeneral%2BEHS%2BGuidelines.pdf?MOD=AJPERES&CVID=nPtguVM

<sup>&</sup>lt;sup>20</sup> Environmental, Health, and Safety Guidelines (ifc.org)

https://www.ifc.org/wps/wcm/connect/7b65ce6b-129d-4634-99dc-12f85c0674b3/Final%2B-%2BElectric%2BTransmission%2Band%2BDistribution.pdf?MOD=AJPERES&CVID=nPtfp32&id=1323162154847

Table 2-9: International Environmental Treaties Endorsed by Pakistan

Topic	Convention	Date of Treaty	Entry into Force in Pakistan
Climate change and the ozone layer	United Nations Framework Convention on Climate Change - the primary objective is the stabilization of greenhouse gas concentrations in the atmosphere at a level that would prevent dangerous anthropogenic interference with the climate system.	1992	1994
	Kyoto Protocol to the United Nations Framework Convention on Climate Change - enabled by the above Convention on Climate Change. It has more powerful and legally binding measures. It sets binding targets for 37 industrialized countries and the European community for reducing greenhouse gas emissions.	1997	2005
	Vienna Convention for the Protection of the Ozone Layer - acts as a framework for the international efforts to protect the ozone layer with a primary objective to protect human health and the environment against adverse effects resulting from human activities that modify or are likely to modify the ozone layer.	1985	1993
	The Montreal Protocol on Substances that Deplete Ozone Layer and associated amendments - enabled by the Vienna Convention, it is designed to protect the ozone layer by phasing out the production and consumption of several substances believed to be responsible for ozone depletion.	1987	1993
Waste and pollution	Basel Convention on the Control of Trans Boundary Movements of Hazardous Wastes and their Disposal - regulates the transboundary movement of hazardous waste and other waste with a stated purpose to protect human health and the environment against the adverse effects of generation and management of hazardous waste and other waste. The Convention provides for three sets of measures with binding obligations. These are Strict control of the transboundary movement of hazardous waste; Environmentally sound management of hazardous waste; and Enforcement and implementation of the provisions of the convention at international and national levels.	1989	1994
	International Convention on Oil Pollution Preparedness, Response and Co-operation	1990	1995

Topic	Convention	Date of Treaty	Entry into Force in Pakistan
	Stockholm Convention on Persistent Organic Pollutants - seeks to protect human health and the environment from Persistent Organic Pollutants, which are chemicals that remain intact in the environment for long periods and become widely distributed geographically and accumulate in the fatty tissue of humans and wildlife.		2008
	International Convention for the Prevention of Pollution from Ships (MARPOL) – is the main international convention that covers the prevention of pollution of the marine environment by ships from operational or accidental causes. The Convention includes regulations aimed at preventing and minimizing pollution from ships, both accidental pollution and that from routine operations, and currently includes six technical Annexes.	1983	
Desertification	International Convention to Combat Desertification –to combat desertification and mitigate the effects of drought. It is supported by international cooperation and partnership arrangements, to achieve sustainable use of land and water resources and sustainable development in affected areas.	1994	1997
Biodiversity and the protection of plants and	the field of biotechnology. The objectives are:		1994
animals	conserve of biological diversity		
	sustainable use of its components; and		
	<ul> <li>fair and equitable sharing of benefits arising from genetic resources.</li> </ul>		
	Cartagena Protocol on Biosafety to the Convention on Biological Diversity - addresses potential risks posed by living modified organisms resulting from modern biotechnology.	2000	2009
	Bonn Convention on the Conservation of Migratory Species of Wild Animals - aims to conserve terrestrial, marine, and avian migratory species throughout their range. It is concerned with the conservation of wildlife and habitats on a global scale.	1979	1987
	Memorandum of Understanding concerning Conservation Measures for the Siberian Crane - parties undertake to provide strict protection to Siberian Cranes and identify and conserve wetland habitats essential for their survival.	1998	1999

Topic	Convention	Date of Treaty	Entry into Force in Pakistan
	Convention on International Trade in Endangered Species of Wild Fauna and Flora - to ensure that international trade in specimens of wild animals and plants does not threaten their survival.	1973	1976
	International Plant Protection Convention (1997 Revised Text) - to prevent the international spread of pests and plant diseases. It requires maintenance of lists of plant pests, tracking of pest outbreaks, and coordination of technical assistance between member nations.	1951/52	1954
	Agreement for the Establishment of the Near East Plant Protection Organization - to establish the Near East Plant Protection Organization (NEPPO), which promotes international cooperation to implement the International Plant Protection Convention.	1993	2009
	Plant Protection Agreement for the Asia and Pacific Region and amendments – establishes the Asia and Pacific Plant Protection Commission to review and promote the region's progress in the implementation of the Agreement. Trade-in plants and plant products are regulated by certification, prohibition, inspection, disinfection, quarantine, destruction, etc., as necessary.	1955 (amend ment 1967)	1958 (amendme nt 1969)
	Convention on Wetlands of International Importance especially as Waterfowl Habitat and associated protocols and amendments - to promote conservation and sustainable use of wetlands. The Ramsar List of Wetlands of International Importance now includes almost 1,800 sites (known as Ramsar Sites). There are currently 19 Ramsar sites in Pakistan.	1971 (amend ed 1987)	1976 (amended 1994)
Cultural heritage	Convention concerning the Protection of the World Cultural and Natural Heritage - requires parties to adopt a general policy on the protection of the natural and cultural heritage, to set up services for such protection, to develop scientific and technical studies, to take appropriate legal, technical, scientific, and administrative measures and to foster training and education for such protection.	1972	1976

# 2.13 Electric and Magnetic Field (EMF) Exposure Guidelines

- 76. EMF are invisible lines of force emitted by and surrounding any electrical device such as power lines.
- 77. **Table 2-10** lists exposure limits for general public exposure to EMF published by the International Commission on Non-Ionizing Radiation Protection (ICNIRP)<sup>23</sup> while **Source:** ICNIRP
- 78. **Table 2-11** provides the exposure limits for occupational exposure.

Table 2-10: Electric and magnetic fields (EMF) General Public Exposure Limits

Frequency	Electric Field (V/m)	Magnetic Field (uT)
50 Hz	5,000	100
60 Hz	4,150	83

Source: ICNIRP

Table 2-11: Electric and magnetic fields (EMF) Occupational Exposure Limits

Frequency	Electric Field (V/m)	Magnetic Field (uT)
50 Hz	10,000	500
60 Hz	8,300	415

Source: ICNIRP

<sup>23</sup> ICNIRP (1998): "Guidelines for limiting exposure to time-varying electric, magnetic, and electromagnetic fields (up to 300 GHz).

### 3. Description of the Project

79. This section describes the main elements of the Project, including associated construction and operation activities. In the description, particular emphasis has been placed on those aspects that can potentially affect the environment.

### 3.1 Project Detail

80. Subproject 4 involves procurement of goods for the construction of a new 220kV Jamrud grid station and approximately 20 km of the associated 220kV Jamrud-Sheikh Muhammadi transmission line in the south-western area of Pakistan.

### 3.2 Location and the Layout

- 81. The Project 220kV Jamrud Substation will be built in Khyber district of Khyber Pakhtunkhwa and the 20 km 220 kV ETL passes through the district of Peshawar and Khyber in Khyber Pakhtunkhwa province.
- 82. The location map is provided in **Figure 1-1**.

### 3.3 Land Use in the Project Area

83. Project AoI comprises majorly of agricultural land (36%), barren land (24.1%), hills/mountains (19.3%) and built-up area (14.3%). The remaining land consists of scrub forest (3.1%) and roads (2.1%).

### 3.4 Road Access

84. The available existing roads will be used during the construction of the Project. Temporary access roads will be built where no track or road access is available to a tower location after consultation with the local community and compensation for damages to the crops will be done as per requirement.

# 3.5 Vegetation Features of the Project Site

85. The primarily most of the area is formed of barren lands and hills/ mountains. After that the main land use is agriculture; crops like wheat, maize and sugar cane are grown. Vegetables and fruits are also grown in the area.

# 3.6 Cost and Magnitude of the Operations

- 86. The construction cost of Project 4, as per the estimate made in October 2017 was 2,398 million Pak Rupees. <sup>24</sup>
- 87. The Project include installation of a 220kV Grid Station at Jamrud with two 220/132kV, 250MVA transformers and a 20 km long of ETL. Tower erection will be carried out on the concreted pile pad locations with the help of derrick poles or cranes.
- 88. The required working area for this activity is about  $50 100 \text{ m}^2$  for each tower. The tower is erected in panels. The panels are assembled on the ground, lifted in parts with the help of derrick poles/crane and then joined together with nuts and bolts, which are tightened at the specified torque.

<sup>&</sup>lt;sup>24</sup> PC-1, 220kV Jamrud Substation along with associated 220 kV Transmission Line, NTDC, Oct 2017.

# 3.7 Schedule of Implementation

- 89. The Project proponent (NTDC) plans to have the tranche-4 completed within 2 to 3 years, after completing the necessary arrangements, on the fast track. The land will be acquired for the Jamrud Grid Station. The land requirement will be established in the detailed design phase.
- 90. There will not be any significant land acquisition or compensation process for ETL except for the crop compensation of the ETL towers.
- 91. The construction period will follow, and best estimates indicate between eighteen to twenty-four months.

# 3.8 Project Design

92. Project design or construction flow is discussed below.

### 3.8.1 Project Alignment

- 93. As the components of the Project are on a 'turn-key' basis i.e., construction by a contractor or developer and handover to NTDC in a ready-to-use condition which includes design, supply, and installation. In this context, the proposed design provided by NTDC will be finalized by the contractor at the stage of implementation.
- 94. The Survey & Investigation (S&I) wing of NTDC has marked the route alignment of the ETL on the grand trunk sheet (G.T. Sheet). Thus, it is pointed out that although the proposed alignment/ route alignment of ETL including design and RoW was provided by the concerned section of NTDC (i.e., Survey & Investigation), this will be finalized by the contractor/ developer. Once the detailed design work has been completed, NTDC will review these designs before contracts are finalized and modifications will be incorporated, if considered necessary.

# 3.8.2 Width of Right of Way (RoW)

95. In consultation with the Survey & Investigation section and the Environment and Social Impact Cell (ESIC), of Project Management Unit (PMU) of NTDC, the width of RoW for ETL considered was 30 m, i.e., 15 m on either side from the center of ETL and it was 225  $m^2$  (i.e. 15m x15m) in case of tower spotting.

# 3.8.3 Design Standards for Transmission Line

96. NTDC has developed design parameters for the planning and design of transmission systems in Pakistan (see **Table 3-1**). The design parameters are based on standard NTDC's existing specifications and practices for the existing as well as proposed grid stations and ETLs.

**Table 3-1: Permissible Conductor Clearance** 

at 65°C for 220 kV ETL

No	Description	Clearance (m)
1	Across country (including across/along street)	8.23
2	Roads and highways	9.45
3	Rivers and major canals (from high flood line)	9.14
4a	Railway track – inside the station 11.89	
4b	Railway track – outside the station	9.14

No	Description	Clearance (m)
5a	Building part – vertical	7.62
5	Building part – horizontal	9.14
6	Earth part of lines	4.57
7	Telegraph lines	4.57
8	400 volts (and below), 11 kV, and 33 kV lines	3.96
9	66 kV and 132 kV lines	4.88

### 3.8.4 Climatic Consideration

- 97. Local climatic conditions, i.e., the temperature, wind velocity, thunderstorm levels, relative humidity, etc., control the selection of materials to be used.
- 98. The following climate parameters were considered in the design criteria.

Maximum Temperature 41.5°C Minimum Temperature 2.1°C

Annual Mean temperature 29.6°C (maximum) to 14.6°C (minimum)

Maximum Rainfall 420 mm/month

Annual Relative Humidity 60.1%

### 3.8.5 Civil Works and Other Facilities

99. Civil work for erection of towers will be required for construction of 220 kV double circuit ETL, for which necessary provision has been made in the cost estimate.

# 3.8.6 Equipment & Machinery

100. **Table 3-2** shows the key equipment required for the installation of 220kV Jamrud Grid Station. **Table 3-3** identifies some key equipment required for the Project Construction.

**Table 3-2: List of Jamrud Grid Station Equipment** 

Sr#	Item	Unit	Qty
220kV equipment			
1.	Circuit Breaker	Set	6
2.	Bus Isolator	Set	14
3.	Line Isolator	Set	2
4.	C.T	No.	24
5.	CVT	No.	10
6.	Lightning Arrestor	No.	12
7.	Autotransformer 220/132kV, 250MVA	No.	2
132kV equipment			
1.	Circuit Breaker	Set	5
2.	Bus Isolator	Set	10
3.	Line Isolator	Set	2
4.	C.T	No.	24
5.	PT	No.	6
6.	Lightning Arrestor	No.	9
7.	Autotransformer 132/11kV, 6.3MVA	No.	1

Table 3-3: List of 220 kV D/C Transmission Line Equipment

T/L from Jamrud- Peshawar grid station (20km)

No.	Item	Unit	Qty.
1.	TOWERS	To be estimated during detailed design	
	Light angle (DA1)	No.	13
	Heavy angle (DD1)	No.	9
	Suspension (DS1)	No.	39
	Total		61
2.	Conductor (Rail)	Km	252
3.	OPGW	Km	21
4.	INSULATORS		
	Suspension 80 KN	No.	3,875
	160KN		13,104
	Total		16,979
5	HARDWARE	Lot	1

### 3.8.7 Tower Structures for Transmission Line

- 101. All the towers shall be self-supporting type, lattice steel structures, fabricated from galvanized structural steel shapes. The steel employed will be following the latest edition of the standards implemented by NTDC at various ETL projects. All towers will be equipped with danger plates, number plates, and anti-climbing devices.
- 102. The normal foundations (inverted T shaped) as shown in **Figure 3-1** would be laid/applied for the erection of new towers which would be placed on a plain field. The tower height will be 5 to 10 meters higher, and the foundation span will be changed 1 to 5 meters wider.
- 103. The choice of foundation is usually influenced by the type of terrain encountered and the underlying geotechnical conditions. The actual size and type of foundation to be installed will depend on the soil bearing capacity (actual sub-soil conditions).
- 104. All towers will be equipped with danger plates, number plates, and anti-climbing devices. The other tower designs to be used are provided in **Figure 3-2** and **Figure 3-3**.

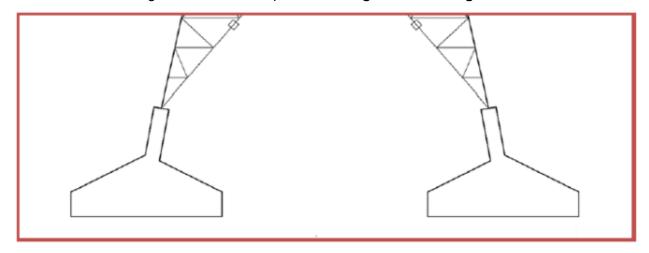


Figure 3-1: Inverted 'T' Type Tower Foundation

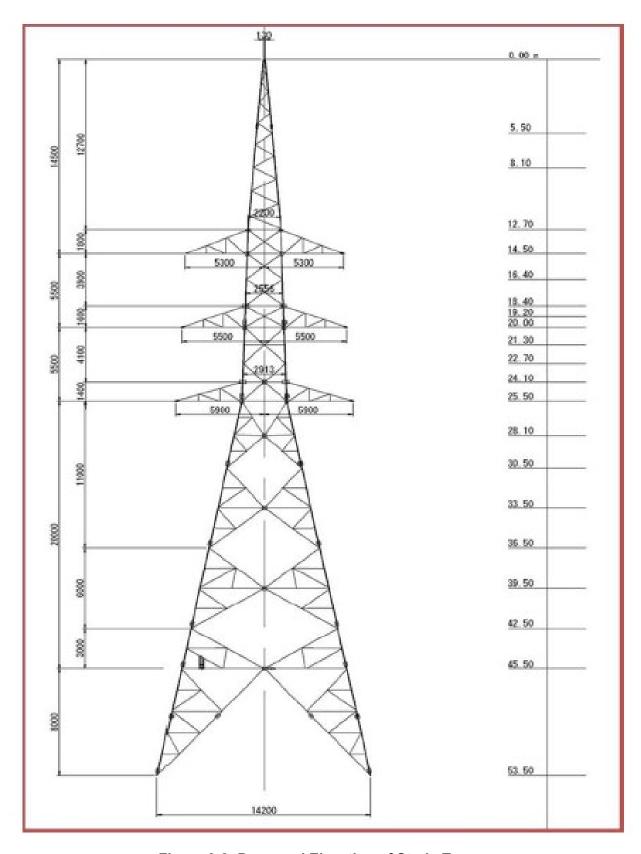


Figure 3-2: Proposed Elevation of Strain Tower

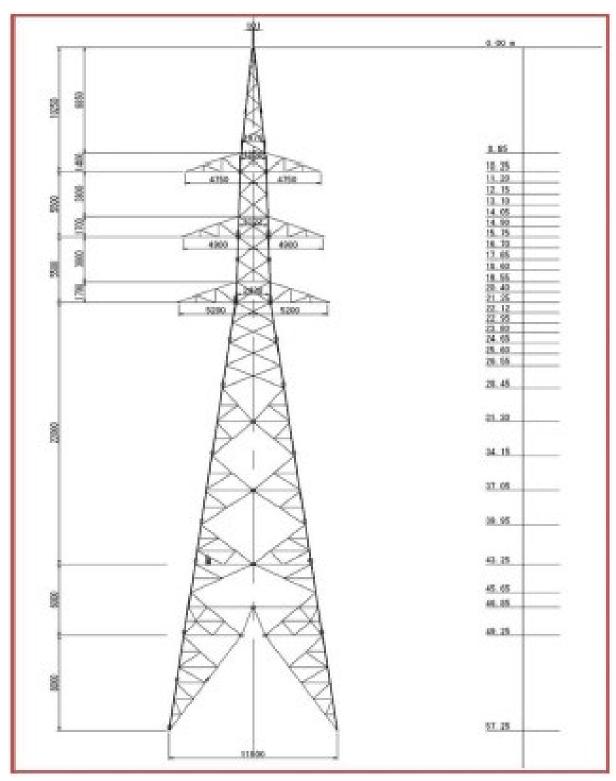


Figure 3-3: Proposed Elevation of Suspension Tower

# 3.9 Safety Parameters

105. For extra-high voltage (EHV) lines, safety considerations are of two types. One is related to the safety of the system, while others are those that are related to the public. It is for this reason

that NTDC has adopted a 3 m wide (25 m either side from the centerline) corridor as the ROW for the allied 500 kV ETL and 30 m for 220 kV ETL in this Project. The aspects are to be considered in this regard are as under:

# 3.9.1 System Safety

- 106. Conductor to Tower Clearance: For the safety of the system, any factor that may interrupt the power supply must be considered in the design. The clearance of the conductor from tower legs and trusses is of prime importance. Therefore, in the design, a minimum clearance of 1.55 m has been adopted under extreme wind conditions. This is based on regulations of Government of Pakistan /WAPDA and minimum requirements of the National Electric Safety Code (ANSI C2). With this clearance, there is a 99% probability of withstanding switching surge of 3-sigma margin due to maximum overvoltage under adverse climatic conditions.
- 107. Earthing of the System: Every tower is connected to an earthing system. This is to keep tower footings resistance at a level lower than 10 ohms. For this, two earth electrodes of copper-clad steel rods are sunk vertically into the ground to a minimum depth of 3 m and at the locations where the required resistance is not achieved, crow footing will be done.
- 108. Lightning Performance: The tower geometry, clearance, and insulation of the system are designed to perform safely within the permitted lighting intensities. In this respect, consideration has been given to the tower footing resistance and the Isokeraunic level of the area. The accepted level is one trip out/ 100 km/ year due to lightning.
- 109. Security Arrangements: Given the prevailing law and order and security position in the area around the proposed project area, the necessary armed security staff is necessary. Reinforced security will be required at work base, labor camp, material depot, equipment yard and the locations where work is in progress.
- 110. Personal Protective Equipment (PPE): Grid Station and allied ETL construction is a special job and the labor working on such activities requires special protective uniform and personal protection equipment to cope up with safety and health requirements. It will be ensured that the labor engaged in handling rough construction materials, mixing of concrete and handling ETLs, etc. will have all necessary PPEs, including but not limited to, long boots, steel toe shoes, overall dresses, goggles, gloves, and safety hats. They will invariably have their company identity cards worn around their necks with the help of a ribbon. As an overall safety, health and environment measure, anyone going into the construction area will also wear a safety helmet and safety shoes. Special arrangements must be made for fire protection by way of providing appropriate types of fire extinguishers with firefighting training to concerned personnel.

# 3.9.2 Public Safety

- 111. General Aspects: Because of public safety, NTDC has adopted a policy that the existing orchards having fruit trees with a height of not exceeding 2.5 m can remain under the lines. Similarly, open wells, including Persian wheels, can remain under the ETLs. However, tube wells and peter pumps are not permitted under the high voltage conductors. This is to prevent piping and cranes used to refurbish such wells encountering the lines.
- 112. No residential or other public buildings like factories, schools, hospitals, etc. are permitted within the corridor. However, farm buildings, which are not used for residential purposes can remain under the high voltage lines, provided a 7.0 m minimum clearance is maintained. The height of the towers can be increased to accommodate such buildings.

#### 3.9.3 Conductor to Ground Clearance

113. The conductor to ground clearance has been planned to be worked out based on overvoltage due to switching surge. In this consideration, safe clearance is required to be provided for moving objects under the line with a height of 4.5 m, withstanding switching surge of 3-sigma margin with 99.7% probability under adverse atmospheric conditions. This should keep the maximum voltage gradient at ground level and maximum current induced in a person less than the internationally allowable values. As such, the total conductor to ground clearance shall in no way be less than 7.0 meters. This is following the regulations of Government of Pakistan and NTDC practice.

### 3.10 Tower Erection and Scale of the Project

- 114. Tower erection is carried out on the concreted pile pad locations with the help of derrick poles or cranes. The required working area for this activity is about 50-100 m² for each tower. The tower is erected in panels. The panels are assembled on the ground, lifted in parts with the help of derrick poles/crane and then joined together with nuts and bolts, which are tightened at the specified torque.
- 115. In aligning the high-voltage ETL the design aims to avoid cultivated fields and pass through the area as thinly populated as possible. As such, accessibility will not be a problem. There are rough tracks and trail ways, and the contractor may have to develop a few tracks for transporting the materials. This should result in very little if any, damage to the vegetation or disruption of the farmland in the vicinity of the route of the ETL. The ETL route is easily accessible mostly through metaled roads or by rough tracks or village roads. Almost all the village tracks are linked to the metaled roads and are thus accessible to vehicles. The contractor is unlikely to need to transport the materials manually. In any event, care will be taken to ensure that the disruption to the vegetation is kept to a minimum.

### 3.11 Associated Facilities

### 3.11.1 Access Tracks

116. The ETL route passes through barren land, agricultural fields, and settlements. Already available access routes will be used. New tracks will be made only when access route is not available. Complete compensation will be given to the landowners as per market rates for damages and the land will be rehabilitated after completion of the construction activities.

# 3.11.2 Construction Camps

- 117. The ETL total length is 20 km, and one or 2 construction camps will be constructed. However, the exact location of these camps will be decided by contractors as per their work plan. The construction camps will include residential quarters, washing areas, kitchen, toilets, fuel storage, water storage, sewage disposal arrangements, firefighting arrangements, electric generators, and others. Preference will be given to establishing these camps within the NTDC-owned premises or settled areas. Otherwise, the land for these camps will be obtained on a rental or lease basis. Proper waste (solid and liquid) handling facilities will be developed, and the waste will be disposed of as proposed in this IEE.
- 118. On average domestic water uses in Pakistan per capita consumption varies significantly from 30 liter per capita per day to 350 liters per capita per day.<sup>25</sup> On average 50 gallons per capita per day if taken for estimate purposes, and if there will be 50 persons on-board in two camps then about 2,500 gallons per day water will be required for the camps. 3-5 times more water will be required at construction sites. An estimate of daily wastewater flows of approximately 30 gallons

-

<sup>&</sup>lt;sup>25</sup> https://ssms.jp/img/files/2019/04/sms10 183.pdf

per person per day and so based on 50 persons on-board, 1,500 gallons per day wastewater will be generated from the two camps.

- 119. On average  $0.613 \text{ kg}^{26}$  of solid waste generation is estimated per person per day and if there will be 50 persons on board in two camps then about 23 kg per day solid waste will be generated from the camps. A similar number of wastes is expected at construction sites.
- 120. The contractor, before mobilization for construction, a site camping layout plan will share as part of Site-Specific EMP. The layout plan will clearly show all camp facilities including runoff and sewerage drainage streams and end disposal points.
- 121. A machinery yard will also be needed for each construction team; it can be combined with the construction camp or established separately. The machinery yard will be parking bays, maintenance, and washing bays, fueling arrangements, oil and fuel storage, firefighting arrangements, and tools and parts storage.

### 3.11.3 Batching Plants

122. The contractors may need to establish concrete mixing and batching plants for tower foundation construction. These plants will be established at appropriate places based upon the distance from and accessibility to the tower locations. The batching plants will be complete with dust control arrangements and away from water bodies and settlements.

### 3.11.4 Material and Human Resource Usage

- 123. The Project will be required 100 150 skilled and unskilled workers. Unskilled workers will be engaged from the locals. Skilled workers if not available locally then will be hired from other regions of the province.
- 124. The tower and circuit materials will be provided by NTDC. Material for concrete and reinforcement will be acquired from Peshawar.

### 3.12 Restoration and Rehabilitation Plans

125. All damaged areas including access tracks will be rehabilitated upon completion of the construction work to near pre-construction conditions and natural areas impacted during construction will be rehabilitated with locally indigenous grasses typical of the representative botanical unit. The restoration and rehabilitation plan have been discussed in **Section 9** in more detail.

### 3.13 Other Government Department Approvals

126. No designated forest or protected area falls on the RoW. The approvals required from other departments will be sorted before the start of construction. Examples of such departments include the National Highway Authority (NHA) and provincial highways department where ETL crosses a national highway or provincial highway. The ETL Route is located 5 km south of the Peshawar International Airport, however, it would be good practice to consult relevant department (Civil Aviation Authority) if formal approval is required.

<sup>&</sup>lt;sup>26</sup> https://epd.punjab.gov.pk/solid\_waste

### 4. Description of the Environment (Baseline Data)

1. This section describes the existing physical, ecological, and socioeconomic conditions in the Project area. The information presented in this section was collected from the field surveys and the available literature.

### 4.1 Project Area of Influence

- 2. For the impact assessment, the definition of the AoI given in IFC Performance Standard 1 is used.
- 3. "The area likely to be affected by: (i) the Project and the client's activities and facilities that are directly owned, operated or managed (including by contractors) and that are a component of the Project; (ii) impacts from unplanned but predictable developments caused by the Project that may occur later or at a different location; or (iii) indirect project impacts on biodiversity or on ecosystem services upon which Affected Communities' livelihoods are dependent"
- 4. For the Project, the direct AoI is the spatial extent of the Project footprint and related facilities as well as on the associated effects on the receiving environment (**Figure 4-1**). This encompasses the ETL RoW to 1.5 km on each side of the ETL project.

### 4.2 Physical Environment

- 5. The physical baseline includes a description of the topography, land use, geology and soils, seismicity, climate, water resources, water quality, ambient air quality and sound levels in the AoI of the Project.
- 6. The field survey plan that was adopted for field data collection is provided in **Annexure II.**

### 4.2.1 Topography, Geology, and Soil

- 7. The topography in the Project area, passing through the districts of Peshawar and Khyber is a hilly terrain with piedmont plains, rough broken land, and gullied land. The land elevation in the area varies from 356 m, msl (mean sea level) (Peshawar district) to 1089 m msl (Khyber district).
- 8. The topography of the Project area is shown in **Figure 4-2**.
- 9. The surface geology of the Project area is mainly composed of Tertiary Eocene and Paleocene sedimentary rocks and Alluvium, unconsolidated surficial deposit of silt, sand, and gravel.
- 10. The geology of the Project area is shown in **Figure 4-3**.
- 11. Peshawar is situated near the eastern end of the Khyber Pass and sits mainly on the Iranian plateau along with the rest of the Khyber-Pakhtunkhwa. The Vale of Peshawar is covered with consolidated deposits of silt, sands, and gravel of recent geological times. The areas between the Kabul River and Budni Nala consist of flood Plains/Zones.
- 12. The meander flood plain extends from Warsak in the Northwest towards Southeast in the upper Northern half of the district.
- 13. The mountainous terrain of Khyber has small basins and valleys, with scattered settlements and agricultural fields. This is the geological region of Pre-Aravalli, metamorphic in general including Precambrian and younger intrusions. The massive grey limestone with sand and clay beds that makes up the Carboniferous Khyber Formation and the slate, phyllites, and schists with minor limestone and quartzite beds of the Ordovician-Silurian Landi Kotal Formation

in the eastern part of the Khyber Agency. Mesozoic sediments occur in the western part of the Khyber Agency.

- 14. According to the agro-ecological zoning of Pakistan, the district of Peshawar is the Northern Irrigated Plain (Zone IV b) while the Khyber district lies in the semi-arid piedmonts and western mountains. The sub-soil strata are composed of gravel, boulders, and sand. The topsoil is silty clay and clay loam.
- 15. The soil of Khyber Agency is mainly from the local weathering of bedrock, deposited by streams and rivers. Level areas are loamy, while lowlands are slightly strongly calcareous. The soil of low permeability strata consists of silt, clay, and rarely fine sand. While the soil of high permeability strata is generally composed of sand and gravel from a depth of 30 m to 150 m. The content of organic matter and available phosphorus is very low. The slate, limestone, and gravel are suitable for construction material and are available in the area, although their extraction entails high risks of landslides.
- 16. The agriculture in the area is not very developed. The western region faces water scarcity issues; generally, the hills are barren except the few productive patches of agricultural land found along the tributaries. The main crops are sugar cane, maize, tobacco, wheat, sugar beet and fruit orchards. The fruits produced in the districts include citrus, pear, peach, apricot, persimmon, strawberry, plum, and watermelon. Small quantities of vegetables like potato, turnip, tomato, peas, okra, and beans area also cultivated by farmers.

### 4.2.2 Land Use

- 17. The land use of the ETL AoI comprises majorly of agricultural land (36%), barren land (24.1%), hills/mountains (19.3%) and built-up area (14.3%). The remaining land consists of scrub forest (3.1%) and roads (2.1%).
- 18. Land use in the AoI is summarized in **Table 4-1** and shown in **Figure 4-4**.

Table 4-1: Land Use in the Aol

Land use Area	Agricultural Land	Barren Land	Hills/ Mountains	Built- up Area	Water Body	Scrub Forest	Sealed Road	Grave yard
%	36.0	24.1	19.3	14.3	1.0	3.1	2.1	0.1
Area, km² 141.0	50.7	34.0	27.2	20.2	1.4	4.4	3	0.1

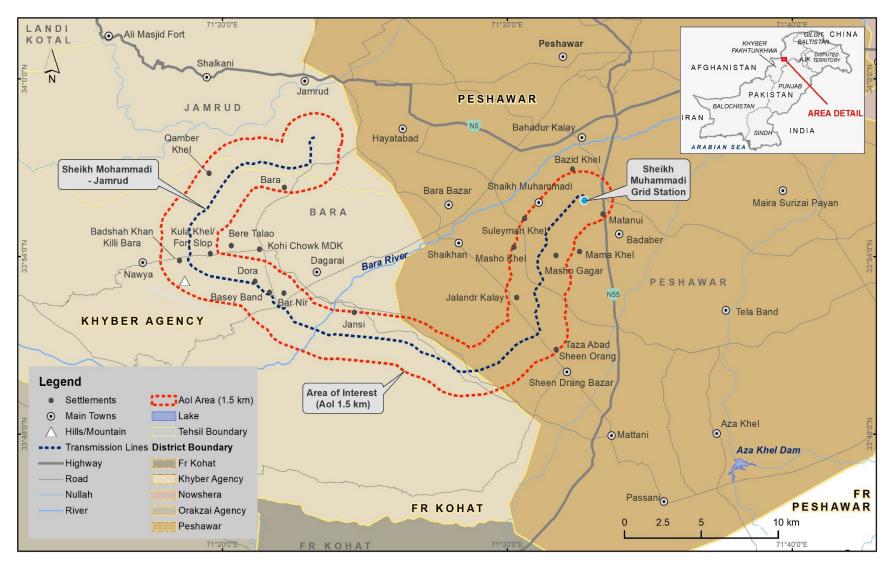


Figure 4-1: Project Area of Influence

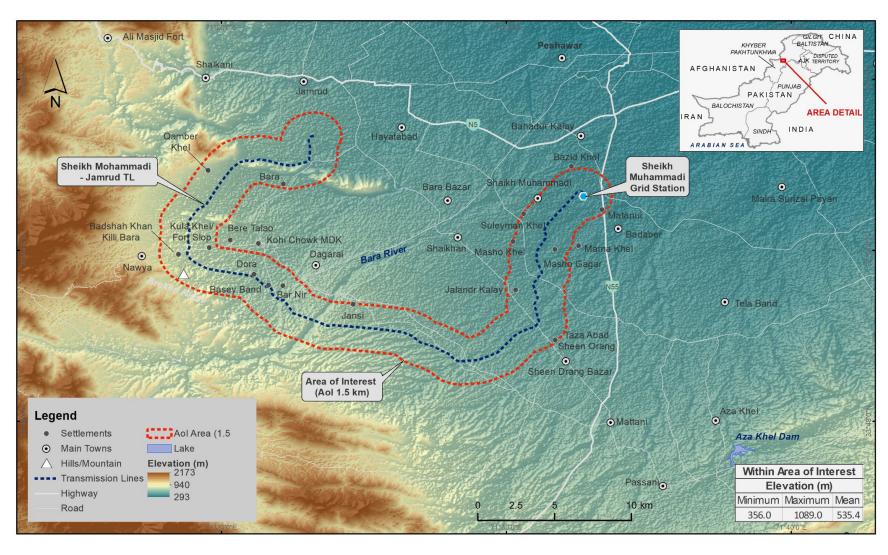


Figure 4-2: Topography

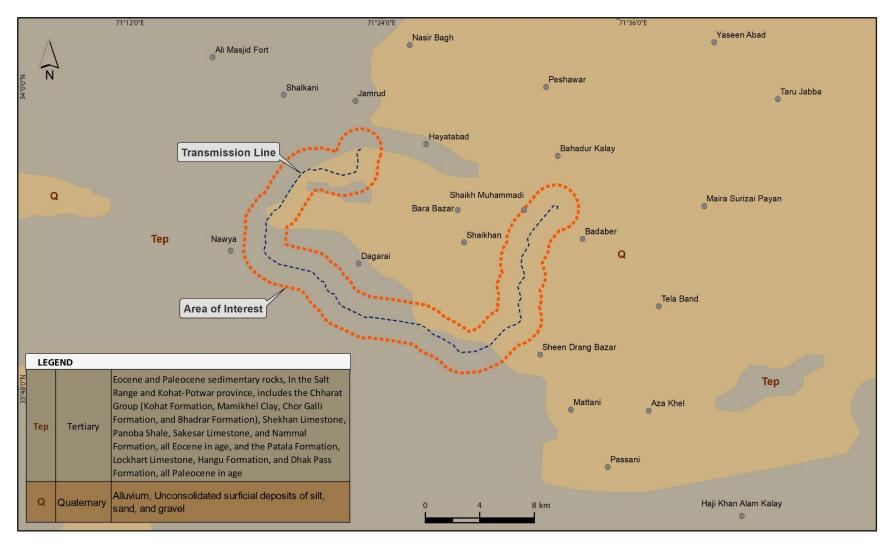


Figure 4-3: Geology of the Subproject Area

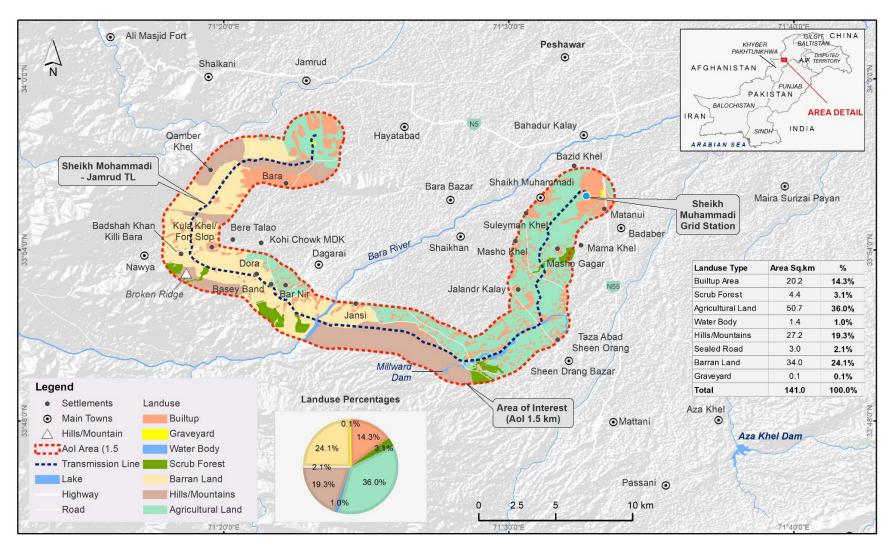


Figure 4-4: Land Use in Aol

# 4.2.3 Seismicity

- 19. In 2007, Pakistan Building Code (PBC) revised the seismic zone categorization to 5 seismic zones based on peak ground acceleration<sup>27</sup> as provided in **Table 4-2** and **Table 4-3** provides hazard significance.
- 20. According to this classification, The Project is located in Zone 2B or between 1.6 and 2.4 m/s<sup>2</sup>.

Table 4-2: Seismic Zone Categorization, PBC 2007

Seismic Zone	Peak Horizontal Ground Acceleration
1	0.05 to 0.08g
2A	0.08 to 0.16g
2B	0.16 to 0.24g
3	0.24 to 0.32g
4	> 0.32g

**Note:** g is the acceleration due to gravity, where  $g = 9.81 \text{ m/s}^2$ .

21. The Global Seismic Hazard Assessment Program (GSHAP)<sup>28</sup> launched in 1992, conducted a seismicity analysis in 1999. The Seismic Hazard Map of Pakistan is shown in **Figure 4-5**. Based on the GSHAP, <sup>29</sup> the peak ground acceleration (PGA), with 10% probability of exceedance in 50 years with a return period of 475 years, is between 1.6 and 2.4 m/s<sup>2</sup>.

Table 4-3: Seismic Zone Categorization, PBC 1986

Seismic Zone	Peak Horizontal Ground Acceleration
0	Negligible damage
1	Minor damage, distant earthquakes may cause damage to structures with fundamental periods greater than 1.0 seconds, corresponds to intensity V and VI of the M.M. scale
2	Moderate damage, corresponds to intensity VII of the M.M. scale
3	Major damage, corresponds to intensity VII and higher of the M.M. scale


22. According to these classifications, the Project is in Zone 2B in PBC 2007 classification which is for moderate risk zone.

48

<sup>&</sup>lt;sup>27</sup> Peak ground acceleration is equal to the maximum ground acceleration that occurred during earthquake shaking at a location. PGA is equal to the amplitude of the largest absolute acceleration recorded on an accelerogram at a site during an earthquake. Its units are g = 9.8 m/s<sup>2</sup>

<sup>&</sup>lt;sup>28</sup>www.ndma.gov.pk/sep/researchpapers/r2.pdf (accessed 3 January 2017).

<sup>&</sup>lt;sup>29</sup>Giardini, D., Grünthal, G., Shedlock, K. M. and Zhang, P. The GSHAP Global Seismic Hazard Map. Annali di Geofisica 42 (6), 1225-1228, 1999.

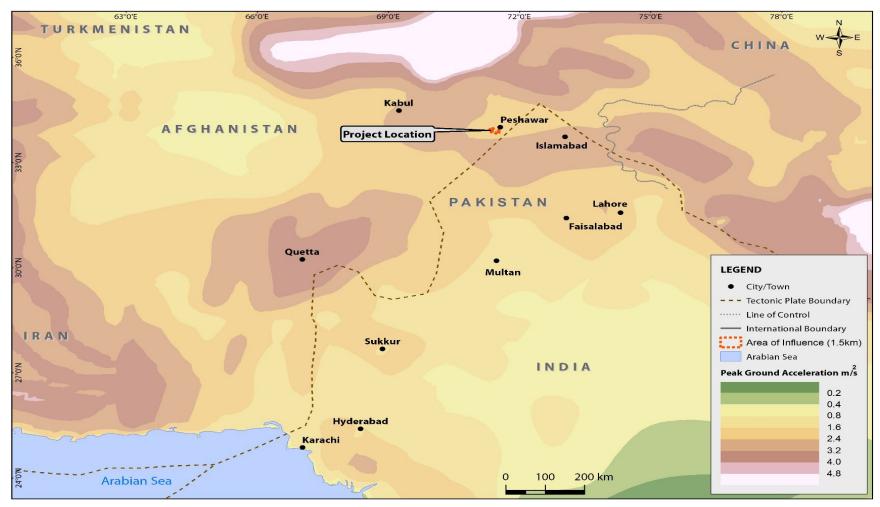

**Source:** Adapted from Giardini, D., Grünthal, G., Shedlock, K. M. and Zhang, P. *The GSHAP Global Seismic Hazard Map*. Annali di Geofisica 42 (6), 1225-1228, 1999.

Figure 4-5: Seismic Hazard Map

#### 4.2.4 Climate

- 23. Overall, the climate of Project area is semi-arid, consisting of a very hot summer from the months of May to September and a cold winter from November to March. Although, the climate in the districts varies with elevation. The hilly areas are cold in winter and cool in summer, and a temperature markedly rises towards South.
  - Summer: The duration of this season is from May- September. Summers are very hot with maximum mean temperatures of over 40 degrees Celsius with a minimum temperature of 25 °C.
  - Winter: Winter season in Peshawar starts from mid-November to the mid of March. The mean minimum temperature during winter is 4 °C and maximum is 18.35 °C. In winters temperatures drops below 0 °C also and recorded as low as -3.9 °C in 1970.
  - Spring: The most pleasant season is spring which the starts in March where the spring sets in and the flowers start blooming.
  - Precipitation: The Project area receives rainfall in both winter and summer season. The influence of the monsoon rainfall and western disruptions increase the humidity and cause rainfall.
- 24. There is a weather station installed in Peshawar City by the Pakistan Meteorological Department (PMD). The data from this station has been considered for explaining climate of the Project area.
- 25. Historical meteorological data over the period of 31 years (1985 2016), shows that the month of May, June, July, and August are the hottest months of the year. While, the months of December, January and February are the coldest with temperatures recorded as low as 4.4 °C.
- 26. A summary of historical data i.e., the average month maximum and minimum data for Peshawar is shown in **Table 4-4**.

Table 4-4: Project Area Temperature Data

Average data of 1985-2016

Month	Peshawar						
	Max Temp(°C)	Min Temp (°C)					
January	4.46	18.51					
February	7.26	20.2					
March	11.99	24.54					
April	16.9	30.62					
May	22.09	36.77					
June	25.64	39.61					
July	26.69	37.54					
August	25.88	35.99					
September	23.15	34.93					
October	16.67	30.92					
November	10.15	25.56					
December	5.62	20.73					

27. The area receives rainfall both in winter and summer. **Figure 4-6** shows 50 years rainfall data from 1967-2017.<sup>30</sup> The past data shows that the average annual rainfall is around 420 mm.

-

<sup>&</sup>lt;sup>30</sup> Pakistan Meteorological Department (PMD).

The highest annual rainfall was recorded in the year 2003, which saw 904.5 mm of precipitation. The lowest rainfall of 200 mm took place in 1972. Similarly, 236 mm was the highest monthly winter rainfall recorded in 2007 while the highest monthly summer rainfall was recorded in the 2010, which was 402 mm.

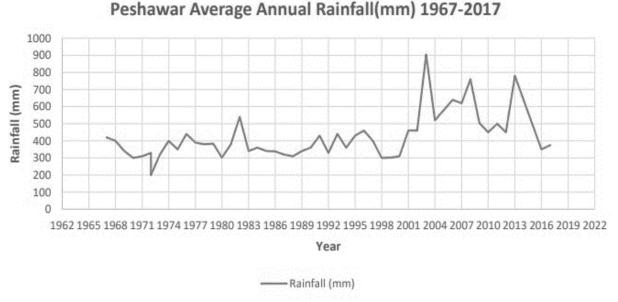


Figure 4-6: Historic Rainfall Pattern of the Area

- 28. **Table 4-5** shows the monthly mean rainfall for Peshawar based on 31 years (January 1985 to December 2016) data. Precipitation is high during February, March, April, July, and August. Occasional heavy showers can take place during other months. June, October, and November are the driest months. According to the metrological records, winter rains especially in March are brought by westerly winds, while the summer rains are associated with the monsoon<sup>31</sup>'
- 29. The recent meteorological data from the year (Aug 2021- July 2022) for Peshawar are shown in **Table 4-6**.
- 30. Recent record shows that the area received about 68 mm of rainfall in the month of July 2022 which is the highest records rainfalls compared to the past months.

-

<sup>&</sup>lt;sup>31</sup> Ali, A., Khan, T. A., & Ahmad, S. (2018). Analysis of climate data of Khyber Pakhtunkhwa, Pakistan. *International Research Journal of Engineering and Technology*, *5*(5), 4266-4282.

# 31. Table 4-5: Monthly Mean Rainfall in Project Area

Month	Mean Rainfall (mm)
January	29.55
February	56.6
March	69.27
April	53.38
May	26.07
June	16.17
July	51.6
August	52.37
September	23.81
October	11.22
November	10.44
December	22.02

**Table 4-6: Current Year Meteorological Data** 

Average Data of Aug 2021-July 2022

Mauth	Peshawar								
Month	Avg Temp(°C)	Max Temp(°C)	Min Temp(°C)	Rainfall (mm)					
July-2022	30.6	35.1	25.9	68					
June-2022	31.8	40.3	23.4	3					
May-2022	30.4	38.8	22	11					
April-2022	28.2	37.5	18.8	2					
March-2022	22.9	31	14.3	3					
February-2022	14	21.4	6.4	7					
January-2022	10.6	16.9	4.2	9					
December-2021	11.3	21	3.2	0					
November-2021	16.2	26.2	7.7	0					
October-2021	24	32.4	16.5	3					
September-2021	30.4	36.5	24.9	3					
August-2021	31.3	37.3	25.7	6					

### 4.2.5 Water Resources

- 32. The main source of drinking water in the Project area is groundwater which is extracted through pumping. The area is underlain by a thick sequence of the alluvial sediments of Pleistocene age which provide suitable conditions for the existence and development of a good aquifer system. The flow direction is from southwest to the northeastern side and drains to the Kabul River, which flows along the eastern edges of the Peshawar. The groundwater, which is called Peshawar Aquifer, prevails over an area of 6,270 km<sup>2</sup>. 32
- 33. The groundwater was investigated in 1968 when the re-regulating (regulating the flow rate) of the Warsak reservoir was started. The investigation was carried out on the right bank of the Kabul River by WAPDA and indicated that two aquifers exist in the area. The upper aquifer is the unconfined water table aquifer with a depth of 61 m while the bottom aquifer is a semi-confined aquifer having a thickness of 120 m. Permeability of the lower aquifer is 10 times lower than the

<sup>&</sup>lt;sup>32</sup> Kruseman, G. P., & Naqavi, S. A. H. (1988). Hydrogeology and groundwater resources of the North-West Frontier Province Pakistan. WAPDA Hydrogeology Directorate, Peshawar.

shallow upper unconfined layer.<sup>33,34</sup> The recharge to the groundwater takes place from infiltration of rainfall from the surrounding mountains and the seepage taking place from irrigation practices.

- 34. The surface water of the Peshawar District comes from the Kabul River, Bara River and the streams draining from mountain sides. The main source of water supply for the irrigation purpose is the Kabul River, which enters Peshawar District boundary from near the north edge and moves across the area in a south easterly direction. It splits into two tributaries and join up again further downstream in the eastern part of the Peshawar district. <sup>35</sup>
- 35. The Bara River originates from the Tira Valley and enters the Peshawar District from the southern boundary, moving across the district to join the Kabul River at on the eastern side of the region near Nowshera district. There are a series of ephemeral streams originating in the mountains in the western and southern part of the district, which eventually drain towards the eastern side and finally to the Kabul River. The agricultural land of the Peshawar District, which constitutes around 62% of the total land area is irrigated by five canals, which take water from the Kabul River. These canals are the Kabul River canal, Hazar Khani canal, Warsak Gravity Lift canal, and Joe Sheikh canal. **Table 4-7** shows details of the main canal system in the region.

53

<sup>&</sup>lt;sup>33</sup> Ahmad, Manzoor, et al. "The geology of the Warsak area, Peshawar, west Pakistan." Geol. Bull. Univ. Peshawar 4 (1969): 44-78

<sup>&</sup>lt;sup>34</sup> Butt, J. A., Inaam-Ur-Rahim Akhunzada, and J. Khan. "A limnological study of Warsak Dam water." (1986).

<sup>35</sup> Nasir Ali (2018) Groundwater Assessment of the Peshawar District and its Potential for Future Demand.

**Table 4-7: Specifications of Canal System** 

Canal System	Length (kilometers)	Discharge (Cusec)	Canal Command Area (acres
Kabul River Canal System	121.3	800	72,000
Warsak Canal System	198.4	595	107,414

# 4.2.6 Water Quality

- 36. The water quality was defined based on primary data collected during the current survey.
- 37. In order to establish the baseline water quality conditions, four water samples were collected from Project AoI between 13<sup>th</sup> September to 16<sup>th</sup> September 2022.
- 38. The samples were selected based on the land use of the AoI and sensitive receptors i.e., near settlement and agricultural area (W-3 and W-4) and,
- 39. The land use where the grid station be located and surrounded by sparsely populated residential area and agricultural lands (W-1 and W-4).

# Sampling and Methodology

- 40. **Table 4-8** provides information on sampling points and containers collected and the rationale for selection.
- 41. **Photo 4-1** provides photographs during the sample collection.
- 42. The sampling locations are shown in **Figure 4-7**.

**Table 4-8: Description of Water Quality Sampling Location** 

Sample ID	Coordinates	Sample Taken	Locati on	Rationale of Selection
W1	33°58'14.14"N 71°23'9.13" E	Tube well (Groundwater)	Jamrud	This is the location where the Jamrud Grid Station will be installed. The site is surrounded mostly by barren area and few settlements.
W2	33°52'19.92" N 71°21'50.90" E	Tap Water (Groundwater)	Jamrud	This point is near RoW and is close to sensitive environmental Receptors i.e. agricultural lands and residential area.
W3	33°52'54.18" N 71°29'50.60" E	Tube well (Groundwater)	Jalandr Kalay	This point is near RoW and is close to sensitive environmental Receptors i.e. agricultural lands and residential area.
W4	33°55'53.36" N 71°32'20.56" E	Tap Water (Groundwater)	Sheikh Muham madi	This point is located near Sheikh Muhammadi Grid Station which is surrounded by agriculture and residential area.

# Results and Analysis

- 43. The results of the groundwater quality sampling are summarized in **Table 4-9**. The complete results are given in **Annexure III.**
- 44. From the measured values the following conclusions can be drawn:
  - At all sampling points, all the water quality parameters were found within the World Health Organization (WHO) Standards for drinking water and the NEQS drinking water limits.
  - Only one parameter i.e., Antimony has higher values than the set limits of NEQS and WHO drinking water standards at all locations.
  - The Khyber Pakhtunkhwa region is reach in mineral resources and there are deposits of antimony in the region, this can be a reason of high levels of antimony in the groundwater.<sup>36</sup> Another source of antimony in drinking-water appears to be dissolution from metal plumbing and fittings.



Water Sample(W-1) – September 2022



Water Sample (W-2) - September 2022



Water Sample (W-3) - September 2022



Water Sample (W-4) - September 2022

**Photo 4-1: Water Quality Sampling Photographs** 

<sup>&</sup>lt;sup>36</sup> Malkani, Muhammad Sadiq, et al. "Mineral Deposits of Khyber Pakhtunkhwa and FATA, Pakistan." Lasbela University Journal of Science and Technology 6 (2017): 23-46.

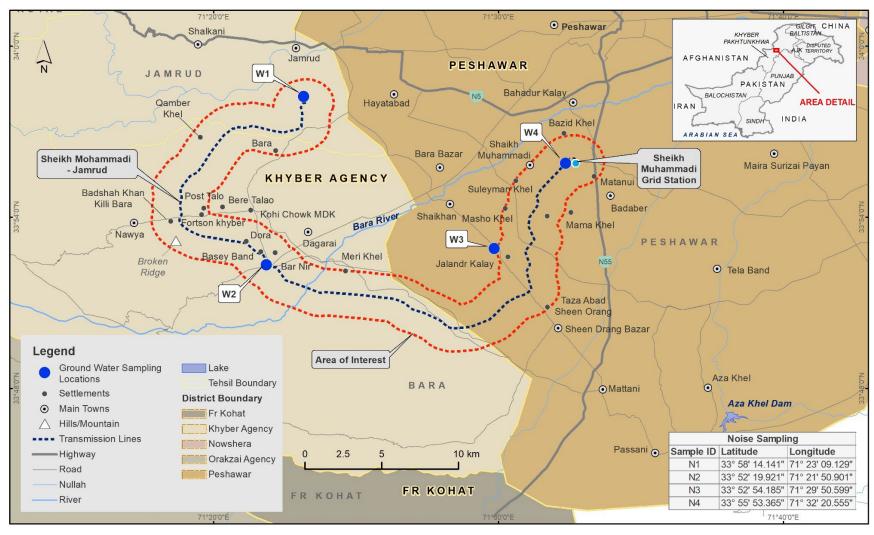


Figure 4-7: Water Quality Sampling Locations

**Table 4-9: Water Quality Sampling Results** 

Parameter	Analysis Method	Units	NEQS for Drinking Water	WHO Guideline Drinking Water	W-1	W-2	W-3	W-4
Color	SMWW 2120 C	TCU	≤ 15	<15	0	0	0	0
Taste	SMWW 2160 C		Non- Objectionab le	-	Non Objectionab le	Non Objectionab le	Non Objectionab le	Non Objectionab le
Odor	SMWW 2150 B		Non- Objectionab le	-	Non Objectionab le	Non Objectionab le	Non Objectionab le	Non Objectionab Ie
Turbidity	SMWW 2130 B	NTU	< 5	< 5	0	0	0	0
Total Hardness (as CaCO3)	SMWW 2340 C	mg/l	< 500	< 500	240	260	240	408
Total Dissolved Solids (TDS)	SMWW 2540 C	mg/l	< 1000	< 1000	279	308	284	541
рН	SMWW 4500 H+ B		6.5- 8.5	6.5 – 8.5	7.64	7.69	7.54	7.42
Aluminum (Al)	SMWW 3111 B	mg/l	0.2	-	0.006	0.006	0.007	0.007
Antimony (Sb)	SMWW 3114 B	mg/l	≤ 0.005	-	0.006	0.007	0.007	0.007
Arsenic (As)	SMWW 3114 B	mg/l	≤0.05	0.01	<0.005	<0.005	<0.005	<0.005
Barium (Ba)	SMWW 3113 B	mg/l	0.7	0.7	0.0035	0.0035	0.0036	0.0035
Boron (B)	SMWW 3113 B	mg/l	0.3	0.3	<0.02	<0.02	<0.02	<0.02
Cadmium (Cd)	SMWW 3113 B	mg/l	0.01	0.03	<0.006	<0.006	<0.006	<0.006
Chloride (CI-)	SMWW 4500 CI- B	mg/l	≤ 250	250	14	14	16	32
Chromium (Cr)	SMWW 3113 B	mg/l	≤ 0.05	0.05	<0.004	<0.004	<0.004	<0.004
Copper (Cu)	SMWW 3111 B	mg/l	2	2	<0.164	<0.164	<0.164	<0.164
Cyanide (CN-)	SMWW 4500 CN- F	mg/l	≤ 0.05		0	0	0	0

Parameter	Analysis Method	Units	NEQS for Drinking Water	WHO Guideline Drinking Water	W-1	W-2	W-3	W-4
Fluoride (F-)	SMWW 4500 F- D	mg/l	≤ 1.5	1.5	0.33	0.15	0.2	0.21
Lead (Pb)	SMWW 3114 B	mg/l	≤ 0.05	0.01	<0.005	<0.005	<0.005	<0.005
Manganese (Mn)	SMWW 3113 B	mg/l	≤ 0.5	0.5	<0.015	<0.015	<0.015	<0.015
Mercury (Hg)	SMWW 3114 B	mg/l	≤ 0.001	0.001	<0.001	<0.001	<0.001	<0.001
Nickel (Ni)	SMWW 3113 B	mg/l	≤0.02	0.02	<0.02	<0.02	<0.02	<0.02
Nitrate (NO <sub>3</sub> -)	SMWW 4500 NO3- B	mg/l	≤50	50	1.03	1.81	1.41	2.34
Nitrite (NO <sub>2</sub> -)	SMWW 4500 NO2- B	mg/l	≤3	3	0.001	0.008	0	0
Selenium (Se)	SMWW 3114 B	mg/l	≤ 0.01	0.01	<0.01	<0.01	<0.01	<0.01
Residual Chlorine (Cl <sub>2</sub> )	SMWW 4500 CI- B	mg/l	0.2 – 0.5	0.2 - 0.5	0	0	0	0
Phenolic Compounds (as Phenols)	SMWW 5530 D	mg/l		-	0	0	0	0
Zinc (Zn)	SMWW 3113 B	mg/l	5	5	0.054	0.053	0.054	0.052
Microbiological Analysis								
Total Coliforms	SMWW 9222 B	mL CFU	0/ 100	-	0	0	0	0
Fecal Coliforms	SMWW 9222 D	mL CFU	0/ 100	-	0	0	0	0

<sup>&</sup>quot;-"means not available/ not applicable

NQES = National Environmental Quality Standards

# 4.2.7 Air Quality

- 45. The pollutants selected for evaluation, based on the expected emissions from the Project activities and the level of risk to human health posed by these pollutants, are as follows:
  - Respirable particulate matter—Coarse (PM<sub>10</sub>)<sup>37</sup>, Fine (PM<sub>2.5</sub>)<sup>38</sup> and Particulate Matter (PM Total)
  - Sulfur dioxide (SO<sub>2</sub>)
  - Oxides of Nitrogen (NOX)—Mainly Nitrogen dioxide (NO<sub>2</sub>) and Nitric oxide (NO)
  - Carbon Monoxide (CO)

# Methodology and Sampling Locations

- Air quality sampling was carried out for 24 hours at each location and total three locations in the AoI between 26 August and 1 September 2022.
- 47. The samples were selected based on the land use of the AoI and sensitive receptors i.e., near a settlement in a densely populated area (A-3 and A-4) and near a sparsely populated settlement area surrounded by agricultural lands (A-5).
- 48. A description of sampling locations and the rationale of selection is given in **Table 4-10**.

Table 4-10: Details of Air Quality Sampling Locations

Sample ID	Coordinates	Location	Pollutants Sampled	The rationale for Site Selection
A1	33°58'14.14" N 71°23'9.13" E	Jamrud	CO, SO <sub>2</sub> , NO <sub>2</sub> , and NO $PM_{10}$ , $PM_{2.5}$ and $PM$ Total	This is the location where the Jamrud Grid Station will be installed. The site is surrounded mostly by barren area and few settlements.
A2	33°52'19.92" N 71°21'50.90" E	Jamrud	$CO$ , $SO_2$ , $NO_2$ , and $NO$ $PM_{10}$ , $PM_{2.5}$ and $PM$ Total	This point is near RoW and is close to sensitive environmental Receptors i.e. agricultural lands and residential area.
A3	33°52'54.18" N 71°29'50.60" E	Jalandr Kalay	CO, SO <sub>2</sub> , NO <sub>2</sub> , and NO PM <sub>10</sub> , PM <sub>2.5</sub> and PM Total	This point is near RoW and is close to sensitive environmental Receptors i.e. agricultural lands and residential area.
A4	33°55'53.36" N 71°32'20.56" E	Sheikh Muhamm adi	CO, SO <sub>2</sub> , NO <sub>2</sub> , and NO PM <sub>10</sub> , PM <sub>2.5</sub> and PM Total	This point is located near Sheikh Muhammadi Grid Station which is surrounded by agriculture and residential area.

49. Particulate matter was sampled using MP101M (Automatic particulate Analyzer) Portable Air Sampler. This instrument has high accuracy and not influenced by the physicochemical nature. color, or shape of particles. Sampling flowrate continuously regulated to the atmospheric temperature and pressure, reduces evaporation artifacts of volatile compounds (mandatory for PM<sub>2.5</sub> according to EU regulations). The instrument has a regulated sampling tube (RST) compliant with CEN PM10 and US-EPA standards.

59

<sup>&</sup>lt;sup>37</sup>PM<sub>10</sub> is particulate matter 10 micrometers or less in diameter

<sup>&</sup>lt;sup>38</sup>PM<sub>2.5</sub> is particulate matter 2.5 micrometers or less in diameter

- 50. CO was measured using CO12e (Carbon Monoxide Analyzer). The CO12e is a continuous carbon monoxide analyzer with a detection limit of 0.035 ppm. Its measurement principle is based on carbon monoxide detection by absorption of infrared light.
- 51. NO and NO<sub>2</sub> were measured using AC32e (Nitrogen Oxide Analyzer) which has embedded Communication Protocol for XR® Management Software with automatic recognition and configuration.
- 52. SO<sub>2</sub> was measured AF22e (Sulfur Dioxide Analyzer). The AF22e is a continuous ambient air-quality monitoring analyzer (CAMs), based on the ultraviolet fluorescence principle, which is the standard method for the measurement of SO<sub>2</sub> concentration (EN 14212).
- 53. The sampling location are shown in **Figure 4-8**. The method, duration of sampling and laboratory for analysis is summarized in **Table 4-11**. Photographs of the air quality testing equipment are given in **Photo 4-2**.

Table 4-11: Methodology and Duration of Sampling

Parameter	Equipment	Date and Duration of Sampling	Laboratory for Analysis			
СО	CO12e Carbon Monoxide Analyzer	6 <sup>th</sup> September and 10 <sup>th</sup> September 2022 24 hours each location	Asian Environmental Services, Lahore			
NO and NO <sub>2</sub>	AC32e Nitrogen Oxide Analyzer	6 <sup>th</sup> September and 10 <sup>th</sup> September 2022 24 hours each location	Asian Environmental Services, Lahore			
SO <sub>2</sub>	AF22e Sulfur Dioxide Analyzer	6 <sup>th</sup> September and 10 <sup>th</sup> September 2022 24 hours each location	Asian Environmental Services, Lahore			
PM <sub>10</sub> , PM <sub>2.5</sub> and PM Total		6 <sup>th</sup> September and 10 <sup>th</sup> September 2022 24 hours each location	Asian Environmental Services, Lahore			

Note: Hourly reading was taken from the arithmetic mean of 12 readings recorded by the monitoring instrument with five-minute interval. For 24 Hours Value, athematic means of hourly average is considered to depict conditions of each hour.

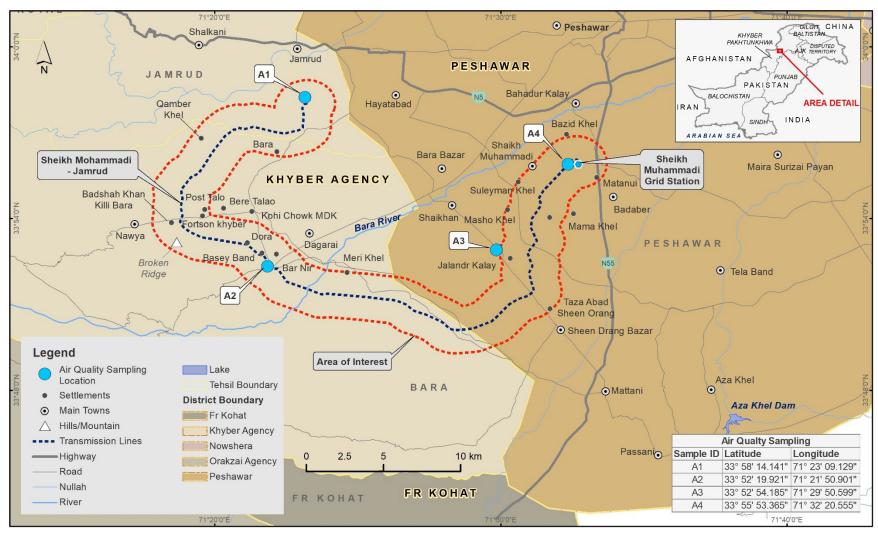


Figure 4-8: Air Quality Sampling Locations



Ambient Air Quality Equipment (September 2022)



Ambient Air Quality monitoring at A-2 (September 2022)



Ambient Air Quality Monitoring at A-3 (September 2022)



Ambient Air Quality Monitoring at A-4 (September 2022)

Photo 4-2: Ambient Air Quality Sampling Site Photographs

A-1

### Ambient Air Quality Results

- 54. The sampling results are provided in **Table 4-12** and the complete results are given in **Annexure III.**
- 55. From the measure values following key findings can be drawn:
  - At all sampling locations, NO and NO<sub>2</sub> were found within NEQS.
  - At all locations, NO and NO2 were also found within WHO AGQs.
  - At all sampling locations, Sulfur Dioxide (SO2) measured values were found within NEQS guidelines and WHO AGQ Level.
  - At all sampling locations, Particulate Matter (PM10) measured values were found within NEQS.
     However, all locations had the measured values of PM10 higher than the WHO AGQ levels.
  - At all sampling locations, Particulate Matter (PM2.5) measured values were found within NEQS. However, all the locations had higher values than the WHO AGS level.
- 56. The higher value of the parameters is impacted by dust from non-metaled roads and traffic can cause a higher quantity of air dust particles. Agricultural activities and combustion of fossil fuel, gasoline and wood are also contributing factors toward high particulate matter (both  $PM_{10}$  and  $PM_{2.5}$ ) in ambient air.

Table 4-12: Results of Ambient Air Quality Sampling

(µg/m³) unless otherwise specified

(pg/iii)						J difficas offici wise specified			
Parameter	Monitoring Duration	LDL	Parameter	NEQS	WHO AGQ Level	A-1	A-2	A-3	A-4
Nitrogen Dioxide	24Hours	1	NO <sub>2</sub>	80	25	24.45	24.08	24.85	24.15
Nitrogen Oxide	24Hours	1	NO	40	25	14.62	14.76	15.35	15.45
Nitrogen Oxides	24Hours	1	NO <sub>x</sub>	120	-	39.03	38.80	40.15	39.55
Sulphur Dioxide	24Hours	1	SO <sub>2</sub>	120	40	22.02	24.42	20.73	22.17
Carbon Monoxide	8-hours	0.01	СО	5	4	0.89	0.95	0.88	0.87
Particulate Matter	24Hours	1	PM <sub>10</sub>	150	45	120.55	114.2	116.41	121.5
Particulate Matter	24Hours	1	PM <sub>2.5</sub>	35	15	32.19	33.65	33.15	32.1
Total Particulate Matter	24Hours	1	TSP	500	-	188.34	176.81	171.44	168.43

Note: '- ' means information is not available or not applicable.

NEQS = National Environmental Quality Standards

#### 4.2.8 Noise

- 57. This section defines the baseline ambient noise levels in the AoI in a manner that can be used for the assessment of the noise impact of the proposed Project. Noise levels were measured at three selected locations considered representative of the nearby receptors of possible noise disturbance from the Project.
- 58. The following is a brief description of the terminology used in this assessment:
  - Sound: A vibratory disturbance created by a vibrating object, which, when transmitted by pressure waves through a medium such as air, is capable of being detected by a receiving mechanism, such as the human ear or a microphone
  - Noise: Sound that is loud, unpleasant, unexpected, or otherwise undesirable
  - Decibel (dB): A unitless measure of sound on a logarithmic scale, which indicates the squared ratio of sound pressure amplitude to a reference sound pressure amplitude. The reference pressure is 20 micro-pascals
  - A-Weighted Decibel (dB A): An overall frequency-weighted sound level in decibels, which
    approximates the frequency response of the human ear. The typical human ear is not equally
    sensitive to all frequencies of the audible sound spectrum. Therefore, when assessing potential
    noise impacts on people, an electronic filter is used that de-emphasizes certain frequencies in
    a manner corresponding to the human ear's decreased sensitivity to low and extremely high
    frequencies. All the noise levels reported in this Section are A-weighted
  - Equivalent Sound Level (Leq): The equivalent steady-state sound or vibration level, which is a stated period, typically one hour, would contain the same acoustical or vibration energy.

# Sampling Methodology

- 59. Noise measurements were taken at four locations listed in **Table 4-13**. Noise readings were taken for 24 hours at the sampling sites.
- 60. The sampling points were selected based on the land use of AoI and sensitive receptor i.e., near populated settlement area.
- 61. The noise levels were measured using portable BSWA308 (Type 1 Sound Level Meter). The BSWA308 has a dynamic range of 102 dB and always measure noise from 29 dBA to 131 dBA in a single range. It can measure three parameters simultaneously with the A, C, and Z frequency weightings and with F, S, and I time weightings. Besides, the equivalent continuous sound pressure level, maximum and minimum values are calculated. The BSWA308 is ideal sound level sound for general purposes of noise measurements where the Class 1 accuracy is required.
- 62. The meter was calibrated at the start of measurement at each site, using CA111 Sound Calibrator. The calibrator can be used on 1/2-inch and 1/4-inch microphones with an adapter. It conforms to IEC 60942:2003 Class 1, ANSI S1.40-1984 and GB/T 15173-1994. Calibration of measurement microphones, sound level meters and other sound measurement equipment.
- 63. The instrument was mounted on a tripod, to avoid interference from reflecting surfaces within the immediate neighborhood, and a windshield was used in all measurements.
- 64. The noise levels measurement locations map is provided in **Figure 4-9**.

**Table 4-13: Noise Sampling Locations** 

Sample ID	Coordinates	Location	Date and Duration	The rationale for Site Selection
N1	33°58'14.14" N 71°23'9.13" E	Jamrud		This is the location where the Jamrud Grid Station will be installed. The site is surrounded mostly by barren area and few settlements.
N2	33°52'19.92" N 71°21'50.90" E	Jamrud	7 <sup>th</sup> September - 8 <sup>th</sup> September, 2022	This point is near RoW and is close to sensitive environmental Receptors i.e. agricultural lands and residential area.
N3	33°52'54.18" N 71°29'50.60" E	Jalandr Kalay	6 <sup>th</sup> September - 7 <sup>th</sup> September, 2022	This point is near RoW and is close to sensitive environmental Receptors i.e. agricultural lands and residential area.
N4	33°55'53.36" N 71°32'20.56" E	Sheikh Muhammadi		This point is located near Sheikh Muhammadi Grid Station which is surrounded by agriculture and residential area.


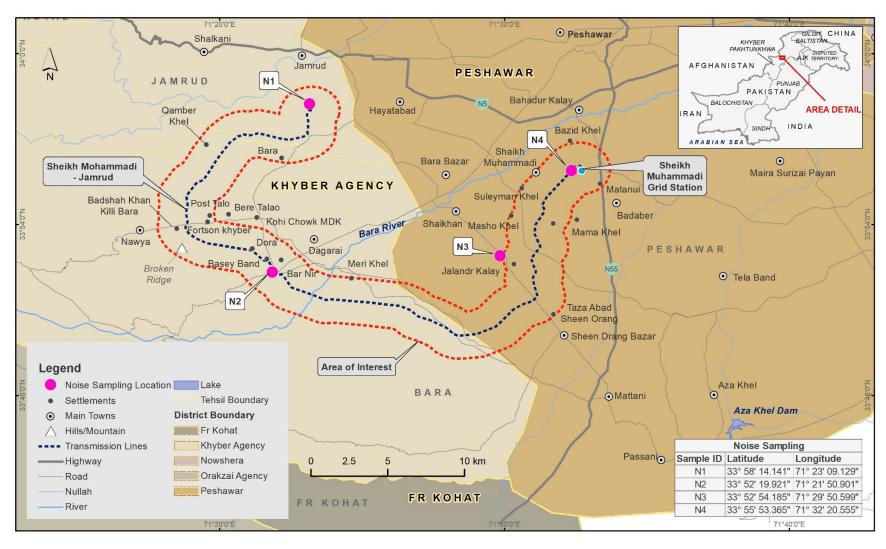


Figure 4-9: Noise Sampling Locations

Noise	Measurement Results and Analysis
65.	A summary of results is provided inNEQS = National Environmental Quality Standards

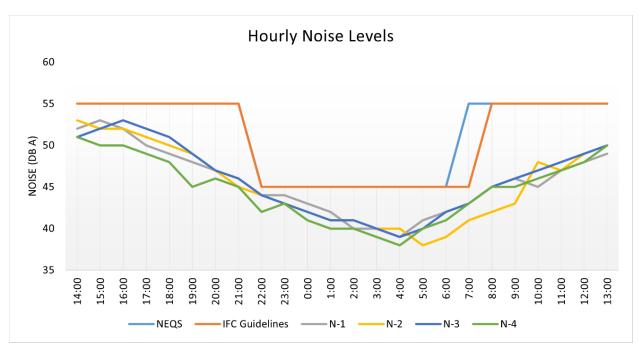

- 66. **Figure 4-10** with an hourly Leq values in **Table 4-15** provides graphical presentation of hourly Leq data with NEQS and IFC guidelines. The complete data provided by the testing team are presented in **Annexure III.**
- 67. From the measured values the following conclusions can be drawn:
  - The measured noise levels at all sampling points (N-1, N-2, N-3, and N-4)) are within the NEQS for both daytime and nighttime readings.
  - Measures noise levels at all sampling locations were also, within IFC guideline values for both, daytime, and nighttime.
  - Overall, daytime noise values are measured higher compared to nighttime values. This may be due to anthropogenic sources such as traffic and other human activities.

**Table 4-14: Noise Measurement Levels** 

Average Values for Nighttime and Daytime, Leq, dB A

Measurement Point/ Reference Values	Daytime	Nighttime
N-1	48	41.7
N-2	47.9	40.9
N-3	48.6	41.3
N-4	47.2	40.4
NEQS	55	45
IFC Guideline Values	55	45

NEQS = National Environmental Quality Standards

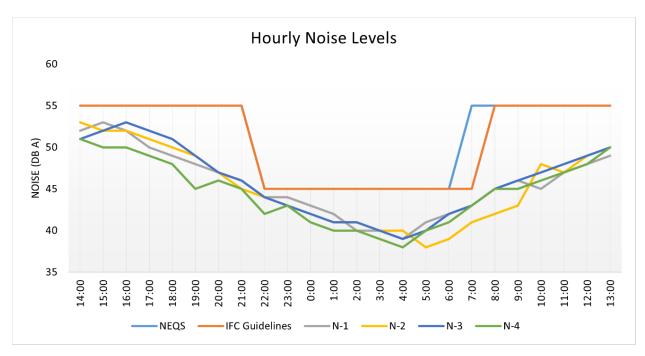


Figure 4-10: Hourly Noise Measurement Values and Standards

**Table 4-15: Hourly Noise Measurement Values** 

Leq, dB A

Time (Income)	NEQS	IFC Guidelines		Sound L	eq (dB A	
Time (hours)	(dB A)	(dB A)	N-1	N-2	N-3	N-4
14:00	55	55	52	53	51	51
15:00	55	55	53	52	52	50
16:00	55	55	52	52	53	50
17:00	55	55	50	51	52	49
18:00	55	55	49	50	51	48
19:00	55	55	48	49	49	45
20:00	55	55	47	47	47	46
21:00	55	55	46	45	46	45
22:00	45	45	44	44	44	42
23:00	45	45	44	43	43	43
0:00	45	45	43	42	42	41
1:00	45	45	42	41	41	40
2:00	45	45	40	41	41	40
3:00	45	45	40	40	40	39
4:00	45	45	39	40	39	38
5:00	45	45	41	38	40	40
6:00	45	45	42	39	42	41
7:00	55	45	43	41	43	43
8:00	55	55	45	42	45	45
9:00	55	55	46	43	46	45
10:00	55	55	45	48	47	46
11:00	55	55	47	47	48	47
12:00	55	55	48	49	49	48
13:00	55	55	49	50	50	50

Note: National Environmental Quality Standards (NEQS) daytime means from 06:00 hours to 22:00 hours and nighttime from 22:00 to 06:00 hours.

IFC daytime means from 07:00 to 22:00 hours and nighttime hours from 22 hours to 07:00 hours.
[a] for getting Leq<sup>39</sup> levels, anti-log [10^xx/10] of instantaneous level then log [10\*log10\*Average Energy Levels).

<sup>&</sup>lt;sup>39</sup> Leq is the equivalent continuous sound level and represents the total sound exposure for the period of interest or an energy average noise level for the period of interest.

# 4.2.9 Environmental Sensitive Receptors

- 68. Sensitive receptors are people/places more susceptible to the adverse effects of exposure to pollutants and social disturbance, due to the developmental projects. Thus, sensitive receptors are necessary to be identified, to evaluate the potential impacts of the proposed project on public health and the environment and adopt necessary mitigation measures to minimize the impact.
- 69. The sensitive receptors identified for the proposed project within AOI are residential areas; water bodies, and religious places (graveyards and mosques). They are prone to sensitivity during the construction phase, due to emission of air pollutants, noise and vibration, traffic jams/access, the temporary edifice of construction camps, and mobilization issues.
- 70. The sensitivity feature of receptor is divided into a three-scale score considering sensitivity and risk to the receptors. These include High, Medium, and Low risk. **Table 4-16** shows a description of the risk scale.
- 71. The sensitive receptor and environmental values in the AOI are mentioned in **Table 4-17** shown in **Figure 4-11**.
- 72. Detailed list of sensitive receptors (covering type, and orientation) is provided in **Annexure IV.**

**Table 4-16: Sensitivity Risk Scale** 

Risk Category	Description
High	Definite susceptible to a potential impact of project activity and the high priority of mitigation
Medium	Moderate susceptible to a potential impact of project activity and the mitigation of impact is required
Low	Unlikely (or low likelihood) impact, minor deterioration and/or short-term impact and/or small footprint

**Table 4-17: Sensitive Receptors and Environmental Values** 

Feature Category	Feature Sensitivity	Number of Features Found
Agricultural Land Area	Medium	2
Mosques	High	3
Settlements – Small (<15 houses)	High	1
Settlements – Small (<15 houses)	Medium	17
Farmhouse	Medium	2
Small Roads	Low	5
Medium Blacktop Roads	Medium	1
Water Bodies (Canal and Nullahs)	Medium	4

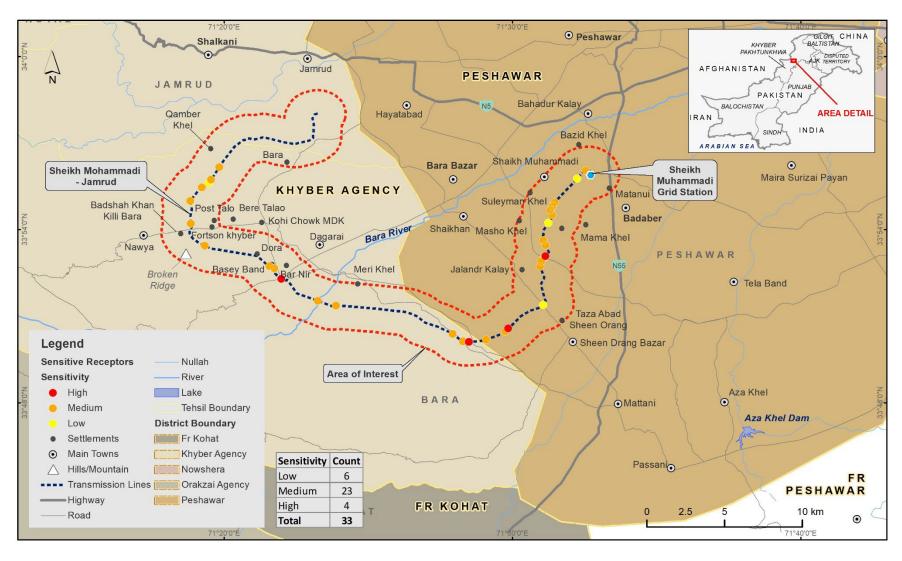


Figure 4-11: Sensitive Receptors in Area of Influence

### 4.3 Ecology

- 73. The ecology baseline has been prepared to provide an overview of the ecological conditions in the terrestrial Project area and surroundings.
- 74. Due to the proposed project, 250-300 trees of varying species and sizes, may be affected by the project.
- 75. Sources of information for preparation of this baseline included published literature, reports, scientific journals as well as information obtained from national and globally recognized sources such as the International Union for Conservation of Nature (IUCN), the Convention on International Trade in Endangered Species of Wild Fauna and Flora (CITES).
- 76. In addition, a field survey was also carried out from 6 to 9 September 2022 to collect field data and information about the terrestrial ecological resources in and around the Project area.
- 77. The proposed study for terrestrial ecological resources (vegetation, mammals, birds, and herpetofauna) was carried out within a 1.5 km buffer area of the proposed ETL referred as AoI in this report.
- 78. A map of the AoI for terrestrial ecological resources is given in **Figure 4-12**.
- 79. The sampling was carried out in three major habitats (agriculture fields, sand dunes, and vegetation) found in the AoI with the aim to obtain quality information regarding different species of different classes.
- 80. The reason for selecting different sampling locations in different habitats is mainly because of the affiliation of some flora and fauna species to a specific habitat.
- 4.3.1 Terrestrial Sampling Locations
- 81. The sampling locations for terrestrial ecology are provided in **Figure 4-13**. The locations were selected considering three main habitat types identified using *Google Earth* satellite imagery.
- 82. These include Agricultural Land, Sand Dunes, and Vegetation.
- 83. The number of sampling locations was based on the percentage representation of the habitats in the Terrestrial AoI.
- 84. Four sampling locations were selected each in the agriculture fields and sand plain or dunes while three sampling locations were in the vegetation habitat.
- 85. Photographs of different habitats found in the AoI are given in **Photo 4-3**.
- 86. The habitat type at each sampling location is listed in **Table 4-18**.
- 4.3.2 Survey Methodology
- 87. The methodology used to collect data on the terrestrial ecological resource is summarized below.

## Terrestrial Vegetation

88. The usual means of sampling vegetation for floristic composition is the quadrat. The vegetation in the terrestrial AoI was sampled by the quadrate method, taking 3 quadrates of 5m x 5m at each sampling site. The first quadrat was taken at the beginning of the transect, the second at 250 meters, and the third at 500 m.

- 89. Plants from each quadrate were noted. Additional plant species in the area adjacent to the quadrate were also noted down. Cover, relative cover, density, relative density, frequency, relative frequency percentages, and Importance Value Index (IVI) for each species from the AoI was calculated.
- 90. The sampling locations for terrestrial vegetation are shown in **Figure 4-13**.
- 91. The observed information (GPS reading, habitat type, species name, number of each species counted, and circumference of each species) at each sampling location were noted on a survey form.

#### **Mammals**

- 92. Line transects (500 m long and 20 m wide) were placed at each sampling location to record all mammals or their signs.
- 93. All the mammal species sighted, or their signs (footmarks, droppings, dens, burrow, etc.) found were identified with necessary information like coordinates of the site, species, sign type, sign age (on the base of freshness), etc.
- 94. GPS coordinates of the location and habitat type were also documented.
- 95. Anecdotal information regarding specific mammals like large carnivores was also collected from the local people and relevant literature was also used for mammals' baseline.
- 96. The sampling locations for mammals are shown in **Figure 4-13**.

#### **Birds**

- 97. Line transect sampling involves an observer traveling along a predetermined line of a consistent length, recording the total number of birds, nests, and other relevant sites detected.<sup>40</sup>
- 98. To count birds of different species, a total of 11 transects were placed at different locations in different habitats of the Project area, each with an approximate length of 500 m long and 50 m wide.
- 99. A single observer spends approximately 40 min walking along each transect and counted all birds of each observed species on both sides of the transect.<sup>41</sup>
- 100. Binoculars (Nikon 8245 ACULON A211 8 × 42) were used for observation and transects were walked at the times of peak bird activity, i.e., early in the morning (4 hr of surveying) and late in the afternoon (2.5 hr of surveying).
- 101. All the associated habitats of the transect and the GPS location of each transect were marked.
- 102. A digital camera was used for the photography of birds and associated habitats.
- 103. The abundance of birds (number of individuals of each species observed) and diversity (number of species observed) were calculated.
- 104. The sampling locations for birds are shown in **Figure 4-13**.

<sup>40</sup> Gibbons, D. W., and R. D. Gregory (2006). Birds. In Ecological Census Techniques: A Handbook (W. J. Sutherland, Editor). Second Ed. Cambridge University Press, Cambridge, UK.

<sup>&</sup>lt;sup>41</sup> Subedi, T. R., Virani, M. Z., Gurung, S., Buij, R., Baral, H. S., Buechley, E. R., Anadón, J. D., and Sah, S. A. (2018). Estimation of Population Density of Bearded Vultures Using Line-Transect Distance Sampling and Identification of Perceived Threats In the Annapurna Himalaya Range of Nepal. Journal of Raptor Research, 52(4), 443-453.

# Herpetofauna

- 105. For the herpetofauna survey, line transects of 500 m long and 20 m wide were walked at each sampling location.
- 106. Active searching was carried out along the line transect to record the presence of herpetofauna species.
- 107. The specimens were identified with the help of the most recent key available in the literature.
- 108. Density and diversity were calculated for each sampling point.
- 109. Microhabitats (e.g., stagnant water bodies) were also searched for herpetofauna species, particularly for the presence of amphibians.
- 110. The sampling locations for herpetofauna are shown in **Figure 4-13**.

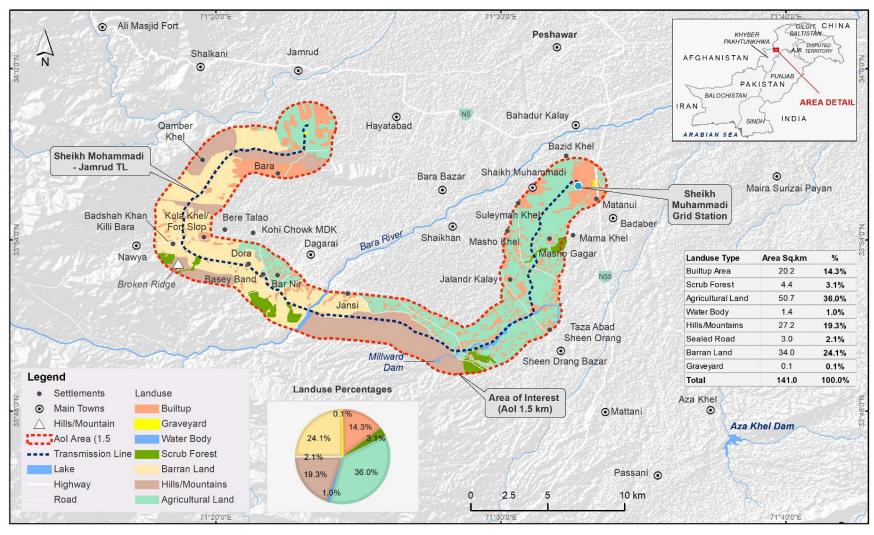


Figure 4-12: Terrestrial Project area

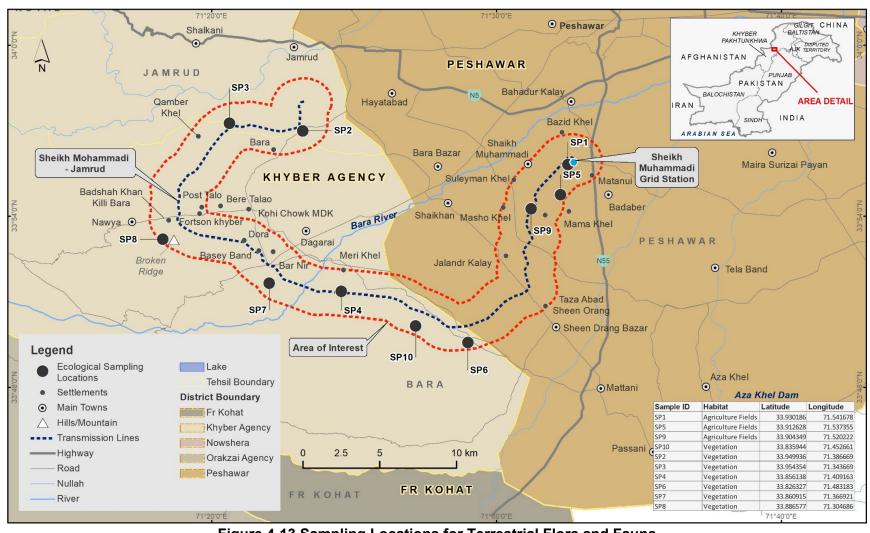


Figure 4-13 Sampling Locations for Terrestrial Flora and Fauna









Photo 4-3: Different Habitat Types in the Terrestrial Project area

Table 4-18: Habitat Types for the Terrestrial Sampling Locations

Habitat Type	Sampling Locations				
Agriculture Field	SP-1, SP-2 and SP-9				
Vegetation	SP-3, SP-4, SP-5, SP-6, SP-7, SP-8 and SP-10				

# 4.3.3 Terrestrial Ecological Resources

- 111. An overview of terrestrial ecological resources in and around the Project area based on a review of available literature and recent field surveys.
- 112. Terrestrial sampling locations are shown in Figure 4-13.

### Literature Review

- 113. A limited information is available about floral diversity in the project area falls in District Khyber. However, several scientists have conducted studies in nearby areas.
- 114. Thirty-four (34) plant species, belonging to 21 families and 30 genera were recorded from the Landi kotal area.
- 115. Lamiaceae and Solanaceae were the dominant species. Other families documented were Asteraceae, Asclepiadaceae, Chenopodiaceae, Mimosaceae, Moraceae, Oleaceae, Apocynaceae, Cannabaceae, Celastraceae, Colchicaceae, Elaeagnaceae, Fumariaceae,

Liliaceae, Meliaceae, Papillionaceae, Salicaceae, Sapindaceae, Simaroubaceae, and Zygophyllaceae.<sup>42</sup>

- 116. A study carried out by Ullah and Ullah (2016) reported 94 species belonging to 48 families and 85 genera from the region around Jamrud. Out of the 94 species, 5 species were from 5 genera and 4 families were monocotyledons, while the remaining 89 species from 80 genera and 44 families were dicotyledonous. In this instance, Asteraceae and Lamiaceae each had the most genera and species.<sup>43</sup>
- 117. Approximately 31 taxa of weeds from 30 genera and 18 families were investigated by Safeer Ullah et al. (2014) for their regional and therapeutic benefits. There were eight species of Asteraceae, followed by Poaceae and Polygonaceae.<sup>44</sup>

### **Current Survey Result**

- 118. During the September 2022 survey, a total of 26 species of plants were observed in the Project area. The indicators, including plant cover, plant count, and diversity per sampling location describe the floral conditions within the Project area.
- 119. The Project area is dominated by plant species such as *Prosopis juliflora*, *Parthenium hysterophorus*, *Arundo donax*, *Rhazya stricta*, *Justicia adhatoda*, *Zizyphus spp.*, and *Calotropis procera*.
- 120. Among plant species, the large size plant species were observed in both types of habitats. The highest number of plant species was observed at sampling location SP-9 where a total of nine plant species were observed.
- 121. Eight plant species were observed each at sampling location SP-2, while six species were observed each at SP-1, SP-6, and SP-8 (**Annexure V**).
- 122. Plant count and the cover of each species at each sampling location are provided in **Annexure V**.
- 123. The vegetation cover, plant count, and diversity in the Project area are provided in **Table 4-19**.
- 124. The phytosociological attributes for the species in the three habitat types for the September 2022 Survey are provided in **Table 4-20**.
- 125. Photographs of plant species observed in the Project area are given in **Photo 4-4**.

<sup>43</sup> ULLAH, A., & ULLAH, S. (2016). Vascular plant diversity in Landi Kotal Valley, Khyber Agency, Pakistan. *FUUAST Journal of Biology*, *6*(2), 265-271.

<sup>44</sup> Ullah, S., Ullah, A., & Rashid, A. (2014). Medicinal diversity of weeds in the historical valley of Landikotal, Khyber Agency, Pakistan. *Pak. J. Weed Sci. Res*, *20*(4), 531-539.

79

<sup>&</sup>lt;sup>42</sup> Ullah, S., Ullah, A., & Rashid, A. Utilization of plant natural resources by the local communities in Landi Kotal Valley Khyber Agency, Pakistan. *International Journal of Biology and Biotechnology (Pakistan)*.

Table 4-19: Habitat Vegetation Cover, Plant Count, and Diversity by Habitat Type

September 2022 Survey

No.	Habitat	Plant Count			Pla	ant Cover (	Diversity	
		Max	Min	Avg	Max	Min	Avg	(No. of Species per Sampling Location
1	Agriculture Field	44	5	11.50	170.10	0.70	26.60	6.33
2	Vegetation	32	17	23.57	249.56	107.09	163.06	2.29

Table 4-20: Phytosociological Attributes of Plant Species in Habitats

September 2022 Survey

Species Name	D1, Density	D3, Relative	C1, Average	C3, Relative	F1,	F3, Relative	IVI, Importance
·		Density	Cover	Cover	Frequency	Frequency	Value Index
Acacia modesta	2.33	26.95	0.08	93.22	1.33	42.22	54.13
Acacia nilotica	2.33	26.92	0.95	39.06	1.67	53.06	39.68
Arundo donax	7.33	53.57	10.11	3.79	1.00	29.17	28.84
Broussonetia papyrifera	2.33	20.99	0.74	32.33	1.00	27.78	27.03
Calotropis procera	3.00	29.54	2.06	13.71	1.33	51.39	31.55
Dalbergia sissoo	0.33	4.17	0.37	0.68	0.33	8.33	4.39
Datura innoxia	2.00	12.24	5.58	0.49	0.33	8.33	7.02
Dodonaea viscosa	0.67	6.25	0.46	3.14	0.33	12.50	7.30
Ficus carica	0.67	8.33	0.04	13.17	0.67	16.67	12.72
Rhazya stricta	4.00	54.41	3.26	6.60	2.00	75.24	45.42
Withania coagulans	2.33	34.56	16.00	1.62	1.33	61.11	32.43
Justicia adhatoda	4.33	48.74	1.68	7.96	1.00	36.67	31.12
Lantana camara	0.33	5.88	0.02	37.78	0.33	14.29	19.32
Melia azedarach	1.00	8.25	0.11	61.93	0.67	16.67	28.95
Morus alba	2.00	22.38	0.26	54.12	1.00	27.78	34.76
Morus nigra	0.67	4.08	0.12	7.70	0.33	8.33	6.71
Nerium oleander	1.00	9.68	0.60	4.69	0.33	11.11	8.49
Parthenium	17.33	150.23	32.47	8.87	2.67	77.78	78.96
hysterophorus							
Populus ciliata	1.33	11.43	0.05	76.75	0.33	11.11	33.10
Prosopis juliflora	27.00	362.84	2.45	377.34	6.33	248.69	329.62
Ricinus communis	0.33	2.86	0.37	2.35	0.33	11.11	5.44
Saccharum sp.	0.67	7.14	0.15	5.51	0.33	10.00	7.55
Salix spp.	1.67	20.83	0.05	26.68	0.67	16.67	21.39
Tamarix aphylla	0.67	6.25	0.02	73.64	0.33	12.50	30.80
Xanthium strumarium	0.67	11.76	1.45	1.05	0.33	14.29	9.03
Zizyphus sp.	3.33	36.81	1.03	42.69	2.33	75.00	51.50

D1: Density The number of individuals of a species counted on a unit area.

C1: Average cover in sq m for a single species

C3: Relative cover The proportion of the total cover of a species to the sum of the cover of all the species in the area.

F3: Relative frequency The proportion of the total frequency of a species to the sum of the frequency of all the plants of all species in the area.

D3: Relative density The proportion of a density of a species to that of a stand as a whole.

F1: Frequency Percentage of sampling plots in which a given species occurs.

IVI: Importance value index It can be obtained by adding the values of relative density, relative cover, and relative frequency and dividing them by 3



Acacia modesta (September 2022)



Justicia adhatoda (September 2022)



Calotropis procera (September 2022)



Rhazya stricta (September 2022)

Photo 4-4: Plant Species in the Project Area

# **Invasive Plant Species**


- 126. During the September 2022 survey, five invasive plant species; *Prosopis juliflora*, *Broussonetia papyrifera*, *Parthenium hystrophorus*, *Lantana camara*, and *Ricinus communis* were observed in the Terrestrial Project area.
- 127. Parthenium hystrophorus is widely distributed and mostly present in Agriculture Fields and along roads side. Lantana camara was observed mostly along the roadside near settlements. Prosopis juliflora is the most abundant and widely distributed invasive plant species in the area.
- 128. *Prosopis juliflora* is a nitrogen-fixing, perennial, evergreen plant, found both as a bush and medium size tree with a sizeable crown and an open canopy growing to an average height of 5-10 m.

- 129. *Prosopis juliflora* is considered one of the most dangerous invasive species for biodiversity and in affected areas of Pakistan, this invasive species is eliminating the habitat of indigenous species at a catastrophic level. <sup>45</sup>
- 130. Some photographs of invasive plant species observed in the AoI are given in **Photo 4-5**.

#### **Conservation and Protection Status**

131. None of the species observed in the AoI or surroundings were found to be globally/nationally threatened species, endemic species, or protected species.







Prosopis juliflora

Photo 4-5: Invasive Plant Species in the Aol

#### 4.3.4 Mammals

#### Literature Review

- 132. The mammalian species of the Project area have not been studied in detail, however, based on the available literature on the wider area of the Project area and anecdotal evidence a total of about 11 species are present.
- 133. Mammals' species found in the wider area of the Project area include *Golden Jackal* Canis aureus, *Red Fox* Vulpes, *Small Indian Mongoose* Herpestes javanicus, *Jungle Cat* Felis chaus, *Indian Crested Porcupine* Hystrix indica, *Wild Boar* Sus scrofa, *Cape Hare Lepus capensis*,
- 134. *Afghan Hedgehog* Hemiechinus auritus megalotis, *Black Rat Rattus*, *House Shrew* Suncus murinus, *and Indian Field Mouse* Mus booduga.<sup>46</sup>
- 135. Based on the IUCN Red List Criteria none of the documented species from the wider area of the Project area are listed as threatened globally.

#### **Current Survey Results**

- 136. Sampling was carried out at 10 sampling locations during the August 2022 Survey to study the *mammalian* species abundance and diversity within the Terrestrial Project area. The locations of these are shown in **Figure 4-13**.
- 137. The results of the surveys, based on the sightings or signs of the mammals observed are provided in **Table 4-21**.
- 138. Photographs of the mammalian signs observed are shown in **Photo 4-6**.

<sup>&</sup>lt;sup>45</sup> Qureshi, H., Arshad, M. and Bibi, Y., 2014. Invasive flora of Pakistan: a critical analysis. International Journal of Biosciences, 4(1), pp.407-427.

<sup>&</sup>lt;sup>46</sup> Roberts, T.J. and Bernhard (principe d'Olanda.), 1977. The mammals of Pakistan.

- In the present survey signs and sightings of four mammalian species were confirmed in the Project area. The Five Striped Palm Squirrel was the most abundant mammalian species in the Project area.
- 140. This species was observed in all two habitats of the Project area.
- The locals were also interviewed about the mammalian species occurrence in the Project area. Based on the locals' information the Indian Crested Porcupine and Red Fox are also present in the Project area.
- Field data collected during September 2022 survey is given in **Annexure V**. 142.

Table 4-21: Mammal Signs and Sightings in the Aol

September 2022 Survey

NO	Common Name	Scientific Name	IUCN Status	Agriculture Fields		Vegetatio	Total	
				Sighting	Sign	Sighting	Sign	
1	Golden Jackal	Canis aureus	Least Concern			2		2
2	Cape Hare	Lepus capensis	Least Concern		-		3	3
3	Five Striped Palm Squirrel	Funambulus pennantii	Least Concern	7	-	2	-	9
4	Rodent spp.				4			4





Burrows of Rodent spp. (September 2022) Fecal Pellets of Cape Hare (Sept. 2022)

Photo 4-6: Mammalian Species Sign in Project Area

#### **Birds**

Literature Review

No published literature is available about the bird diversity of the proposed project area however study on the wider area shows that about 195 bird species are present in the wider area.47

144. Conservational important bird species found in the wider area are included White-rumped Vulture Gyps bengalensis and Sociable Lapwing Vanellus gregarious which are globally listed as Critically Endangered. The Endangered species found in the wider area of the project are included Indian Skimmer Rynchops albicollis, Pallas's Fish Eagle Haliaeetus leucoryphus, White-headed Duck Oxyura leucocephala, Saker Falcon Falco cherrug, Steppe Eagle Aquila nipalensi, and Egyptian Vulture Neophron percnopterus. Eastern Imperial Eagle Aquila heliacal, Greater Spotted

<sup>&</sup>lt;sup>47</sup> Grimmett, Richard, Tom J. Roberts, Tim Inskipp, and Clive Byers. 2008. *Birds of Pakistan*. A&C Black.

Eagle Clanga, Common Pochard Aythya ferina, and Marbled Teal Marmaronetta angustirostris are listed as Vulnerable on IUCN Red Data Book.

145. Besides the globally threatened species, many migratory bird species also pass through the proposed project area each year during winter following the *Indus Flyway* (**Figure 4-14**).

# **Current Survey Results**

- 146. Surveys for bird diversity and abundance were carried out in the Terrestrial Project area in September 2022.
- 147. A total of 10 locations were sampled covering two types of habitats within the Project area.
- 148. A summary of the results by sampling locations including the bird abundance and diversity is provided in **Table 4-22**.
- 149. Photographs of some birds' species observed in the Project area are given in **Photo 4-7**.
- 150. A total of 434 bird individuals belonging to 32 species were observed.
- 151. Maximum abundance was observed at Sampling Locations SP-2 and SP-1 where a total of 73 and 68 birds' individuals were observed respectively.
- 152. The abundant bird species in the terrestrial Project area were Barn Swallow *Hirundo rustica*, House Sparrow *Passer domesticus*, Paddyfield Pipit *Anthus rufulus*, Little Egret *Egretta garzetta*, and Common Myna *Acridotheres tristis*, etc.
- 153. Maximum diversity was observed at Sampling locations SP-1 and SP-8. A total of 14 bird species were observed at each of these two Sampling Locations.
- 154. The other diversity-rich sampling locations were SP-9, SP-6, SP-2, and SP-10 where a total of 11, 10, 9, and 9 bird species were observed respectively.
- 155. A list of the bird species observed in the Project area is provided in **Annexure V**.

#### **Conservation and Protection Status**

156. Of the bird species reported from the Project area, none are listed as threatened on the IUCN Red List of Threatened Species.

157. Of the observed bird species in the terrestrial Project area, the Black Kite *Milvus migrans* and Shikra *Accipiter badius* are included in CITES Appendix II.<sup>48</sup>

<sup>&</sup>lt;sup>48</sup> CITES (convention on international trade in endangered species of wild fauna and flora) is an international agreement between governments. its aim to ensure that international trade in specimens of wild animals and plants does not threaten the survival of the species. Cites appendix II: species not necessarily threatened with extinction, but in which trade must be controlled in order to avoid utilization incompatible with their survival.

Table 4-22: Total Birds Sightings, Density, and Diversity by Habitat Type

September 2022 Survey

Habitat	No. of Sampling Points	Total Sighting	Density	No. of Species
Agriculture Fields	3	191	63.66	21
Vegetation	7	243	34.71	23
Total	10	434	43.40	32



House Sparrow (Female) (September 2022)



White-cheeked Bulbul (September 2022)



Cattle Egrets (September 2022)



Inactive Nest (September 2022)

Photo 4-7: Mammalian Birds Species Photographed in the Project Area

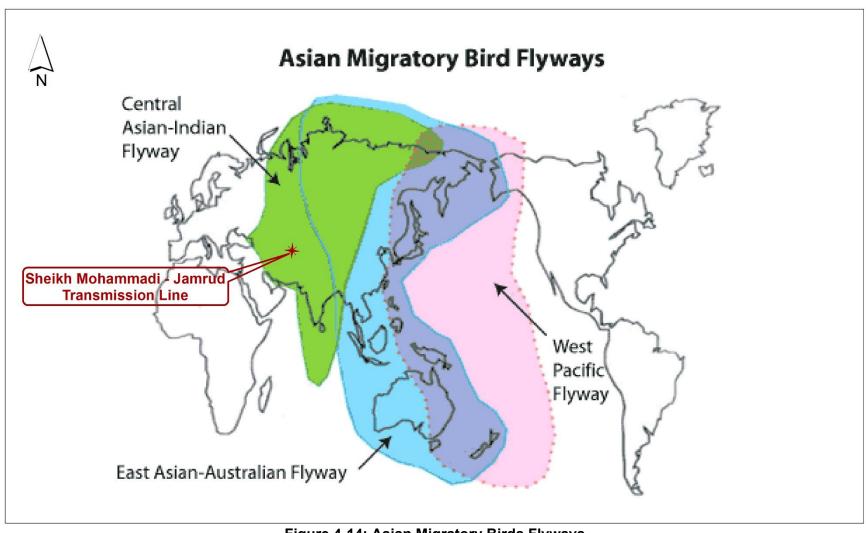


Figure 4-14: Asian Migratory Birds Flyways

### 4.3.5 Herpetofauna

#### **Literature Review**

- 158. The herpetofauna of the Project area has not been studied in detail. However, the presence of about 14 herpetofauna species in the wider area of the project can be assumed from the literature.
- 159. These are represented by Skittering Frog *Euphlyctis cyanophlyctis*, Chitral Gecko *Tenuidactylus walli*, Reticulate plump-bodied Gecko *Cyrtodactylus battalensis*, *Rough-tailed Gecko Cyrtopodion scaber*, Common Snake Skink *Lygosoma punctata*, Slender Worm Snake *Typhlops porrectus*, Northern Wolf Snake *Lycodon bicolor*, Caspian Cobra *Naja oxiana*, Diadem Snake *Spalerosophis diadema*, Indian Monitor Lizard *Varanus bengalensis*, Indian Rat Snake *Ptyas mucosus*, Common Krait *Bungarus caeruleus*, and Dark-headed Dwarf Racer *Eirenis persica*. <sup>49</sup> Based on IUCN Red Data Book the Crowned River Turtle *Hardella thurjii*, Indian Softshell Turtle *Nilssonia gangetica*, Indian Peacock Softshell Turtle *Nilssonia hurum*, Indian Roofed Turtle *Pangshura tecta*, and Indian Flapshell Turtle *Lissemys punctate*.
- 160. The Crowned River Turtle, Indian Softshell Turtle, Indian Peacock Softshell Turtle are listed as globally endangered while the Indian Roofed Turtle and Indian Flapshell Turtle found in the wider area of the project is listed as Vulnerable on the IUCN Red Data Book.
- 161. Of the documented herpetofauna species from the wider area of the project, the Indian Monitor Lizard and Caspian Cobra are included in CITES Appendices I<sup>50</sup> and II respectively.<sup>51</sup>

### **Current Survey Results**

- 162. A total of 10 locations were sampled for herpetofauna during the September 2022 Survey. The locations of these are shown in **Figure 4-13**.
- 163. A total of three herpetofauna species were observed in the terrestrial Project area.
- 164. The most abundant herpetofauna species observed in the Project area was the Skittering Frog.
- 165. A total of nine individuals of Skittering Frog were observed at two sampling locations in agriculture fields.
- 166. Indian Monitor Lizard *Varanus bengalensis* and Agror Agama *Laudakia agrorensis* were observed at a single sampling location in Vegetation. A summary of the herpetofauna species observed in different habitats of the Project area is given in **Table 4-23**.
- 167. Photographs of the Skittering Frog sighted in the terrestrial Project area are provided in **Photo 4-8**.
- 168. Herpetofauna species observed at each sampling location in the terrestrial Project area are given in **Annexure V**.

<sup>49</sup> Khan, M.S., 1999. Herpetology of habitat types of Pakistan. *Pakistan Journal of Zoology*, 31(3), pp.275-289.

<sup>50</sup> Cites Appendix I: in this appendix, those species included are threatened with extinction. trade in specimens of these species is permitted only in exceptional circumstances, Cites Appendix III: species that are protected in at least one country which has asked other cites parties for assistance in controlling the trade. Not listed: species with no trade restrictions.


<sup>&</sup>lt;sup>51</sup> CITES. Checklist of CITES Species. Accessed on September 05, 2022. Available at https://checklist.cites.org/#/en.

Table 4-23: Herpetofauna Sightings in the Project Area

September 2022 Survey

NO	Common Name	Scientific Name	IUCN Status	Agriculture Fields	Vegetation	Total
1	Skittering Frog	Euphlyctis cyanophlyctis	Least Concern	9		9
3	Indian Monitor Lizard	Varanus bengalensis	Least Concern	-	1	1
4	Agror Agama	Laudakia agrorensis	Least Concern	-	1	1







Skittering Frog (September 2022)

### Photo 4-8: Skittering Frogs observed in Aol

# **Conservation and Protection Status**

169. Of the reported species, none are listed as threatened in the IUCN Red Data Book. The Indian Monitor Lizard is included in CITES Appendix I.

#### 4.3.6 Critical Habitat Assessment

- 170. Performance Standard 6 (PS6) "Biodiversity Conservation and Sustainable Management of Living Natural Resources" requires the categorization of habitats into modified, natural, and critical.
- 171. Critical Habitats are a subset of modified or natural habitats. They are habitats of high biodiversity value.<sup>52</sup>

#### Natural and Modified Habitats

172. Natural and Modified Habitats are defined and described in IFC Performance Standard 6.<sup>53</sup> Their definitions, according to IFC Performance Standard 6, are as follows:

<sup>&</sup>lt;sup>52</sup> International Finance Corporation. January 2012. Policy on Social and Environmental Sustainability, Performance Standard 6: Biodiversity Conservation and Sustainable Management of Living Natural Resources, The World Bank Group

<sup>&</sup>lt;sup>53</sup> International Finance Corporation. January 2012. Policy on Social and Environmental Sustainability, Performance Standard 6: Biodiversity Conservation and Sustainable Management of Living Natural Resources, The World Bank Group.

- 173. Natural habitats are areas composed of viable assemblages of plant and/or animal species of largely native origin, and/or where human activity has not essentially modified an area's primary ecological functions and species composition. Under IFC Performance Standard 6 No Net Loss is required in Natural Habitats.
- 174. Modified habitats are areas that may contain a large proportion of plant and/or animal species of non–native origin, and/or where human activity has substantially modified an area's primary ecological functions and species composition. Modified habitats may include areas managed for agriculture, forest plantations, reclaimed coastal zones, and reclaimed wetlands.
- 175. The terrestrial Project area is classified as a modified habitat. Most of the area is agriculture land habitat type. Human populations are present in and around the Project area.

#### **Critical Habitat**

- 176. Critical Habitat is a requirement under the International Finance Corporation's (IFC) Performance Standards (PS).
- 177. Critical habitat is an area that has high biodiversity value and may include sites that are legally protected or officially proposed for protection. These may include Areas protected by the International Union for Conservation of Nature (Categories I–VI) (IUCN, 1994), wetlands of international importance (according to the Ramsar Convention), important bird areas (defined by Birdlife International), and biosphere reserves (under the UNESCO Man and the Biosphere Programme).<sup>54</sup>
- 178. The Project does not fulfill any of these characteristics.
- 179. Critical Habitat Assessment as per IFC Performance Standard 6 requires the definition of a Discrete Management Unit (DMU). This is based on the following:
- 180. "For Criteria 1 through 3, the project should determine a sensible boundary (ecological or political) that defines the area of habitat to be considered for the Critical Habitat Assessment. This is called the "discrete management unit," an area with a definable boundary within which the biological communities and/or management issues have more in common with each other than they do with those in adjacent areas (adapted from the definition of discreteness by the Alliance for Zero Extinction).
- 181. A discrete management unit may or may not have an actual management boundary (e.g., legally protected areas, World Heritage sites, KBAs, IBAs, community reserves) but could also be defined by some other sensible ecologically definable boundary (e.g., watershed, interfluvial zone, intact forest patch within a patchy modified habitat, seagrass habitat, coral reef, concentrated upwelling area, etc.). The delineation of the management unit will depend on the species (and, at times, subspecies) of concern."55
- 182. The criterion for Critical Habitat Assessment based on IFC's PS6 along with their application to the biodiversity within the Project area is provided below.

Habitats of significant importance to critically endangered and/or endangered species:

According to IFC's Guidance Note 6, Tier 1 sub-criteria for Criterion 1 is defined as:

<sup>54</sup> Hagler Bailly Pakistan (2018). Arkari Gol Hydropower Project Environmental and Social Impact Assessment. Report Prepared for Master Hydro (Pvt.) Limited.

<sup>&</sup>lt;sup>55</sup> International Finance Corporation. January 2012. Policy on Social and Environmental Sustainability, Performance Standard 6: Biodiversity Conservation and Sustainable Management of Living Natural Resources, The World Bank Group.

- Habitat required sustaining ≥ 10 percent of the global population of an IUCN Red–listed Critically Endangered (CR) or Endangered (EN) species".
- Habitat with known, regular occurrences of CR or EN species where the habitat is one of 10 or fewer discrete management sites globally for that species.
- Tier 2 sub-criteria for Criterion 1 is defined as follows:
  - Habitat that supports the regular occurrence of a single individual of an IUCN Red-listed CR species and/or habitat containing regionally-important concentrations of an IUCN Red-listed EN species where the habitat could be considered a discrete management unit for that species.
  - Habitat of significant importance to CR or EN species that are wide-ranging and/or whose population distribution is not well understood and where the loss of such a habitat could potentially impact the long-term survivability of the species. As appropriate, habitat containing nationally/regionally important concentrations of an EN, CR, or equivalent national/regional listing.
- 183. Based on information available from the literature and September 2022 survey, there are no endangered species reported from the terrestrial Project area therefore the result does not trigger any IFC criteria for critical habitat.

Habitat of significant importance to endemic and/or restricted-range species:

- According to IFC's GN6, Tier 1 sub-criteria for Criterion 2 is defined as follows:
  - O Habitats know to sustain ≥ 95 percent of the global population of an endemic or restricted-range species where that habitat could be considered a discrete management unit for that species (e.g., a single–site endemic).
- Tier 2 sub-criteria for Criterion 2 is defined as follows:
  - O Habitat known to sustain ≥ 1 percent but < 95 percent of the global population of an endemic or restricted–range species where the habitat could be considered a discrete management unit for that species, where data are available and/or based on expert judgment.
- 184. No endemic and/or restricted-range species have been reported from the terrestrial Project area. Therefore, Critical Habitat is not triggered for Criterion 2 for the terrestrial Project area.

Habitat supporting globally significant concentrations of migratory species and/or congregatory species:

- According to IFC's GN6, Tier 1 sub-criteria for Criterion 3 is defined as follows:
  - Habitat is known to sustain, on a cyclical or otherwise regular basis, ≥ 95 of the global population of a migratory or congregatory species at any point of the species lifecycle where that habitat could be considered a discrete management unit for that species.
- Tier 2 sub-criteria for Criterion 3 is defined as follows:
  - Habitat known to sustain, on a cyclical or otherwise regular basis, ≥ 1 percent but < 95 percent of the global population of a migratory or congregatory species at any point of the species' lifecycle and where that habitat could be

- considered a discrete management unit for that species, where adequate data are available and/or based on expert judgment.
- For birds, habitat that meets BirdLife International's Criterion A4 for congregations and/or Ramsar Criteria 5 or 6 for Identifying Wetlands of International Importance.
- For species with large but clumped distributions, a provisional threshold is set at ≥5 percent of the global population of terrestrial species. Source sites that contribute ≥ 1 percent of the global population of recruits.
- 185. Within the terrestrial Project area, some migratory and congregatory bird species are expected to be found. However, these bird species are widespread. According to expert judgment, the migratory bird populations are small and do not trigger Tier 1 or Tier 2 sub—criteria for Criterion 3 and the terrestrial Project area is not a Critical Habitat for migratory birds.

### Highly threatened and/or unique ecosystems

186. There is no information that indicates the Project area, or any part of them, is a highly threatened and/or unique ecosystem. Furthermore, no information indicates the Project area is a part of a threatened or unique ecosystem.

Areas with unique assemblages of species or which are associated with key evolutionary processes or provide key ecosystem services:

187. No information indicates the Project area, or any part of them, is associated with key evolutionary processes or provides key ecosystem services. While the species are functioning components of ecosystems, there are no unique assemblages of species or association of key evolutionary processes in the Project area.

Areas with biodiversity that has significant social, cultural, or economic importance to local communities.

- 188. No information indicates the Project area or any part of them is associated with biodiversity that has significant social, cultural, or economic importance to local communities.
- 189. Therefore, the terrestrial Project area is not biodiversity of significant social, cultural, or economic importance for the local communities, and Critical Habitat is not triggered for this criterion.

### 4.3.7 Integrated Biodiversity Assessment Tool (IBAT) Assessment

- 190. Based on IBAT, presence of many global conservation important species of different classes of vertebrates are predicted in the 5 km buffer area of the proposed ETL (**Annexure VI**).
- 191. Most of the IBAT assessments are valid particularly for birds and reptiles, however; their assessments about a few species particularly for mammals and some bird species are not valid. For example,
  - The IBAT predicted the presence of Asiatic Black Bear Ursus thibetinus in the 5 km buffer area
    of the project but IUCN Data and local database shows that Black Bear is extirpated from this
    region.
  - Similarly, Urial *Ovis vignei* distribution range does not fall in the 5 km buffer of the proposed ETL.

- Indian Pangolin Manis crossocaudata is present in the District Kohat, Nowshehra, Charsada, Mardan, and some parts of Peshawar but Pangolin is not present even in the 10 km buffer of the proposed ETL.
- Similarly, the Common Leopard *Panthera pardus* is present in parts of Kohat but based on IUCN data and regional information shows that Common Leopard is extirpated from the project area and surrounding area (about 12 km buffer area).
- The IBAT predicted the presence of Red-headed Vulture Sarcogyps calvus, Tawny Eagle Aquila rapax, and River tern Sterna aurantia but data from Pakistan and IUCN shows that Redheaded Vulture is possibly extinct from this region while Tawny Eagle and River Tern distribution range does not fall in the area.
- 192. IBAT identifies Bilyamin Game Reserve in Khyber district as protected areas within 5km buffer. However, the above information seems incorrect. As per the GIS data of the area and actual location, Bilyamin Game Reserve is located in the Hangu district at a distance of 40 km south of the ETL route.

#### 4.4 Socioeconomic Environment

193. This sub-section provides information on the socio-economic environment existing in and around the AoI including methodology, administrative setup, demographic characteristics, educational and institutional facilities, transportation, water supply, income sources, common diseases, religious/archaeological and historical sites (if any) existing in the area.

# 4.4.1 Administrative Setting

- 194. Peshawar is located in a geo-strategically important location and has an enriched history. This district and city have seen the rise and fall of many civilizations. Under the latest revision of Pakistan's administrative structure, promulgated in 2001, Peshawar was also given the status of a City District and divided into four towns. Each town consists of a number of union councils. There are total of 92 union council in district Peshawar. The administrative towns are known as Peshawar Town I, Peshawar Town II, Peshawar Town III, and Peshawar Town IV.
- 195. Khyber District was formerly known as Khyber Agency was a part of the former Federal Administration Tribal Areas (FATA). It was merged with the Khyber Pakhtunkhwa Province in May 2018 and renamed as Khyber district. The district comprises of four tehsils namely, Bara, Jamrud, Kotal and Mula Gori. After the merge, it is now annexed to the Peshawar division.
- 196. The potential administration system is identical all over the country. Union Council (UC) is the lowest tier of the local government. Village council in Pakistan is an elected local government body headed by a Nazim (which is equivalent to a mayor) and a Naib Nazim (Deputy Mayor). Union councils are the fifth tier of government in Pakistan and are often known as "village councils" in rural areas, the territory represented by a village council usually comprises a large village and surrounding areas, often including nearby small villages. The term "union council" may be used for localities that are part of cities.
- 197. Headed by a union Nazim, each union council has 13 elected members or councilors. In addition to four male and two female members elected directly, there are two male and two female representatives of the labor, a minority member, a union council Nazim and his deputy known as union council Naib Nazim. Besides elected members, there are several government employees and functionaries in every union council, who report to the secretary of the union council. The territory of a union council or village council is usually part of a tehsil (a district subdivision).

Tehsil Council is the next tier of local government. About 4 to 5 UCs fall in the Tehsil Council (TC). Tehsil is a sub-unit of the district, which is the highest tier of the local government system, dealing

with administrative matters at the district level. In Khyber Pakhtunkhwa province, it is called a Union Council.

198. Union Council Nazim is responsible to collect and maintain statistical information for socio-economic surveys in the community and consolidate village and neighborhood development needs and priorities them into union-wide development proposals with the approval of the Union Council and make recommendations thereof to the district government of Tehsil Municipal Administration, as the case may be. Union council Nazim also manages O&M of public resources such as drinking water, including wells, water pumps, tanks, ponds, and other works for the supply of water. Union council Nazim has access to Tehsil Nazim and Tehsil Nazim has access to District Nazim. The district government takes funds from the provincial government and district Nazim allocate funds with the coordination of DCO to tehsil Nazim and Tehsil Nazim allocates funds as per the need of the administrative set up at the district, tehsil, and Union Council levels.

# 4.4.2 Demographics

### Population

- 199. The land required for the construction of the proposed ETL of 20 km passes through 19 villages of district Khyber and Peshawar. At the time of the 2017 census, the district Khyber had a population of 984,246 and district Peshawar was 4,267,198. Based on 2017 census the average population growth rate is 2.4%; thus, the estimated current population of the Khyber is 1,102,351 and Peshawar district is 4,779,258.
- 200. The ratio of male and female population is shown in **Figure 4-15**. Overall, about 51% of the population are male and 48% are female in the Project area districts.
- 201. The ration of rural and urban population is show in **Figure 4-16**. More people (46.16%) in urban area in Peshawar district as compared to Khyber district were only 9.9% of the population live in urban area.

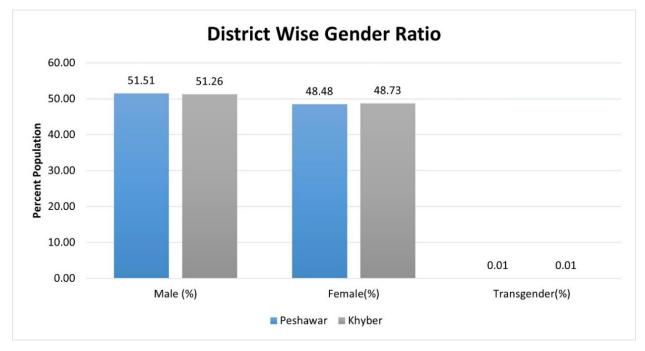


Figure 4-15: Gender Ratio

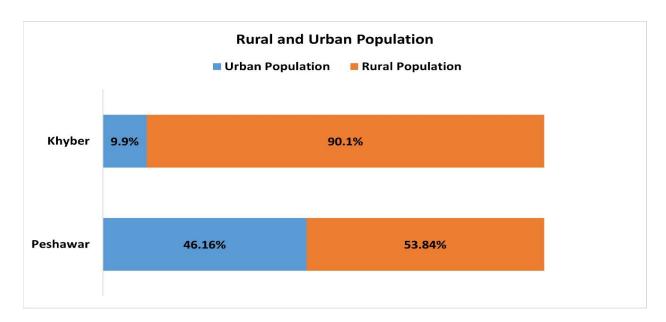


Figure 4-16: Rural and Urban Population Ratio

### Family/Household Size

202. The average household size is 8.3 in Peshawar district and 8.5 in Khyber district. The joint family system is common throughout the Project area, whereas only a small percentage of families is living like a single family (called a nuclear family system). In most areas, the tribal system exists, thus people give preference to live as a joint family.

## Ethnicity/ Caste Groups

- 203. The core unit of social organization is the baradari/caste group, which is either defined based on specific occupation or lineage. The tribal social organization is based on patrilineal tribal and egalitarian principles marked by the absence of hereditary authority figures. The major of the population are Pakhtun in the Project area. The main tribes in this area include Afridi, Shinwari, Mullagori and Shilmani.
- 204. Among the Pakhtun people a tribe (qaum), is subdivided in clan (Khel);lineages (tappa); lineage-section (bajar orpalarina) and, finally household (kor). There are two main domains of leadership relevant to land acquisition and impacts of compensation, namely the sphere of traditional power and the sphere of state power that today are inextricably interlinked.
- 205. It is worth mentioning here that the major castes/tribes are important because they have a key role in decision-making regarding the resolution of social issues of family matters. For instance, the Tribe Leader (locally named Khan), as well as the head/ or elder of the respective tribe, generally make decisions related to the social issues at the village level and tribe level. They also influence the social development works in their areas.
- 206. Majority of the population in both districts are Muslims (98.5%) while there are a minority of Sikhs and Christians community.

### Languages Spoken

207. Pashto is the predominant language spoken by 98.83% of the population. However, Urdu and Hindko are also spoken, and all the affected people understand Urdu. Urdu reading and

writing are easier for them than Pashtu, because Pashtu script is not commonly available/ used in the province.

#### 4.4.3 Social Infrastructure

#### Health

- 208. The availability of health facilities varies in the project area. Peshawar district has better health facilities compared to the Khyber district.
- 209. Presently, in district Peshawar, health services are provided by both Public and private institutions. There are 12 public hospitals out of these 3 are teaching hospitals, 72 private hospitals, 3 RHC, 37 civil dispensaries, 4 MCH centers, 49 BHUs and 4 TB clinics in district Peshawar. The total beds strength of government teaching hospital is about 3460 beds.
- 210. The development statistics has also painted bleak picture of the health indicators in Khyber Agency. There are four hospitals, 22 Dispensaries, 17 Community health centers, 13 basic health units and four T.B clinics and two MCH centers. The population per hospital/RHC (rural health center) has been calculated as 4143 persons. The proposition of births attended by skilled health personnel was 29.5 % which is far less as compared with the national average of 86%.56
- 211. During the socio-economic survey, people reported problems with availability for health facilities, long distances to be travelled to reach there, and lack of equipment and medicines as well as skilled personnel. Women face major constraints in using health facilities, requiring permission from male relatives and being unable to travel alone.
- 212. Per health perspective in the project area, 28% of the households did not suffer from any disease while 72% of the respondents spoke about various diseases like Diarrhea, Hepatitis, Malaria, Typhoid, Diabetes, Dengue, and Heart problem as presented in the **Figure 4-17**.
- 213. The people reported that most of the diseases happen due to poor sanitation and unsafe drinking water. However, most of the households have shown un-satisfaction with the available health facilities (from the government) in the -project area. On average, they are spending about Rs. 618 on medical treatment every month.

96

<sup>&</sup>lt;sup>56</sup> Health resources availability and mapping system in health facilities of FATA Pakistan (2018)

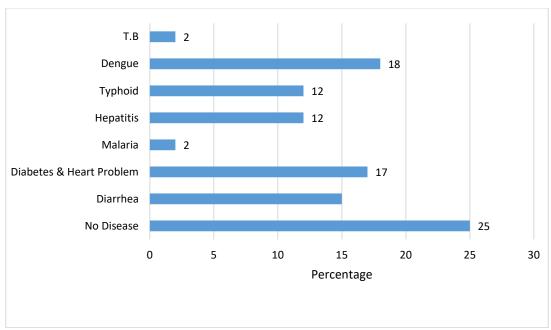


Figure 4-17: Prevalence of Diseases

## Literacy Status

- 214. The literacy rate is measured as the number of literate people among the population of 10 years and above. In Khyber district, literacy rate is 41.97% the male literacy rate is 65.08% while the female literacy rate is 18.10%. Likewise, in Peshawar the literacy rate is 55.04%, the male literacy rate is 68.52% and female literacy rate is 40.7%.
- 215. In terms of the availability of educational infrastructure, in the urban and sub-urban areas people have relatively better access to schools and colleges compared to the rural area. The quality of educational institutes is no good in the rural area and there is a huge gap between the public and private institutes. People are not satisfied with the higher education centers. They have to travel a maximum of 6 km away for higher education. Hence, it becomes difficult to provide education for the girl as due to lack of security and conservative society.
- 216. Statistics show that there are 1060 primary, 155 middle, 140 secondary and 32 higher secondary schools in district Peshawar. The estimated Teacher Student Ratio is 1:45 at primary, 1:70 at middle, 1:32 at secondary and 1:27 at the level of higher secondary schools.
- 217. Details of the educational facilities for Khyber District is provided in the **Table 4-24**.
- 218. Though at the primary level quite a number of schools are set up for both boys and girls, but the gender disparity starts at middle education level and widens at high secondary.
- 219. As considerable progress has been made in achieving universal primary education and closing the gender gap in enrolment, the higher education opportunities for girls in the district remain a challenge and demonstrates the severe lack of political will and social commitment in investing in girl's education.

Table 4-24: Statistics of Educational Facilities in Khyber District

Khyber	Primary	Middle	High	Higher	Degree
District	School	school	School	Secondary	College

Boys	312	30	32	2	3
Girl	270	24	7	2	1
Total	582	54	39	4	4

## 4.4.4 Physical Infrastructure

#### Road

220. Roads are available to 97% of the households, however, the local people are not happy about the current road infrastructure, as mostly required extensive maintenance.

# Housing

- 221. The housing condition is also an important parameter for the assessment of the living standard/household well-being of the locals. Information collected from primary as well as secondary sources indicates that the settlement pattern of the houses in all the districts of Khyber Pakhtunkhwa province is very simple.
- 222. In the rural parts of the project area, people are living in a small house constructed mostly of mud and stones. The economic situation of household has a huge impact on the house structure and facilities. People with better means of income and mostly urban part have housed made of brick and concrete with installed with modern facilities like furniture and appliances.
- 223. Houses of all the tribesmen are shaped like fortresses having towers and are mostly situated on commanding sites on the hills. Each family in the tribal areas has its own separate dwelling with its size being proportionate to the members of the household, their cattle, and flocks. The Afridis are generally dokora (having two dwelling places) amongst the Khyber tribes as in summer they live high in the hills while in winter they come down along with their families and flocks to the plains to spend the winter.
- 224. A vast courtyard with rooms depending on the social status of the guests and male members of the family is also to be found; a mosque is also made available. The interior of houses is very simple and devoid of any decoration and proper furniture. Cattle are mostly kept inside their houses in the rural areas.
- 225. Every cluster of houses has Hujra where the male members daily discuss their local issues and spend free time; it also serves as a common place used as a guest room.

#### **Electricity**

- 226. Electricity is provided by the Peshawar Electric Supply Company (PESCO). The electricity supply is available to most of the villages and settlements along the line route. According to the statistics of 2017, 90% of households in the district Peshawar while 50% of households are supplied with electricity.
- 227. It indicates that all the houses in the project areas are electrified. However, people are not satisfied with the power supply. They complained about the frequent power failure and low voltage; eventually, leaving an adverse impact on daily life.

## Sanitation / Drainage Facilities and Solid Waste

228. Sanitation is poor in the area. There is no proper sewerage system available and only a few villages of the project area are connected with the sewerage system. In most cases, the

village wastewater is disposed of into open spaces or nearby ponds. Ultimately, wastewater is drained into a pond/nullah, thus it becomes a source of pollution. Similarly, there is no proper arrangement for the disposal of solid waste.

#### Sui Gas or Natural Gas

- 229. The facility of Sui gas is available to the limited number of residents along the project route. Natural gas (or Sui Gas) is available to 63.7% of the household in the project area, however, it has emerged as the need of the entire project area, and it is ranked as the top priority demand of women in the project area.
- 230. According to the census of 2017, 24% of households in the district of Peshawar and 18% of the households in Khyber district are provided with gas supply line. Data reveals that many people are using compressed gas cylinders and in rural areas people use locally available wood and animal dung for cooking purposes.

#### **Telecommunication**

231. Mobile phone communication is widely spread in the RoW and the project area, the frequent use of the mobile phone was observed. Landline facilities are available in the project area outside the RoW. The landline facilities are available in urban areas only.

#### Post Offices and Banks

232. Postal, money order and bank facilities exist throughout the vicinity of the project area.

# Water Supply

- 233. In the project area, the public water supply is not available, and people are dependent on the local water supply system to meet the drinking as well as household use requirements.
- 234. Potable drinking water supply is available to 50% of the houses and people are only relying on the groundwater, extracted either manually through hand pumps or electrically through the electric pump. There are cases where people get the drinking water from the tube wells which are Installed for irrigation purposes.

## 4.4.5 Sources of Income and Livelihood

- 235. The major livelihood sources of the Project area include employment in government and private sector, agriculture, wage labor, operating own business such as shopkeepers, running fuel station, traders, and workshops.
- 236. As the region is located near international border therefore, income related to the transportation industry (operation of different vehicles especially trucks and trailers) also account of the source of livelihood for many people. Some households also receive foreign remittances from family members mostly working as laborers in Gulf Countries.
- 237. During the socio-economic survey of the Project area, people reported of the high level of employment in the area. Young people are mostly unemployed as there are few job opportunities in the area.
- 238. The average monthly family income is calculated to be PKR 34,755 and PKR 4,344 on per capita basis in Khyber district.

# Agriculture

- 239. The agricultural sector is fairly underdeveloped in this region, as there is less rainfall, and the terrain is hilly. Among the two districts, Peshawar has the major agriculture production as compared to Khyber district which is hilly and composed of barren land.
- 240. The major crops of Peshawar district include:<sup>57</sup>
  - wheat production of 80306 tons on 37,544-hectare area
  - maze production of 29532 tons on 16000-hectare area
  - sugarcane production 422998 tons on 8134-hectare area
- 241. In the horticulture sector, Peshawar is known for producing quality fruit products. Particularly quality citrus, pear, peach, apricot, persimmon, strawberry, plum, watermelon. The vegetables produced in the area include potato, turnip, tomato, peas, okra, and beans etc.

## Industry

242. Peshawar hosts an industrial base that manufactures a wide range of products like steel and other alloys, marble blocks, textiles, beverages, automobile body parts, sporting arms, ceramics, edible items (biscuits, bakery items, oil/ghee etc.), furniture and soaps/shampoo.

# 4.4.6 Archaeological Sites

- 243. No archaeological or historical sites were observed within the project area AOI. Some of the historical sites near are:
  - Jamrud Fort (12 km away)
  - Bala Hisar Fort (15 km away)
- 244. However, it is predicted that there will be no direct impact on this historical landmark since the project corridor alignment passes next to the fort and the vibration effects resulting from the construction activity are not expected to be so significant as to cause any damage to the Fort.



Grid Station Access Road (September 2022)



Housing Types in the Grid Station Area (September 2022)

<sup>&</sup>lt;sup>57</sup> Agriculture Dept. Crop Statistics for Khyber Pakhtunkhwa year 2018-19



Proposed Grid Station Site Land (September 2022)



KASA 1000 Project Towers Nearby (September 2022)



Housing Types in the Grid Station Area (September 2022)



An Abandoned Forces Camp near Grid Station Site (September 2022)



Seasonal Drain near Grid Station Site (September 2022)



Rearing Cattle is Common in the Area (September 2022)



A Religious School (Madrassa) in Bara A Primary School in Jamrud (September 2022) (September 2022)





A Community Health Center in Jmrud (September 2022)

Photo 4-9: Photographs of the Project Area

# 5. Potential Environmental Impacts and Mitigation Measures

245. This section discusses the Project's potential impact on the area's physical, ecology and socioeconomic environment and mitigation measures that will reduce, if not eliminate, its adverse impact. The mitigation measures then become part of the environmental management plan (EMP) for implementation provided in **Section 9**.

# 5.1 Methodology for Impact Assessment

- 246. Environmental and socioeconomic impacts are assessed in the following stages:
  - Scoping: Scoping is a broad term that refers to the process through which potential
    environmental issues associated with the proposed project are identified. Potential
    impacts are identified by various means. These include, for example, concerns expressed
    by the community, formal checklists, and previous experience of the experts. The outcome
    of the exercise is the identification of all issues that need further investigation and
    screening out of issues that are not relevant.
  - **Prediction of potential impacts:** This step refers to the evaluation and prediction, quantitatively, if possible, of the anticipated impacts of the proposed Project on various environmental factors.
  - Evaluation of the significance of predicted impacts: Significance of the potential impacts can be determined by considering both the consequence and the likelihood of occurrence of the impact. The consequence of the proposed activity is evaluated by comparing it against recognized significance criteria, such as institutional recognition, technical recognition, scientific or technical knowledge, or judgment of recognized experts, public recognition, and professional and experience-based interpretation of the evaluator.
  - Mitigation measures: If it is determined that the predicted impact is significant, practicable mitigation measures are identified to reduce impacts for each activity to acceptable levels.
  - **Residual impacts:** This step refers to the identification of the anticipated remaining impacts after mitigation measures have been applied.
  - Management actions and monitoring: The last step in the assessment process is the identification of the monitoring requirements to confirm that the residual impacts are within the predicted limits and to provide timely information if the impacts exceed predicted limits.
- 5.1.1 Evaluation of Significance of Potential Impacts
- 247. The significance of potential or the predicted impacts are evaluated based on their associated risk levels or effects on the receiving environment.
- 248. Risk is assessed as the likelihood that the activity will have an effect on the environment as well as the consequence of the effect occurring. It is often described like this:

Risk = Likelihood X Consequence

249. Likelihood definition, consequence scale and risk score evaluation approach is provided in **Table 5-1**, **Table 5-2** and **Table 5-3**.

Table 5-1: Evaluation of Impact Significance Matrix (Likelihood Scale)

Likelihood	Definition	Scale
Certain	Will certainly occur during the activity at a frequency greater than every	5
	week if preventative measures are not applied	
Likely	Will occur more than once or twice during the activity but less than weekly	3
	if preventative measures are not applied	
Unlikely	May occur once or twice during the activity if preventative measures are	2
	not applied	

Rare	Unlikely to occur during the project	1

**Table 5-2: Evaluation of Impact Significance Matrix (Consequence Scale)** 

Consequence	Definition	Score
Catastrophic	The action will cause unprecedented damage or impacts on the environment or surrounding communities	5
Major	The action will cause major adverse damage to the environment or surrounding communities	3
Moderate	No or minimal adverse environmental or social impacts	2
Minor	No or minimal adverse environmental or social impacts	1

Table 5-3: Evaluation of Impact Significance Matrix (Risk Score Table)

Consequence								
Catastrophic Major Moderate								
Certain	25	15	10	5				
Likely	15	9	6	3				
Unlikely	10	6	4	2				
Rare	5	3	2	1				

Risk:

Critical: 15 – 25,

Significant/ Moderate:

6 - 10,

Low: 1 - 5

Critical and moderate risks will be addressed in EMP.

# 5.2 Pre-construction (design) phase Impacts

- 250. Proper planning during project design can significantly reduce the negative impacts at the time of construction and operation.
- 251. A summary of screening of potential impacts at the pre-construction (design) phase, based on methodology discussed in **Section 5.1**, is provided in **Table 5-4**.

Table 5-4: Screening of Potential Impacts at Pre-construction (design) phase

No.	Potential Impact	Likelihood (Certain, Likely, Unlikely, Rare)	Consequence (Catastrophic, Major, Moderate, Minor)	Risk Score (Critical, Significant/ Moderate, Low)	Residual Impact (Critical, Significant/ Moderate, Low)
1	Lack of integration of IEE/EMP/EIA	3	3	9	Low
	requirements into construction bid documents	Likely	Major	Significant	
2	Lack of planning in ETL design <sup>58</sup>	3	3	9	Low
		Likely	Major	Significant	
3	Improper Location of Camps Leading to	3	3	9	Low
	Environmental and Social Issues	Likely	Major	Significant	
4	Lack of Project environmental safeguards	3	3	9	Low
	(human resource) capacity	Likely	Major	Significant	
5	Removal of vegetation/trees	3	3	9	Low
	Ŭ	Likely	Major	Significant	
6	Noise caused by construction equipment	3	2	6	Low
		Likely	Moderate	Moderate	
7	Land acquisition	3	3	9	Low
	•	Likely	Major	Significant	
8	Waste generation	3	2	6	Low
		Likely	Moderate	Moderate	
9	Disruption to existing drainage pathways and	3	2	6	Low
	utilities	Likely	Moderate	Moderate	
10	Impacts on Sensitive and High Value Areas	2	2	4	Low
		Unlikely	Moderate	Low	
11	EMF	3	2	6	Low
		Likely	Moderate	Moderate	
12	Impact on Community Safety due to Structure/	2	3	6	Low
	Mechanical Failure of the overhead conductors	Unlikely	Major	Moderate	
13	Natural hazard risks (flooding, earthquakes,	2	2	4	
	etc.)	Unlikely	Moderate	Low	



Critical Risk Level
Significant/ Moderate Risk Level
Low Risk Level

<sup>&</sup>lt;sup>58</sup> Covering (i) Route Selection, (ii) Transmission, (iii) Structure Design, (iv) Tower Placement Add-ons, (v) Visual Amenity, and (vi) Mechanical Failure of the Overhead Conductors.

# 5.2.1 Lack of Integration of IEE/EMP/EIA Requirements into Construction Bid Documents

## Assessment

252. The bidding documents must reflect the requirement to select a qualified and experienced Contractor from the perspective of ensuring implementation of required safeguards during project development.

# Mitigation Measures

- 253. The mitigation measures described below will be implemented while completing the final design of the Project.
  - The ESIC should be assigned the task to check that design and bid documents are responsive to key environmental, social, and safety considerations, and that the proposed method of work reflects the boundaries defined in the EMP.
  - The bid documents must include the EMP, and its implementation cost must be reflected in the bill of quantity (BoQ).

# 5.2.2 Lack of Planning in ETL Design<sup>59</sup>

## **Assessment**

254. Vulnerability to climate change and natural disasters poses an additional significant challenge to the sustainable and reliable electricity supply, as witnessed by the monsoon rains and the subsequent flashfloods in July and August 2022, which wreaked tremendous devastations in Pakistan. As per the NTDC's Rapid Flood Damage Assessment of its network, no damage was reported on 500 kilovolt (kV) and 220kV grid stations except two high voltage ETLs with a total of thirteen towers collapsed as a result of floods. The Climate Risk and Vulnerability Assessment (CRVA) September 2022 concluded that changes in intensity and frequency of extreme weather events and unseasonal deviations from average weather will affect current and future energy infrastructure, supply reliability, and the energy sector's profitability. Therefore, additional investment is required to ensure the transmission network resilient to climate change and natural disaster.

The <u>pre</u>-construction (design) phase planning is very important for the following parameters. Better planning will produce less environmental and social impacts during later phases of construction and operations.

- Route Selection
- Transmission Structure Design
- Tower Placement
- Add-ons
- Visual Amenity
- Mechanical Failure of the Overhead Conductors

# Mitigation Measures

255. The mitigation measures described below will be implemented while completing the final design of the Project.

<sup>&</sup>lt;sup>59</sup> Covering (i) Route Selection, (ii) Transmission, (iii) Structure Design, (iv) Tower Placement Add-ons, and (v) Visual Amenity, (vi) Mechanical Failure of the Overhead Conductors.

<sup>60</sup> Islamic Relief Pakistan. 2022. Rapid Assessment: Flood Emergency - Balochistan and Sind (28 August 2022).

<sup>&</sup>lt;sup>61</sup> One tower on 220kV Khuzdar-Dadu transmission lines and 12 towers on 220kV Dadu-Sibbi transmission line.

<sup>&</sup>lt;sup>62</sup> The Climate Risk and Vulnerability Assessment is in Appendix 12.

- Using corridor-sharing with existing ETLs for minimize RoW requirements. Preference will be given to a route with a minimum community displacement and minimum tree cutting requirement
- Better planning during the selection of RoW will generate less negative socioeconomic impacts on the affected persons.
- Selection and use of the latest available technology for reducing the EMF from ETLs.
- a. ETLs to be designed for higher resilience to climate change impacts to ensure the transmission network resilient to climate change and natural disaster.
- Choosing a ETL tower with aesthetic appeal such as the darker color of oxidized steel structures may blend in better with forested backgrounds.
- Making minor adjustments in tower locations to avoid archeological sites or minimize effects on agricultural operations.
- Adding flight diverters to conductors to minimize bird collisions with the wires.
- Location of high-voltage transmission and distribution lines in less populated areas, where possible, to mitigate the impact on visual amenity and noise. This will also create less land acquisition and resettlement issues.

# 5.2.3 Improper Location of Camps Leading to Environmental and Social Issues

## Assessment

256. The selection of campsites for construction and field residence is very important step to be taken by the contractors before mobilization for construction. Poor planning in selection of the sites and poor camping facilities, can cause environmental and social issues during construction.

## Mitigation Measures

- 257. The mitigation measures described below will be implemented while completing the final design of the Project.
  - Camp locations at least 200-300 m from the sensitive receptors including settlements and water bodies.
  - Development of the campsite plans indicating walkways, car parking, recreational areas, rooms, kitchen, dining, storm run-off, toilets and sewerage lines and treatment, disposal, freshwater storage, and lines, etc.
- 5.2.4 Lack of Project environmental safeguards (human resource) capacity

# <u>Assessment</u>

258. The lack of environmental and social safeguards team and lack of capacity within project proponent and contractors creates implementation issues of project environmental safeguard documents including local law requirements, ADB SPS requirements, IEE, EIA, SSEMP, and NoC.

- 259. The mitigation measures described below will be implemented while completing the final design of the Project.
  - b. The ESIC/PMU to make sure that it is staffed by EHS Manager, Deputy EHS Manager and Assistant EHS Manager in addition to social safeguard staff.
  - The ESIC/PMU to ensure, contractor's environmental safeguards capacity before construction starts. Make sure that the Construction Contractor assigns and retains a full-time and qualified ESO and a full-time and qualified HSO.

# 5.2.5 Removal of vegetation/trees

#### Assessment

260. Due to the proposed project, 350-400 trees of varying species and sizes, may be affected by the project. This impact will be permanent and moderate adverse. Lack of planning in clearing RoW from trees can cause unnecessary cutting trees.

## Mitigation Measures

- 261. The proposed mitigation measures will include:
  - Incorporate technical design measures to minimize the removal of these trees, as far as possible.
  - Compensatory planting of ten (10) trees against each fallen tree of similar floral function will be planted; and.
  - The plantation plan will prefer the prevalent indigenous species of plants and ensure that there will be no exotic species in the plantation plan with known environmental setbacks.

# 5.2.6 Noise caused by construction equipment

# <u>Assessment</u>

262. Increase in ambient noise levels are expected in construction phase of the Project especially in areas near to sensitive receptors. An early assessment in pre-construction (design) phase, at sensitive receptors, will be useful.

# **Mitigation Measures**

- 263. The following measures will be implemented to ensure that the cumulative noise impacts are within acceptable limits during construction activities:
  - Conduct detailed acoustic assessment for all residential buildings, schools, (other sensitive structures) within 50 m of RoW.
  - After the assessment, identify the areas where noise barriers are required. Also, suggest noise reducing devices on equipment such as mufflers and silencers.
  - The audible noise of the ETL is most severe under wet conditions. During detailed design, it will be ensured that audible noise under wet conditions is within acceptable limits.
  - During detail design, it will be ensured that audible noise as per CISPR18-2 "Methods for measurement of RI characteristics of overhead power lines and high voltage equipment" will be either category-I (which is Interference not audible) or category-II (which is Interference just perceptible).

# 5.2.7 Land Acquisition

## Assessment

264. Though no land will be acquired permanently, however, damages (crops and trees) to the land will be happened during ETL construction. This may result in loss of land, assets and livelihood associated with the loss of crops and trees. This impact will be permanent and high adverse in nature.

- 265. Mitigation measures will involve careful alignment selection by the designer to minimize the impact by avoiding the acquisition of residential and commercial areas. Also, an adequate budget will be provided in the project cost for the compensation to the affected people as per the Land Acquisition Act, 1894 and framing of a judicious and fair compensation package for the provision of compensation on the prevailing market rates.
  - NTDC to select the route in a way that minimum impact on trees and crops occur.

- Assessment of loss of land, trees and crops (if any) due to construction of ETL towers.
- Preparation of land acquisition and resettlement plan (LARP) for the proposed Project before commencement of construction activities.
- All the impacts identified by the IEE will be incorporated into the project LARP and relevant entitlements will be included into the Entitlement Matrix.
- All the payments / entitlements are paid according to the Entitlement Matrix, prepared according to the LARP.

266. According to Land Acquisition Act 1894, the following points are to be considered while determining compensation to the project affectees:

- The market value of the land at the date of publication of the notification under section 4 sub section (1).
- The damage sustained by the person interested, because of the taking of any standing crops, or trees which may be on the land at the time of the collector's taking possession thereof.
- The damage if any sustained by the person interested at the time of the collector's taking
  possession of the land because of acquisition injuriously affecting his other property,
  moveable, or immoveable, in any other manner, or his earning; and
- As a consequence of the acquisition of the land by the collector, the person affected is compelled to change his residence or place of business, the reasonable expenses incidental to such change.

#### 5.2.8 Waste Generation

## Assessment

267. The appropriate disposal of waste and management of spills needs to be assessed at pre-construction (design) phase and its implementation cost must be reflected in BoQ.

## Mitigation Measures

268. The following measures will be implemented to ensure that adequate disposal options for all wastes are in place:

- Identify enough locations for disposal of transformer oils, unsuitable soils, scrap metal "cradle to grave".
- Include in contracts for unit rates for re-measurement for disposal.
- Designate disposal sites in the contract and cost unit disposal rates accordingly.

#### 5.2.9 Disruption to Existing Drainage Pathways and Utilities

# **Assessment**

269. The construction of Project may affect the drainage system and irrigation crossings and other public utilities within RoW.

## Mitigation Measures

270. The possible mitigation measures, to be include in preliminary and detailed designs, are as follows:

- Identify locations where drainage or irrigation crossing, utilities within RoW may be affected by works.
- Include in protection works contract as a payment milestone(s).

# 5.2.10 Impacts on Sensitive and High Value Areas

## Assessment

- 271. The construction and operation of the Project will result in several impacts including air, noise and water pollution, electrocution, collisions, aesthetics, EMF and community health and safety.
- 272. However, the impact will be low as 1) the majority length of the ETL passes from the least populated area, 2) the ETL RoW is not located in any protected or ecologically sensitive area (**Section 4.3**), and 3) there is no mosque, graveyard, tomb or any other religious/archaeological site within 100 m boundary from the edge of the Project (**Section 4.4**).

- 273. The following mitigation measures will be implemented:
  - Siting the Project facilities away from any residential area.
  - If, siting of Project facilities cannot be avoided altogether, the area of disruption should be minimized, and the impacts should be mitigated.

# 5.2.11 Electromagnetic field (EMF)

# <u>Assessment</u>

- 274. Electric fields are produced by voltage and increase in strength as the voltage increases whereas EMF result from the flow of electric current and increase in strength as the current increases. The operation of the Project will result in the production of EMF which needs to be controlled to protect environment and public health.
- 275. EMF are also created by electrical household appliances such as motors in refrigerators, vacuum cleaners, microwaves, televisions, and computers. Due to the proximity of humans to household appliances, the level of EMF is often far greater than those levels produced by ETLs fixed on high towers (**Figure 5-1**).<sup>63</sup>
- 276. EMF generated by electric lines are in the extremely-low-frequency (ELF) range of the electromagnetic spectrum. The energy from these EMF is very small. EMF from appliances and ETLs cannot break molecular bonds. The highest frequency electromagnetic radiation, like gamma rays, can break apart DNA and lead to cancer. Low frequency radiations such as microwaves do not have enough energy to break molecular bonds but can heat food items.
- 277. For overhead ETLs, the EMF typically range from about 5 to 150 mG (**Table 5-5**) depending on current load, separation of the conductors, and distance from the lines. In general, at a distance of about 300 feet from an ETL, measured EMF are similar to typical ambient background levels found in most homes.
- 278. The EMF interference is significantly dependent on the power line configurations, separation distance between ETL and objects underneath, separation distance between conductors of ETL, the ETL tower height, existence of the earth wire, and the length of system parallelism.<sup>64</sup>
- 279. In the literature, EMF data are presented in either units of Gauss (G) or Tesla (T). A milligauss (mG) is equal to one-thousandth of a Gauss (G). One Tesla is equal to 10,000 Gauss. A microtesla ( $\mu$ T) is equal to one-millionth of a Tesla or 10 mG.
- 280. EMF strength and distances from overhead ETLs is provided in **Figure 5-2**. This generalized graphic view is showing on how EMF quickly diminish with distance.

\_

<sup>63</sup> https://psc.wi.gov/Documents/Brochures/EMF.pdf

<sup>&</sup>lt;sup>64</sup> Chaaban, Farid & Hassan, Heba. (2009). Modelling and Measurements of the Electromagnetic Field of High Voltage Transmission Lines: A Practical Case in Lebanon.

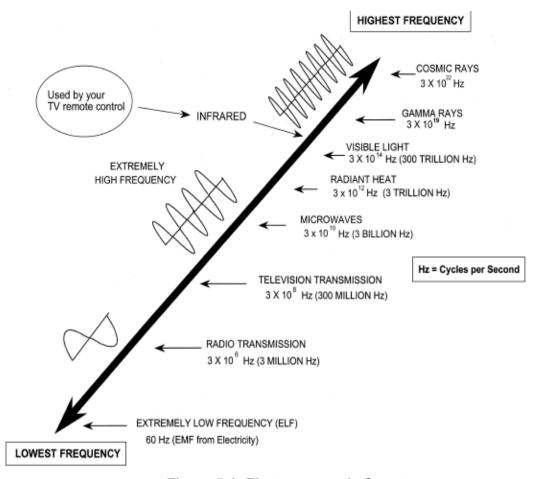


Figure 5-1: Electromagnetic Spectrum

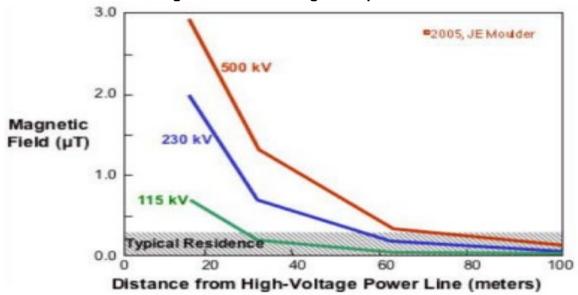


Figure 5-2: Magnetic Strength from Overhead Transmission Lines

Table 5-5: Magnetic Fields Observed for Overhead Transmission Lines

		Туј	pical Magnetic	Field Measu	urements (m	G)
Overhead Transmission		Maximum	**			
Line Voltages	Usage	in ROW	50	100	200	300
115 kV	Average	30	7	2	0.4	0.2
113 KV	Peak	63	14	4	0.9	0.2 0.4 0.8
230 kV	Average	58	20	7	1.8	0.8
230 KV	Peak	118	40	15	3.6	1.6
500 kV	Average	87	29	13	3.2	1.4
500 KV	Peak	183	62	27	6.7	3.0

Table 5-6: Safety Distances for 220 kV Transmission Line

Description <sup>65</sup>	Distance (meters)
Minimum Approach Distance for People	3m (Authorized person) 6m (Ordinary)
Minimum Safe Vertical Distance	8 m
Clearance distance from ETL to ground and road	7m
Clearance distance to trees/hedges	4.6
Clearance distance to water course	7.6 m
Vertical Passing clearance (if vehicles will below the power line)	2.4 m

Many studies have been conducted by researchers through animal experiments, clinical studies, computer simulations, and human population (epidemiological) to determine the relationship between exposure to EMF and impact on health such as childhood leukemia <sup>66</sup>, cardiovascular disease, cancer etc. In the past, numerous reports have presented conflicting information. Some of these reports have provided evidence of adverse health effects like anxiety, poor sleep <sup>67</sup>; while results of most of these studies did not indicate any correlation between the EMF and chronic diseases emanating from power lines. <sup>68,69,70</sup>

- 282. Birds use electrical power lines, and towers for perching, and nesting. Therefore, many bird species, like humans, are exposed to EMFs throughout their lives.<sup>71</sup>
- 283. The significance of impact for this Project is moderate, because the ETL is passing overhead of a settlement near Sheikh Muhammadi Grid Station.

## Mitigation Measures

\_

<sup>65</sup> UK Power Network Standards -EI 02-2019

<sup>&</sup>lt;sup>66</sup> Tynes, T., & Haldorsen, T. (1997). Electromagnetic fields and cancer in children residing near Norwegian high-voltage power lines. *American journal of epidemiology*, *145*(3), 219-226.

<sup>&</sup>lt;sup>67</sup> Bagheri Hosseinabadi, M., Khanjani, N., Ebrahimi, M. H., Haji, B., & Abdolahfard, M. (2019). The effect of chronic exposure to extremely low-frequency electromagnetic fields on sleep quality, stress, depression and anxiety. *Electromagnetic biology and medicine*, *38*(1), 96-101.

<sup>&</sup>lt;sup>68</sup> Liu, J., Dawalibi, F. P., Ma, J., & Mitskevitch, N. (2006, August). Modeling techniques for analyzing electromagnetic interference caused by high voltage power lines to neighboring communication cables. In *The 2006 4th Asia-Pacific Conference on Environmental Electromagnetics* (pp. 235-243). IEEE.

<sup>&</sup>lt;sup>69</sup> Valberg, P. A. (1996). Electric and magnetic fields (EMF): What do we know about the health effects. *International archives of occupational and environmental health*, 68(6), 448-454.

<sup>&</sup>lt;sup>70</sup> Kim J Fernie and S James Reynolds. The effects of electromagnetic fields from power lines on avian reproductive biology and physiology: a review. *Journal of toxicology and environmental health. Part B, Critical reviews.* Vol. 8(2).

<sup>&</sup>lt;sup>71</sup> Biasotto, L. D., & Kindel, A. (2018). Power lines and impacts on biodiversity: A systematic review. *Environmental Impact Assessment Review*, *71*, 110-119.

- 284. The following mitigation measures will be implemented at pre-construction (design) phase to reduce the future impact on environment:
  - NTDC's standard operating procedures (SOPs) of a minimum vertical ground clearance for ETL conductor of 7 meters will be ensured.
  - Raising conductor height above the ground to 8 m, typically by increasing tower height, will be ideal.
  - Reducing conductor spacing.
  - Arranging phases so that fields tend to cancel.
  - Increasing transmission voltage (since EMF intensities are a function of current, and increased voltage, all things being equal, will result in reduced current).
  - Reducing loads (and therefore, currents).
  - Identification of potential exposure levels in the work area including surveys of exposure levels and establishment of safety zones.
  - Safety signs and warning zone will be highlighted to indicate EMF in the area
  - Limit access to properly trained workers and those equipped with appropriate PPE when entering safety zones.
  - Increasing RoW widths or buffer zone widths, to move people further from ETLs.
- 5.2.12 Impact on Community Safety due to Structure/ Mechanical Failure of the overhead conductors

# Assessment

285. Risks related to EMFs and natural hazards, such as earthquakes, landslides, and rockfalls, can result in adverse impacts during operation. Structure failure, especially near or at residential areas, may create public safety issues if better design and technology is not recommended.

- 286. The following mitigation measures will be implemented at pre-construction (design) phase:
  - Ensure all safety aspects related to safety of structure is considered.
  - Ensure seismic design requirements are incorporated in the Project design.
  - The ETL will be constructed using very robust design and there is very low probability of mechanical failure even under extreme weather conditions. Nonetheless, following special arrangements will be made in this section to ensure safety in case of mechanical failure of the ETL conductors.
  - Installation of special tower/pole structures that would support a long span of up to 500 m so that no tower/pole has to be installed inside the streets.
  - Special tower/pole structures will be designed with load safety margin factor of 2.5 instead of generally used 1.5, thus having an extraordinary strength bearing margin to cater for any untoward mechanical hazardous situation.
  - Special tower/pole structures will be designed to achieve enhanced vertical ground clearance of 15-20 meters whereas the standard requirement of ground clearance of 220 kV line is 7.1 meter.
  - Installation of grounded metallic mesh beneath the lowest conductor to act as fall arrester in case of mechanical failure of the conductor in residential areas.


# 5.3 Construction Phase Impacts

- 287. The construction phase impacts on the physical environment, ecology, and socioeconomic environment are listed separately in the below sections.
- 288. A summary of potential impacts at the construction phase, based on methodology discussed in **Section 5.1**, is provided in **Table 5-7**.

**Table 5-7: Potential Impacts at Construction Phase** 

No.	Potential Impact	Likelihood (Certain, Likely, Unlikely, Rare)	Consequence (Catastrophic, Major, Moderate, Minor)	Risk Score (Critical, Significant/ Moderate, Low)	Residual Impact (Critical, Significant/ Moderate, Low)
1	Dust from construction activity and Air	3	3	9	Low
	emissions from construction equipment and vehicles	Likely	Major	Significant	
2	Noise from construction vehicles and	3	3	9	Low
	heavy equipment	Likely	Major	Significant	
3	Sediment run-off from construction	3	3	9	Low
	sites	Likely	Major	Significant	
4	Impact on Water Resources Quality	3	3	9	Low
	and Quantity	Likely	Major	Significant	
5	Untreated disposal of effluent from	3	3	9	Low
	worker camps and batching plant(s)	Likely	Major	Significant	
6	Vibrations	3	3	9	Low
		Likely	Major	Significant	
7	Traffic Congestions	3	2	6	Low
		Likely	Moderate	Moderate	
8	Disposal of spoils and waste materials	3	2	6	Low
		Likely	Moderate	Moderate	
9	Impact on Occupational Health and	3	3	9	Low
	Safety	Likely	Major	Significant	
10	Habitat loss and impact on mammals, amphibians, birds, and reptiles	2	3	6	Low
		Unlikely	Major	Moderate	
11	Increased employment opportunities and local economy (positive impact)	_	-		
12	Overburden on local resources	3	2	6	Low
		Likely	Moderate	Moderate	
13	Social Conflicts due to Influx of	3	2	6	Low
	Workers	Likely	Moderate	Moderate	
14	Impact on Community Health and	2	3	6	Low
	Safety Risk	Unlikely	Major	Moderate	

No.	Potential Impact	Likelihood (Certain, Likely, Unlikely, Rare)	Consequence (Catastrophic, Major, Moderate, Minor)	Risk Score (Critical, Significant/ Moderate, Low)	Residual Impact (Critical, Significant/ Moderate, Low)
15	Impact on Physical Cultural Resources	2	3	6	Low
	(PCRs)	Unlikely	Major	Moderate	
16	Uncontrolled Solid Waste Disposal,	3	3	9	Low
	Communicable Diseases	Likely	Major	Significant	
17	Natural Hazard Risks (Flooding,	2	3	6	Low
	Earthquakes etc.)	Unlikely	Major	Moderate	



Low Risk Level

# 5.3.1 Physical Environment

# 5.3.1.1 Dust from construction activity and Air emissions from construction equipment and vehicles

# **Assessment**

- 289. Fugitive dust and other emissions are expected from earthwork, construction site camps, vehicle traffic, and other construction activities including land clearing activities and materials stockpiles.
- 290. The baseline values for air quality including particulate matter were found within NEQS.
- 291. The construction works will be carried out within RoW i.e. 15 m on both sides of ETL route. The nearest sensitive receptors such as settlements are located at about 40 m from center of ETL route. Therefore, at least a distance of about 25 m is expected from work sites to nearby settlements along ETL route.
- 292. The major activities related to construction which will generate dust emissions (or PM) during the construction phase include vehicular movement, site preparation, loading/unloading of materials, and stockpiles.
- 293. The amount of dust generation is highly dependent on the activity type, construction methods, and weather conditions during the activity hence any estimation of dust generation is highly uncertain therefore a worst-case area-based emission factor has been used to estimate the dust emissions from the construction activities. Level 1 general emission factor suggested in 'Improvement of Specific Emission Factors (BACM Project No. 1)' report (MRI 1996) prepared for the South Coast Air Quality Management District' have been used to estimate the emissions from the construction activities (Muleski, G.E, Garman G. 1996). The suggested emission factor of 0.11 ton/acre-month for average conditions and 0.40 ton/acremonth for worst-case scenarios (construction sites with active large-scale earth moving operations) were considered and worst-case scenario has been used for impact assessment.

Emission Factor: 0.40 ton/acre-month

Project Site Active Area: 154.3 Acre [a]
Construction Phase time: 18 months

Total Emission = 0.40 × 154.3 × 18 = 1067.8 tons in 18 months

• Emission Rate: 1.32 × 10<sup>-10</sup> g/s/m<sup>2</sup> (208 hours per month Assumed)

Notes: [a] Right of way of 30 m and 20 km long and two campsites of approximately 6 acres land.

- 294. Although the estimated emission rates are not significant, but as discussed before, the baseline concentrations of PM in the area are higher than the WHO AQGs values, therefore, additional dust could further deteriorate the quality of air in the area. If not mitigated.
- 295. During the construction phase, the area of probable impact for air can typically reach 500 m from the boundary of the construction site. It is envisaged that in areas more than 500 m away from the construction area, the impact due to fugitive dust will be insignificant due to settling effects, unless there are exceptional gusts of wind, in which case a small amount of very fine dust particles (<10 $\mu$ m in diameter) could reach up to 1,000 m. Apart from human health impacts and nuisance, PM<sub>10</sub> and PM<sub>2.5</sub> when deposited on vegetation inhibits photosynthesis and potentially degrades habitats and also affect the crop yield of agricultural fields nearby.

Muleski, G.E, Garman G. (1996). Improvement of Specific Emission Factors (BACM Project No. 1); Prepared for South Coast Air Quality Management District, Contract 95040; Diamond Bar, CA,

296. Therefore, based on the above discussions, unmitigated air quality impacts due to dust emissions are considered to be significant.

## Mitigation Measures

- 297. A Dust Management Plan must be prepared by the Contractor. A sample plan has been provided in **Annexure VIII.**
- 298. The following mitigation measures will be used to limit dust generation during construction activities:
- Water will be sprinkled through a dedicated water-bowser at source, around the construction site and along the routes used for construction activities to prevent the generation of dust and to minimize the levels of dust within the vicinity of orchards and fruit farms.
- A speed limit of not more than 30 kilometers per hour (km/h) will be imposed on the vehicles in areas where the potential of dust generation is greater including unpaved roads.
- Fuel-efficient and well-maintained haulage trucks will be employed to minimize exhaust emissions.
- Vehicles transporting soil, sand and other construction materials will be covered.
- The movement of vehicles through densely populated areas will be avoided.
- Water will be sprayed at bare areas that are prone to high dust emissions.
- Stockpiled soil and sand will be kept slightly wet before loading, particularly in windy conditions.
- Dust emissions at the camp and construction sites to be minimized by implementing good housekeeping and sound management practices.
- All project vehicles and other equipment will be maintained as per NEQS for vehicular emissions.
- The construction material will be stored in the boundary wall and no disturbance to surrounding areas is expected. The contractor will be, however, required to provide a traffic management plan before the commencement of work at the site.
- The need for large stockpiles will be minimized by careful planning of the supply of materials from controlled sources. Stockpiles (if required) will not be located within 50 m of schools, hospitals, or other public amenities such as wells and pumps and should be covered with tarpaulins when not in use and at the end of the working day to enclose dust.
- Concrete plants will not be located close to any sensitive receptors.
- A check will be kept by the NTDC that no construction will be allowed within 100 m of the ETL.
- 299. Once the mitigation measures given above are incorporated, it is expected that the project will not have any significant incremental impacts on the baseline dust and gaseous levels of the area. The effectiveness of the mitigation measures will be monitored during the construction, restoration, and operation phases.

## 5.3.1.2 Noise from construction vehicles and heavy equipment

# <u>Assessment</u>

- 300. The ETL Row is passing through agricultural fields or open and hilly lands.
- 301. The construction works will be carried out within RoW i.e., 15 m on both sides of ETL route.
- 302. Blasting activities are anticipated in RoW in hilly areas. Therefore, the construction noise is considered significant due to nearby sensitive receptors to the construction sites.

303. **Table 5-8** represents typical noise levels from various construction equipment items. It should be noted that the values indicated in the table may differ depending on the brand and age of machinery provided/used by the construction company.

Table 5-8: Construction Equipment Noise Ranges, dB (A)

Equipment	Quantity	Usage Factor		Distance ft	Actual Lmax (50ft)	Lmax	Leq
Batch Plant		15%	0.15	1066	83	56.4	48.2
Concrete Mixers	1	40%	0.40	1066	78.8	52.2	48.2
Crane	1	16%	0.16	1066	80.6	54.0	46.1
Excavator	1	40%	0.40	1066	80.7	54.1	50.1
Tractor/Trolley	2	40%	0.40	1066	80	53.4	49.4
Bulldozers		40%	0.40	1066	80	53.4	49.4
Paver		50%	0.50	1066	77	50.4	47.4
Compactor	1	20%	0.20	1066	83	56.4	49.4
Pumps		50%	0.50	1066	77	50.4	47.4
Generators	1	50%	0.50	1066	80.6	54.0	51.0
Vibrators	1	20%	0.20	1066	76	49.4	42.4
Drilling machines		10%	0.10	1066	90	63.4	53.4
Compressors	2	40%	0.40	1066	77.7	51.1	47.1
Dump Truck	1	40%	0.40	1066	76.5	49.9	45.9
Welder	1	40%	0.40	1066	74	47.4	43.4

## Mitigation Measures

304. A Noise Management Plan must be prepared by the Contractor. A sample plan has been provided in **Annexure XXI**.

305. The following specific measures will be adopted to mitigate any potential issues.

- Noise monitoring will be carried out at edge of RoW or at boundary wall of communities located within 100 m of RoW, if required, to assess compliance with day and nighttime noise limits of 55 dBA and 45 dBA prescribed in the NEQS / IFC guideline values.
- No nighttime work will be allowed in populated areas of ETL's RoW.
- All heavy equipment and machinery will be maintained as per NEQS/ IFC guideline values and with effective noise controlling devices in place such as silencers.
- The noise level from construction activity can be reduced by regular maintenance of machinery. Noise can be controlled through engineering control e.g., hammering actions can be substituted by hydraulic.
- Ensure that the workers are wearing necessary personal protection equipment (PPE's) such as earplugs, earmuffs, etc. where engineering control is not applicable to reduce the impact of noise.
- Equipment emitting excessive noise in comparison with other similar equipment will not be allowed to operate.
- Equipment under use will be regularly maintained, tuned, and provided with mufflers and speed controls to minimize noise levels.
- Blowing horns on all access roads except under emergency conditions will be prohibited.

- Muffled breakers and silenced diesel generators and compressors will be used to reduce construction noise.
- Contractor will take necessary measures to minimize noise nuisance using acoustic enclosures and barriers.
- A check will be kept by the NTDC that no construction will be allowed within 100 m of the FTI

306. Once the mitigation measures given above are incorporated, it is expected that the project will not have any significant incremental impacts on the baseline noise levels of the area. The effectiveness of the mitigation measures will be monitored during the construction, restoration, and operation phases.

#### 5.3.1.3 Sediment run-off from construction sites

#### Assessment

307. Construction of the Project will require clearing of some vegetation, excavation, and stockpiling of excavated and construction material.

308. The following potential impacts on the geomorphology and soil are identified:

- Loss of soil fertility due to loss of topsoil
- Contamination of soil due to the accidental release of solvents, oils, and lubricants.
- Failure of stockpile areas resulting in increased erosion and sediment flash.
- Generation of waste (hazardous and non-hazardous)
- Soil erosion and surface run-off from materials sourcing areas and site preparation activities.
- Potential for hazardous materials and oil spills associated with heavy equipment operation and fueling activities.
- 309. The project involves excavation. Therefore, find a chance is to be considered while digging or excavation. In case of chance finding, The Contractor must follow procedures provided in **Annexure IX**.
- 310. The significance criteria were found significant based on the methodology discussed in **Section 5.1**.

- 311. The mitigation measures described below will be implemented to reduce the impacts listed above:
  - All construction workers will be provided awareness training on the prevention of waste generation and spill prevention.
  - The topsoil can be preserved and used after the restoration of construction campsites and storage areas after the construction period.
  - Surplus excavated material will be disposed of at appropriate or designated sites and will be disposed of in a manner that does not disturb the natural and community drainages and tracks.
  - Equipment will be maintained properly to minimize oil or fuel leakages from construction machinery. Clean-up will be undertaken in the event of an oil spill larger than half a liter. This will include the removal of contaminated soil and disposal at a proper location.
  - A Spill Prevention and Response Plan will be prepared including the induction of staff for spill prevention and management.

- All storage fuel tanks will be marked with their contents and stored in diked areas with an
  extra 10% of the storage capacity of the fuel tank. The area will be lined with an impervious
  base.
- Grease traps will be constructed wherever needed, to prevent the flow of oily water into drainage channels or waterbodies.
- Spill cleanup kits (shovels, plastic bags, and absorbent materials) will be available near fuel and oil storage areas. Should any accidental spills occur, the immediate cleanup will be undertaken, and all cleanup materials will be stored in a secure area for further disposal. Disposal of such will be undertaken by a waste management company contracted by the Contractors. The waste management company must have the required licenses to transport and dispose any hazardous waste before any such waste is removed from the site. The Contractors will keep copies of the company's licenses and provide waste transfer manifests at their camp site for routine inspection by the engineer.
- Cleanup kits will be carried in all fuel trucks.
- Fueling of construction vehicles and machinery will take place at designated places or over impermeable surfaces for fixed machinery.
- Hazardous materials will be stored in designated places having impervious linings.
- 312. In addition to above, the following measures will also be implemented to specifically mitigate soil erosion and surface run-off:
  - Schedule works in sensitive areas (e.g. water body) for dry season.
  - Temporary erosion control plan one month before commencement of works.
  - Proper installation of TD and EC before works within 50 m of water bodies.
  - Cut areas will be treated against flow acceleration while filled areas will be carefully designed to avoid improper drainage.
  - Stockpiles will not be formed within such distances behind excavated or natural slopes that would reduce the stability of the slopes.
  - In the short-term, either temporary or permanent drainage works will protect all areas susceptible to erosion.
  - Measures will be taken to prevent pounding of surface water and scouring of slopes.
     Newly eroded channels will be backfilled and restored to natural contours.
  - Contractor will arrange to adopt suitable measures to minimize soil erosion during the construction period. Contractor will consult concerned authorities in the area before deciding mitigation measures.
  - Clearing of green surface cover to be minimized during site preparation.
  - Replanting trees to be done before the site is vacated and handed back to NTDC with appropriate trees (other vegetation cover as appropriate) to ensure interception of rainwater and the deceleration of surface run-off.
- 313. After the mitigation measures given above are incorporated, it is expected that the Project will not have any significant residual impacts on the area's geomorphology or soils. The effectiveness of the mitigation measures will be monitored during the construction and restoration phases.

## 5.3.1.4 Impact on Water Resources Quality and Quantity

# Assessment

- 314. As stated in **Section 4.2**, the major surface water feature in the area is the Kabul River and Bara River along with groundwater. The Bara River is crossing through the Project AOI.
- 315. The following are the potential impacts on water resources that may result during the construction of the ETL Project:

- Contamination of surface and groundwater due to improper handling of materials, leakage
  of oil and fuels and discharge from construction activities.
- Increased usage of local water resources due to its use in construction activities; and Blockade of natural drainage ways due to foundations construction.
- 316. The wastewater may be generated from the construction site or camp if constructed nearby may produce a major impact on these if not disposed of properly. However, the impact of construction activities on water availability may not be significant as there are few water resources available in the area.

- 317. The following specific measures will be adopted to mitigate any potential issues:
  - Erosion and sediment flash-control measures will be employed and maintained where necessary.
  - Washing vehicles will be allowed only in designated places such as local car wash or a similar facility to be built at the site with the provision of oil-water separators (OWS) and waste collection pits. Further details on the construction of OWS, waste collection pits, and the handling of contaminated waste are included section 5.3.1.
  - Equipment will be maintained properly to minimize oil or fuel leakages from construction machinery.
  - No effluents will be released to the environment untreated, as per procedures discussed in Section 9.3.
  - All types of solid and liquid wastes will be handled as per procedures discussed in Section 9.3.
  - The natural drainages will be restored after completion of civil works of the tower foundations in areas where tower locations fall within the catchment of dry stream beds.
  - The source of water for construction from authorized abstraction sources will be agreed between the local communities, local government, and the contractor.
  - Water conservation techniques will be developed and implemented by the contractor.
  - Access routes of the community to water sources will be kept clear and open so that the community's ability to meet its water requirements are not compromised.
  - Care will be exercised while moving heavy machinery to avoid damage or blockage of natural waterways and channels.
  - Records will be kept of water usage in all Project activities.
  - Construction camp and residential camp will not be built nearby water bodies.
- 318. In addition to above, the following are specific measures to mitigate hydrology and drainage aspects:
  - Consideration of weather conditions when construction activities are undertaken.
  - Limitations on excavation depths in use of recharge areas for material exploitation or spoil disposal.
  - Use of landscaping as an integrated component of construction activity as an erosion control measure.
  - Minimizing the removal of vegetative cover as much as possible and providing for its restoration where construction sites have been cleared of such areas.
- 319. In addition to above, the following are specific measures to mitigate water quality impacts:
  - Compile temporary drainage management plan one month before commencement of works.

- Proper installation of Temporary Drainage (TD) and Erosion Control (EC) before works within 50 m of water bodies.
- Proper construction of TD and EC measures, maintenance and management including training of operators and other workers to avoid pollution of water bodies by the considerate operation of construction machinery and equipment.
- Storage of lubricants, fuels, and other hydrocarbons in self-contained dedicated enclosures >50 m away from water bodies.
- Proper disposal of solid waste from construction activities and labor camps.
- Cover the construction material and spoil stockpiles with a suitable material to reduce material loss and sedimentation and avoid stockpiling near to water bodies.
- Topsoil stripped material will not be stored where natural drainage will be disrupted.
- Borrow sites (if required) will not be close to sources of drinking water.
- 320. Once the mitigation measures listed above are incorporated, it is expected that the project will not have any significant impacts on the area's water resource. The effectiveness of the mitigation measures will be monitored during the construction and restoration phases.

# 5.3.1.5 Untreated disposal of effluent from worker camps and batching plant(s)

# Assessment

321. The workers camp and construction camp facilities such as batching plant (s) will produce effluent during construction and if not handled and treated appropriately, it can contaminate local land, surface, and groundwater resources.

# Mitigation Measures

- 322. The following specific measures will be adopted to mitigate any potential issues:
  - Ensure safe storage and handling of fuels, oils, and other hazardous substances according to standard safety practices. Disposal should be carried out through KP-EPA approved contractors and facilities.
  - All efforts will be made for the proper disposal of solid waste, applying principles of reducing waste as far as possible, reusing what is practical and recycling all recyclable materials.
  - The solid waste generated during construction and campsites will be safely disposed of in demarcated waste disposal sites and the contractor will provide a proper waste management plan.
  - The sewage system for camps will be properly designed (pit latrines or, as required, septic tanks) to receive all sanitary wastewaters.
  - The solid residue from the septic tanks will be transported to the nearby municipal sewage disposal site.
  - Lined wash areas will be constructed within the campsite or at the site, for the receipt of wash waters from construction machinery; and ensure proper labeling of containers, including the identification and quantity of the contents, hazard contact information, etc.
  - Construction workers and supervisory staff will be encouraged and educated to practice waste minimization, reuse, and recycling to reduce the quantity of waste.

#### 5.3.1.6 Vibration

## **Assessment**

323. Piling-induced ground vibrations can lead to human disturbance and structural damage.

- 324. Other construction activity employing heavy machinery such as powered mechanical equipment and heavy traffic such as trucks for transportation of construction materials and supplies can also generate vibration. The cumulative effects of several machines can be significant.
- 325. The construction works will be carried out within RoW i.e., 15 m on both sides of ETL route.
- 326. The ETL Row is passing through agricultural fields or open and hilly lands.
- 327. Construction activities generate vibration. These activities include site clearing, site grading and soil compaction, pile driving, installation of deep foundations and industrial dynamic sources such as forge hammers etc. This vibration-inducing equipment used for land clearing are excavators, dozers, loaders, and large trucks.
- 328. For comparison, building impact vibration levels are often noted as a single number quantifying the peak particle velocity (PPV), in in/sec or mm/sec.<sup>73</sup>
- 329. **Table 5-9** provides typical construction equipment vibration level. **Table 5-10** provide predicted minimum separation between piling operations and sensitive buildings.<sup>74</sup>
- 330. According to The United States Bureau of Mines (USBM) RI 8507 vibration limits for 1- and 2-story houses which are the most typical structures in urban and rural areas, the vibration limits in the resonance zone are 12.7 mm/s and 19.0 mm/s for walls with plaster and dry walls, respectively. <sup>75</sup>
- British Standard provides vibration guidelines for two types of buildings.
  - Industrial and heavy commercial buildings the limit of 51 mm/s is used for frequencies from 4 to 100 Hz.
  - Residential or light commercial type buildings, the limits are: 15 mm/s at 4nHz increasing to 20 mm/s at 15 Hz and then increasing to 50 mm/s at 40 Hz and above.

**Table 5-9: Construction Equipment Vibration Level** 

measured at 7.6 m from the source

Equipment	PPV, in in/sec or mm/sec		
Vibratory Roller	5.6		
Mounted Impact Hammer (Hoe Ram)	2.3		
Grader	2.3		
Compaction Machine	2.3		
Excavator	2.3		
Large Bulldozer	2.3		
Loaded Trucks	1.9		
Crane	1.9		
Semi-Trucks	1.9		
Cement Trucks	1.9		
Dump Trucks	0.9		
Jack Hammer	0.9		

<sup>75</sup> FTA Report No. 0123 (2018), Transit noise and vibration impact assessment manual, U.S. Department of Transportation, Federal Transit Administration

124

<sup>&</sup>lt;sup>73</sup> Svinkin, Mark R. "A choice of proper criteria for soil and structural vibrations from construction and industrial sources." ICSMGE 2017–19th International Conference on Soil Mechanics and Geotechnical Engineering, Seoul, pp 1589â. Vol. 1592. 2017.

<sup>74</sup> http://www-civ.eng.cam.ac.uk/geotech\_new/people/bolton/mdb\_pub/117\_DFC\_2002\_363\_371.pdf

<sup>&</sup>lt;sup>76</sup> BS 735-2:1993 (1993), Evaluation and measurement for vibration in buildings – Part 2: Guide to damage levels from groundborne vibration (British Standard)

Table 5-10: Predicted Minimum Separation between Piling Operations and Sensitive Buildings

Building type	Piling method						
(vibration limit from Eurocode 3)	Press-in method (Eq <sup>n</sup> 4)	Impact hammer (stiff clay / medium dense sand; (C=0.75) (Eurocode 3)		Vibrator (Eurocode 3) kJ/cycle			
		5 kJ/blow	25 kJ/blow	2 kJ/cycle	10 kJ/cycle	50 kJ/cycle	
Architectural merit (2 mm/s)	3.5 m	26.5 m	59 m	16 m	36 m	78 m	
Residential area (4 mm/s)	1.75 m	13 m	30 m	8 m	18 m	39 m	
Light comer- cial (10 mm/s)	0.7 m	5 m	12 m	3.1 m	7 m	16 m	
Heavy Indust- rial (15 mm/s)	0.5 m	3.6 m	8 m	2.1 m	5 m	10 m	

332. A Vibration Management Plan must be prepared by the Contractor. A sample plan has been provided in **Annexure XXI**.

333. The following specific measures will be adopted to mitigate any potential issues:

- construction will not be allowed during nighttime (10 PM to 6 AM) and will only be conducted during daytime.
- Vibration from the construction of piles to support pads may be required for some tower construction and maybe a significant impact but this should be for a short duration. Where vibration could become a major consideration (within say 100 m of schools, religious premises, hospitals, or residences) a building condition survey will take place before construction.
- Use of better equipment with less vibration effects will be used such as Free-Suspended Vibrators (FSV).<sup>77</sup>
- The physical effect of piling will be assessed before construction and measures will be
  discussed with the local population as well as the timing of the works to serve as a vehicle
  for further public consultation at the implementation stage and to assist in public relations.
  At nearby schools, the contractor will discuss with the school principals the agreed time
  for operating these machines and completely avoid machine use near schools during
  examination times, if such a need arises.
- Ensure that the workers are wearing necessary personal protection equipment (PPE's) such as earplugs, earmuffs, etc. where engineering control is not applicable to reduce the impact of noise.
- Equipment under use will be regularly maintained, tuned, and provided with mufflers and speed controls to minimize noise levels.

334. Once the mitigation measures given above are incorporated, it is expected that the vibration impacts will be significantly reduced at nearby buildings to RoW.

## 5.3.1.7 Traffic Congestions

#### Assessment

\_

https://www.vpgroundforce.com/gb/footer-links/useful-links/industry-resources/reducing-ground-vibrationsduring-the-piling-proce/

- 335. There will be limited traffic during construction of the Project and will have little or no incremental effects on the existing traffic on the national or provincial highways.
- 336. There will be an increase in traffic on the internal roads, used for the transportation of construction materials, spoils, equipment and machinery. However, the increase will be for a limited period i.e. during construction activities.

- 337. Contractor to provide a traffic management plan as part of SSEMP. A template for typical traffic plan is provided in **Annexure X**.
- 338. The following measures will be employed to minimize potential impacts:
  - Efforts will be made to minimize the use of heavy trucks by preferring transport of equipment and supplies using 4x4 pickups, wherever possible, and
  - A speed limit of not more than 30 km/h will be imposed near settlements, on unpaved roads and link roads for reducing traffic accident risks and dust generation.
  - A traffic management plan, if required, will be prepared, and submitted to NTDC one
    month prior to start of works. Vicinity of schools, hospitals and communities will be
    considered while preparing plans and will be avoided to the extent feasible.
  - Plan of alternate routes for heavy vehicles will be formulated and implemented. Existing
    roads will be used wherever practical for transportation of materials and a 'no-short-cut'
    policy will be used.
  - While preparing plan of access routes, existing conditions of roads and bridges will also be considered to see for any requirement of widening and upgrading of access paths and roads.
  - Traffic warning signs will be installed, and traffic regulations will be enforced during transportation of materials and equipment and machinery.
  - Nighttime construction traffic will be avoided as much as possible.
  - Drivers will be instructed to give way to locals while driving on access tracks, to keep a close watch for wild/domestic animals and children while driving and to not throw any litter or cigarettes out of vehicle.
  - The use of canal flood protection bunds for the movement of heavy vehicles will be minimized. Wooden/damaged bridges on canal/river/ other crossings will not be used for the movement of heavy vehicles.
  - Dry stream beds will not be used as access routes.
  - Any damage to access tracks, metaled roads, watercourses, or the canal/river protection bunds, etc., will be appropriately repaired to bring these structures to their pre-construction condition. Any damage, which may cause hardship to the local community or wildlife, will be immediately repaired.

# 5.3.1.8 Disposal of spoils and waste materials

# <u>Assessment</u>

- 339. There is a possibility of the generation of hazardous and non-hazardous solid waste during construction such as used vehicle oil filters, oil-contaminated cloths, used batteries, iron and copper, cotton and kitchen waste, solid residue from the septic tanks, etc. These can create a nuisance to the environment if not handled appropriately.
- 340. It is anticipated that demolition of an existing ETL will be required. The demolition will not generate or relates to hazardous wastes such as PCB's, asbestos containing materials etc. However, if found then suitable waste disposal plans dealing with this type of wastes will be prepared and implemented.

- 341. Measures that will be implemented are as follows:
  - Ensure safe storage and handling of fuels, oils, and other hazardous substances according to standard safety practices. Disposal should be carried out through KP-EPA approved contractors and facilities.
  - Management and storage of fuel, waste oil, hazardous waste will be planned in accordance with EHS General Guidelines on Hazardous Materials Management.<sup>78</sup> This includes the use of appropriate secondary containment structures capable of containing the larger of 110 % of the largest tank or 25% of the combined tank volumes in areas with above-ground tanks with a total storage volume equal or greater than 1,000 liters.
  - All efforts will be made for the proper disposal of solid waste, applying principles of reducing waste as far as possible, reusing what is practical and recycling all recyclable materials.
  - The solid waste generated during construction and campsites will be safely disposed of in demarcated waste disposal sites and the contractor will provide a proper waste management plan as part of SSEMP. A framework waste management plan is attached as Annexure XI.
  - The sewage system for camps will be properly designed (pit latrines or, as required, septic tanks) to receive all sanitary wastewaters.
  - The solid residue from the septic tanks will be transported to the nearby municipal sewage disposal site.
  - Lined wash areas will be constructed within the campsite or at the site, for the receipt of
    wash waters from construction machinery; and ensure proper labeling of containers,
    including the identification and quantity of the contents, hazard contact information, etc.
  - Construction workers and supervisory staff will be encouraged and educated to practice waste minimization, reuse, and recycling to reduce the quantity of waste.

# 5.3.1.9 Impact on Occupational Health and Safety

#### Assessment

342. The occupational health and safety hazards associated with the construction of ETLs mainly include:

- Exposure to fall hazards from working at heights for poles and structures
- Exposure to EMFs to workers as the workers typically have a higher exposure to EMF than the general public due to working in proximity to electric power lines.
- The construction activities and vehicular movement at the construction site and access service roads may also result in roadside accidents particularly inflicting local communities who are not familiar with the presence of heavy equipment and machinery.

# **Mitigation Measures**

343. The contractor will prepare OHSE Management Plan as part of SSEMP. A template for OHSE Management Plan is provided in **Annexure XII.** 

344. The following are prevention and control measures will be implemented to the extent feasible to mitigate any issue related to occupational health and safety:

 Provide adequate personal protective equipment (PPE) and working platforms as per the job requirements

<sup>78 &</sup>lt;u>https://www.ifc.org/wps/wcm/connect/90231ba8-5bb3-40f4-9255-eaf723d89c32/1-5%2BHazardous%2BMaterials%2BManagement.pdf?MOD=AJPERES&CVID=nPtgwml</u>

- Install occupational safety warning signs at construction sites and camps.
- Provide workers with skull guard or hard hat.
- Allow only trained and certified workers to install electrical equipment with safety and insulation measures in place.
- Test structures for integrity prior to undertaking work.
- Prepare and implement fall protection program that will include training in climbing techniques and use of fall protection measures; inspection, maintenance, and replacement of fall protection equipment; and rescue of fall-arrested workers, among others.
- The fall protection system will be appropriate for the tower structure and necessary
  movements, including ascent, descent, and moving from point to point and fixtures will be
  installed, wherever possible, to facilitate the use of fall protection systems.
- Provide adequate work-positioning device system for workers to the extent possible.
- Properly maintained hoist equipment will be used along with properly trained personnel.
- Proper safety belts will be provided. The Safety belts should be of not less than 16 millimeters (mm) (5/8 inch) two-in-one nylon or material of equivalent strength.
- Use a backup safety strap when operating power tools at height.
- Remove signs and other obstructions from poles or structures prior to undertaking work.
- Provide an approved tool bag for raising or lowering tools or materials to workers on structures.
- Prepare and implement EMF safety program to prevented or minimize occupational hazards due to exposure to EMF.
- The contractor will prepare OHSE Management Plan as part of SSEMP. Also include provision of a safety champion program to be initiated on a monthly basis to encourage workers to adhere with H&S requirements.
- The plan will also include impacts and mitigation measures related with COVID-19. COVID-19 health and safety management plan are attached as **Annexure XIII.**
- The plan will also include details related with labour working conditions and details on prohibit child labour.
- Identify potential exposure levels in the workplace, including surveys of exposure levels in new projects and the use of personal monitors during working activities.
- Train workers in the identification of occupational EMF levels and hazards.
- Establish and identify safety zones to differentiate between work areas with expected elevated EMF levels compared to those acceptable for public exposure, limiting access to properly trained workers.
- Prepare and implement action plans to reduce adverse impact of EMF and to address occupational exposure. Action plans may include limiting exposure time through work rotation, increasing the distance between the source and the worker, when feasible, or the use of shielding materials.
- Worker's Accommodation Plan will be prepared in reference to Workers' Accommodation:
   Processes and Standards<sup>79</sup> as part of SSEMP and implemented.

345. Once the mitigation measures given above are incorporated, it is expected that the project will not have any significant incremental impacts. The effectiveness of the mitigation measures will be monitored during the construction, restoration, and operation phases.

<sup>&</sup>lt;sup>79</sup> A guidance note by IFC and the EBRD Workers' Accommodation: Processes and Standards (August 2009)

# 5.3.2 Ecological Environment

346. This section assesses the impacts on ecology in and around the Project site and outlines the mitigation measures proposed for the management of those impacts.

# 5.3.2.1 Habitat loss and impact on mammals, amphibians, birds, and reptiles

# <u>Assessment</u>

- 347. The Area of Habitat Loss is defined as the area that will be occupied due to the construction and operation of the Project infrastructure and from where vegetation will be cleared for the Project-related activities.
- 348. Since the proposed ETL passes through mostly covered with seasonal crops and mango and other fruit tree orchards so an estimate of 250-300 trees may be required to clear from RoW during construction.
- 349. Due to construction-related activity the fragmentation of habitat, and loss of wildlife habitat including bird nesting sites due to removal of vegetation.
- 350. The disturbance created by heavy types of machinery and the movement of the heavy vehicle will disturb fauna.
- 351. During the excavation period, accidental death of small mammals and reptiles may occur particularly if the excavation-related activities are performed in winter because reptile species mostly went hibernation during this period of the year.
- 352. Due to construction-related disturbances, many mammalian and bird species may leave their habitats.
- 353. Existing threats to biodiversity could be exacerbated by project-related indirect impacts caused by road access, wildlife hunting/poaching particularly Desert Hare and Indian Spinytailed Lizard, and migratory birds.
- 354. Project construction-related activities may cause the spread of invasive plant species such as *Prosopis juliflora, Cannabis sativa*, *Parthenium hysterophorus*, etc. through the import of material and reinstatement activities
- 355. Ecology or, no plant species of conservation importance has been observed or reported from the Area of Habitat Loss or AoI. Similarly, none of the mammal species from the AoI are included in the IUCN Red List of Threatened Species. There are no threatened or endemic herpetofauna species.
- 356. No critical or endangered species found in the AoI. IBAT identifies no key biodiversity areas or protected areas within a buffer of 10 km around The Project area.
- 357. For these reasons, project construction is not likely to have a significant impact on ecology. Though there will be irreversible harm to some ecological receptors (individuals) such as 250 to 300 trees may require to be removed.

- 358. The following mitigation measure will be followed during the project construction activities to minimize the impact on ecology:
  - If tree cutting is unavoidable for RoW clearance, the contractor will keep a record of cut trees. During plantation, ten-time (1 x 10 times) more plants will be planted. Before the plantation campaign, the forest department will be consulted on the selection of local species. A tree management plan will be prepared as part of SSEMP. **Annexure XIV** provides a framework plan for tree plantation.

- Provide adequate knowledge to the Project workers on relevant government regulations and punishments for illegal poaching to prevent hunting, trapping and exploitation of wildlife
- Minimize disturbance to, or movement of, soil and vegetation to prevent soil damage and erosion leading to spread of alien invasive plant species
- Revegetate disturbed areas with native plant species
- Ensure that solid and liquid waste is disposed only at designated locations, to prevent pollution of the water bodies in the AoI and vicinity.
- In addition to this, spray water twice or thrice a day (as per needed) to avoid dispersal of dust on the adjacent flora.
- Lights used in the camps, during the construction of towers will be kept to the minimum requirement. Upward scattering lights will preferably be used.
- Vehicle speed will be controlled to avoid incidental mortality of small mammals and reptiles.
- The contractor's staff and labor will be strictly directed not to damage any vegetation such as trees or bushes
- Clearing of green surface cover for construction, for borrow for development, cutting trees and other important vegetation during construction will be minimized.
- Provide awareness training identifications of animal hazards (such as venomous snakes);
   what to do if dangerous animals are encountered; report kills of large mammals and other migratory birds particularly designated species of conservation concern.
- Provide adequate knowledge to the workers on relevant government regulations and punishments for illegal poaching and trade in animals and plants; incorporate in contract documents regulations for Project staff and contractors to avoid illegal poaching of wild animals.
- The relevant stakeholders should ensure the protection of all wildlife species particularly species which are highly trafficked like Indian Pangolin and Indian Spiny-tailed Lizard.
- Reflective balls or a moving tag with different colors should be installed on lines for diverting the bird's flight. Reflective ball installment is very important for reducing mortality, especially among the nocturnal migrant species.
- A line space of about 1.4 m should be ensured between different conductors and between conductors and grounded wires or hardware. This mitigation will minimize the electrocution of large size birds such as vultures and other raptor species.

## 5.3.3 Socioeconomic Environment

359. The Project will have both positive and negative socio-economic impacts during the construction phase. Positive socio-economic impacts of the project are the creation of job opportunities and a boost to the local economy, while negative impacts include a disturbance to the privacy of locals due to the influx of workers and increased risks of community and occupational safety due to construction machinery and vehicles. The following sections provide impact assessment, significance, and mitigation measures for the positive and negative impacts of the project and measures to maximize the benefits of the project.

# 5.3.3.1 Increased Employment Opportunities and Local Economy

# <u>Assessment</u>

360. Direct, indirect, and induced employment at the local level, resulting in increased prosperity and wellbeing due to higher and more stable incomes of people. The impact has positive and high significance as the Project will provide economic opportunities for local people.

## **Enhancement Measures**

- 361. To maximize benefits to the local community, the following mitigation, enhancement, and good-practice measures will be adopted.
  - The contractor and sub-contractors will explain the recruitment process to local communities.
  - Local candidates will be given preference for jobs provided they have the required qualifications and skills for the announced positions
  - Coordinate efforts to recruit unskilled labor, if any are required under the Project, from the adjacent areas.
  - Determine what is 'fair and transparent' in the distribution of jobs between different community groups in consultation with local communities and their leaders.
  - As the nearby economy is mostly based on agriculture, it will be ensured that construction activities do not disturb or disrupt agricultural activities in the surrounding areas.
  - Local communities will be consulted before the start of work.

#### 5.3.3.2 Overburden on Local Resources

362. During the construction, overburden on local resources is possible if construction facilities such as workers camp and construction camp built near rural areas and can create problems for local communities.

#### Mitigation Measures

- 363. Proposed mitigation measures include:
  - Construction Contractor will prepare a resource conservation plan as per template given in Annexure XV.
  - The use of water will not disturb public water availability and the source of water will be selected carefully.
  - Contractor to source raw material and camp utilities from Peshawar city to avoid overburden on local resources.

#### 5.3.3.3 Social Conflicts due to Influx of Workers

## Assessment

- 364. The influx of workers into the AOI can potentially result in the deterioration of social values and an increase in social conflict in the communities due to the in-migration of employees and jobseekers. The presence of outsiders can also restrict the movement of local women, affecting their economic and social opportunities. The growth in population and associated economic disparity can result in increased crime, such as theft and robbery.
- 365. The impact has moderate impact as most of the workers will be hired from local communities as this will provide a monetary benefit to the contractor as well by saving overheads on housings and food if hired personnel from other areas.

- 366. Proposed mitigation, enhancement, and good-practice measures include.
  - Require non-locals employed by the Project to adhere to a social 'code of conduct' in terms
    of relations with local communities including restricting their movement to stay within
    camping sites
  - Provide employees and visitors with cultural awareness training.

### 5.3.3.4 Impact on Community Health and Safety

### Assessment

367. During the construction phase, there will be a health and safety risks to community members and there is risk of spreading communicable diseases.

# Mitigation Measures

368. To mitigate these risks the following measures are proposed:

- The camping sites of the Project site will be completely fenced off before the commencement of any other construction activities.
- Access to the site will be controlled and unauthorized people will not be allowed to enter.
   Workers will not allow socializing with local communities.
- Potential for the spread of vector-borne and communicable diseases (such as COVID-19, HIV infection, etc.) from labor camps will be suppressed through worker awareness orientation and appropriate accommodation and sanitation systems.
- Children will not be allowed to enter the site under any circumstances.
- The prescribed vehicle speed limit will be strictly enforced for community and worker safety.
- Dust emissions due to vehicular traffic will be minimized by enforcing the speed limit.
   Water will be sprinkled on unpaved surfaces where necessary.
- All vehicles used by the project will undergo regular maintenance and will be tuned following the requirements of the NEQS.
- The labor works with different transmittable diseases will be restricted within the construction site.
- Efforts will be made to create awareness about road safety among the drivers operating construction vehicles.
- Timely public notification on planned construction works.
- Close consultation with local communities to identify optimal solutions for diversions to maintain community integrity & social links
- Seeking cooperation with local educational facilities (schoolteachers) for road safety campaigns.
- Provision of proper safety and diversion signage, particularly at sensitive/accident- prone spots
- The use of water will not disturb public water availability and the source of water will be selected carefully.

# 5.3.3.5 Impact on Physical Cultural Resources (PCRs)

### Assessment

369. The location of mosques and other cultural and other heritage sites has been reviewed. There is no mosque, graveyard, tomb, or any other religious/archaeological site within 100 m boundary from the edge of the Project; therefore, no impact on the site is expected.

#### Mitigation Measures

370. However, a chance find procedure is presented in **Annexure IX** in case of finding any artifact during construction activities.

# 5.3.3.6 Uncontrolled Solid Waste Disposal, Communicable Diseases

#### Assessment

- 371. The main issues of concern are uncontrolled or unmanaged disposal of solid and liquid wastes into watercourses and natural drains, improper disposal of stormwater and black water and open defecation by construction workers.
- 372. Wherever water can accumulate in temporary drainage facilities, due to improper stormwater management, or improper disposal of wastewater generated from the site, there is the risk of mosquitoes and another insects breeding.
- 373. The impact has a significant impact on local communities if appropriate mitigation measures are not taken.

# Mitigation Measures

- 374. To mitigate these risks the following measures are proposed:
  - To maintain proper sanitation around construction sites, access to the nearby public lavatories will be allowed or provision of temporary toilets will be made. Construction worker camps will be necessary, based on the scale of the works needed. The construction camp will be provided with toilets with soakage pits or portable lavatories or at least pit latrines.
  - Disposal of surplus materials will also be negotiated through local authority approvals before the commencement of construction. The Project work will not involve any significant cutting and filling, but minor excavations (down to 4m) and piling may be required to create the foundations for towers (if required). It is expected (depending on the mode of contract) that the surface under the towers will need to be scrabbled to remove unstable materials, or to stockpile topsoil.
  - If surplus materials arise from the removal of the existing surfaces from specific areas, it
    will be used elsewhere on the Project before additional soil, rock, gravel, or sand is brought
    in. The use of immediately available material will generally minimize the need for additional
    rock-based materials extraction from outside.
  - Contractual clauses will require the contractor to produce a materials management plan (one month before construction commences) to identify all sources of cement and aggregates and to balance cut and fill. The plan will clearly state the methods to be employed before and during the extraction of materials and all the measures to be employed to mitigate nuisances to residents. Financial compensation will not be allowed as mitigation for environmental impacts or environmental nuisance.
  - Contractual clauses will require the contractor to produce a solid waste management plan so that the proper disposal of waste can be ensured.
  - Claims/complaints of the people on construction nuisance/damages close to RoW will be considered and responded promptly by the Contractor.
  - Temporary and permanent drainage facilities will be designed to facilitate the rapid removal of surface water from all areas and prevent the accumulation of surface water ponds.
  - The contractor will organize temporary means of access and make alternative arrangements to avoid access problems to local community and to avoid such short-term negative impacts.
  - Potential for the spread of vector-borne and communicable diseases (such as COVID-19, HIV infection, etc.) from labor camps will be avoided through worker awareness orientation and appropriate sanitation systems.

# 5.3.3.7 Natural Hazard Risks (Flooding, Earthquakes etc.)

### **Assessment**

375. According to the classifications in **Section 4.2.3**, the Project is located in moderate risk zone for earthquakes and unprecedented precipitation events as observed in the current year

(see current data in **Section 4.2.4)**, It is predicted to receive more rainfalls in the following years.

### Mitigation Measures

- 376. The structures of the ETL such as tower bases should be built as per the rules of Pakistan Building Code (PBC).
- 377. The tower bases should be built considering the local climatic conditions including flooding.
- 378. Project construction facilities should be built considering climatic conditions such as risk of flash flooding in case of high precipitation events.
- 379. Material testing and tensile strength of conductors must be checked before commencement of works.

# 5.4 Operation Phase

- 380. The operation phase impacts on the physical environment, ecology, and socioeconomic environment are listed separately in the below sections.
- 381. A summary of potential impacts during operation phase, based on methodology discussed in **Section 5.1**, is provided in **Table 5-11**.

**Table 5-11: Potential Impacts at Operation Phase** 

No.	1. Potential Impact	Likelihood (Certain, Likely, Unlikely, Rare)	Consequence (Catastrophic, Major, Moderate, Minor)	Risk Score (Critical, Significant/ Moderate, Low)	Residual Impact (Critical, Significant/ Moderate, Low)	
1	Noise	2	2	4	Low	
		Unlikely	Moderate	Low		
2	Impact of Faulted SF6	2	2	4	Low	
		Unlikely	Moderate	Low		
3	Electrocution and Collision of birds	3	3	9	Low	
		Likely	Major	Significant		
4	Occupational Health and Safety	3	3	9	Low	
		Likely	Major	Significant		
5	Community Health and Safety Risk	3	3	9	Low	
		Likely	Major	Significant		
6	Visual Amenity	3	3	9	Low	
		Likely	Major	Significant		
7	Aircraft Navigation Safety	2	2	4	Low	
		Unlikely	Moderate	Low		
8	Reduced Pressure for Local	3	3	9	Low	
	Resources	Likely	Major	Significant		



Critical Risk Level
Significant/ Moderate Risk Level
Low Risk Level

#### 5.4.1 Physical Environment

### 5.4.1.1 Noise

#### <u>Assessment</u>

- 382. The Project works will extend the power distribution. Maintenance works will be very small in scale and infrequent. The operation of the ETL project is not likely result in atmospheric pollution during operation and generate liquid or solid waste during operation.
- 383. However, the operations may cause increased audible noise specially in raining times. This will have a major impact in areas where ETL is passing through settlements.

### Mitigation Measures

- 384. The height of ETL and RoW as per NTDC standard for 220 kV ETL discussed in **Section** 3 will be maintained to avoid audible noise issues.
- 385. In addition to above, much more robust design for ETL and its ground clearance with much higher levels have been proposed for this project due to the Project passing through settlements in parts of the RoW.

### 5.4.1.2 Impact of Faulted SF6

## <u>Assessment</u>

- 386. Sulfur Hexafluoride (SF6) used as circuit breaker in electric transmission operations. Toxic decomposition products are formed when SF6 gas is subjected to an electric arc. The decomposition products are metal fluorides and form a white powder. Toxic gases are also formed which have the characteristic odor of rotten eggs.
- 387. Faulted Sulfur Hexafluoride (SF6) will be handled carefully ensuring standard industry practices. EHS Guidelines on Electric Transmission and Distribution (footnote **22**) will also be followed to handle SF6.

### Mitigation Measures

- Do not breathe the vapors remaining in a circuit breaker where arcing or corona discharges have occurred in the gas.
- Evacuate the faulted SF6 gas from the circuit breaker and flush with fresh air before working on the circuit breaker
- Arc products which do not recombine, or which combine with any oxygen or moisture present, are normally removed by the molecular sieve filter material within the circuit breaker.

# 5.4.2 Ecological Environment

#### 5.4.2.1 Electrocution and Collision of birds

#### Assessment

- 388. Operations and maintenance will be very small in scale and infrequent and involve a few changes to the existing situation. The practice of allowing some re-growth of vegetation along the RoW will also have ecological benefits as it will allow plants and animals to re-colonize.
- 389. The combination of the height of transmission towers and distribution poles and the electricity carried by transmission and distribution lines can pose significant risk to birds and bats through collisions and electrocutions.

- 390. The following possible risks of bird's collision can occur during operation of the Project:
  - Electrocution: spacing of conductors (the current-carrying wires) and the availability of perches affect electrocution risk. The risk of electrocution of large birds by ETL is real as they provide a structure for birds from which they can hunt and roost.
  - Electrocution occurs when a bird encounters two wires or when it perches on a conductive pylon and comes into simultaneous contact with a wire. The impact of electrocution of birds depends on the electrotechnical design of a pylon and the natural features surrounding it.<sup>80</sup> In short, the birds may be electrocuted by power lines in one of three ways:
    - o Simultaneously touching an energized wire and a neutral wire;
    - Simultaneously touching two live wires; and
    - Simultaneously touching an energized wire and any other piece of equipment on a pole or tower that is bonded to the earth through a ground wire.
  - Collisions may also occur if the ETLs are difficult to see. Earth wires (sometimes called the
    static or ground wires, which protect the power line from lightning strikes) are thought to be
    responsible for a much higher rate of collisions than the thicker, often bundled conductor
    wires. This is because they are harder for birds to see and are typically positioned at the top
    of the wire array, putting them in the flight path of birds which have taken avoiding action to
    fly over the conductors.
  - In addition to above, bird collisions with power lines may result in power outages and fires.

391. The net impact of electrocution of large birds is not considered significant because there is an EMF around the high voltage ETLs which produces noise and the excessive noise deters birds.<sup>81</sup> However, even if the birds sit on the conductors, the danger will arise if two phases of the current meet, but as there is sufficient distance between the two opposite phased conductors; therefore, no danger to birdlife is expected. The collision and siting of birds will be further avoided by installing visibility enhancement objects such as marker balls, bird deterrents, or diverters.

#### Mitigation Measures

392. The following mitigations are proposed to avoid the electrocution and collision affects:

- Maintain 1.5 meter (60-inch)<sup>82</sup> spacing between energized components and grounded hardware or, where spacing is not feasible, covering energized parts and hardware.
- Install visibility enhancement objects such as marker balls, bird deterrents, or diverters.83
- · Make power lines less of an 'obstacle' for birds to collide with
- Keep birds away from the power line by making the power lines more visible by placing colorful/fluorescent tape on the towers to make them conspicuous enough to enable birds to see them.
- Keep power line cables lower to the ground to the extent feasible as these are better for preventing bird collision.

<sup>80</sup> EIA, 132kV ETL, Nikachhu Pothead Yard to Mangdechhu Pothead Yard, ADB, 2014

<sup>81</sup> https://sciencing.com/sounds-frighten-birds-7807173.html, and https://en.wikipedia.org/wiki/Bird scarer

<sup>&</sup>lt;sup>82</sup> Manville, Albert M. 2005. Tall Structures: Best Management Practices for Bird- Friendly Tall Buildings, Towers and Bridges – U.S. Fish and Wildlife Service Recommendations to Address the Problem. Prepared for the U.S. Fish and Wildlife Service.

<sup>&</sup>lt;sup>83</sup> Crowder, Michael R. and Olin E. Rhodes, Jr. 1999. Avian Collisions with Power Lines: A Review. Proceedings of a workshop on Avian Interactions with Utility and Communication Structures Charleston, South Carolina, 2-3 December 1999. Edited by Richard G. Carlton. Electric Power Research Institute.

- Keep vertical separation of cables as less to the extent feasible, as it poses less of an 'obstacle' for birds to collide with.
- Provide horizontal separation of conductors and construct cage box on conductors to prevent birds from sitting or making nest on the towers; and
- Construct self-supporting towers, which do not require stay wires.

#### 5.4.3 Socioeconomic Environment

# 5.4.3.1 Occupational Health and Safety

#### <u>Assessment</u>

393. The occupational health and safety hazards associated with operation, repair, and maintenance, and decommissioning of ETLs mainly include:

- Exposure with live power lines.
- Exposure to fall hazards from working at heights for poles and structures.
- Exposure to EMFs to workers as the workers typically have a higher exposure to EMF than the general public due to working in proximity to electric power lines.

394. The impact has a significant impact related to occupational safety if appropriate mitigation measures are not taken.

# **Mitigation Measures**

395. The following are prevention and control measures will be implemented to the extent feasible to mitigate any issue related to occupational health and safety:

- All associated ETLs will be shut down before conducting any repair and maintenance work as per the NTDC's operation and maintenance procedures.
- Adherence to the standards Occupational Health and Safety Guidelines.
- Allow only trained and certified workers to maintain, or repair electrical equipment with safety and insulation measures in place.
- Deactivate and properly ground the live power distribution prior to performing work on or in proximity to the ETLs.
- Ensure proper use of special safety equipment and procedures when working near or on exposed energized parts of an electrical system.
- Ensure worker is properly isolated and insulated from the energized part with gloves or other approved insulation and energized part is properly insulated from the worker.
- Test structures for integrity prior to undertaking work.
- Prepare and implement fall protection program that will include training in climbing techniques and use of fall protection measures; inspection, maintenance, and replacement of fall protection equipment; and rescue of fall-arrested workers, among others.
- The fall protection system will be appropriate for the tower structure and necessary
  movements, including ascent, descent, and moving from point to point and fixtures will be
  installed, wherever possible, to facilitate the use of fall protection systems.
- Provide adequate work-positioning device system for workers to the extent possible.
- Properly maintained hoist equipment will be used along with properly trained personnel.
- Proper safety belts will be provided. The Safety belts should be of not less than 16 millimeters (mm) (5/8 inch) two-in-one nylon or material of equivalent strength.

- Use a backup safety strap when operating power tools at height.
- Remove signs and other obstructions from poles or structures prior to undertaking work.
- Provide an approved tool bag for raising or lowering tools or materials to workers on structures.
- Prepare and implement EMF safety program to prevented or minimize occupational hazards due to exposure to EMF.
- Identify potential exposure levels in the workplace, including surveys of exposure levels in new projects and the use of personal monitors during working activities.
- Train workers in the identification of occupational EMF levels and hazards
- Establish and identify safety zones to differentiate between work areas with expected elevated EMF levels compared to those acceptable for public exposure, limiting access to properly trained workers.
- Prepare and implement action plans to reduce adverse impact of EMF and to address
  occupational exposure. Action plans may include limiting exposure time through work rotation,
  increasing the distance between the source and the worker, when feasible, or the use of
  shielding materials.
- Signs and barriers (e.g. locks on doors, use of gates, use of steel posts surrounding transmission towers) will be used.

## 5.4.3.2 Community Health and Safety

### Assessment

396. The community health and safety impacts associated with operation, and decommissioning of ETLs include:

- **Electrocution:** Electrocution through direct contact with high-voltage electricity or from contact with devices or equipment that are in contact with high-voltage electricity
- Noise: Noise in the form of buzzing or humming can often be heard around transformers or high voltage power lines producing corona. Noise from ETLs reaches its maximum during periods of precipitation, including rain, sleet, snow or hail, or as the result of fog. The sound of rain typically masks the increase in noise produced by the ETLs, but during other forms of precipitation (e.g. snow and sleet) and fog, the noise from overhead power lines can be troubling to nearby residents.
- Aircraft Navigation Safety: Power transmission towers, if located near an airport or known flight paths, can impact aircraft safety directly through collision or indirectly through radar interference.
- Impacts of EMF: The local people believe that their movement will be restricted in the project area due to EMF, and it may have adverse impacts on their health. However, there has been much research on the health and environmental impacts of EMF since the 1970s, but most research and laboratory studies have failed to show strong associations between exposure to EMF and health effects. Several scientific panels convened by national and international health agencies reviewed the research and concluded that there was insufficient evidence to prove the same. However, they also concluded that there is insufficient evidence to prove that EMF exposure is safe. 84 Since the Project has been planned in the least populated area, even if some effects due to EMF are envisaged, these will be minimal due to safe distance. More assessment on EMF has been provided in Section 5.2.11.

139

<sup>&</sup>lt;sup>84</sup> EIA, 132kV ETL, Nikachhu Pothead Yard to Mangdechhu Pothead Yard, ADB, 2014

## **Mitigation Measures**

397. The following are prevention and control measures that will be implemented, to the extent feasible, to mitigate impacts related to community health and safety:

- Signs and barriers (e.g. locks on doors, use of gates, use of steel posts surrounding transmission towers) will be used.
- Conducting objects (e.g. fences or other metallic structures), installed near power lines, will be grounded to prevent shock.
- A vertical clearance, required as per international standards, will also be maintained especially
  near the populated areas. If required, application of engineering techniques will be considered
  to reduce the EMF produced by power lines and grid stations such as increasing height of
  transmission towers, modification to size, spacing, and configuration of conductors, shielding
  with metal alloys (This is effective for reduction of electric field exposure, but not for reduction
  of EMF exposure.).
- During the operation stage, a check will be kept by the NTDC that no construction will be allowed within 100 m of the ETL.
- Power lines will be designed, with due consideration to landscape views and important environmental and community features.
- Use of noise barriers or noise canceling acoustic devices will be considered as necessary.
- Adherence to regional or national air traffic safety regulations.
- Use of buried lines when installation is required in flight sensitive areas.

## **5.4.3.3 Visual Amenity**

398. Impact on visual amenity due to the transmission and distribution facilities to communities may be visually intrusive and undesirable to nearby residents

399. However, it is common practice to create some local hard and soft landscaping and successful planting of fruit trees at such sites. This practice should be encouraged as far as practicable. Other opportunities for enhancements can be assessed before construction and proposed enhancements will be discussed with the local population to serve as a vehicle for further public consultation at the implementation stage and to assist in public relations.

### 5.4.3.4 Aircraft Navigation Safety

#### Assessment

400. Power transmission towers and ETL, if located near an airport or known flight paths, can impact aircraft safety directly through collision or indirectly through radar interference. Peshawar International Airport is the nearest airport to the Project and is in located 5 km north of the ETL route. Though, there are already existing ETLs connected with the Muhammadi grid station, still as a best practice, measures should be taken to make the ETL more visible.

## Mitigation Measures

401. The following are prevention and control measures that will be implemented, to the extent feasible:

- Use of buried lines when the installation is required in flight sensitive areas.
- Making the power lines more visible by placing colorful/fluorescent tape on the towers and colorful balls on the conductor to make them visible.
- Keep power line cables lower to the ground to the extent feasible

#### 5.4.3.5 Reduced Pressure for Local Resources

402. During the operation phase, no negative social impacts are anticipated. Instead, the people will benefit positively due to the availability of uninterrupted power and reduced pressure on demand of liquid petroleum gas, kerosene, diesel, and fuelwood.

#### 5.5 Cumulative, and Induced impacts

### Assessment

- 403. Cumulative impacts are those impacts that result from the successive, incremental, and/or combined effects of an action, project, or activity when added to other existing, planned, and/or reasonably anticipated future ones. For practical reasons, the identification and management of cumulative impacts are limited to those effects generally recognized as important based on scientific concerns and/or concerns of affected communities (local communities directly affected by the Project).<sup>85</sup>
- 404. The Project is being developed and will connect an existing grid station (Muhammadi grid station) that already having many other ETLs and distribution lines.
- 405. The incremental EMF impacts are expected, and local population concern will be increased with the addition of this ETL and Grid Station.

#### Mitigation Measures

- 406. The Project ETL will be designed with a better tower structure and technology at the Jamrud Grid Station and surroundings, as discussed in **Project Description Section 3** so the EMF incremental impact of this project will be minimal.
- 407. The measures to be taken in the design phase **Section 5.2.11** above will also further reduce the incremental EMF impacts of this ETL. The measures include,
  - NTDC's standard operating procedures (SOPs) of a minimum vertical ground clearance for ETL conductor of 7 meters will be ensured.
  - Raising conductor height above the ground to 8 m, typically by increasing tower height, will be ideal.
  - Reducing conductor spacing.
  - Arranging phases so that fields tend to cancel.
  - Increasing transmission voltage (since magnetic field intensities are a function of current, and increased voltage, all things being equal, will result in reduced current).
  - Reducing loads (and therefore, currents).
  - Identification of potential exposure levels in the work area including surveys of exposure levels and establishment of safety zones.
  - Safety signs and warning zone will be highlighted to indicate EMF in the area
  - Limit access to properly trained workers and those equipped with appropriate PPE when entering safety zones.
  - Increasing RoW widths or buffer zone widths, to move people further from ETLs.

<sup>&</sup>lt;sup>85</sup> Cadinale, Pablo, and Lorne Greig. "Cumulative Impact Assessment and Management: Guidance for Private Sector in Emerging Markets." In Good Practice Handbook: International Finance Corporation and ESSA Technologies Ltd, 2013.

# 6. Analysis of Alternatives

- 408. The Project is a subproject of Tranche 4 of MFF. Tranche 4 will expand the 220 kV transmission systems in the provinces of Sindh and Punjab and Khyber Pakhtunkhwa. It will also upgrade the supervisory control and data acquisition system across the national grid to enable the NTDC to monitor and control the grid in real-time, and to prevent network outages or reduce their duration, thereby increasing grid stability, reliability, and resilience to accommodate more intermittent renewable energy.
- 409. Several alternatives, including no project alternative, layout and design alternatives were considered for the proposed Project. The consideration of these alternatives is detailed below.

# 6.1 No Project Alternative

- 410. Based on the available information, the predictions have indicated that without the power enhancement projects, the supply will not be reliable. This Project is a part of an overall strategic improvement to the system.
- 411. In the absence of the Project, the potential for interruptions to the power supply will increase and socio-economic development, especially in the low-income areas of the province will be affected in the short to medium term.
- 412. In an un-enhanced state, the wear and tear on existing facilities will rise and further power disruptions may have occurred.

#### **6.2 Alternative Construction Methods**

- 413. The feasibility and constructability of the ETL towers are well established locally, and the installation of equipment is well-practiced in the international context (even if some types of equipment are new to Pakistan). The process includes the transportation of equipment to the site and the assembly of prefabricated units' in-situ. Thus, the impacts of construction activities are very manageable from the environmental viewpoint.
- 414. An alternative to overhead tower-based ETL is buried ETL which was proposed but not implemented. Special towers will be designed for section of ETL passing through the residential areas for power evocation considering community safety.

### 6.3 Design/Technology Alternatives

- 415. This project will promote high-level technologies and climate change resilient transmission system. It will promote deployment of high-temperature low sag (HTLS) conductors which can operate at higher ambient temperature within requested vertical clearance.
- 416. Comparing to equivalently sized conventional aluminum conductor steel reinforced (ACSR) conductors, the HTLS conductors can also transfer more current with less loss. This project will also support the replacement of porcelain insulators with fog-resistant insulators such as glass or composite types in the heavily polluted area.
- 417. Moreover, this project will contribute to the reduction of CO<sub>2</sub>, due to loss reduction and improved efficiency.
- 418. The total conductor to ground clearance will in no way be less than 7.0 meters.

## 6.4 Alternative Alignments for Transmission Line

419. The design and route of the ETL is as short as it can be and avoids the local villages by erecting angle towers.

- 420. The ETL route is of total 20 km and the settlements have been avoided by passing the line through cultivated and semi forested land.
- 421. Some further detailed surveys may be carried out for the detailed design to determine the exact construction methods and locations.

#### 6.5 Economic Alternatives

- 422. The proposed Project is considered highly economical viable. The project's useful economic life has been assumed as 40 years and will help in reduction in transmission system losses apart of improvement in reliability of NTDC and PESCO system networks. <sup>86</sup>
- 423. The project will provide additional source of supply to 220 kV Jamrud and Muhammadi Grid Stations
- 424. The proposed project will provide the resynchronization of the NTDC network during collapse due to severe bad weather conditions.
- 425. It has been visualized that if the project is delayed then the cost of the project is going to escalate each year. The cost escalation impact for each year can be estimated @ 6.5% p.a.<sup>87</sup>

<sup>&</sup>lt;sup>86</sup> PC-1, 220kV Jamrud Substation along with associated 220 kV Transmission Line, NTDC, Oct 2017

<sup>&</sup>lt;sup>87</sup> PC-1, 220kV Jamrud Substation along with associated 220 kV Transmission Line, NTDC, Oct 2017

### 7. Information Disclosure, Consultation, and Participation

- 426. Stakeholders are groups and individuals that are affected by or can affect the outcome of a project. Stakeholder engagement is a broad, inclusive, and continuous process between a developer of a project and its stakeholders. This process comprises a range of coherent approaches and activities that spans the entire life cycle of the Project. This is achieved by informing the stakeholders on time about the proposed project and its potential consequences on the environment and by encouraging their feedback.
- 427. The purpose of this exercise is to inform all the stakeholders about the Project and include their concerns, suggestions, and opinions and develop confidence amongst them that the Project will be developed responsibly.
- 428. The continuous engagement with the local community and other stakeholders will be carried out throughout the Project lifecycle including construction and operations.

# 7.1 Consultation Methodology

- 429. A stakeholder is either an individual, group or organization who is impacted by the outcome of a project. There are two types of stakeholders, i.e., community and institutions. Firstly, these stakeholders were identified.
- 430. Then separate consultations have been done with both and their concerns, suggestions, and opinions have been recorded on a consultation form. Their concerns, suggestions, and opinions are included in the Project's potential impacts and mitigation measures are advised for each of the impacts.
- 431. The community (male, female and vulnerable) and institutional consultations were conducted between August 30 and September 12, 2022.

#### 7.1.1 Consultation Material

- 432. During field survey for IEE of the Project, a Basic Information Document (BID) was prepared in English and Urdu for communities living nearby the RoW (see para. 20932 on page 95 of this IEE). BID was distributed to stakeholders during the consultation to inform the stakeholders about the Project. The BID contained information about the Project and the IEE process.
- 433. A consultation form was used to record the issues, concerns, and suggestions of the stakeholders. The BID and consultation form used for the Project is included as **Annexure VI.**

### 7.1.2 Community Consultation Mechanism

- 434. The focus of this consultation is the population living near the proposed ETL route i.e., the population that is living around the radius of 30 m to around 1.5 km of the proposed ETL.
- 435. The vulnerable population in the AoI including local women and elderly groups were also part of the consultation process.
- 436. The list of the communities consulted is given in **Table 7-1**. The dates of consultations, names and contact details of community consultation participants are given in **Table 7-2**.
- 437. The location of these communities is shown in a Google image map with a ETL passing near these villages in **Figure 7-1**.
- 438. Photographs from the public consultation campaign are presented in **Photo 7-1**.

- 439. The community consultations were conducted in Urdu as well as in Pashtu language to make consultations understandable to the communities (see para. 20932 on page 95 of this IEE). The meetings progressed in the following manner:
- 440. Stakeholders were introduced to the visiting team and briefed about the consultation process and its objectives
- 441. The main points of the BID were read out to the stakeholders in Urdu. Through the BID an overview of the Project and IEE process was provided
- 442. Stakeholders could raise queries or concerns regarding the Project. Queries were responded to, and concerns were documented.

**Table 7-1: List of Communities Consulted** 

No	Community/Village name	Coordinates
1	Village Dora	33° 53' 9.4" N, 71° 21' 8.7" E
2	Village Kula Khel	33°54' 5.4" N, 71° 19' 34.6" E
3	Village Jhansi	33°52' 6.7" N, 71° 24' 37.4" E
4	Village Bazid Khel	33°56' 56.5" N, 71° 32' 17.4" E
5	Village Masho Gagar	33° 54' 9.9" N, 71° 32' 32.0" E
6	Village Suleman Khel	33° 55' 49.7" N, 71° 30 36.5" E

**Table 7-2: Participant of the Community Consultations** 

No.	Participant Name	Village/Area	Date Consulted
1	Fazal Malik (0332-9181092) Iqbal Ameen (0307-0525387) Rahim Ullah M Shahid	Kula Khel	September 03,2022
2	Abdul Aziz (3065949393) Kamal Khan (3009358180) Janbar khan Hazrat Gul (3025769194) Muhammad amin	Jhansi	September 03,2022
3	Adil Nawaz (0309-2051379) Sajjad Khan Attaullah (0323-5194427)	Dora	September 03,2022
4	Ismail (3159297661) Zahid Mohammad Sajid (3109917393) Jadan khan	Bazid Khel	September 03,2022
5	Abdullah Jan (0321-9857293) Alam Khan Abdul Jalil Usman Ghani	Suleyman Khel	September 04,2022
6	Abdul Mateen Tariq Jan (0321-9956030) Abdul Wahid	Masho Gagar	September 04,2022
7	Muhammad Zakaria (0318 0583188) Murad Khan Abid Khan Jamil Ahmed Sawaab Khan Jamil	Nasir Khan Kileh, Jamrud	September 05,2022
8	Umar Gul Khan (0318-0535862) Zahid Sher Nawaz Qaisar Khan Kamal Khan	Bara	September 05,2022

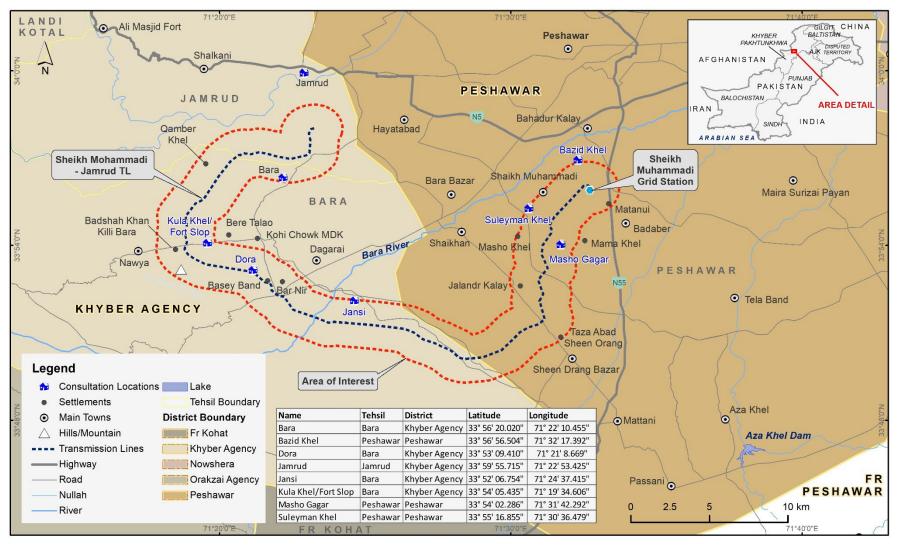


Figure 7-1: Locations of Community Consultations



District (Sep. 2022)



Community Consultation Jhansi, in Khyber Community Consultation Dora, Khyber District (Sep. 2022)



Station, Peshawar District (Sep. 2022)

Community Consultation Near Muhammadi Grid Community Consultation Near Suleyman Khel, Peshawar District (Sep. 2022)



Community Consultation in Jamrud (Sep. 2022)



Community Consultation in Bara (Sep. 2022)



(Sep. 2022)



Female Consultation in Dora in Khyber District Female Consultation near Muhammadi Grid Station, Peshawar (Sep. 2022)

**Photo 7-1: Community Consultations Photographs** 

- 7.1.3 Institutional Consultation Mechanism
- 443. Various important Government departments were consulted to accumulate their concerns concerning the Project activities. The list of institutional stakeholders is given in **Table 7-3**.
- 444. The meetings progressed in the manner mentioned below.
  - The institutions were provided with the BID in advance of the meeting. Stakeholders were provided with an overview of the Project description.
  - The IEE/EIA process that will be undertaken for the Project was briefly described and the structure of the IEE/EIA report was presented to facilitate understanding of the process.
  - Their opinion, concern, and issues related to the physical environment, socioeconomic environment and other general views about the Project were documented.
- 445. Photographs from the public consultation campaign are presented in **Photo 7-2**.

Table 7-3: List of Institutional Stakeholders

No.	Institutional Stakeholders	Date Consulted
1	Forest Department, Khyber District	31st August, 2022
2	National Highway Authority, Khyber Pakhtunkhwa	31st August, 2022
3	Foundation for Rural Development (FRD)	31st August, 2022
4	Wildlife Department, Khyber District	1 <sup>st</sup> September, 2022
5	CECOS university Peshawar	8 <sup>th</sup> September, 2022
6	GHS Qambar Khel Bara	8 <sup>th</sup> September, 2022
7	Environmental Protection Agency, Khyber / Peshawar	9 <sup>th</sup> September ,2022
8	Forest Department, Peshawar Division	12 September 2022
9	Irrigation Department, Peshawar/Khyber	12 September 2022



Institutional Consultation with Forest Department Khyber (Sep. 2022)



Institutional Consultation with Wildlife Department Khyber (Sep. 2022)



Institutional Consultation with NHA, Peshawar Khyber Pakhtunkhwa (Sep. 2022)



Irrigation Department Peshawar (Sep. 2022)



Forest Department Peshawar (Sep. 2022)



Institutional Consultation with NGO Foundation for Rural Development Khyber Pakhtunkhwa (Sep. 2022)



Environmental Protection Peshawar/Khyber (Sep. 2022)

Agency

Photo 7-2: Institutional Stakeholder Consultations

## 7.2 Summary of Concerns Raised by Stakeholders

446. Many concerns were raised by stakeholders during the consultation process. The leading issue raised was that the ETL installation will definitely damage sections of the agricultural lands and existing crops, thus will have ultimate negative impacts on the communities residing alongside the ETL, whose livelihood depends on agriculture. Secondly, unemployment is a major issue in the area and people expect that this Project will bring job opportunities for them. Moreover, community wants fair and timely compensation of lands and crops damaged due to the Project. Thirdly, community members are concerned about the privacy and culture interference due to outsider people working on the Project in future. Women in the area highlighted the issue of lack of health and educational (both schools and vocational) facilities in the area.

- 447. In the stakeholder consultations, the other topics which were discussed with communities and government officials are noise pollution, dust pollution, environmental monitoring, EMP effect of ETL, water pollution, solid waste and chemical handling, disturbing residents, and some ecological issues. A detailed summary of the concerns raised by the community and institutions with responses are provided in **Table 7-4** and **Table 7-5**.
- 448. The consultation logs are provided in **Annexure VII.**

Table 7-4: Summary of the Concerns Raised by Community

Environmental Parameter	Opinion, Concern, and Issues	Response Provided			
Physical Environment					
Vegetation Damage	Minimum damage to the existing crops, orchards and pastures should be ensured  Carrying on construction in the harvesting seasons i.e., July-Sep should be avoided				
Air Pollution	Dust and noise should be minimum near the residential areas	reduce the impacts on the local community.  The mitigation measures for the suppression of the dust generated by the			
		project are discussed in <b>Section 5.3.1</b> (Physical Environment).			
Water	Lack of public water supply so people face water shortages	The issue would be highlighted in the IEE.			
Soil Pollution	Agricultural lands near the ETLs should be kept safe from any sort of contaminants, which can possibly compromise the yield and quality of crops.	fields.			
Socioeconomic Enviro		polition are discussed in Section 5.5.1			
Compensations	Fair & timely compensation of crops	A resettlement plan will be prepared to compensate for all the affected parties of the project.			
Local stakeholders committee	A committee of local people should be formed which will be in contact with the Project team to communicate and resolve any issue throughout the Project. Such as to discuss the compensation value etc				
Jobs	The project should offer jobs to the affected persons and compensation should be according to shares in crops.	The project will generate job and business opportunities for locals.			
Cultural Issues	Company workers should take care of the local culture during the installation of T/L				

151

Environmental Parameter	Opinion, Concern, and Issues	Response Provided
	During the construction phase, labor and general workers should be inducted from the adjoining villages/areas.	
Local employment	Employment should be given to local men	Locals will be preferred for the job.
Education and Health facilities	Lack of good educational institutes and vocational training center (mainly highlighted by women) Poor health care facilities	The concern of locals will be raised in the IEE
Women Issues - unavailability of birth attendants	There are a very small number of trained birth attendants available, which leads to a high mortality rate of pregnant women due to maltreatment at the time of birth.	The concern of locals will be raised in the IEE
Women Issues - untrained and unequipped midwives	There are no trained and equipped midwives, which lead to severe maternity issues	The concern of locals will be raised in the IEE
Women Issues - education to girls	The literacy rate for girls is extremely low and the community hopes that the company would promote education for girls.	The concern of locals will be raised in the IEE
General		
Women Issues Load shedding	Power shortage is a major issue. Consistent and economical power supply should be provided to the area	The new proposed project will improve the situation in the area
Intimation of work	Early information before the start of work	The contractor will inform the locals before commencing the construction works
Privacy	Company works should not disturb the locals privacy	The construction works will be limited to the project area and the privacy of the locals will not be disturbed.  The construction crew's interaction with the
		local population will be minimized
Public health and safety	Rehabilitation of the existing ETL.  Care should take to avoid threat to	The design of ETL will be done properly to avoid any safety concerns in future.
	public health and safety	The Project will follow a proper safety and health management plan throughout the Project implementation.
Road condition	The road condition is very bad and deteriorating	Recommendations will be made part of IEE
	Locals expect the Project will improve the road condition	

Environmental Parameter	Opinion, Concern, and Issues	Response Provided
Peace and stability	Efforts should be made to ensure peace and stability in the area.	Project will ensure not to cause any threat to local peace and stability
	Project should not cause any risk to stability in the area	

ETL = Electricity Transmission Line, IEE = initial environmental examination

Table 7-5: Summary of the Concerns Raised by Institutions

Concern/Issue	Stakeholder	Response Provided
Physical Environment		
Ensure there is minimum damage to natural habitats near the buffer zones of ETLs	Khyber Wildlife Division	Noted
The contractors should conduct a detailed preliminary survey focusing on health-related impacts of the project on the inhabitants of the area, with special emphasis on the electromagnetic waves	Development (FRD	Noted
Divisional Forest Officer asked to provide complete details of the project outlines and execution maps, for better understanding. It would be used to visit the sites to get a complete insight regarding species		Noted
Dust and noise should be minimum near the residential areas	KP-EPA	Noted and a detailed mitigation measures will be presented for controlling such issues.
Socioeconomic Environment		
Compensation for tree losses should be resolved with the landowners. The forest department can play role in calculating the market values		Noted.
The contractor should engage the local poor communities in ongoing works by providing job opportunities		Noted and suggestions will be made part of IEE
Compensation schemes should be provided timely and based on ground realities	Foundation for Rural Development (FRD	Noted and suggestions will be presented in IEE
It is suggested to hire local workers during the construction process if suitable for any work	National Highway Authority	
Ecology		
The Divisional Forest Officer Khyber Wildlife Division offered full support to the project, adding that existing wild fauna will not be much affected. However, the department needs to visit areas specially where poles will be installed to investigate any wildlife presence		Noted. The concern will be made part of IEE.
Agricultural lands near the ETLs should be kept safe from any sort of contaminants, which can possibly compromise the yield and quality of crops	Qambar Khel Bara.	
Proper and exact locations for poles installation should be provided, so that the department can		

Concern/Issue	Stakeholder	Response Provided
estimate the tree loss in the process, only if it falls in their jurisdiction as Govt property		
The Divisional Forest officer offer generous support in sorting out trees stewardship and calculation of trees market values on behalf and for communities if needed.	Khyber	
Note down girth and species carefully while estimation of compensation amount	Forest Department Khyber	
Before the commencement of the project a proper NoC should be acquired from National Highway Authority		
Checklist of any wild fauna encountered during the Project implementation should be recorded and subsequently shared with the wildlife department		
The negative impact on the environment from the source of power generation and ETLs should be investigated.		Noted
General		
The ETL path should avoid schools and educational facilities	Govt. High School Qambar Khel Bara.Khyber	Noted
Power shortage is a major issue. Consistent and economical power supply should be provided to the area.  There is a lot of power crisis in our country. It is	Peshawar	Noted
good to reduce power shortage through such projects.		
Many problems have arisen due to tribal conflicts like Sepah Bara which are exemplified in the PCSP CASA 1000 project. It is a good move that you are consulting the local people of the area before starting the project.		Noted
In this ETL we don't see any harm in our projects, so we don't have any concerns regarding this project.  Efforts should be made to ensure peace and stability in the area.	Peshawar/Khyber	Noted
We have 2 plantation projects going on in "Masho Gagar" and "Sulyman khel Canal". At present we do not see any objection regarding this area. We want our team member Mr. Usman (Subdivision Forest officer) to visit the area with your team.	Peshawar Division	NTDC will conducted another study for KP-EPA approval. We will recommend NTDC for a visit of Forest Department to Project site during the study.
After the visit we will decide what suggestions, we will be made for the IEE.		

KP-EPA = Khyber Pakhtunkhwa Environment Protection Agency, NTDC = National Transmission and Despatch Company

# 7.3 Information Disclosure

- 2. ADB SPS environmental Policy Principle #6 requires the borrower to "Disclose a draft environmental assessment (including the EMP) in a timely manner, before project appraisal, in an accessible place and in a form and language(s) understandable to affected people and other stakeholders."
- 449. The executive summary of the IEE and the EMP will be translated to Urdu language (see para. 20932 on page 95 of this IEE) for disclosure along with complete existing document (in English). Within 2 weeks after ADB's clearance of the IEE, the summary (including the EMP) in Urdu language will be disclose on NTDC's website. The summary will also be placed at main gate of Muhammadi Grid Station for public access. During construction phase, complete document along with translated executive summary to Urdu will be kept at main gate of construction camp for access to public.
- 450. Provincial EPA will also disclose EIA on its website before the public hearing and NOC award. The disclosure on the website with the invitation for participation in public hearings, which is required by the law before approval is granted, will be announced by EPA through public advertisement in the local and national newspapers.

#### 8. Grievance Redress Mechanism

- 451. NTDC will establish a mechanism to receive and facilitate the resolution of affected peoples' concerns, complaints, and grievances about the project's environmental performance. NTDC at site will be the PMU. The PMU will overall be responsible for executing the work at site. The Executive Engineer/Resident engineer will be in charge of the project. The Executive Engineer will be supported with Sub Divisional Officers and other supporting staff.
- 452. The GRM will be established at each project location as described below:
- 453. A grievance mechanism will be available to allow affected persons appealing any disagreeable decision, practice or activity arising from land or other assets compensation. affected persons will be fully informed of their rights and of the procedures for addressing complaints whether verbally or in writing during consultation, survey, and time of compensation.
- 454. Affected persons/ local community will enter their complaints/ concerns and issues formally including the information of date, name and address of complainant, description of complain. The Assistant Manager (social mobilization) at PMU will maintain a register named as "community complaint register (CCR)". The register will include the information such as date, name and address of complainant, description of complaints, and will enter the complaints in a date covering the minimum information of name and address of complaint, description of complaints, action taken, status of redress of complaints and reasons in case issue not resolved.
- 455. Prior to the contractor's mobilization to the project site NTDC ESIC will assist the affected communities to establish a Grievance Redress Committee (GRC) and identify local representatives to act as Grievance Focal Points (GFP) for that community. GRC will work at field level, while unsettled issues will be referred to the PMU at sub-project level. The field level PMU will inform the affected persons about GRC and its mechanism by passing the information at known places. The GRC will comprise of:
  - Executive Engineer (NTDC)

- EHS Manager under ESIC, NTDC
- FMC-IESS, FMC-NESS, and FMC-NEIs
- Representative of Contractor; and
- GFP of relevant community
- 456. The function of the GRC is to address the project related grievances of the affected parties that are unable to be resolved satisfactorily through the initial stages of the GRM procedure.
- 457. The GFPs are designated personnel from within the community who will be responsible for: i) acting as community representatives in formal meetings between the project team (contractor, FMC, EHS Manager under ESIC, ESIC and the local community he/she represents and ii) communicating community members' grievances and concerns to the contractor during project implementation.
  - (i) A pre-mobilization public consultation meeting will be convened by ESIC and attended by GFPs, contractor, FMC, ESIC representatives and other interested parties (e.g., District level representatives, NGOs). The objectives of the meeting will be as follows: Introduction of key personnel of each stakeholder including roles and responsibilities.
  - (ii) Presentation of project information of immediate concern to the communities by the contractor (timing and location of specific construction activities, design issues, access constraints etc.). This will include a brief summary of the EMP its purpose and implementation arrangements
  - (iii) Establishment and clarification of the GRM to be implemented during project implementation including routine (proactive) public relations activities proposed by the project team (contractor, FMC, ESIC) to ensure communities are continually advised of project progress and associated constraints throughout project implementation.
  - (iv) Identification of members of the GRC
  - (v) Elicit and address the immediate concerns of the community based on information provided above.
- 458. Following the pre-mobilization public consultation meeting, environmental complaints associated with the construction activity will be routinely handled through the GRM as explained below and shown schematically in **Figure 8-1**:
  - (i) Individuals will lodge their environmental complaint/grievance with their respective community's nominated GFP.
  - (ii) The GFP will bring the individual's complaint to the attention of the Contractor.
  - (iii) The Contractor will record the complaint in the onsite Environmental Complaints Register (ECR) in the presence of the GFP.
  - (iv) The GFP will discuss the complaint with the Contractor and have it resolved.
  - (v) If the Contractor does not resolve the complaint within one week, then the GFP will bring the complaint to the attention of the CSC's Environmental Specialist. The SC's Environment Specialist will then be responsible for coordinating with the Contractor in solving the issue.
  - (vi) If the Complaint is not resolved within 2 weeks, the GFP will present the complaint to the GRC.
  - (vii)The GRC will have to resolve the complaint within a period of 2 weeks and the resolved complaint will have to be communicated back to the community. The Contractor will then record the complaint as resolved and closed in the Environmental Complaints Register.

- (viii) Should the complaint not be resolved through the GRC, the issue will be adjudicated through local legal processes.
- (ix) In parallel to the ECR placed with the Contractor, each GFP will maintain a record of the complaints received and will follow up on their rapid resolution.
- (x) ESIC will also keep track of the status of all complaints through the Monthly Environmental Monitoring Report submitted by the Contractor to the FMC and will ensure that they are resolved in a timely manner.

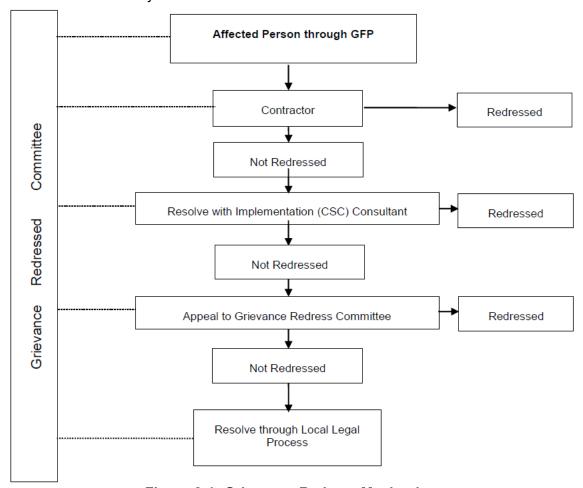


Figure 8-1: Grievance Redress Mechanism

459. An Organogram showing the institutional arrangements has been illustrated through a diagram presented in **Figure 8-2**.

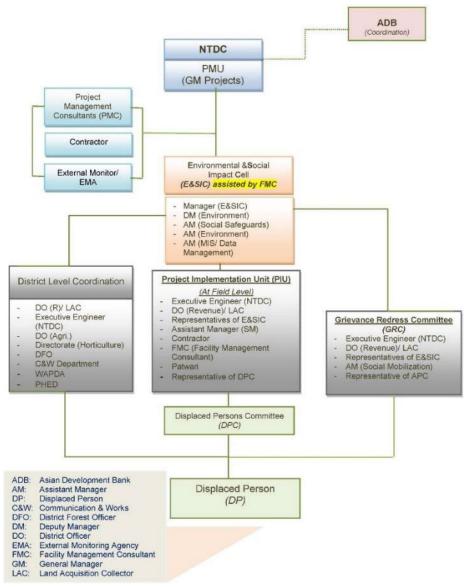


Figure 8-2: Institutional set-up

### 9. Environmental Management Plan

- 460. This section provides an overall approach for managing and monitoring the environment-related issues and describes the institutional framework and resource allocations proposed by NTDC to implement the Environmental Management Plan (EMP) for the ETL construction.
- 461. The bid documents must include the EMP, and its implementation cost must be reflected in the bill of quantity (BoQ).

#### 9.1 General

- 462. The main objectives of EMP are to:
  - Provide the details of the project impacts along with the proposed mitigation measures, and a corresponding implementation schedule.
  - Define the responsibilities of the project proponent, contractor, supervisory consultants, and other role players, and effectively communicate environmental issues among them.
  - Define a monitoring mechanism, reporting frequency, auditing, and identifying monitoring parameters to ensure that all the mitigation measures are completely and effectively implemented.
  - Identify the resources required to implement the EMP and outline the corresponding financing arrangements.

### 9.2 Construction Schedule

463. As mentioned in **Section 3.7**, The Project Proponent (NTDC) plans to have the tranche-4 completed within 2 to 3 years, after completing the necessary arrangements, on the fast track. There will not be any significant land acquisition or compensation process except for the crop compensation of the ETL towers. Designs, power transmission arrangements, access, review of environmental management and construction processes will need to be completed in about three months after tranche 4 readiness approval by ADB. When the detailed designs are completed, tendering and award of contract will take place over about three to six months. The construction period will follow, and best estimates indicate between eighteen to twenty-four months.

**Table 9-1: Implementation Arrangements for Tranche 4** 

Aspects	Arrangements
Implementation period	January 2023–June 2026
Estimated completion date	30 June 2026
Estimated loan closing date	23 August 2026

# 9.3 Summary of Impacts and Mitigation Measures

- 464. The environmental protection and enhancement are achieved in various ways. These approaches should begin right at the embryonic stage i.e. i) project location, ii) design, specifications, and tender/contract documents, iii) construction activities and iv) post completion activities i.e. operation and maintenance stage. Appropriate environmental management measures are required to be exercised in a cascade order by NTDC at each stage of the project.
- 465. An EMP establishes the linkages between the environmental and social impacts, mitigation strategy and the agencies responsible for execution. Thus, the EMP in **Table 9-2** cover:
  - A comprehensive listing of mitigation measures (actions).
  - The institution(s)/ person(s) responsible for implementation of specific actions.

- The parameters to be monitored to ensure the effective implementation of the actions.
- A timescale for the implementation of actions has been indicated subject to the project life cycle and indicated as During Construction or During Restoration.
- Set out a basis for preparing SSEMP by the Contractor.

466. The Effects Monitoring Plan for the ongoing activities is presented in **Table 9-5**.

**Table 9-2: Environmental Management Plan (EMP)** 

Potential Impacts	Mitigation Measures (MM)	Timing to Implement MM	Location to Implement MM	Implementation Responsibility	Monitoring Responsibility
Pre-construction (des	ign) phase				
Lack of Integration of IEE/EMP/EIA Requirements into Construction Bid Documents	<ol> <li>The ESIC should be assigned the task to check that design and bid documents are responsive to key environmental, social, and safety considerations, and that the proposed method of work reflects the boundaries defined in the EMP.</li> </ol>	Bid Preparation	BOQ	NTDC	ESIC, NTDC
	2. The bid documents must include the EMP, and its implementation cost must be reflected in the bill of quantity (BoQ).				
Lack of planning in ETL design <sup>88</sup>	Using corridor-sharing with existing ETLs to minimize RoW requirements.	Well before the commencement of the	RoW of ETL	NTDC with the design consultant	NTDC
	<ol> <li>Preference will be given to a route with a minimum community displacement and minimum tree cutting requirement</li> </ol>	construction phase			
	<ol><li>Better planning during the selection of RoW will generate fewer negative socioeconomic impacts on the affected persons.</li></ol>				
	<ol><li>Selection and use of the latest available technology for reducing the EMF from ETLs.</li></ol>				
	<ol> <li>ETLs to be designed for higher resilience to climate change impacts to ensure the transmission network resilient to climate change and natural disaster.</li> </ol>				
	8. Choosing a ETL tower with aesthetic appeal such as the darker color of oxidized steel structures may blend in better with forested backgrounds.				

-

<sup>88</sup> Covering (i) Route Selection, (ii) Transmission, (iii) Structure Design, (iv) Tower Placement Add-ons, and (v) Visual Amenity, (vi) Mechanical Failure of the Overhead Conductors.

Potential Impacts	Mitigation Measures (MM)	Timing to Implement MM	Location to Implement MM	Implementation Responsibility	Monitoring Responsibility
	<ol> <li>Making minor adjustments in tower locations to avoid archeological sites or minimize effects on agricultural operations.</li> </ol>				
	10. Adding flight diverters to conductors to minimize bird collisions with the wires.				
	11.Location of high-voltage transmission and distribution lines in less populated areas, where possible, to mitigate the impact on visual amenity and noise. This will also create fewer land acquisition and resettlement issues.				
Improper Location of Camps Leading to Environmental and Social Issues	<ul> <li>12. Camp locations at least 200-300 m from the sensitive receptors including settlements and water bodies.</li> <li>13. Development of the campsite plans indicating walkways, car parking, recreational areas, rooms, kitchen, dining, storm run-off, toilets and sewerage lines and treatment, disposal, freshwater storage, and lines, etc.</li> </ul>	Well before the commencement of the construction phase	Camps Location	Construction Contractor with FMC	NTDC
Lack of Project environmental safeguards (human resource) capacity	<ul> <li>14. The ESIC/PMU to make sure that it is staffed by EHS Manager, Deputy EHS Manager and Assistant EHS Manager in addition to social safeguard staff.</li> <li>15. The ESIC/PMU to ensure, contractor's environmental safeguards capacity before construction starts. Make sure that the Construction Contractor assigns and retains a full-time and qualified ESO and a full-time and qualified HSO.</li> </ul>	During bidding and before construction starts	Bid document and contractor human resources	ESIC/ PMU	NTDC
Removal of vegetation/trees	<ul><li>16. Incorporate technical design measures to minimize the removal of these trees, as far as possible.</li><li>17. Compensatory planting of ten (10) trees against each fallen tree of similar floral function will be planted.</li></ul>	Well before the commencement of the construction phase	RoW of ETL	NTDC with the design consultant	NTDC

Potential Impacts	Mitigation Measures (MM)	Timing to Implement MM	Location to Implement MM	Implementation Responsibility	Monitoring Responsibility
	18. The plantation plan will prefer the prevalent indigenous species of plants and ensure that there will be no exotic species in the plantation plan with known environmental setbacks.				
Noise caused by construction equipment	<ul><li>19. Conduct detailed acoustic assessment for all residential buildings, schools, (other sensitive structures) within 50 m of RoW.</li><li>20. After the assessment, identify the areas where noise barriers are required.</li></ul>	Well before the commencement of the construction phase	RoW of ETL	Construction Contractor with FMC	NTDC
	21. Also, suggest noise-reducing devices on equipment such as mufflers and silencers.				
	22. The audible noise of the ETL is most severe under wet conditions. During detailed design, it will be ensured that audible noise under wet conditions is within acceptable limits.				
	23. During detail design, it will be ensured that audible noise as per CISPR18-2 "Methods for measurement of RI characteristics of overhead power lines and high voltage equipment" will be either category-I (which is Interference not audible) or category-ii (which is Interference just perceptible).				
Land Acquisition	<ul><li>24.NTDC to select the route in a way that minimizes impact on trees and crops occur.</li><li>25.Assessment of loss of land, trees, and crops (if any) due to the construction of ETL towers.</li></ul>	Well before the commencement of the construction	RoW of ETL	NTDC with the design consultant	NTDC
	26. Preparation of land acquisition and resettlement plan (LARP) for the proposed Project before the commencement of construction activities.	phase			

Potential Impacts	Mitigation Measures (MM)	Timing to Implement MM	Location to Implement MM	Implementation Responsibility	Monitoring Responsibility
	27.All the impacts identified by the IEE will be incorporated into the project LARP and relevant entitlements will be included in the Entitlement Matrix.				
	28. All the payments/entitlements are paid according to the Entitlement Matrix, prepared according to the LARP.				
Waste Generation	29. Identify enough locations for disposal of transformer oils, unsuitable soils, and scrap metal "cradle to grave".	Well before commencement of the construction phase	RoW of ETL	NTDC with the design consultant	NTDC
	30. The unit rates to include in contracts to cover the cost of disposal.				
	31. Designate disposal sites in the contract and cost unit disposal rates accordingly.				
Disruption to Existing Drainage Pathways and Utilities	32. Identify locations where drainage or irrigation crossing, and utilities within RoW may be affected by works.	Well before the commencement of the construction phase	RoW of ETL	Construction Contractor with FMC	NTDC
	33.Include in protection works contract as a payment milestone(s)				
Impacts on Sensitive and High Value Areas	34. Siting the Project facilities away from any residential area.	Well before the commencement of the construction phase	RoW of ETL	Construction Contractor with FMC	NTDC
	35. If, siting of Project facilities cannot be avoided altogether, the area of disruption should be minimized, and the impacts should be mitigated.				
EMF	36. NTDC's standard operating procedures (SOPs) of a minimum vertical ground clearance for ETL conductor of 7 meters will be ensured.	Well before the commencement of the construction phase	ent	Construction Contractor with FMC	NTDC
	37. Raising conductor height above the ground to 8 m, typically by increasing tower height, will be ideal.				
	38. Reducing conductor spacing.				
	39. Arranging phases so that fields tend to cancel.				

Potential Impacts	Mitigation Measures (MM)	Timing to Implement MM	Location to Implement MM	Implementation Responsibility	Monitoring Responsibility
	40. Increasing transmission voltage (since EMF intensities are a function of current, and increased voltage, all things being equal, will result in reduced current).				
	41.Reducing loads (and therefore, currents).				
	42. Identification of potential exposure levels in the work area including surveys of exposure levels and establishment of safety zones.				
	43. Safety signs and warning zone will be highlighted to indicate EMF in the area				
	44.Limit access to properly trained workers and those equipped with appropriate PPE when entering safety zones.				
	45. Increasing RoW widths or buffer zone widths, to move people further from ETLs.				
Impact on Community Safety due to	46. Ensure all safety aspects related to the safety of the structure are considered.	Well before the commencement	RoW of ETL	Construction Contractor with	NTDC
Structure/ Mechanical Failure of the overhead conductors	47.Ensure seismic design requirements are incorporated in the Project design.	of the construction phase		FMC	
	48. The ETL will be constructed using very robust design and there is a very low probability of mechanical failure even under extreme weather conditions.				
	49. Nonetheless, following special arrangements will be made in this section to ensure safety in case of mechanical failure of the ETL conductors.				
	50. Installation of special tower/pole structures that would support a long span of up to 500 m so that no tower/pole has to be installed inside the streets.				
	51. Special tower/pole structures will be designed with load safety margin factor of 2.5 instead of generally used 1.5, thus having an extraordinary strength				

Potential Impacts	Mitigation Measures (MM)	Timing to Implement MM	Location to Implement MM	Implementation Responsibility	Monitoring Responsibility
	bearing margin to cater for any untoward mechanical hazardous situation.				
	52. Special tower/pole structures will be designed to achieve enhanced vertical ground clearance of 15-20 meters whereas the standard requirement of ground clearance of 220 kV line is 7.1 meter.				
	53. Installation of grounded metallic mesh beneath the lowest conductor to act as fall arrester in case of mechanical failure of the conductor in residential areas.				
<b>Construction Phase</b>					
Dust from construction activity and Air emissions from construction equipment and vehicles	1. Water will be sprinkled through a dedicated water-bowser at source, around the construction site and, along the routes used for construction activities to prevent the generation of dust and to minimize the levels of dust within the vicinity of orchards and fruit farms.	During Construction	Project-wise facilities and construction sites	Construction Contractor Oversee by FMC	NTDC
	<ol> <li>A speed limit of not more than 30 kilometers per hour (km/h) will be imposed on the vehicles in areas where the potential for dust generation is greater including unpaved roads.</li> </ol>				
	3. Fuel-efficient and well-maintained haulage trucks will be employed to minimize exhaust emissions.				
	4. Vehicles transporting soil, sand and other construction materials will be covered.				
	<ol><li>The movement of vehicles through densely populated areas will be avoided.</li></ol>				
	6. Water will be sprayed at bare areas that are prone to high dust emissions.				

Potential Impacts	Mitigation Measures (MM)	Timing to Implement MM	Location to Implement MM	Implementation Responsibility	Monitoring Responsibility
	7. Stockpiled soil and sand will be kept slightly wet before loading, particularly in windy conditions.				
	8. Dust emissions at the camp and construction sites to be minimized by implementing good housekeeping and sound management practices.				
	9. All project vehicles and other equipment will be maintained as per NEQS for vehicular emissions.				
	10. The construction material will be stored in the boundary wall and no disturbance to surrounding areas is expected. The contractor will be, however, required to provide a traffic management plan before the commencement of work at the site.				
	11. The need for large stockpiles will be minimized by careful planning of the supply of materials from controlled sources. Stockpiles (if required) will not be located within 50 m of schools, hospitals or other public amenities such as wells and pumps and should be covered with tarpaulins when not in use and at the end of the working day to enclose dust.				
	12. Concrete plants will not be located close to any sensitive receptors.				
	13.A check will be kept by the NTDC that no construction will be allowed within 100 m of the ETL.				
Noise from construction vehicles and heavy equipment	<ul> <li>14. Noise monitoring will be carried out at edge of RoW or at boundary wall of communities located within 100 m of RoW, if required, to assess compliance with day and nighttime noise limits of 55 dBA and 45 dBA prescribed in the NEQS.</li> <li>15. All heavy equipment and machinery will be maintained as per NEQS for vehicular noise</li> </ul>	During Construction	Project-wise facilities and construction sites	Construction Contractor Oversee by FMC	NTDC

Potential Impacts	Mitigation Measures (MM)	Timing to Implement MM	Location to Implement MM	Implementation Responsibility	Monitoring Responsibility
	16. Noise from the construction of Grid Stations is not covered under any regulations however to keep in line with the best international practice, construction will not be allowed during nighttime (10 PM to 6 AM) and will not only be conducted during daytime.				
	17. Vibration from the construction of piles to support pads may be required for some tower construction and maybe a significant impact but this should be for a short duration. Where vibration could become a major consideration (within say 100 m of schools, religious premises, hospitals or residences) a building condition survey will take place before construction.				
	18. The physical effect of piling will be assessed before construction and measures will be discussed with the local population as well as the timing of the works to serve as a vehicle for further public consultation at the implementation stage and to assist in public relations.				
	19. At nearby schools, the contractor will discuss with the school principals the agreed time for operating these machines and completely avoid machine use near schools during examination times, if such a need arises.				
	20. The noise level from construction activity can be reduced by regular maintenance of machinery.				
	21. Noise can be controlled through engineering control e.g. hammering actions can be substituted by hydraulic.  Ensure that the workers are wearing necessary personal protection equipment (PPE's) such as earplugs, earmuffs, etc. where engineering control is not applicable to reduce the impact of noise.				
	22. Equipment emitting excessive noise in comparison with other similar equipment will not be allowed to operate.				

Potential Impacts	Mitigation Measures (MM)	Timing to Implement MM	Location to Implement MM	Implementation Responsibility	Monitoring Responsibility
	23. Equipment under use will be regularly maintained, tuned, and provided with mufflers and speed controls to minimize noise levels.				
	24. Blowing horns on all access roads except under emergency conditions will be prohibited.				
	25. Muffled breakers and silenced diesel generators and compressors will be used to reduce construction noise.				
	26. Contractor will take necessary measures to minimize noise nuisance using acoustic enclosures and barriers.				
	27. A check will be kept by the NTDC that no construction will be allowed within 100 m of the ETL.				
Sediment run-off from construction sites	28. All construction workers will be provided awareness training on the prevention of waste generation and spill prevention.	During Construction	Project-wise facilities and construction	Construction Contractor with FMC	NTDC
	29. The topsoil can be preserved and used after the restoration of construction campsites and storage areas after the construction period.		sites		
	30. Surplus excavated material will be disposed of at appropriate or designated sites and will be disposed of in a manner that does not disturb the natural and community drainages and tracks.				
	31. Equipment will be maintained properly to minimize oil or fuel leakages from construction machinery. Cleanup will be undertaken in the event of an oil spill larger than half a liter. This will include the removal of contaminated soil and disposal at a proper location.				
	32. A Spill Prevention and Response Plan will be prepared including the induction of staff for spill prevention and management.				
	33. All storage fuel tanks will be marked with their contents and stored in diked areas with an extra 10%				

Potential Impacts	Mitigation Measures (MM)	Timing to Implement MM	Location to Implement MM	Implementation Responsibility	Monitoring Responsibility
r oteritiai impacts	of the storage capacity of the fuel tank. The area will be lined with an impervious base.  34. Grease traps will be constructed wherever needed, to prevent the flow of oily water into drainage channels or waterbodies.  35. Spill cleanup kits (shovels, plastic bags, and absorbent materials) will be available near fuel and oil storage areas. Should any accidental spills occur, the immediate cleanup will be undertaken, and all cleanup materials will be stored in a secure area for further disposal. Disposal of such will be undertaken by a waste management company contracted by the Contractors. The waste management company must have the required licenses to transport and dispose any hazardous waste before any such waste is removed from the site. The Contractors will keep copies of the company's licenses and provide waste transfer manifests at their camp site for routine inspection by the engineer.  36. Cleanup kits will be carried in all fuel trucks.  37. Fueling of construction vehicles and machinery will take place at designated places or over impermeable surfaces for fixed machinery.  38. Hazardous materials will be stored in designated places having impervious linings.  39. Schedule works in sensitive areas (e.g. water bodies) for the dry season.  40. Temporary erosion control plan one month before the commencement of works.				
	41. Proper installation of TD and EC before works within 50 m of water bodies.				

Potential Impacts	Mitigation Measures (MM)	Timing to Implement MM	Location to Implement MM	Implementation Responsibility	Monitoring Responsibility
	42. Cut areas will be treated against flow acceleration while filled areas will be carefully designed to avoid improper drainage.				
	43. Stockpiles will not be formed within such distances behind excavated or natural slopes that would reduce the stability of the slopes.				
	44. In the short-term, either temporary or permanent drainage works will protect all areas susceptible to erosion.				
	45. Measures will be taken to prevent pounding of surface water and scouring of slopes. Newly eroded channels will be backfilled and restored to natural contours.				
	46. Contractor will arrange to adopt suitable measures to minimize soil erosion during the construction period. Contractor will consult concerned authorities in the area before deciding mitigation measures.				
	47. Clearing of green surface cover to be minimized during site preparation.				
	48. Replanting trees to be done before the site is vacated and handed back to NTDC with appropriate trees (other vegetation cover as appropriate) to ensure interception of rainwater and the deceleration of surface run-off.				
Impact on Water Resources Quality and Quantity	<ul> <li>49. Erosion and sediment flash-control measures will be employed and maintained where necessary.</li> <li>50. Washing vehicles will be allowed only in designated places such as local car wash or a similar facility to be built at the site with the provision of oil-water separators (OWS) and waste collection pits. Further details on the construction of OWS, waste collection pits, and the handling of contaminated waste are included in the Spill Prevention and Waste Generation sections.</li> </ul>	During Construction	Project-wise facilities and construction sites	Construction Contractor with FMC	NTDC

Potential Impacts	Mitigation Measures (MM)	Timing to Implement MM	Location to Implement MM	Implementation Responsibility	Monitoring Responsibility
	51. Equipment will be maintained properly to minimize oil or fuel leakages from construction machinery.				
	52. No effluents will be released to the environment untreated,				
	53. All types of solid and liquid wastes will be handled and disposed of as per disposal plan.				
	54. The natural drainages will be restored after completion of civil works of the tower foundations in areas where tower locations fall within the catchment of dry stream beds.				
	55. The source of water for construction from authorized abstraction sources will be agreed between the local communities, local government, and the contractor.				
	56. Water conservation techniques will be developed and implemented by the contractor.				
	57. Access routes of the community to water sources will be kept clear and open so that the community's ability to meet its water requirements are not compromised.				
	58. Care will be exercised while moving heavy machinery to avoid damage or blockage of natural waterways and channels.				
	59. Records will be kept of water usage in all Project activities.				
	60. Construction camp and residential camp will not be built nearby water bodies.				
	61. Consideration of weather conditions when construction activities are undertaken.				
	62. Limitations on excavation depths in use of recharge areas for material exploitation or spoil disposal.				
	63. Use of landscaping as an integrated component of construction activity as an erosion control measure.				

Potential Impacts	Mitigation Measures (MM)	Timing to Implement MM	Location to Implement MM	Implementation Responsibility	Monitoring Responsibility
	64. Minimizing the removal of vegetative cover as much as possible and providing for its restoration where construction sites have been cleared of such areas.				
	65. Compile temporary drainage management plan one month before commencement of works.				
	66. Proper installation of Temporary Drainage (TD) and Erosion Control (EC) before works within 50 m of water bodies.				
	67. Proper construction of TD and EC measures, maintenance and management including training of operators and other workers to avoid pollution of water bodies by the considerate operation of construction machinery and equipment.				
	68. Storage of lubricants, fuels, and other hydrocarbons in self-contained dedicated enclosures >50 m away from water bodies.				
	69. Proper disposal of solid waste from construction activities and labor camps.				
	70. Cover the construction material and spoil stockpiles with a suitable material to reduce material loss and sedimentation and avoid stockpiling near to water bodies.				
	71. Topsoil stripped material will not be stored where natural drainage will be disrupted.				
	72. Borrow sites (if required) will not be close to sources of drinking water.				
Untreated disposal of effluent from worker camps and batching plant(s)	73. Ensure safe storage and handling of fuels, oils, and other hazardous substances according to standard safety practices. Disposal should be carried out through KP-EPA approved contractors and facilities.	During Construction	Project-wise facilities and construction sites	Construction Contractor with FMC	NTDC
	74. All efforts will be made for the proper disposal of solid waste, applying principles of reducing waste as far as				

Potential Impacts	Mitigation Measures (MM)	Timing to Implement MM	Location to Implement MM	Implementation Responsibility	Monitoring Responsibility
	possible, reusing what is practical and recycling all recyclable materials.  75. The solid waste generated during construction and campsites will be safely disposed of in demarcated waste disposal sites and the contractor will provide a proper waste management plan.  76. The sewage system for camps will be properly designed (pit latrines or, as required, septic tanks) to receive all sanitary wastewaters.  77. The solid residue from the septic tanks will be transported to the nearby municipal sewage disposal site.  78. Lined wash areas will be constructed within the campsite or at the site, for the receipt of wash waters from construction machinery; and ensure proper labeling of containers, including the identification and quantity of the contents, hazard contact information, etc.  79. Construction workers and supervisory staff will be				
	encouraged and educated to practice waste minimization, reuse, and recycling to reduce the quantity of waste.				
Vibration	<ul> <li>80. Construction will not be allowed during nighttime (10 PM to 6 AM) and will only be conducted during daytime.</li> <li>81. Vibration from the construction of piles to support pads may be required for some tower construction and maybe a significant impact but this should be for a short duration. Where vibration could become a major consideration (within say 100 m of schools, religious premises, hospitals or residences) a building condition survey will take place before construction.</li> </ul>	During Construction	Project-wise facilities and construction sites	Construction Contractor with FMC	NTDC

Potential Impacts	Mitigation Measures (MM)	Timing to Implement MM	Location to Implement MM	Implementation Responsibility	Monitoring Responsibility
	<ul> <li>82. Use of better equipment with less vibration effects will be used such as Free-Suspended Vibrators (FSV). 89</li> <li>83. The physical effect of piling will be assessed before construction and measures will be discussed with the local population as well as the timing of the works to serve as a vehicle for further public consultation at the implementation stage and to assist in public relations. At nearby schools, the contractor will discuss with the school principals the agreed time for operating these machines and completely avoid machine use near schools during examination times, if such a need arises.</li> <li>84. Ensure that the workers are wearing necessary personal protection equipment (PPE's) such as earplugs, earmuffs, etc. where engineering control is not applicable to reduce the impact of noise.</li> <li>85. Equipment under use will be regularly maintained, tuned, and provided with mufflers and speed controls</li> </ul>				
Traffic Congestions	<ul> <li>to minimize noise levels.</li> <li>86. Efforts will be made to minimize the use of heavy trucks by preferring transport of equipment and supplies using 4x4 pickups, wherever possible, and,</li> <li>87. A speed limit of not more than 30 km/h will be imposed near settlements, on unpaved roads, and on link roads for reducing traffic accident risks and dust generation.</li> <li>88. A traffic management plan, if required, will be prepared and submitted to NTDC one month prior to start of works. Vicinity of schools, hospitals, and communities will be considered while preparing plans and will be avoided to the extent feasible.</li> </ul>	During Construction	Project-wise facilities and construction sites	Construction Contractor with FMC	NTDC

<sup>89</sup> https://www.vpgroundforce.com/gb/footer-links/useful-links/industry-resources/reducing-ground-vibrations-during-the-piling-proce/

Potential Impacts	Mitigation Measures (MM)	Timing to Implement MM	Location to Implement MM	Implementation Responsibility	Monitoring Responsibility
	89. Plan of alternate routes for heavy vehicles will be formulated and implemented. Existing roads will be used wherever practical for transportation of materials and a 'no-short-cut' policy will be used.				
	90. While preparing a plan of access routes, existing conditions of roads and bridges will also be considered to see for any requirement of widening and upgrading access paths and roads.				
	91. Traffic warning signs will be installed, and traffic regulations will be enforced during the transportation of materials and equipment, and machinery.				
	92. Nighttime construction traffic will be avoided as much as possible.				
	93. Drivers will be instructed to give way to locals while driving on access tracks, to keep a close watch for wild/domestic animals and children while driving, and to not throw any litter or cigarettes out of the vehicle.				
	94. The use of canal flood protection bunds for the movement of heavy vehicles will be minimized. Wooden/damaged bridges on canal/river/ other crossings will not be used for the movement of heavy vehicles.				
	95. Dry stream beds will not be used as access routes.				
	96. Any damage to access tracks, metaled roads, watercourses or the canal/river protection bunds, etc., will be appropriately repaired to bring these structures to their pre-construction condition. Any damage, which may cause hardship to the local community or wildlife, will be immediately repaired.				
Disposal of spoils and waste materials	97. Ensure safe storage and handling of fuels, oils, and other hazardous substances according to standard safety practices. Disposal should be carried out through KP-EPA approved contractors and facilities.	During Construction	Project-wise facilities and construction sites	Construction Contractor with FMC	NTDC

Potential Impacts	Mitigation Measures (MM)	Timing to Implement MM	Location to Implement MM	Implementation Responsibility	Monitoring Responsibility
	<ul> <li>98. Management and storage of fuel, waste oil, hazardous waste will be planned in accordance with EHS General Guidelines on Hazardous Materials Management. This includes the use of appropriate secondary containment structures capable of containing the larger of 110 % of the largest tank or 25% of the combined tank volumes in areas with above-ground tanks with a total storage volume equal or greater than 1,000 liters.</li> <li>99. All efforts will be made for the proper disposal of solid waste, applying principles of reducing waste as far as possible, reusing what is practical and recycling all recyclable materials.</li> </ul>				
	100. The solid waste generated during construction and campsites will be safely disposed of in demarcated waste disposal sites and the contractor will provide a proper waste management plan as part of SSEMP. A framework waste management plan is attached as <b>Annexure XI.</b>				
	101. The sewage system for camps will be properly designed (pit latrines or, as required, septic tanks) to receive all sanitary wastewaters.				
	102. The solid residue from the septic tanks will be transported to the nearby municipal sewage disposal site.				
	103. Lined wash areas will be constructed within the campsite or at the site, for the receipt of wash waters from construction machinery; and Ensure proper labeling of containers, including the identification and quantity of the contents, hazard contact information, etc.				

<sup>90</sup> https://www.ifc.org/wps/wcm/connect/90231ba8-5bb3-40f4-9255-eaf723d89c32/1-5%2BHazardous%2BMaterials%2BManagement.pdf?MOD=AJPERES&CVID=nPtgwml

Potential Impacts	Mitigation Measures (MM)	Timing to Implement MM	Location to Implement MM	Implementation Responsibility	Monitoring Responsibility
	104. Construction workers and supervisory staff will be encouraged and educated to practice waste minimization, reuse, and recycling to reduce the quantity of waste.				
Impact on Occupational Health and Safety	quantity of waste.  105. Provide adequate personal protective equipment (PPE) as per the job requirements and install warning signs at construction sites and camps.  106. Allow only trained and certified workers to install electrical equipment with safety and insulation measures in place.  107. Test structures for integrity prior to undertaking work.  108. Prepare and implement fall protection program that will include training in climbing techniques and use of fall protection measures; inspection, maintenance, and replacement of fall protection equipment; and rescue of fall-arrested workers, among others.  109. The fall protection system will be appropriate for the tower structure and necessary movements, including ascent, descent, and moving from point to point and fixtures will be installed, wherever possible, to facilitate the use of fall protection systems.  110. Provide adequate work-positioning device system for workers to the extent possible.  111. Properly maintained hoist equipment will be used along with properly trained personnel.  112. Proper safety belts will be provided. The Safety belts should be of not less than 16 millimeters (mm) (5/8 inch) two-in-one nylon or material of equivalent strength.	During Construction	Project-wise facilities and construction sites	Construction Contractor with FMC	NTDC
	<ul><li>113. Use a backup safety strap when operating power tools at height.</li><li>114. Remove signs and other obstructions from poles or</li></ul>				
	structures prior to undertaking work.				

Potential Impacts	Mitigation Measures (MM)	Timing to Implement MM	Location to Implement MM	Implementation Responsibility	Monitoring Responsibility
	115. Provide an approved tool bag for raising or lowering tools or materials to workers on structures.				
	116. Prepare and implement EMF safety program to prevented or minimize occupational hazards due to exposure to EMF.				
	117. The contractor will prepare OHSE Management Plan as part of SSEMP. Also include the provision of a safety champion program to be initiated monthly to encourage workers to adhere with H&S requirements.				
	118. The plan will also include impacts and mitigation measures related with COVID-19. COVID-19 control and prevention.				
	119. The plan will also include details related to labor working conditions and details on prohibiting child labor.				
	120. Identify potential exposure levels in the workplace, including surveys of exposure levels in new projects and the use of personal monitors during working activities.				
	121. Train workers in the identification of occupational EMF levels and hazards.				
	122. Establish and identify safety zones to differentiate between work areas with expected elevated EMF levels compared to those acceptable for public exposure, limiting access to properly trained workers. Prepare and implement action plans to reduce adverse impact of EMF and to address occupational exposure. Action plans may include limiting exposure time through work rotation, increasing the distance				
	between the source and the worker, when feasible, or the use of shielding materials.				
	123. Worker's Accommodation Plan will be prepared in reference to Workers' Accommodation: Processes				

Potential Impacts	Mitigation Measures (MM)	Timing to Implement MM	Location to Implement MM	Implementation Responsibility	Monitoring Responsibility
	and Standards91 as part of SSEMP and implemented.				
Habitat loss and impact on mammals, amphibians, birds, and reptiles	<ul> <li>124. If tree cutting is unavoidable for RoW clearance, the contractor will keep a record of cutting trees.</li> <li>125. During plantation, ten-time (1 x 10 times) more plants will be planted.</li> <li>126. Before the plantation campaign, the forest department will be consulted on the selection of local species.</li> <li>127. Provide adequate knowledge to the Project workers on relevant government regulations and punishments for illegal poaching to prevent hunting, trapping and exploitation of wildlife</li> <li>128. Minimize disturbance to, or movement of, soil and vegetation to prevent soil damage and erosion leading to spread of alien invasive plant species.</li> <li>129. Revegetate disturbed areas with native plant species</li> <li>130. Ensure that solid and liquid waste is disposed only at designated locations, to prevent pollution of the water bodies in the AOI and vicinity.</li> <li>131. In addition to this, sprinkle water twice or thrice a day (as per needed) to avoid dispersal of dust on the adjacent flora.</li> <li>132. Lights used in the camps, during the construction of towers will be kept to the minimum requirement.</li> <li>133. Upward scattering lights will preferably be used.</li> <li>134. Vehicle speed will be controlled to avoid incidental mortality of small mammals and reptiles.</li> </ul>	During Construction	Project-wise facilities and construction sites	Construction Contractor with FMC	NTDC

\_

<sup>&</sup>lt;sup>91</sup> A guidance note by IFC and the EBRD Workers' Accommodation: Processes and Standards (August 2009)

Potential Impacts	Mitigation Measures (MM)	Timing to Implement MM	Location to Implement MM	Implementation Responsibility	Monitoring Responsibility
	135. The contractor's staff and labor will be strictly directed not to damage any vegetation such as trees or bushes.				
	136. Clearing of green surface cover for construction, for borrow for development, and cutting trees and other important vegetation during construction will be minimized.				
Increased Employment	137. The contractor and sub-contractors will explain the recruitment process to local communities.	During Construction	Project-wise facilities and	Construction Contractor with	NTDC
Opportunities and Local Economy	138. Local candidates will be given preference for jobs provided they have the required qualifications and skills for the announced positions		construction sites	FMC	
	139. Coordinate efforts to recruit unskilled labor, if any are required under the Project, from the adjacent areas.				
	140. Determine what is 'fair and transparent' in the distribution of jobs between different community groups in consultation with local communities and their leaders.				
	141. As the nearby economy is mostly based on agriculture, it will be ensured that construction activities do not disturb or disrupt agricultural activities in the surrounding areas.				
	142. Local communities will be consulted before the start of work.				
Overburden on Local Resources	143. Construction Contractor will prepare a resource conservation plan as per template given in <b>Annexure XV.</b>	During Construction	Project-wise facilities and construction	Construction Contractor with FMC	NTDC
	144. The use of water will not disturb public water availability and the source of water will be selected carefully.		sites		
	145. Contractor to source raw material and camp utilities from Peshawar city to avoid overburden on local resources.				

Potential Impacts	Mitigation Measures (MM)	Timing to Implement MM	Location to Implement MM	Implementation Responsibility	Monitoring Responsibility		
Social Conflicts due to Influx of Workers	146. Require non-locals employed by the Project to adhere to a social 'code of conduct' in terms of relations with local communities including restricting their movement to stay within camping sites.	During Construction	Project-wise facilities and construction sites	Construction Contractor with FMC	NTDC		
	147. Provide employees and visitors with cultural awareness training.						
Impact on Community Health and Safety	<ul><li>148. The camping sites of the Project site will be completely fenced off before the commencement of any other construction activities.</li><li>149. Access to the site will be controlled and unauthorized</li></ul>	During Construction	Project-wise facilities and construction sites	Construction Contractor with FMC	NTDC		
	people will not be allowed to enter. Workers will not allow socializing with local communities.						
	150. Potential for the spread of vector-borne and communicable diseases (such as COVID-19, HIV infection, etc.) from labor camps will be suppressed through worker awareness orientation and appropriate accommodation and sanitation systems.						
	151. Children will not be allowed to enter the site under any circumstances.						
	152. The prescribed vehicle speed limit will be strictly enforced for community and worker safety.						
	153. Dust emissions due to vehicular traffic will be minimized by enforcing the speed limit. Water will be sprinkled on unpaved surfaces where necessary.						
	154. All vehicles used by the project will undergo regular maintenance and will be tuned following the requirements of the NEQS.						
	155. The labor works with different transmittable diseases will be restricted within the construction site.						
	156. Efforts will be made to create awareness about road safety among the drivers operating construction vehicles.						

Potential Impacts	Mitigation Measures (MM)	Timing to Implement MM	Location to Implement MM	Implementation Responsibility	Monitoring Responsibility
	157. Timely public notification on planned construction works.				
	158. Close consultation with local communities to identify optimal solutions for diversions to maintain community integrity & social links.				
	159. Seeking cooperation with local educational facilities (schoolteachers) for road safety campaigns.				
	160. Provision of proper safety and diversion signage, particularly at sensitive/accident-prone spots;				
	161. The use of water will not disturb public water availability and the source of water will be selected carefully.				
Impact on Physical Cultural Resources (PCRs)	162. A chance find procedure is presented in <b>Annexure</b> IX in case of finding any artifact during construction activities				
Uncontrolled Solid Waste Disposal, Communicable	163. Maintain proper sanitation around construction sites, access to the nearby public lavatories will be allowed or provision of temporary toilets will be made.	During Construction	Project-wise facilities and construction	Construction Contractor with FMC	NTDC
Diseases	164. The construction camp will be provided with toilets with soakage pits or portable lavatories or at least pit latrines.		sites		
	165. Disposal of surplus materials will also be negotiated through local authority approvals before the commencement of construction.				
	166. The Project work will not involve any significant cutting and filling, but minor excavations (down to 4m) and piling may be required to create the foundations for towers (if required).				
	167. It is expected (depending on the mode of contract) that the surface under the towers will need to be scrabbled to remove unstable materials, or to stockpile topsoil.				

Potential Impacts	Mitigation Measures (MM)	Timing to Implement MM	Location to Implement MM	Implementation Responsibility	Monitoring Responsibility
	168. If surplus materials arise from the removal of the existing surfaces from specific areas, it will be used elsewhere on the Project before additional soil, rock, gravel, or sand is brought in.				
	169. The use of immediately available material will generally minimize the need for additional rock-based materials extraction from outside.				
	170. Contractual clauses will require the contractor to produce a materials management plan (one month before construction commences) to identify all sources of cement and aggregates and to balance cut and fill.				
	171. The plan will clearly state the methods to be employed before and during the extraction of materials and all the measures to be employed to mitigate nuisances to residents.				
	172. Financial compensation will not be allowed as mitigation for environmental impacts or environmental nuisance.				
	173. Contractual clauses will require the contractor to produce a solid waste management plan so that the proper disposal of waste can be ensured.				
	174. Claims/complaints of the people on construction nuisance/damages close to RoW will be considered and responded to promptly by the Contractor.				
	175. Temporary and permanent drainage facilities will be designed to facilitate the rapid removal of surface water from all areas and prevent the accumulation of surface water ponds.				
	176. The contractor will organize temporary means of access and make alternative arrangements to avoid access problems to the local community and to avoid such short-term negative impacts.				

Potential Impacts		Mitigation Measures (MM)	Timing to Implement MM	Location to Implement MM	Implementation Responsibility	Monitoring Responsibility
	177	7. Potential for the spread of vector-borne and communicable diseases (such as COVID-19, HIV infection, etc.) from labor camps will be avoided through worker awareness orientation and appropriate sanitation systems.				
Natural Hazard Risks (Flooding, Earthquakes etc.)	179 180	B. The structures of the ETL such as tower bases should be built as per the rules of Pakistan Building Code (PBC).  D. The tower bases should be built considering the local climatic conditions including flooding.  D. Project construction facilities should be built considering climatic conditions such as risk of flesh flooding in case on high precipitation events.  D. Material testing and tensile strength of conductors must be checked before commencement of works	During design and before construction starts	Project-wise facilities and construction sites	NTDC design, Construction Contractor with FMC	NTDC
Operation Phase						
Noise	1.	The height of ETL and RoW as per NTDC standard for 220 kV ETL discussed in <b>Section 3</b> will be maintained to avoid audible noise issues.	During operations	Project-wise facilities and construction	ESIC	NTDC
	2.	In addition to above, much more robust design for ETL and its ground clearance with much higher levels have been proposed for this project due to the Project passing through settlements in parts of the RoW.		sites		
Impact of Faulted SF6	3.	Do not breathe the vapors environment remaining in a circuit breaker where arcing or corona discharges have occurred in the gas.	During Operations	RoW of ETL	NTDC	ESIC, NTDC
	4.	Evacuate the faulted SF6 gas from the circuit breaker and flush with fresh air before working on the circuit breaker				
	5.	Arc products that do not recombine, or which combine with any oxygen or moisture present, are normally				

Potential Impacts	Mitigation Measures (MM)	Timing to Implement MM	Location to Implement MM	Implementation Responsibility	Monitoring Responsibility
	removed by the molecular sieve filter material within the circuit breaker.				
Electrocution and Collision of birds	<ol> <li>Maintain 1.5 meter (60-inch) spacing between energized components and grounded hardware or, where spacing is not feasible, covering energized parts and hardware.</li> </ol>	During Operations	RoW of ETL	NTDC	ESIC, NTDC
	7. Install visibility enhancement objects such as marker balls, bird deterrents, or diverters.				
	8. Make power lines less of an 'obstacle' for birds to collide with.				
	<ol> <li>Keep birds away from the power line by making the power lines more visible by placing colorful/fluorescent tape on the towers to make them conspicuous enough to enable birds to see them.</li> </ol>				
	<ol> <li>Keep power line cables lower to the ground to the extent feasible as these are better for preventing bird collision.</li> </ol>				
	11. Keep vertical separation of cables as less to the extent feasible, as it poses less of an 'obstacle' for birds to collide with.				
	<ol> <li>Provide horizontal separation of conductors and construct cage box on conductors to prevent birds from sitting or making nests on the towers; and</li> </ol>				
	13. Construct self-supporting towers, which do not require stay wires.				
Occupational Health and Safety	14. All associated ETLs will be shut down before conducting any repair and maintenance work as per the NTDC's operation and maintenance procedures.	During Operations	RoW of ETL	NTDC	ESIC, NTDC
	<ol> <li>Adherence to the standards Occupational Health and Safety Guidelines.</li> </ol>				

Potential Impacts	Mitigation Measures (MM)	Timing to Implement MM	Location to Implement MM	Implementation Responsibility	Monitoring Responsibility
	16. Allow only trained and certified workers to maintain, or repair electrical equipment with safety and insulation measures in place.				
	17. Deactivate and properly ground the live power distribution prior to performing work on or in proximity to the ETLs.				
	18. Ensure proper use of special safety equipment and procedures when working near or on exposed energized parts of an electrical system.				
	19. Ensure the worker is properly isolated and insulated from the energized part with gloves or other approved insulation and energized part is properly insulated from the worker.				
	20. Test structures for integrity prior to undertaking work.				
	21. Prepare and implement a fall protection program that will include training in climbing techniques and use of fall protection measures; inspection, maintenance, and replacement of fall protection equipment; and rescue of fall-arrested workers, among others.				
	22. The fall protection system will be appropriate for the tower structure and necessary movements, including ascent, descent, and moving from point to point and fixtures will be installed, wherever possible, to facilitate the use of fall protection systems.				
	23. Provide adequate work-positioning device system for workers to the extent possible.				
	24. Properly maintained hoist equipment will be used along with properly trained personnel.				
	25. Proper safety belts will be provided. The Safety belts should be of not less than 16 millimeters (mm) (5/8 inch) two-in-one nylon or material of equivalent strength.				

Potential Impacts	Mitigation Measures (MM)	Timing to Implement MM	Location to Implement MM	Implementation Responsibility	Monitoring Responsibility
	26. Use a backup safety strap when operating power tools at height.				
	27. Remove signs and other obstructions from poles or structures prior to undertaking work.				
	28. Provide an approved tool bag for raising or lowering tools or materials to workers on structures.				
	29. Prepare and implement EMF safety program to prevent or minimize occupational hazards due to exposure to EMF.				
	<ol> <li>Identify potential exposure levels in the workplace, including surveys of exposure levels in new projects and the use of personal monitors during working activities.</li> </ol>				
	31. Train workers in the identification of occupational EMF levels and hazards.				
	32. Establish and identify safety zones to differentiate between work areas with expected elevated EMF levels compared to those acceptable for public exposure, limiting access to properly trained workers.				
	33. Prepare and implement action plans to reduce adverse impact of EMF and to address occupational exposure. Action plans may include limiting exposure time through work rotation, increasing the distance between the source and the worker, when feasible, or the use of shielding materials.				
	34. Signs and barriers (e.g. locks on doors, use of gates, use of steel posts surrounding transmission towers) will be used.				
Community Health and Safety Risk	35. Signs and barriers (e.g. locks on doors, use of gates, use of steel posts surrounding transmission towers) will be used.	During Operations	RoW of ETL	NTDC	ESIC, NTDC

Potential Impacts	Mitigation Measures (MM)	Timing to Implement MM	Location to Implement MM	Implementation Responsibility	Monitoring Responsibility
	<ul> <li>36. Conducting objects (e.g. fences or other metallic structures), installed near power lines, will be grounded to prevent shock.</li> <li>37. A vertical clearance, required as per international standards, will also be maintained especially near the populated areas. If required, the application of engineering techniques will be considered to reduce the EMF produced by power lines and Grid Stations such as increasing the height of transmission towers, modifying to size, spacing, and configuration of conductors, and shielding with metal alloys (This is effective for reduction of electric field exposure, but not for reduction of EMF exposure.).</li> <li>38. During the operation stage, a check will be kept by the NTDC that no construction will be allowed within RoW of the ETL.</li> </ul>				
	<ul><li>39. Power lines will be designed, with due consideration to landscape views and important environmental and community features.</li><li>40. Use of noise barriers or noise canceling acoustic</li></ul>				
	<ul> <li>devices will be considered as necessary.</li> <li>41. Adherence to regional or national air traffic safety regulations.</li> <li>42. Use of buried lines when installation is required in flight sensitive areas.</li> </ul>				
Visual Amenity	<ul> <li>43. Impact on visual amenity due to the transmission and distribution facilities to communities may be visually intrusive and undesirable to nearby residents.</li> <li>44. However, it is common practice to create some local hard and soft landscaping and successful planting of fruit trees at such sites. This practice should be encouraged as far as practicable. Other opportunities for enhancements can be assessed before construction and proposed enhancements will be</li> </ul>	During Operations	RoW of ETL	NTDC	ESIC, NTDC

Potential Impacts	Mitigation Measures (MM)	Timing to Implement MM	Location to Implement MM	Implementation Responsibility	Monitoring Responsibility
	discussed with the local population to serve as a vehicle for further public consultation at the implementation stage and to assist in public relations.				
Aircraft Navigation Safety	<ul> <li>45. Use of buried lines when the installation is required in flight sensitive areas.</li> <li>46. Making the power lines more visible by placing colorful/fluorescent tape on the towers and colorful balls on the conductor to make them visible.</li> <li>47. Keep power line cables lower to the ground to the extent feasible</li> </ul>	During Design	RoW of ETL	NTDC	ESIC, NTDC
Cumulative, and Induced impacts	<ol> <li>NTDC's standard operating procedures (SOPs) of a minimum vertical ground clearance for ETL conductor of 7 meters will be ensured.</li> <li>Raising conductor height above the ground to 8 m, typically by increasing tower height, will be ideal.</li> <li>Reducing conductor spacing.</li> <li>Arranging phases so that fields tend to cancel.</li> <li>Increasing transmission voltage (since EMF intensities are a function of current, and increased voltage, all things being equal, will result in reduced current).</li> <li>Reducing loads (and therefore, currents).</li> <li>Identification of potential exposure levels in the work area including surveys of exposure levels and establishment of safety zones.</li> <li>Safety signs and warning zone will be highlighted to indicate EMF in the area</li> <li>Limit access to properly trained workers and those equipped with appropriate PPE when entering safety zones.</li> <li>Increasing RoW widths or buffer zone widths, to move people further from ETLs.</li> </ol>	During Construction	Project-wise facilities and construction sites	Construction Contractor with FMC	NTDC

COVID-19= Coronavirus Disease 2019, EMF= Electromagnetic Field, ESIC = Environment and Social Impact Cell, ETL = Electricity Transmission Line, HIV= human immunodeficiency virus, LARP= Land Acquisition and Resettlement Plan, NEQS= National Environmental Quality Standards, NTDC = National Transmission and Despatch Company, PMU = Project Management Unit, PPE= Personal Protective Equipment, RoW= Right of Way

# 9.4 Capacity Building and Training

- 467. Personnel, including Contractors' personnel, working for or on behalf of the Project will receive training to maintain awareness of relevant environmental and social aspects, impacts and risks associated with the Project and corresponding controls. The training will also maintain awareness of the environmental benefits of improved personal performance and the potential consequences of departure from specified procedures.
- 468. Visitors to Project sites will receive relevant environmental and social awareness training as part of site induction training. Environmental training will help to ensure that the requirements of this IEE and EMP are clearly understood and followed by all Project personnel in the course of the construction phase.
- 469. The Contractors will have primary responsibility for providing training to all construction personnel in line with the Training Plan shown in **Table 9-3**. The plan will be finalized before the commencement of the training.

**Table 9-3: Training Schedule** 

Target Audience	Trainers	Contents	Schedule
Contractor Supervisors/ Managers	NTDC's ESIC Team/FMC	Induction training per 'Training Plan'	Before the start of construction activities
Selected management staff from contractor	Contractor	Key findings of IEE Mitigation measures EMP	Before the start of construction activities
All site personnel	Contractor	Mitigation measures of EMP and IEE SSEMP Camp rules	Before and during construction activities
Construction crew	Contractor	EMP Waste disposal procedures	Before and during construction activities
Drivers	Contractor	Road safety Defensive driving Road access restrictions Vehicle movement restrictions Waste disposal	Before and during the construction phase
Construction Staff	Contractor	Waste disposal Vehicle movement restrictions	Before and during the construction phase
Camp staff	Contractor	Camp operation Waste disposal Natural resource conservation Housekeeping Camp Rules	Before and during the construction phase

ESIC = Environment and Social Impact Cell, FMC = Facility Management Consultant

#### 9.5 Site-Specific Environmental Management Plan (SSEMP)

470. The EMP and other safeguard requirements (including any conditions stipulated in the EIA approval) will be included in bidding documents and civil works contracts. The bidders will be required to submit, as part of their bids, the expected costs of implementing the EMP to ensure that sufficient resources are allocated for EMP implementation. The Contractor(s) will

be required to prepare SSEMP outlining how they intend to implement the EMP. They will describe the precise locations of the required mitigation/monitoring, the persons responsible for the mitigation/monitoring, the schedule and reporting methodology.

471. The SSEMP needs to include COVID-19 health and safety management plan and emergency response plan. 92 These plans will be prepared based on a risk assessment following relevant government regulations, guidelines, and international best practices. The Contractor(s) will be required to submit the SSEMP to ESIC for approval before taking possession of any work site. No access to the site will be allowed until the SSEMP is approved by ESIC. NTDC will have the right to suspend works or payments if the Contractor is in violation of any of his obligations under the EMP and SSEMP. A template for SSEMP is provided as **Annexure XVI**.

#### 9.6 Equipment Maintenance Details

#### **Construction**

472. Equipment during the construction phase includes dump trucks, loader trucks, excavators, cranes, front-end loaders, fuel tankers, water bowser, cars, etc. This equipment and other machinery will only be repaired at designated sites at the warehouse.

## **Operations**

473. Limited vehicle movement by the maintenance team will be required on a need basis.

## 9.7 Waste Management

- 474. This section provides the key elements to be included in a waste management plan or operating procedure to be developed by the Contractor that will be employed during the construction activities of the Project. The plan or operating procedure will be approved by ESIC, NTDC.
- 475. The Contractor will prepare a detailed Waste Management Plan as part of SSEMP. A framework plan has been provided as **Annexure XI.**
- 476. Every effort will be made to minimize the waste generated while the project is in progress. The main types of waste that will be generated are:
  - Used oils and chemicals
  - Garage Waste
  - Sewage
  - Camp waste
  - Medical waste
  - Packing waste
  - Excess construction material.

477. The solid and liquid waste to be generated from the project activities and camps is to be disposed of as per measures discussed in **Table 9-2**.

# 9.8 Worker Accommodation Plan

478. Worker's Accommodation Plan for the Project covers guidelines, the standards, and practices to be used in the design and management of workers accommodation by NTDC, its contractors and subcontractors. The Worker's Accommodation Plan will largely be

<sup>&</sup>lt;sup>92</sup> Other subplans to be included in the SSEMP are tree management plan, waste management plan, vibration management plan, traffic management plan, camp management plan, worker accommodation plan, resource conservation plan, spill prevention and response plan, emergency response plan, chance finds procedure, dust management plan, OHSE management plan, fire management and protection plan, construction noise and vibration management plan, and worker accommodation plan.

implemented by the Contractor. The scope and applicability of the Worker's Accommodation Plan are limited to the design and management of the worker accommodations provided during the construction phase of the Project. NTDC and its contractors will ensure sufficient resources are allocated on an on-going basis to achieve the effective implementation of the worker accommodation plan.

- 479. Worker accommodations will be located within the Project site and will be provided during the construction phase of the Project. The worker accommodations will encompass areas where it will not interfere with the construction activities.
- 480. Alongside the construction planning, the Contractor along with the Project Management Unit (PMU) of NTDC, will conduct a space assessment of accommodations.
- 481. Worker's Accommodation Plan will be prepared by contractor as part of SSEMP. A template plan has been provided in **Annexure XVII**.
- 482. An emergency response plan and fire management plan will be prepared by contractor as part of SSEMP. The template plans are given in provided in **Annexure XVII** and **Annexure XIX**.

# 9.9 Environmental Monitoring and Reporting

- 483. Implementation of the EMP during construction will be done by the contractors and supervised by FMC and ESIC.
- 484. The parameters to be monitored, frequency and duration of monitoring as well as the locations to be monitored will be as per the environmental monitoring plan (EMoP) prepared as part of the EMP (**Table 9-4** and **Table 9-5**).
- 485. The EMoP identifies environmental monitoring activities to ensure that negative environmental impacts are addressed properly. It identifies environmental parameters to be monitored, frequency of monitoring, applicable standards, agencies, and institutions responsible for monitoring; and provide indicative monitoring costs. The FMC will assist the PMU in this regard. During construction, monitoring will be undertaken by contractors and the FMC. PMU and NTDC ESIC will monitor contractor's environmental performance. During the operation stage, monitoring will be the responsibility of NTDC.
- 486. The main objectives of the pre-construction and construction phase EMoP will be:
  - The compensation for loss of assets will be monitored during the pre-construction activities
    as per the latest rates announced by the government as every year rates have to be
    revised by the government. This aspect will be strictly monitored.
  - Monitor the actual impact of the construction activities on the project corridor's physical, biological, and socio-economic receptors. This will indicate the adequacy of the IEE.
  - Recommend mitigation measures for any unexpected impact or where the impact level exceeds that anticipated in the IEE.
  - Ensure compliance with legal and community obligations including safety at construction sites.
  - Monitor the impacts on land, water resources, air quality, noise level and cutting of trees in the project area as described in the EMP.
- 487. The main objectives of EMoP during the operation phase will be to:
  - Appraise the adequacy of the IEE concerning the project's predicted long-term impact on the corridor's physical, biological, and socio-economic environment.
  - Evaluate the effectiveness of the mitigation measures proposed in the EMP and recommend improvements, if necessary

- 488. Compile periodic accident data to support the analysis that will help to minimize future risks.
- 489. The contractors will report the results and conclusions of EMP implementation and environmental monitoring to the PMU and ESIC NTDC monthly. The budget for environmental monitoring will be included as part of civil works contracts.
- 490. NTDC through its PMU will:
  - (i) Establish and maintain procedures to monitor the progress of implementation of EMPs
  - (ii) Verify the compliance with environmental measures and their progress toward intended outcomes.
  - (iii) Document and disclose monitoring results and identify necessary corrective and preventive actions in the periodic monitoring reports.
  - (iv) Follow up on these actions to ensure progress toward the desired outcomes,
  - (v) Submit SAEMRs to ADB.

491. PMU through NTDC's ESIC will submit semiannual environmental monitoring reports (SAEMRs), which cover all subprojects under Trance 4, to ADB for review and disclosure, within 30 days after completion of each monitoring period. SAEMRs will be prepared and submitted to ADB, starting after Tranche 4 becomes effective, until ADB's Project Completion Report (PCR) is issued. Within three months after completion of all civil works, a report on the project's environmental compliance performance (including lessons learned that may help the NTDC in their environmental monitoring of future projects) will also be prepared. This report will be part of the input to the overall PCR.

492. NTDC, with the support of the FMC, will translate the summary of these documents into Sindhi<sup>93</sup> and Urdu languages (see para. 209 on page 95 of this IEE) and post them on NTDC website with the full reports (in English), within two weeks after ADB's clearance of each document. In case the FMC's liability period ends before ADB's PCR issuance, the NTDC ESIC itself will prepare the SAEMRs. In addition to the above-mentioned reports, in case of any accident related to occupational and community health and safety causing fatality or near-fatal event, NTDC will to (i) report to ADB within 24 hours of any fatal or near-fatal event, (ii) prepare and submit to ADB an incident notification form within 48 hours, and (iii) prepare and submit to ADB an incident root cause investigation and corrective action form within 72 hours.

<sup>&</sup>lt;sup>93</sup> In the areas of Subprojects 1, 2, and a part of Subproject 5 (of "220kV Daharki – Rahim Yar Khan"), Sindhi is spoken as a mother tongue, although Urdu and Punjabi are also spoken in the areas.

Table 9-4: Environmental Monitoring Plan (EMoP)

Environmental Performance Concern		Performance Indicator	Frequency to Monitor	Timing to Check	Locations to implement	Responsible to implement	Resp supervision
Pre-Construction Phase							
1.	Possible encroachment on reserved forests	Route survey to define alternative alignments (Field mapping with Global Positioning System (GPS) Equipment preferable)		During detailed design		NTDC / PMU through route survey contractor	NTDC
Co	nstruction Phase						
2.	Dust, equipment emissions, erosion, noise control, and Waste management	Incorporation of appropriate clauses in construction contracts (Field inspections to ensure that appropriate measures are implemented, and facilities are installed)	Once	Before construction		NTDC and PMU to include in bidding documents.	NTDC, ESIC
3.	Encroachment and Physical Disfiguration	Landscape Conditions, Baseline Environment	Once (update monthly as necessary)	One Month after Construction Work	All NTDC'S alignment	Contractor	NTDC, ESIC
4.	Soil Erosion	Soil Compression, Land Clearing, Vegetation Removal	Once (update monthly as necessary)	Before construction. Update monthly	All NTDC'S alignment	Contractor	NTDC, ESIC
5.	Soil Contamination	Fuels Spillage, Chemicals Containers	Monthly	During Construction	All NTDC'S alignment	Contractor	NTDC, ESIC
6.	Ecological Resources	Land Clearing, Habitat destruction	Monthly	Update monthly	All NTDC'S alignment	Contractor	NTDC, ESIC
7.	Loss of Barani Crops	Number of People affected due to	Once (update monthly as necessary)	During Construction	All NTDC'S alignment	Contractor	NTDC, ESIC

	unavailability of Opportunistic Agriculture					
8. Local Community Work Force	Disturbance due to Stringing, good engineering practices adopted	Once (update monthly as necessary)	Update monthly	All NTDC'S alignment	Contractor	NTDC, ESIC
9. Safety Hazards	Zero near miss, minor, major, and fatal accidents	Monthly	Update monthly	All NTDC'S alignment	Contractor	NTDC, ESIC
Operational Phase						
10. Electric Current	Earthing of the Towers, Safety Plan by the contractor to be followed	Monthly	During Operation	All NTDC'S alignment	Contractor	NTDC, ESIC
11. Breaking of Conductors	Frequency of Conductors Tripping, Complaints reported	Quarterly	Throughout the Project	All NTDC'S alignment	Contractor	NTDC, ESIC
12. Towers Collapse	Soil Geology, Climatic Conditions, Records on displacement (if any)	Six Monthly	During Implementation Phase	All NTDC'S alignment	Contractor	NTDC, ESIC
13. Avifauna Movement	The reported death of Birds, Audit Report by the ESIC cell	Quarterly	After ETL is erected	All NTDC'S alignment	Contractor	NTDC, ESIC

ESIC = Environment and Social Impact Cell, ETL = Electricity Transmission Line, NTDC = National Transmission and Despatch Company, PMU= Project Management Unit

**Table 9-5: Instrumental Environmental Monitoring Plan** 

No	Monitoring Parameter	Monitoring Location	Frequency	Responsibili ty	Resource Requirement	Criteria for Triggering Action	Documentation		
Cor	Construction Phase								
1.		At representative existing wells (if any) within 100 m of the campsite	Every six months	implement,	water sample collection and analysis	Water quality deterioration that can be attributed to the effluents released by the project facsimiles	sample collection and		
2.	Ambient Air Quality: Suspended particulate matter (SPM)	<ul> <li>Campsite</li> <li>Access road</li> <li>Communities within 100 m of RoW, campsite, or access road</li> </ul>	Every six months	Same as above	Resources for monitoring dust generation		Records of measured values to be maintained		
3.	Noise	<ul> <li>Campsite</li> <li>Access road</li> <li>Communities within 100 m of RoW, campsite, or access road</li> </ul>	Every six months	Same as above	Noise meter (1- hr concentration levels)	Exceeding World Bank limits (55 dBA during the day, 45 dBA during the night, measured at the receptor; or an increase of 3 dBA if the background noise is higher than the above-specified levels)			
4.	Visual check for exhaust emissions from	Access road	Routine visits	Contractor	-	Personal judgment	Records of abnormal emissions.		

No	Monitoring Parameter	Monitoring Location	Frequency	Responsibili ty	Resource Requirement	Criteria for Triggering Action	Documentation
Con	struction Phase						
	equipment and vehicles						
5.	Visual check for soil erosion	- 1	Routine Visits	Contractor	-	Visible signs of any soil erosion	Photographic record
6.	Grievances of the local communities	- 1	During field activities	Contractor	Monitoring register	Complaints	Complete grievance record to be maintained in the social complaint register.
7.	ration Phase  Dust, equipment emissions, and erosion control Waste management (Same parameters as during construction period)	• All ETLs	As necessary based on inspections and complaints	5		Spot checks based on visual inspections and any complaints as necessary based on inspections and complaints	

ETL = Electricity Transmission Line, NTDC = National Transmission and Despatch Company, PMU = Project Management Unit, RoW = Right of Way, SAEMR = semi-annual environmental monitoring report, NEQS = National Environmental Quality Standards

# 9.10 Institutional Arrangement

- 493. The lack of an environmental and social safeguards team and lack of capacity within project proponents and contractors creates implementation issues of project environmental safeguard documents including IEE, EIA, SSEMP, and no objection certificate (NoC). To overcome this, NTDC will ensure institutional arrangements as described below.
- 494. The NTDC has established a PMU to implement MFF II. The PMU's day-to-day project management includes procurement, project execution, financial management, and monitoring of and reporting on project progress. The PMU of NTDC which already exists and executes other tranches of the MFF II Program will implement environmental safeguard requirement through its dedicated wing, the ESIC. The ESIC is staffed by EHS Manager, Deputy EHS Manager and Assistant EHS Manager in addition to social safeguard staff. Further resources for environmental safeguards management will be provided by FMC.

(i) Oversight body
(ii) Oversight body
(iii) Executing agency
(iii) Implementation unit
Consulting services

Ministry of Energy (Power Division)
Mr. Zafar Abbas (chair)
Mr. Hammad Raza (member)

National Transmission and Despatch Company Limited (NTDC)
Program Management Unit (PMU) established in NTDC

NTDC consulting firm National Engineering Services Pakistan (NESPAK), recruited by NTDC from its resources, will provide supervision support to NTDC.

Table 9-6: Implementation Arrangements for Tranche 4

- 495. Specific roles and responsibilities for environmental monitoring are provided in **Table 9-7**.
- 496. Institutions responsible for executing and monitoring the environmental aspects of this project are:
- 9.10.1 National Transmission and Despatch Company Limited (NTDC)
- 497. NTDC, the proponent of the ETL, is the executing agency of the Project. NTDC will monitor the implementation of the investment program and all tranches under the program.
- 9.10.2 Project Management Unit (PMU) under NTDC
- 498. The existing PMU established in NTDC under the first MFF 0007-PAK: Power Transmission Enhancement Investment Program (MFF I)<sup>94</sup> will be responsible for day-to-day project implementation for the physical outputs relating to the transmission system and operation (as defined under their transmission license). PMU will also be responsible for complying with the safeguard's requirements and design and monitoring framework, and loan covenants.
- 499. EHS Manager of ESIC under PMU will be responsible for environmental and social safeguards requirement implementation during design, construction, and operations of the ETL though Deputy EHS Manager and Assistant EHS Manager in addition to social safeguard staff.
- 500. The top management of ESIC of PMU will be ultimately responsible to ensure that the SSEMP/EMP is implemented through a monitoring mechanism. For this purpose, ESIC will develop and maintain internal institutional capacity for environmental management.
- 501. ESIC should be assigned the task to check that design and bid documents are responsive to key environmental, social, and safety considerations, and that the proposed

<sup>94 37192-013:</sup> MFF - Power Transmission Enhancement Investment Program | Asian Development Bank (adb.org)

method of work reflects the boundaries defined in the EMP. Further, PMU to ensure, the contractor's environmental safeguards capacity before construction starts.

502. ESIC within the PMU, with the assistance of FMC, will be responsible for:

- Preparing environmental screening checklists and classifying subprojects that have not been yet classified.
- Based on the checklist and as per the requirements of ADB SPS, Pak-Act (1997) and relevant provincial Environmental Protection Acts, preparing IEEs and EMPs.
- Submitting the checklists and IEE reports to ADB.
- Ensuring that EMPs are included in Tender documents.
- Ensuring that all regulatory clearances are obtained before starting civil works for the subproject.
- Ensuring that the EMPs, including all proposed mitigation measures and monitoring programs are properly implemented.
- Undertaking monitoring of subprojects and preparing SAEMRs every six months, to be delivered to ADB.
- In the case of unpredicted environmental impacts occurring during project implementation, preparing, and implementing a Corrective Action Plan (CAP).
- In the case that a subproject needs to have its siting or alignment changed or its
  environmental classification reconfirmed, reviewing it to determine whether a
  supplementary study is required. If so (where unanticipated environmental impacts
  become apparent), carry out the study and implement any amendments to the original
  EMP.
- Approving SSEMP to be submitted by each construction contractor.
- Providing awareness training in environmental management for all employees working on the subproject.
- Ensuring that meaningful public consultations (including both men and women) are undertaken with affected groups and local NGOs. The list of people attending the consultation, time and locations, subjects discussed during consultation will be recorded in a systematic manner.
- Sharing information and disclosure of environmental safeguard documents (including any Corrective Action Plans prepared in cases of change to original project design) as required.

#### 9.10.3 Facility Management Consultant (FMC)

503. Overall tranche supervision will be supported by the FMC: National Engineering Services Pakistan (NESPAK) funded by NTDC's own resources. The FMC (NESPAK) will have following positions for catering environment safeguards requirements of the Project. Person-months indicated here are exclusively for Tranche 4.

- International Environmental Safeguards Specialist (FMC-IESS, 04person-months, intermittent)
- National Environmental Safeguards Specialist (FMC-NESS, 1 Position, 24 person-months full-time)
- National Environmental Inspectors, (FMC-NEIs, 2 Positions, 24 months each full-time)

### 504. The FMC will be responsible for

 To maintain adequate staff for implementation of IEE and EMP including one FMC-IESS, one FMC-NESS and two FMC-NEIs.

- Supervising the Project's Contractors and ensuring that all the contractual obligations related to the design and construction, as well as environmental and social compliance, are met.
- Ensuring that the day-to-day construction activities are carried out in an environmentally
  and socially sound and sustainable manner and developing 'good practices' construction
  guidelines to assist the Contractors and PMU staff in implementing the EMMP
- Assisting the Chief Engineer (EHV-II) in coordinating with the PEPAs, provincial agriculture, forest and Wildlife departments, NGOs/CBOs and other public/private sector organizations.

# 9.10.4 Construction Contractor

- 505. Only one Engineering, Procurement, Construction (EPC) contractor (Construction Contractor) is expected to be mobilized for Subproject 4, while the EPC contractor can hire sub-contractors for timely completion of the Project. The Construction Contractor will assign and retain a full-time and qualified Environmental Safeguards Officer (ESO) and a full-time and qualified Health and Safety Officer (HSO). The contractor is responsible for developing similar arrangement in the subcontractor hierarchy. ESIC of NTDC will make sure the positions are filled with appropriate human resource.
- 506. The Contractor will be primarily responsible for the implementation of the EMP and SSEMP. Contractor will develop an internal monitoring and reporting mechanism for all activities undertaken.
- 507. Contractor is also responsible for developing Site-specific EMP (SSEMP) or making necessary changes to the SSEMP if and as required as a result of any changes in design or location, and ongoing reviews and requirements.

Table 9-7: Roles and Responsibilities for Implementation of EMP

Aspect	NTDC's ESIC Responsibilities	Contractor's Responsibilities	Relevant Documentation
Contracting	Ensure that the SSEMP/ EMP implementation and internal monitoring and reporting requirements are included in the contract between NTDC and the Contractors.	Understand the requirements and estimate the required resources.	The contract between NTDC and Contractors
SSEMP and subsequent Updates	Review and approve SSEMP.	Preparing SSEMP. Update SSEMP if any changes to design happened	SSEMP Revised SSEMP
Resources	Ensure the availability of resources required for EMP implementation, monitoring of Contractors and preparing reports to authorities	Ensure the availability of resources required for EMP implementation and internal monitoring throughout the construction duration and reporting to NTDC.	Project SSEMP implementation and monitoring plans and budgets.
Environmental personnel	Assign and retain full-time and qualified EHS Manager, Deputy EHS Manager and Assistant EHS Manager for the Project	and qualified ESO and a full-	Job descriptions.
Monitoring surveys and inspections	Undertake periodic inspections and carry out field measurements, where needed over and above those		Inspection and survey reports.

Aspect	NTDC's ESIC Responsibilities	Contractor's Responsibilities	Relevant Documentation
	of Contractor. Review Contractor monitoring.	inspections, and carry out surveys	
Environmental inspections	Conduct periodic internal inspections of the construction sites and commissioning third-party (external) inspections	Conducting periodic internal audits.	Audit reports.
Reporting	Ensure that periodic environmental monitoring reports are received from the Contractors and are reviewed. Prepare reports to authorities if necessary	environmental monitoring reports and disseminating these to the management and	Periodic reports.
Corrective actions	Verify that the activities that are carried out comply with the IEE or EIA and EMP and identify corrective actions if needed.	Carry-out the required corrective actions.	Corrective action record.
Maintenance of record	Maintain monitoring data and record of all incidents of environmental significance and related corrective measures.	environmental significance	

ESIC = Environment and Social Impact Cell, ESO = Environmental Safeguards Officer, NTDC = National Transmission and Despatch Company, HSO = Health and Safety Officer, SSEMP = Site-specific Environmental Management Plan

#### 9.11 Change Management

- 508. The Change Management System proposed for the project recognizes three orders of changes in the project design or project area:
- 509. **First-Order:** A first-order change is one that leads to a significant departure from the project described in IEE and consequently requires a reassessment of its environmental impact. Examples of first-order changes include:
  - Shifting of the project area by more than 5 km
  - Increasing the total length of RoW by over 50 km
  - Using technology that has significantly greater effects
  - Increasing the crew size by more than 50%
  - Re-routing the RoW through any sensitive wildlife areas.
- 510. A new environmental assessment will be conducted, and a revised IEE report submitted to the provincial EPAs for a first-order change in the project.
- 511. **Second Order:** A second-order change is one that entails project activities not significantly different from those described in the IEE.
- 512. A second-order change may alter the project's impact, but not its overall magnitude. In case of such changes, the ESIC will be required to reassess the impact of the activity on the environment, specify additional mitigation measures, if necessary, and report the changes to the provincial EPAs. Examples of such changes include:
  - Shifting of the project area by 1 to 5 km
  - Increasing the total length of RoW by 10 to 50 km

- Using a different technology that is as disturbing, or less disturbing than that proposed
- Increasing the crew size by more than 10% but less than 50%.
- 513. **Third Order:** A third-order change or uncertainty is of little consequence to the IEE findings. Where unanticipated environmental impacts become apparent during project implementation, NTDC will update this IEE and EMP or prepare a new IEE and EMP to assess the potential impacts, evaluate the alternatives, and outline mitigation measures and resources to address those impacts.
- 514. Examples of third-order changes are:
  - Shifting of the project area by 1 km or less
  - Increasing the total length of RoW by less than 10 km
  - Changing the layout of the campsites or construction sites.
- 515. The examples given above are hypothetical and have been given to illustrate the magnitude of the three types of changes. At this stage, no changes are under consideration. Any change in the project design will be evaluated based on the criteria provided above, and appropriate action will be taken. The record will be maintained in the Change Record Register.

#### 9.12 Environment Management Cost

- 516. An estimated cost for implementation of mitigation measures prescribed in the Environmental Management Plan (EMP) has been provided in **Table 9-8**, **Table 9-9** and **Table 9-10**.
- 517. The cost includes the hiring of staff, arrangements for water sprinkling, provision of PPEs to workers, the arrangement of first aid kits at the site and waste management, etc. The budget for tree plantation and landscaping is also included in the given cost where required.
- 518. The cost does not cover the implementation of mitigation measures prescribed in the Environmental Management Plan (EMP) for the operational phase which will be included as part of NTDC's ongoing environment management program.

Table 9-8: Estimated Cost for Contractor's EMP Implementation95

Item	Quantity	Unit cost	Estimated cost
SSEMP preparation	Lumpsum	\$7,000	\$7,000
SSEMP implementation (construction mitigation measures)	Lumpsum	\$7,000	\$7,000
Planting of trees	4,00096	\$2	\$8,000
Mobile toilets for workers at each construction site	10	\$150	\$1,500
PPEs and safety measures like signages, barricading etc.	Lumpsum	\$5,000	\$5,000
Hazardous Waste Disposal <sup>97</sup>	24 months	\$500	\$12,000
Instrumental Environmental Monitoring			
Water Quality	16 samples <sup>98</sup>	\$300	\$4,800
Ambient Air Quality	16 samples <sup>99</sup>	\$500	\$8,000
Noise Level	16 samples 100	\$150	\$2,400
Mobilization of ESO	24 months	\$350	\$8,400
Mobilization of HSO	24 months	\$350	\$8,400
		Total	\$72,500

ESO = Environmental Safeguards Officer, HSO = Health and Safety Officer, SSEMP = site-specific environmental management plan

Table 9-9: Estimated Cost for FMC's EMP Implementation

Item	Quantity	Unit Cost	<b>Estimated Cost</b>
International Environmental Safeguards Specialist (FMC-IESS)	4 months (intermittent)	\$20,000	\$80,000
National Environmental Safeguards Specialist (FMC-NESS)	24 months (full-time)	\$1,200	\$28,800
National Environmental Inspectors (FMC-NEIs)	24 months (full-time) x 2	\$350	\$16,800
Training on EMP and GRM	Lumpsum	\$2,500	\$2,500
		Total	\$128,100

EMP = environmental management plan, GRM = grievance redress mechanism

Note: The cost of FMC represents for complete MMF T-4 Program covering all subprojects

Table 9-10: Estimated Cost for ESIC's EMP Implementation

Item	Quantity	Unit Rate	<b>Estimated Cost</b>
EHS Manager	24 months (full-time)	\$2,000	\$48,000
Deputy EHS Manager	Same as above	\$1,500	\$36,000
Assistant EHS Manager	Same as above	\$1,200	\$28,800
		Total	\$112,800

EMP = environmental management plan, GRM = grievance redress mechanism

Note: The cost of ESIC represents for complete Tranche 4 covering all subprojects

<sup>95</sup> The construction period will be between eighteen to twenty-four months. (para. 463 on page 160)

<sup>&</sup>lt;sup>96</sup> Due to the proposed subproject, 250-300 trees of varying species and sizes, may be affected by the project. Compensatory planting of ten (10) trees against each fallen tree of similar floral function will be planted.

<sup>&</sup>lt;sup>97</sup> Contaminated soil or residue of sewerage waste, used filters, other)

<sup>&</sup>lt;sup>98</sup> 4 locations (at representative existing wells [if any] within 100 m of the campsite) x 4 times (every six months) (See **Table 9-5**)

<sup>&</sup>lt;sup>99</sup> 4 locations (Campsite, Access Road and Communities within 100 m of RoW, campsite, or access road) x 4 times (every six months) (See **Table 9-5**)

<sup>&</sup>lt;sup>100</sup> 4 locations (Campsite, Access Road and Communities within 100 m of RoW, campsite, or access road) x 4 times (every six months) (See **Table 9-5**)

#### 10. Conclusion and Recommendations

#### 10.1 Conclusion

- 519. Subproject 4 involves procurement of goods for the construction of a new 220kV Jamrud grid station and approximately 20 km of the associated 220kV Jamrud-Sheikh Muhammadi transmission line in the south-western area of Pakistan. The Project passes through two districts namely Peshawar and Khyber.
- 520. An EARF (footnote **2**) was prepared for MFF II in May 2016. This EARF is applicable for subprojects under MFF II and Tranche-I, funded by ADB. The EARF outlines the policy, procedures, and institutional requirements for preparing the subprojects. These subprojects need to be processed under ADB SPS.
- 521. An IEE has been conducted following the EARF to assess the environmental and socioeconomic impact of NTDC's proposed Project following ADB SPS.
- 522. Key components of the Project, construction materials, transport infrastructure, water requirements, generated emissions and schedule and staffing for the Project are also discussed in the IEE.
- 523. An EIA report in accordance with the national environmental requirements has been submitted to KP-EPA for environmental approval or NOC.
- 524. Alternatives related to the construction method, technology, and ETL RoW were analyzed. The 'No Project Alternative' was also discussed in detail, to ensure that the Project is sufficiently benefitting the local economy and is not unnecessarily degrading the environment.
- 525. Baseline environmental and socioeconomic information was collected from a variety of sources, including published literature, and field surveys. Baseline studies were conducted on the physical, ecology and socioeconomic environment conditions of the AOI around the Project site.
- 526. Proposed Project activities were reviewed and their potential impacts on the physical, biological, and socio-economic environment were assessed. Where appropriate, mitigation measures have been proposed to keep potential adverse environmental impacts within acceptable limits.
- 527. An EMP has been developed in this report to effectively implement the mitigation measures identified in the impact assessment. Contractor will develop SSEMP before construction activities start. The bid documents must include the EMP, and its implementation cost must be reflected in the bill of quantity (BoQ).
- 528. Therefore, if the Project's construction and operation activities, including the implementation of all proposed mitigation measures, are carried out as described in this document, the anticipated impact of the project on the area's natural and socioeconomic environment shall remain well within acceptable limits.
- 529. Following requirements of ADB SPS, NTDC will apply pollution prevention and control technologies and practices consistent with international good practice as reflected in internationally recognized standards such as EHS Guidelines (footnotes **20**, **21** and **22**). When Government regulations differ from these levels and measures, NTDC will achieve whichever is more stringent. If less stringent levels or measures are appropriate in view of specific project circumstances, NTDC will provide full and detailed justification for any proposed alternatives that are consistent with the requirements presented in ADB SPS.

- 530. This IEE will be updated if unanticipated environmental impacts become apparent and will be submitted to ADB for clearance and disclosure at ADB website.
- 531. NTDC will have the right to suspend works or payments if the Contractor is in violation of any of his obligations under the EMP and SSEMP.

#### 10.2 Recommendations

- 532. Comprehensive mitigation measures have been proposed in **Section 5** and **Section 9** of this report to minimize the negative impacts and to enhance the positive impacts of the project. However, major recommended mitigation measures are summarized as follows:
  - Temporary labor camps will be developed inside the grid station boundary and will be facilitated with proper drainage facilities.
  - Soil erosion and contamination, water contamination, air pollution, and high noise levels will be controlled with the use of good engineering practices.
  - The contractor will develop subplans (listed in footnote 92 on page 194 of this IEE) as part of SSEMP before starting the construction activities. No access to the site will be allowed until the SSEMP is approved by the ESIC.
  - Fair and negotiated compensation following the prevailing market prices will be made for the loss of crops and trees during the construction activities of the project.
  - The contractor will take due care of the local community and its sensitivity towards local customs and traditions.
  - EMP proposed in Section 9 will be implemented in true letter and spirit.

# **Initial Environmental Examination Annexures**

Project Number: 48078-006

Date: October 2022

# Pakistan: Second Power Transmission Enhancement Investment Program (Tranche 4)

Subproject 4: Procurement of goods for the construction of a new 220kV Jamrud grid station and approximately 20 km of the associated 220kV Jamrud-Sheikh Muhammadi transmission line in the south-western area of Pakistan

Prepared by the National Transmission and Despatch Company Limited (NTDC) for the Asian Development Bank

Annexures		
Annexure I:	ADB's Rapid Environmental Assessment (REA) Checklist	1
Annexure II:	Field Sampling Plan (Physical Environment)	
Annexure III:	Laboratory Provided Analysis Reports	11
Annexure IV:	Sensitive Receptors	
Annexure V:	Ecological Field Data	
Annexure VI:	IBAT Findings Report	52
Annexure VII:	Consultation Material	59
Annexure VII:	Consultation Logs	
Annexure VIII:	Dust Management Plan	
Annexure IX:	Chance Finds Procedure	
Annexure X:	Traffic Management Plan	82
Annexure XI:	Waste Management Plan	
Annexure XII:	Occupational Health, Safety, and Environment (OHSE) Management 88	: Plar
Annexure XIII:	COVID-19 Management Plan	89
Annexure XIV:	Tree Plantation Plan	
Annexure XV:	Resource Conservation Plan	. 126
Annexure XVI:	Site Specific EMP	. 128
Annexure XVII:	Worker Accommodation Plan	. 129
Annexure XVIII:	Emergency Response Plan	. 131
Annexure XIX:	Fire Management and Protection Plan	. 136
Annexure XX:	Construction Noise and Vibration Management Plan	. 137
Annexure XXI:	Calibration Certificate of Noise and Air Quality Measuring Instruments	140

# Annexure I: ADB's Rapid Environmental Assessment (REA) Checklist

# Rapid Environmental Assessment

Project Name: MFF Power Transmission Enhancement Investment

Program II Tranche 4

Date: September 2022

Environmental Screening and Categorization Report for

 220kV Jamrud Substation along with associated 20 km 220 kV Transmission Line

> Environment and Social Impact Cell of National Transmission & Despatch Company Limited, Lahore

#### 1. Introduction

The Government of Pakistan (GoP) signed a loan agreement with the Asian Development Bank (ADB) for financial support for the construction of the Power Enhancement Projects in Pakistan. The multi-tranche financing facility for the Second Power Transmission Enhancement Investment Program (MFF II or the Program) will expand and reinforce Pakistan's power transmission system, enabling the system to provide a reliable and quality service capable of meeting increasing customer demand and supporting economic growth. MFF II comprises four tranches and Projects located in different areas of the country.

#### **Brief Program Background**

- 2 Under Tranche 4 Readiness, NTDC is planning to construct new 220 kV transmission lines, construct of a grid station, the argumentation of nine existing grid stations and procurement of substation equipment. The names of these subprojects are listed hereunder.
  - a. Subproject 1: Design, supply, installation, testing, and commissioning of 220kV transmission line for looping in/out of the proposed Hala Road Jamshoro 220kV s/c transmission line at Mirpur Khas New
  - b. Subproject 2: Design, manufacture, supply, installation, testing & commissioning of 220kV double circuit transmission line for looping in/out one circuit of the existing Jamshoro T.M. Khan 220kV D/C T/L at Hala Road 220kV Substation
  - Subproject 3: Addition and augmentation of existing substations for removal of NTDC system constraints
  - d. Subproject 4: Construction of 220kV Jamrud Grid Station and the associated 220kV Jamrud-Sheik Muhammadi transmission line
  - e. Subproject 5: Interlinking of 220kV Dharki Rahim Yar Khan and Bahawalpur grid stations
  - f. Subproject 6: Procurement of Substation Equipment for Asset Management NTDC

#### Subproject Background and Work scope

- 3 Under Subproject 4, The proposed Project covers tasks listed hereunder:
  - 220kV Jamrud Substation along with associated 20 km 220 kV Transmission Line
    - 220kV substation at Jamrud with two 220/132kV, 250 MVA transformers along with allied equipment and accessories.
    - 220kV double circuit transmission line on twin bundle Rail conductor from Jamrud to 500 kV Peshawar (Sheikh Muhammadi) Grid Station (20km).
- 2. The subproject location in Khyber Pakhtunkhwa province, is shown in Figure 1.

#### 2. Salient Features of the Subproject

- The subproject 220kV Jamrud Substation is located in Khyber district of Khyber Pakhtunkhwa (KP) and the 20 km proposed transmission line route falls in Khyber and Peshawar district of KP.
- Within the 100 m of the TL route on each side, the area consists of barren land, open areas, agricultural fields, and sparsely populated areas in Khyber district and Peshawar district.
- The construction cost as per the estimate made in October 2017 was 2,398 million Pak Rupees. 1
- 7 No protected area is located within 5 km of the subprojects i.e. Reserved Forest, Game Reserves, National Parks, and Wildlife Sanctuaries, which fall on the transmission line route (Figure 1).<sup>2</sup>
- 8 No wetlands were found along the entire transmission line route notified by the GoP or Govt of Khyber Pakhtunkhwa.
- 9 Findings of the IBAT Assessment
  - IBAT Assessment report identifies Bilyamin Game Reserve in Khyber district as protected areas within 5km buffer.
  - However, the above information seems incorrect. As per the GIS data of the area and actual location, Bilyamin Game Reserve is located in the Hangu district at a distance of 40 km south of the TL route.

#### 3. Environmental Categorization

- 10 The proposed projects were evaluated for environmental settings and anticipated environmental and social impacts.
- 11 There will not be any land acquisition or compensation process per the prevailing law of the country except for the crop compensation of the transmission line towers.
- 12 Rapid Environmental Assessment (REA) was conducted, followed by the ADB checklist by REA provided in **Appendix A**.
- 13 The ADB's Safeguard specialist staff will confirm the categorization of the proposed projects as per ADB SPS 2009 based on the information provided in this document, i.e., sensitive receptor mapping, the scale of the project works with an assessment of the expected impacts also provided in the enclosed.
- However, based on the information in **Section 2**, the environmental categorization for the projects has been proposed and provided in **Table 1**.

<sup>&</sup>lt;sup>1</sup> PC-1, 220kV Jamrud Substation along with associated 220 kV Transmission Line, NTDC, Oct 2017

<sup>&</sup>lt;sup>2</sup> The Protected Area in close vicinity of the subprojects was assessed using the data from different sources including Bird Life International, Punjab Wildlife, Fisheries and Forest Departments, IUCN, WWF Pakistan and World Data Base on Protected Area. This was further verified by assessing the area using the IBAT tool.

- 15 As far as the host country's approval following national guidelines is concerned, considering the scale of this project and the scale of the works involved, and the capital expenditure to be incurred to develop it, this project falls under Schedule II.
- The transmission lines (11 kV and above) and distribution projects are included in Schedule II which requires an EIA<sup>3</sup> under the Sindh Environmental Protection Act, 2014, the Review of Initial Environmental Examination, and Environmental Impact Assessment Regulations (IEE-EIA Regulations 2014).

**Table 1: Summary of Proposed Environmental Category** 

S/No.	Sub-project City	Scoping Findings	Proposed Environment Category
1	220kV Jamrud Substation along with associated 20 km 220 kV Transmission Line     220kV substation at Jamrud with two 220/132kV, 250 MVA transformers along with allied equipment and accessories.      220kV double circuit transmission line on twin bundle Rail conductor from Jamrud to 500 kV Peshawar (Sheikh Muhammadi) Grid Station (20km)	Areas and Agricultural land  Limited Tree Cuttings  No significant number of settlements fall on the	Category 'B'

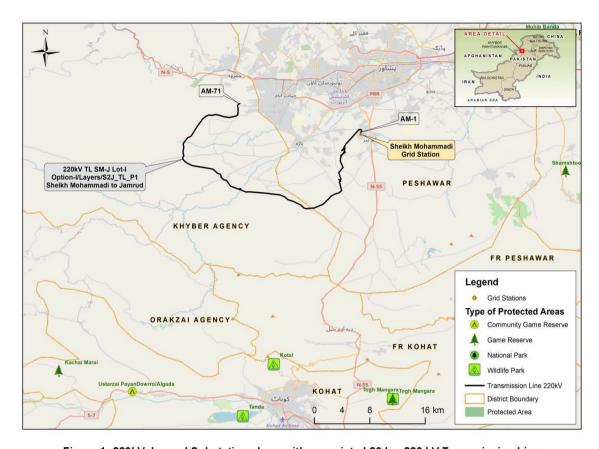


Figure 1: 220kV Jamrud Substation along with associated 20 km 220 kV Transmission Line

#### APPENDIX A: RAPID ENVIRONMENTAL ASSESSMENT (REA) CHECKLIST

#### A.1 220kV Jamrud Substation along with associated 20 km 220 kV Transmission Line

#### Instructions:

- (i) The project team completes this checklist to support the environmental classification of a project. It is to be attached to the environmental categorization form and submitted to Environment and Safeguards Division (SDES) for endorsement by Director, SDES and for approval by the Chief Compliance Officer.
- (ii) This checklist focuses on environmental issues and concerns. To ensure that social dimensions are adequately considered, refer also to ADB's (a) checklists on involuntary resettlement and Indigenous Peoples; (b) poverty reduction handbook; (c) staff guide to consultation and participation; and (d) gender checklists.
- (iii) Answer the questions assuming the "without mitigation" case. The purpose is to identify potential impacts. Use the "remarks" section to discuss any anticipated mitigation measures.

Country/Project Title:	Pak/ MFF II Tranche 4 Subprojects		
Sector Division:			

Screening Questions	Yes	No	Remarks
A. Project siting Is the project area adjacent to or within any of the following environmentally sensitive areas?			
Cultural heritage site		No	There are not any such sites within 100 m of the TL route on each side.
Protected area		No	There are not any such sites within 100 m of the TL route on each side.
Wetland		No	There are not any such sites within 100 m of the TL route on each side.
Mangrove		No	There are not any such sites within 100 m of the TL route on each side.
Estuarine		No	There are not any such sites within 100 m of the TL route on each side.
Buffer zone of protected area		No	There are not any such sites within 100 m of the TL route on each side.
Special area for protecting biodiversity		No	There are not any such sites within 100 m of the TL route on each side.
B. Potential environmental impacts Will the project cause			
encroachment on historical/cultural areas, disfiguration of landscape, and increased waste generation?		No	The TL does not pass or encroach on historical/cultural areas, disfiguration of landscape, and increased waste generation. The spoil/ overburden material will be backfilled after the base construction of the tower then restoring of preserved topsoil cover.

Screening Questions	Yes	No	Remarks
			No such acts are anticipated during
			construction or operations
encroachment on precious ecosystem (e.g. sensitive or protected areas)?		No	No such acts are anticipated during construction or operations
alteration of surface water hydrology of waterways crossed by roads and resulting in increased sediment in streams affected by increased soil erosion at the construction site?		No	Existing public roads will be used for material transport. Local water bodies will be protected during access route construction.
damage to sensitive coastal/marine habitats by construction of submarine cables?		No	No such acts are anticipated during construction or operations
deterioration of surface water quality due to silt runoff, sanitary wastes from worker-based camps and chemicals used in construction?	Yes		Construction camps generate solid and liquid wastes therefore they should be built appropriately and away from settlements.
<ul><li>increased local air pollution due to rock crushing, cutting and filling?</li></ul>		No	There is no such activity involved in the project construction.
<ul> <li>risks and vulnerabilities related to occupational health and safety due to physical, chemical, biological, and radiological hazards during project construction and operation?</li> </ul>	Yes		Significant occupational health and safety hazards will exist at the construction sites considering the tower erecting, and in operations.
chemical pollution resulting from chemical clearing of vegetation for construction site?		No	No such method will be adopted.
noise and vibration due to blasting and other civil works?	Yes		During the construction phase, significant noise and dust emissions are expected from the movement of construction vehicles and equipment.
dislocation or involuntary resettlement of people?	Yes		Preliminary data shows, that the TL passes over a significant number of houses and therefore resettlement of the displaced may be required.
disproportionate impacts on the poor, women and children, Indigenous Peoples or other vulnerable groups?	Yes		The TL is passing through a suburban densely populated area at connecting side of the TL near Hala Road Substation. Therefore, the TL project may generate disproportionate impacts on the poor, women and children, Indigenous Peoples or other vulnerable groups.
<ul> <li>social conflicts relating to inconveniences in living conditions where construction interferes with pre-existing roads?</li> </ul>		No	No such impacts are expected
hazardous driving conditions where construction interferes with pre-existing roads?	Yes		The TL project is expected to pass local roads. Hazardous driving conditions may have arisen during the movement of construction machinery and equipment.
creation of temporary breeding habitats for vectors of disease such as mosquitoes and rodents?	Yes		The temporary breeding habitats for vectors of disease such as mosquitoes and rodents can be created at camps sites if sewage waste and surface run off do not handle appropriately.

Screening Questions	Yes	No	Remarks
dislocation and compulsory resettlement of	Yes	110	Preliminary data shows, the TL
people living in right-of-way of the power transmission lines?			passes over a significant number of houses and therefore resettlement of the displaced may be required.
<ul> <li>environmental disturbances associated with the maintenance of lines (e.g. routine control of vegetative height under the lines)?</li> </ul>	Yes		A significant part of the Mirpur Khas TL passes through mango orchards where a routine control of vegetative height under the lines will be required
facilitation of access to protected areas in case corridors traverse protected areas?		No	No protected areas are fall on the TL route.
<ul> <li>disturbances (e.g. noise and chemical pollutants) if herbicides are used to control vegetative height?</li> </ul>		No	No such methods will be adopted for control vegetative height.
• large population influx during project construction and operation that cause increased burden on social infrastructure and services (such as water supply and sanitation systems)?		Z <sub>0</sub>	No such conflicts are expected since local labor will be utilized as far as possible.
<ul> <li>social conflicts if workers from other regions or countries are hired?</li> </ul>		No	No such conflicts are expected since local labor will be utilized as far as possible.
<ul> <li>poor sanitation and solid waste disposal in construction camps and work sites, and possible transmission of communicable diseases from workers to local populations?</li> </ul>	Yes		The temporary breeding habitats for vectors of disease such as mosquitoes and rodents can be created at camps sites if sewage waste and surface runoff do not handle appropriately.
<ul> <li>risks to community safety associated with maintenance of lines and related facilities?</li> </ul>		No	NTDC applies strict procedures for community safety associated with the maintenance of lines, so the risk is negligible.
<ul> <li>community health hazards due to electromagnetic fields, land subsidence, lowered groundwater table, and salinization?</li> </ul>		No	NTDC applies strict procedures for community safety associated with the maintenance of lines, so the risk is negligible.
<ul> <li>risks to community health and safety due to the transport, storage, and use and/or disposal of materials such as explosives, fuel and other chemicals during construction and operation?</li> </ul>		No	No such material is envisaged or required during the construction of the TL.
community safety risks due to both accidental and natural hazards, especially where the structural elements or components of the project (e.g., high voltage wires, and transmission towers and lines) are accessible to members of the affected community or where their failure could result in injury to the community throughout project construction, operation and decommissioning?	Yes		The risks to the community exist, particularly during the operation of the TL, considering the proximity of the site to residential settlements in some areas of the route.

# Annexure II: Field Sampling Plan (Physical Environment)

#### Fieldwork Schedule for IEE

at

#### 220kV Rahim Yar Khan to Bahawalpur TL (150 km)

The Government of Pakistan (GoP) signed a loan agreement with the Asian Development Bank (ADB) for financial support for the construction of the Power Enhancement Projects in Pakistan. The multi-tranche financing facility for the Second Power Transmission Enhancement Investment Program (MFF II or the Program) will expand and reinforce Pakistan's power transmission system, enabling the system to provide a reliable and quality service capable of meeting increasing customer demand and supporting economic growth. MFF II comprises four tranches and Projects located in different areas of the country.

Tranche 4 will help evacuate hydro and wind power to load centers in central Pakistan through the construction of 500 & 220 kV transmission lines in Khyber Pakhtunkhwa, Punjab & Sindh and will reduce the existing system constraints through an augmentation of the existing 500/220 kV grid stations in Punjab & Sindh.

The proposed Project 48078-006 MFF Power Transmission Enhancement Investment Program II Tranche 4 and covers two subprojects . One of them is inter Linking 220 kV TL for Daharki, Rahim Yar Khan-Bahawalpur, and Chishtian Grid Stations.

This document provides information on the team, and schedule for execution of IEE fieldwork for collection of physical environment samples for the 220KV Transmission Line from Rahim Yar Khan to Bahawalpur (150 km).

#### Team

The HBP team members are:

	Name	Role	Cell Number/Email
1	Salman Ali	Field Manager	+9231 7 0121830
2	M. Usman (AES)	Field Chemist	+92304 7236982
3	Assistant Field Chemist (AES)		

### **Tentative Schedule**


The team is planning to arrive in the field on  $29^{\text{th}}$  August  $2022\,$  and will completed the fieldwork in 4 days.

# Sampling Plan

During this field work, the team will collect samples and data about the physical environment including water, noise, and air. The details of the sampling locations are provided in the table below:

Sampling ID	Coordinates (Lat, Long)	Rationale
A3, N3, W3	28 ° 44' 36.98" , 70 ° 27' 44.68"	This sampling point is near the Grid station which is surrounded mainly by agricultural land and some residential area.
A4, N4, W4	28 ° 55' 59.965" , 70 ° 59' 32.18"	This sampling point is located near settlement area of people and agricultural land.
A5, N5, W5	28 ° 16' 33.092" , 70 ° 34' 0.41"	This sampling point is located near settlement area of people and agricultural land.

# **Sampling Points Location Map**

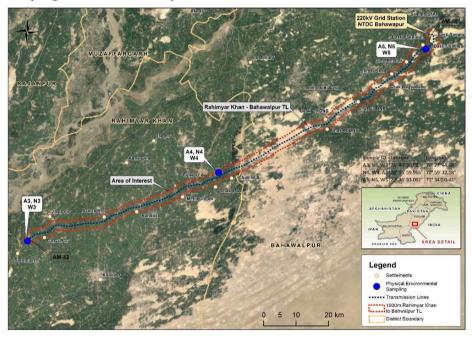

#### **Laboratory Provided Analysis** Annexure III: **Reports**





# **ENVIRONMENTAL MONITORING & ANALYSIS REPORT**

# 220KV JAMURD GRID STATION AND **ASSOCIATED** TRANSMISSION LINE **20KM**

- Reference No.: AES-15-HB/2022
- > Ambient Air Monitoring
- > Noise Level Monitoring
- > Ground Water Analysis

Dated: 16 September, 2022

#### Asian Environmental Services Pvt. Ltd.

has prepared this report as per prerequisites of client. Any other individual using the content of this document shall do so at their own liability The client is responsible for lawful usage of this reported data.

Document No. AES/LMS/FRM-110, Date of Issue 22 June, 2020, Revision No. 00

Head Office: Basement, C-3, Jhelum Block, Green Forts-II, Lahore. Phones: +92 42 35450914-15, Fax: +92 42 35450916,

| Karachi Office: Office No. 410, 4th Floor, Business Avenue, PECHS, Block-6, Main Shaharha-Feital, Karachi. Phone: +92 303 3333828 | Phone: +92 321 6227834 | Phone: +92 300 30303616





Email: info@asianenvirolab.com





# **Location for Ambient Air Monitoring 01** A1, N1, W1

Jamurd



Page 1 of 24

Document No. AES/LMS/FRM-110, Date of Issue 01 April, 2022, Revision No. 01



Head Office: Basement, C-3, Jhelum Block, Green Forts-II, Lahore. Phones: +92 42 35450914-15, Fax: +92 42 35450916,

Karachi Office:
Office No. 410, 4th Floor,
Business Avenue, PECHS, Block-6,
Main Shahrah-e-Faisal, Karachi.
Phone: +92 303 3333828

Islamabad Office:
Office No. 204, 2nd Floor, Al-Safa
Heights - 1 F/11 Markaz
Islamabad.
Phone: +92 321 6227834

Peshawar Office: Office No. 1, Forth Floor, Syeds To Opposite Custom House, University Road, Peshawar. Phone: +92 300 0303616











#### **Monitoring Details**

Reference Number AES-15-HB/2022-AA-01 Sampling Point A1, N1, W1 33°58'14.14" N Sampling 08-Sep-2022 to 09-Sep-2022 **Date of Monitoring** Coordinates 71°23'9.13" E

Sr. No.	Time	CO (mg/m³)	NO (µg/m³)	NO₂ (μg/m³)	NO <sub>x</sub> (μg/m³)	SO₂ (µg/m³)
1	14:00	0.94	11.49	21.82	33.27	25.09
2	15:00	0.75	17.00	25.78	42.73	21.50
3	16:00	1.13	13.58	25.32	38.85	20.86
4	17:00	0.81	17.75	26.87	44.56	24.64
5	18:00	1.02	16.70	26.39	43.03	26.40
6	19:00	0.72	16.20	27.90	44.04	17.77
7	20:00	0.77	13.01	21.19	34.15	23.42
8	21:00	0.69	13.81	24.14	37.89	18.65
9	22:00	0.86	10.82	20.60	31.38	24.67
10	23:00	0.97	16.91	29.17	46.01	23.47
11	00:00	1.14	11.57	22.62	34.15	17.40
12	01:00	0.72	14.31	23.87	38.12	14.45
13	02:00	0.72	12.26	21.63	33.85	27.78
14	03:00	0.99	10.67	20.04	30.67	23.44
15	04:00	0.75	13.77	24.14	37.86	16.05
16	05:00	0.77	10.75	19.60	30.31	20.28
17	06:00	0.84	13.10	24.56	37.61	25.49
18	07:00	0.68	17.16	26.89	43.99	23.15
19	08:00	0.97	19.20	29.80	48.93	26.77
20	09:00	0.70	14.84	21.55	36.35	21.07
21	10:00	1.09	17.65	26.56	44.16	24.61
22	11:00	1.18	20.83	29.84	50.60	17.06
23	12:00	1.02	15.30	24.79	40.03	21.90
24	13:00	1.09	12.28	21.84	34.07	22.56
	erage entration	0.89	14.62	24.45	39.03	22.02

Monitored By

Reviewed By (MT)

(QM)

Document No. AES/LMS/FRM-110, Date of Issue 01 April, 2022, Revision No. 01



Head Office: Basement, C-3, Jhelum Block, Green Forts-II, Lahore. Phones: +92 42 35450914-15, Fax: +92 42 35450916,

Karachi Office: Office No. 410, 4th Floor, Business Avenue, PECHS, Block-6, Main Shahrah-e-Faisal, Karachi. Phone: +92 303 3333828

Islamabad Office: Office No. 204, 2nd Floor, Al-Safa Heights - 1 F/11 Markaz Islamabad. Phone: +92 321 6227834

Peshawar Office: Office No. 1, Forth Floor, Syeds Tov Opposite Custom House, University Road, Peshawar. Phone: +92 300 0303616







Page 2 of 24





#### **Monitoring Details**

Reference Number AES-15-HB/2022-AA-01 Date of Monitoring 08-Sep-2022 to 09-Sep-2022

A1, N1, W1 Sampling Point

Sampling 33°58'14.14" N Coordinates 71°23'9.13" E

Parameters	Units	Monitoring Duration	LDL	Average Obtained Concentration	NEQS	Remarks
Nitrogen Dioxide (NO2) *	µg/m³	24Hours	1.00	24.45	80.0	Optimal
Nitrogen Oxide (NO) *	µg/m³	24Hours	1.00	14.62	40.0	Optimal
NO <sub>x</sub> *	µg/m³	24Hours	1.00	39.03	120.0	Optimal
Sulphur Dioxide (\$O <sub>2</sub> ) *	µg/m³	24Hours	1.00	22.02	120.0	Optimal
Carbon Monoxide (CO) *	mg/m³	24Hours	0.01	0.89	05.0	Optimal
Particulate Matter (PM <sub>10</sub> ) *	µg/m³	24Hours	1.00	120.55	150	Optimal
Particulate Matter (PM <sub>2.5</sub> ) *	µg/m³	24Hours	1.00	32.19	35	Optimal
Total Particulate Matter (TSP)	μg/m³	24Hours	1.00	188.34	500	Optimal

\*Parameters are approved from KP Environmental Protection Agency

Abbreviations: LDL= Lower Detection Limit

NEQS= National Environmental Quality Standards

μg/m³ = Micro Gram per Meter Cube High = Exceeds from Permissible Range

Optimal = Compliance with Permissible Range

Low = Less Than Permissible Range

Marginal = Close to Extreme Edge

Reviewed By (MT)

Approved By (QM)

Page 3 of 24

Document No. AES/LMS/FRM-110, Date of Issue 01 April, 2022, Revision No. 01



Head Office: Basement, C-3, Jhelum Block, Green Forts-II, Lahore. Phones: +92 42 35450914-15, Fax: +92 42 35450916,

Karachi Office:
Office No. 410, 4th Floor,
Business Avenue, PECHS, Block-6,
Main Shahrah-F-aFsiak, Karachi.
Phone: +92 303 3333828

Islamabad Office:
Office No. 204, 2nd Floor, Al-Safa
Heights - 1 F/11 Markaz
Islamabad.
Phone: +92 321 6227834

Peshawar Office:
Office No. 1, Forth Floor, Syeds Tower,
Opposite Custom House,
University Road, Peshawar.
Phone: +92 300 0303616











#### **Monitoring Details**

A1, N1, W1 Reference Number AES-15-HB/2022-AA-01 Sampling Point Sampling 33°58'14.14" N **Date of Monitoring** 08-Sep-2022 to 09-Sep-2022 Coordinates 71°23'9.13" E

Sr. No.	Time	Ambient Temperature °C	Wind Direction	Wind Velocity m/s	Humidity %	Pressure (mm of Hg)
1	14:00	40	NE	2.75	40	752.60
2	15:00	39	NE	2.7	45	752.15
3	16:00	38	NE	2.8	45	751.21
4	17:00	37	NE	3.0	48	752.85
5	18:00	36	Ν	3.0	50	753.10
6	19:00	34	Ν	3.0	51	753.46
7	20:00	33	Ν	2.5	52	753.79
8	21:00	33	NE	2.5	54	754.00
9	22:00	31	NE	1.95	55	754.05
10	23:00	30	SE	1.95	58	753.81
11	00:00	30	SE	1.6	60	753.4
12	01:00	29	S	1.6	62	752.68
13	02:00	28	S	1.45	69	752.00
14	03:00	27	S	1.45	65	751.80
15	04:00	27	S	1.8	65	751.77
16	05:00	29	S	1.8	64	752.65
17	06:00	30	SE	1.95	62	752.99
18	07:00	32	SE	1.95	60	753.50
19	08:00	34	SE	2.0	60	753.81
20	09:00	35	Ν	2.5	58	754.10
21	10:00	36	Ν	3.0	57	754.62
22	11:00	38	Ν	3.6	55	753.88
23	12:00	39	NE	3.6	55	753.11
24	13:00	40 /	NE	3.5	54	752.90
			1		/	

Monitored By

Reviewed By (TM)

Approved By (QM)

Document No. AES/LMS/FRM-110, Date of Issue 01 April, 2022, Revision No. 01



Head Office: Basement, C-3, Jhelum Block, Green Forts-II, Lahore. Phones: +92 42 35450914-15, Fax: +92 42 35450916,

Karachi Office: Office No. 410, 4th Floor, Business Avenue, PECHS, Block-6, Main Shahrah-e-Faisal, Karachi. Phone: +92 303 3333828

Islamabad Office: Office No. 204, 2nd Floor, Al-Safa Heights - 1 F/11 Markaz Islamabad. Phone: +92 321 6227834


Peshawar Office:
Office No. 1, Forth Floor, Syeds Tower,
Opposite Custom House,
University Road, Peshawar.
Phone: +92 300 0303616









Page 4 of 24

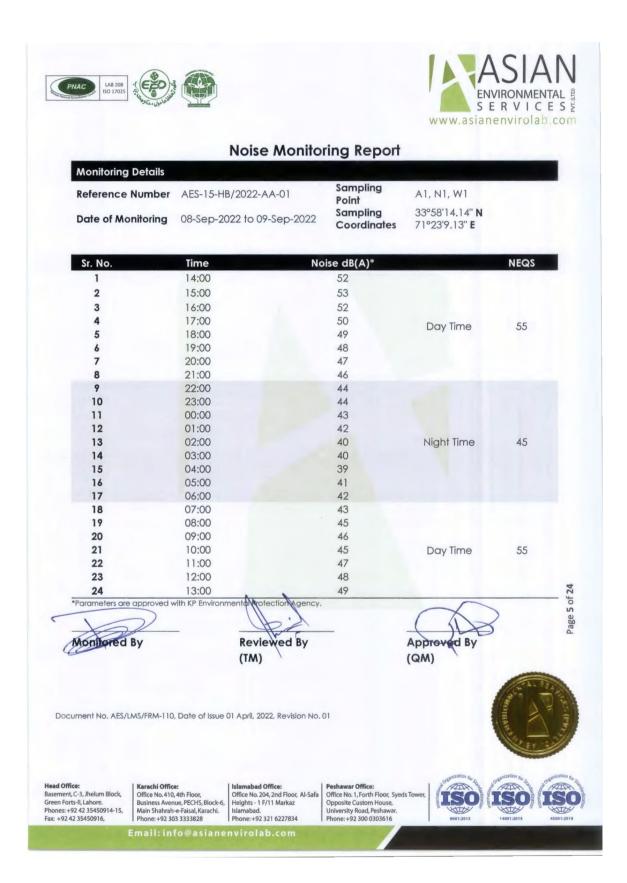

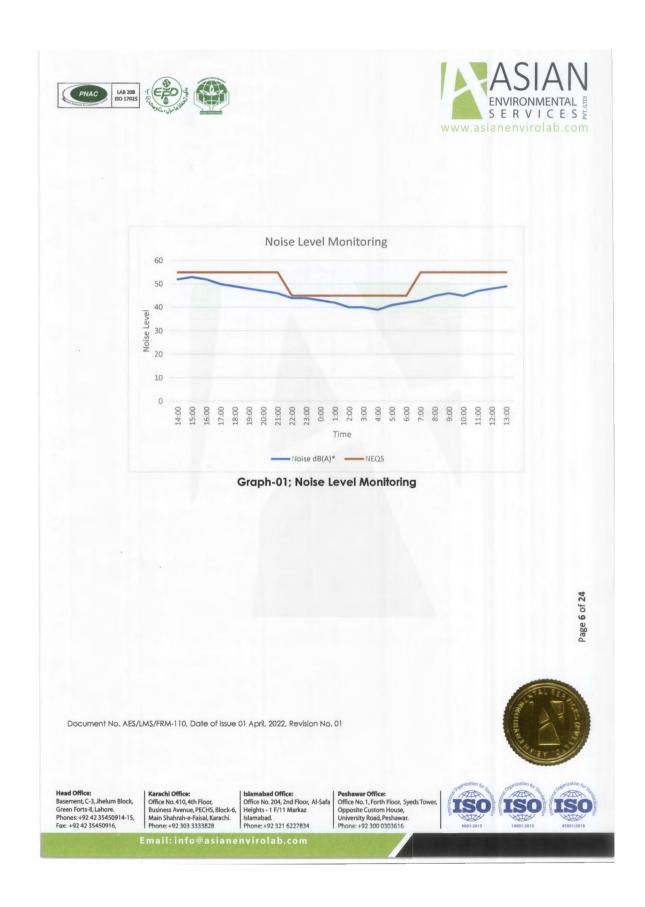

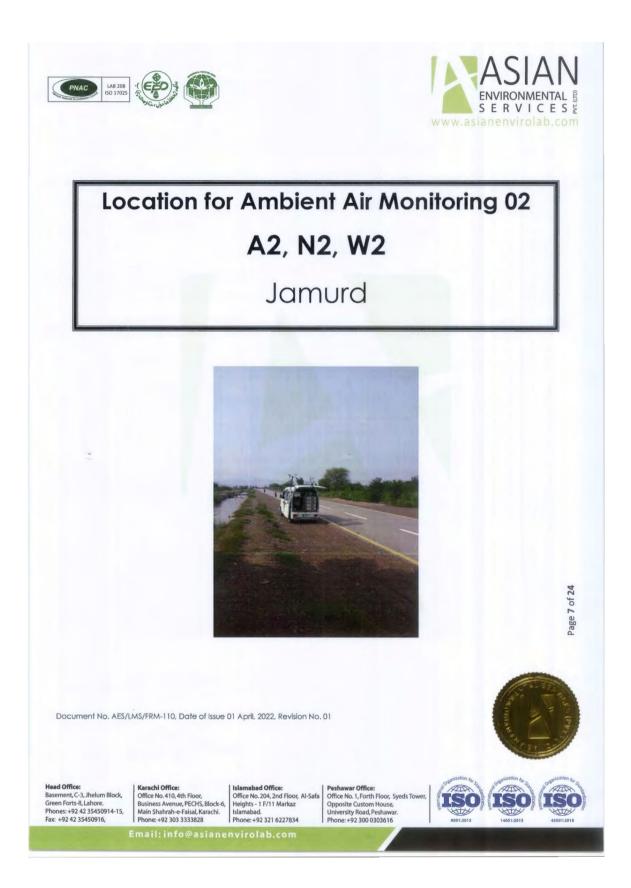





#### **Monitoring Details**

AES-15-HB/2022-AA-02 Reference Number **Sampling Point** A2, N2, W2 Sampling 33°52'19.92" N 07-Sep-2022 to 08-Sep-2022 **Date of Monitoring** Coordinates 71°21′50.90″ **E** 

Sr. No.	Time	CO (mg/m³)	NO (μg/m³)	NO₂ (μg/m³)	NO <sub>x</sub> (μg/m³)	\$O <sub>2</sub> (μg/m³)
1	14:30	1.09	12.26	19.93	32.15	27.38
2	15:30	1.19	18.78	21.55	40.28	30.33
3	16:30	1.27	19.32	25.40	44.66	21.69
4	17:30	0.93	15.40	25.82	41.16	28.84
5	18:30	1.14	19.01	23.37	42.33	29.43
6	19:30	0.76	15.84	19.99	35.77	25.76
7	20:30	0.88	12.55	22.66	35.16	23.68
8	21:30	0.93	16.58	23.64	40.17	27.99
9	22:30	1.02	9.72	20.81	30.48	16.71
10	23:30	0.72	15.01	26.01	40.97	25.04
11	00:30	0.63	11.93	27.75	39.63	19.24
12	01:30	0.83	16.18	30.41	46.53	22.35
13	02:30	0.86	12.64	21.82	34.42	26.72
14	03:30	0.83	11.26	19.56	30.79	23.66
15	04:30	1.11	13.77	25.02	38.73	22.78
16	05:30	0.95	15.45	28.53	43.93	24.53
17	06:30	0.77	11.95	24.37	36.27	17.69
18	07:30	0.80	14.57	29.76	44.27	23.39
19	08:30	0.87	13.08	22.66	35.70	19.96
20	09:30	1.05	12.58	24.27	36.81	31.61
21	10:30	1.00	17.33	24.42	41.70	27.30
22	11:30	1.26	20.79	24.17	44.90	18.12
23	12:30	1.09	15.87	22.36	38.18	25.12
24	13:30	0.71	12.41	23.73	36.10	26.69
	erage entration	0.95	14.76	24.08	38.80	24.42

Monitored By

Reviewed By (MT)

Approved By (QM)

Document No. AES/LMS/FRM-110, Date of Issue 01 April, 2022, Revision No. 01



Head Office: Basement, C-3, Jhelum Block, Green Forts-II, Lahore. Phones: +92 42 35450914-15, Fax: +92 42 35450916,

Karachi Office:
Office No. 410, 4th Floor,
Business Avenue, PECHS, Block-6,
Main Shahrah-e-Faisal, Karachi.
Phone: +92 303 3333828

Islamabad Office: Office No. 204, 2nd Floor, Al-Safa Heights - 1 F/11 Markaz Islamabad. Phone: +92 321 6227834

Peshawar Office:
Office No. 1, Forth Floor, Syeds Tower,
Opposite Custom House,
University Road, Peshawar.
Phone: +92 300 0303616







Page 8 of 24





#### **Monitoring Details**

Reference Number AES-15-HB/2022-AA-02 Sampling Point

A2, N2, W2

Date of Monitoring 07-Sep-2022 to 08-Sep-2022

Sampling Coordinates 33°52'19.92" N 71°21'50.90" E

Parameters	Units	Monitoring Duration	LDL	Average Obtained Concentration	NEQS	Remarks
Nitrogen Dioxide (NO <sub>2</sub> ) *	µg/m³	24Hours	1.00	24.08	80.0	Optimal
Nitrogen Oxide (NO) *	µg/m³	24Hours	1.00	14.76	40.0	Optimal
NO <sub>x</sub> *	µg/m³	24Hours	1.00	38.80	120.0	Optimal
Sulphur Dioxide (SO <sub>2</sub> ) *	µg/m³	24Hours	1.00	24.42	120.0	Optimal
Carbon Monoxide (CO) *	mg/m³	24Hours	0.01	0.95	05.0	Optimal
Particulate Matter (PM <sub>10</sub> ) *	µg/m³	24Hours	1.00	114.20	150	Optimal
Particulate Matter (PM <sub>2.5</sub> ) *	µg/m³	24Hours	1.00	33.65	35	Optimal
Total Particulate Matter (TSP)	μg/m³	24Hours	1.00	176.81	500	Optimal

\*Parameters are approved from KP Environmental Protection Agency

Abbreviations:

LDL= Lower Detection Limit Remarks:

NEQS= National Environmental Quality Standards

µg/m³ = Micro Gram per Meter Cube

Optimal = Compliance with Permissible Range

Low = Less Than Permissible Range

Margina = Close to Extreme Edge

High = Exceeds from Permissible Range

Reviewed By (TM)

Approved By

(QM)

Document No. AES/LMS/FRM-110, Date of Issue 01 April, 2022, Revision No. 01



Head Office: Basement, C-3, Jhelum Block, Green Forts-II, Lahore. Phones: +92 42 35450914-15, Fax: +92 42 35450916, Karachi Office:
Office No. 410, 4th Floor,
Business Avenue, PECHS, Block-6,
Main Shahrah-e-Faisal, Karachi.
Phone: +92 303 3333828

Islamabad Office:
Office No. 204, 2nd Floor, Al-Safa
Heights - 1 F/11 Markaz
Islamabad.
Phone: +92 321 6227834

Peshawar Office:
Office No. 1, Forth Floor, Syeds Tower,
Opposite Custom House,
University Road, Peshawar.
Phone: +92 300 0303616







Page 9 of 24





#### **Monitoring Details**

Reference Number AES-15-HB/2022-AA-02 **Sampling Point** A2, N2, W2 Sampling 33°52'19.92" N 07-Sep-2022 to 08-Sep-2022 **Date of Monitoring** 71°21'50.90" **E** Coordinates

Sr. No.	Time	Ambient Temperature °C	Wind Direction	Wind Velocity m/s	Humidity %	Pressure (mm of Hg)
1	14:30	43	NE	3.2	38	752.11
2	15:30	42	NE	3.2	42	751.77
3	16:30	40	Ν	3.0	45	751.45
4	17:30	40	Ν	3.2	45	752.00
5	18:30	39	Ν	3.0	48	752.60
6	19:30	38	Ν	2.56	50	753.10
7	20:30	36	NE	2.4	55	753.25
8	21:30	35	NE	2.4	55	754.00
9	22:30	34	NE	2.0	55	754.28
10	23:30	32	Е	2.0	60	753.77
11	00:30	30	Е	1.85	60	753.20
12	01:30	30	E	1.5	58	752.85
13	02:30	29	E	1.5	61	752.40
14	03:30	28	SE	1.25	56	751.55
15	04:30	28	SE	1.0	55	751.00
16	05:30	30	SE	0.89	55	751.66
17	06:30	31	SE	0.95	53	752.10
18	07:30	32	NE	0.98	51	752.95
19	08:30	33	NE	1.2	50	753.44
20	09:30	36	NE	1.2	50	753.93
21	10:30	38	Ν	1.85	50	754.56
22	11:30	39	Ν	2.0	47	753.20
23	12:30	40	N	2.35	45	752.88
24	13:30	42	N	2.85	40	752.40

Monitored By

Reviewed By (MT)

Approved By (QM)

Document No. AES/LMS/FRM-110, Date of Issue 01 April, 2022, Revision No. 01



Head Office: Basement, C-3, Jhelum Block, Green Forts-II, Lahore. Phones: +92 42 35450914-15, Fax: +92 42 35450916,

Karachi Office:
Office No. 410, 4th Floor,
Business Avenue, PECHS, Block-6,
Main Shahrah-e-Faisal, Karachi.
Phone: +92 303 3333828

Islamabad Office: Office No. 204, 2nd Floor, Al-Safa Heights - 1 F/11 Markaz Islamabad. Phone: +92 321 6227834

Peshawar Office:
Office No. 1, Forth Floor, Syeds Tower.
Opposite Custom House,
University Road, Peshawar.
Phone: +92 300 0303616







Page 10 of 24





# **Noise Monitoring Report**

Monitoring De
---------------

Reference Number AES-15-HB/2022-AA-02 Sampling Point A2, N2, W2

 Date of Monitoring
 07-Sep-2022 to 08-Sep-2022
 Sampling Coordinates
 33°52'19.92" N

 71°21'50.90" E

Sr. No.	Time	Noise dB(A)*		NEQS
1	14:30	53		
2	15:30	52		
3	16:30	52		
4	17:30	51	Day Time	EE
5	18:30	50	Day Time	55
6	19:30	49		
7	20:30	47		
8	21:30	45		
9	22:30	44		
10	23:30	43		
11	00:30	42		
12	01:30	41		
13	02:30	41	Night Time	45
14	03:30	40 .		
15	04:30	40		
16	05:30	38		
17	06:30	39		
18	07:30	41		
19	08:30	42		
20	09:30	43		
21	10:30	48	Day Time	55
22	11:30	47		
23	12:30	49		
24	13:30	. 50		

Monitored By

Reviewed By (TM)

Approve

Document No. AES/LMS/FRM-110, Date of Issue 01 April, 2022, Revision No. 01



Head Office: Basement, C-3, Jhelum Block, Green Forts-II, Lahore. Phones: +92 42 35450914-15, Fax: +92 42 35450916, Karachi Office:
Office No. 410, 4th Floor,
Business Avenue, PECHS, Block-6,
Main Shahrah-e-Faisal, Karachi.
Phone: +92 303 3333828

Islamabad Office: Office No. 204, 2nd Floor, Al-Safa Heights - 1 F/11 Markaz Islamabad. Phone: +92 321 6227834

Peshawar Office:
Office No. 1, Forth Floor, Syeds Tower,
Opposite Custom House,
University Road, Peshawar.
Phone: +92 300 0303616


ISO Solve Property of Solve Pr





Page 11 of 24

Email: info@asianenvirolab.con

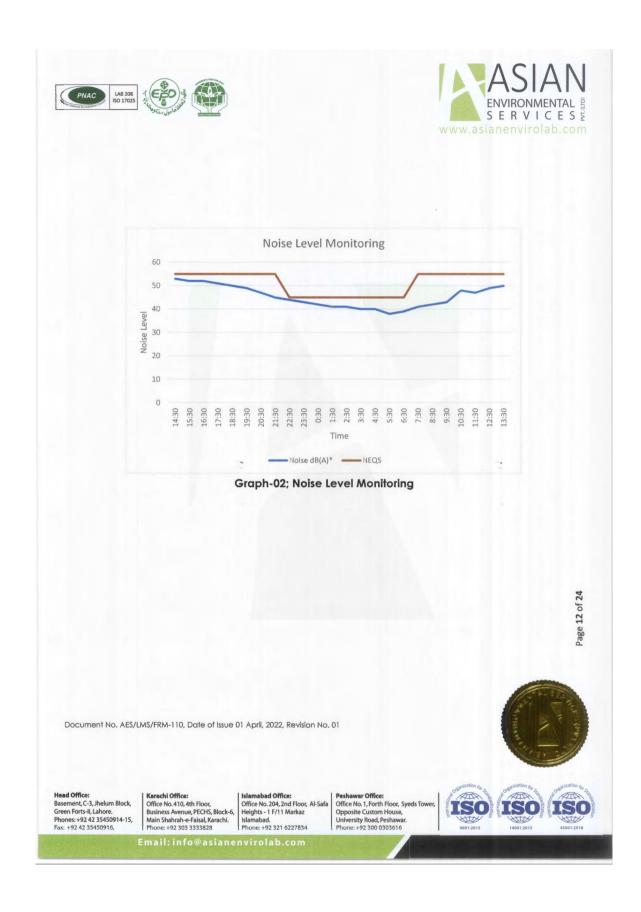





# **Location for Ambient Air Monitoring 03** A3, N3, W3

Jamurd



Document No. AES/LMS/FRM-110, Date of Issue 01 April, 2022, Revision No. 01



Head Office: Basement, C-3, Jhelum Block, Green Forts-II, Lahore. Phones: +92 42 35450914-15, Fax: +92 42 35450916,

Karachi Office:
Office No. 410, 4th Floor,
Business Avenue, PECHS, Block-6,
Main Shahrah-Faisal, Krarachi.
Phone: +92 303 3333828

Islamabad Office:
Office No. 204, 2nd Floor, Al-Safa
Heights - 1 F/11 Markaz
Islamabad.
Phone: +92 321 6227834

Peshawar Office:
Office No. 1, Forth Floor, Syeds Tower,
Opposite Custom House,
University Road, Peshawar.
Phone: +92 300 0303616











#### **Monitoring Details**

Reference Number AES-15-HB/2022-AA-03 **Sampling Point** A3, N3, W3 33°52'54.18" N Sampling Date of Monitoring 06-Sep-2022 to 07-Sep-2022 Coordinates 71°29'50.60" **E** 

Sr. No.	Time	CO (mg/m³)	NO (µg/m³)	NO₂ (µg/m³)	NO <sub>x</sub> (μg/m³)	SO₂ (µg/m³)
1	15:00	0.91	16.08	23.79	39.82	24.32
2	16:00	0.72	16.79	19.41	36.16	18.04
3	17:00	1.06	18.36	28.17	46.47	22.40
4	18:00	0.95	15.19	22.64	37.78	25.54
5	19:00	0.79	19.64	27.20	46.78	16.63
6	20:00	1.09	16.87	26.14	42.96	18.20
7	21:00	0.87	11.63	21.99	33.58	21.29
8	22:00	0.97	14.63	24.40	38.98	21.05
9	23:00	0.71	15.15	25.72	40.82	18.20
10	00:00	0.79	12.79	19.28	32.03	15.49
11	01:00	0.81	10.52	25.84	36.31	22.96
12	02:00	0.78	15.07	23.89	38.91	16.52
13	03:00	0.59	13.85	22.22	36.02	27.73
14	04:00	0.79	13.06	24.56	37.57	16.92
15	05:00	0.63	12.55	19.91	32.41	26.08
16	06:00	0.70	9.72	25.40	35.07	22.06
17	07:00	0.97	14.80	28.31	43.05	16.10
18	08:00	1.15	17.00	22.11	39.06	22.35
19	09:00	0.91	12.24	28.73	40.91	14.85
20	10:00	0.80	18.49	29.91	48.34	20.91
21	11:00	0.98	19.34	24.50	43.78	16.02
22	12:00	0.85	16.87	27.43	44.24	21.90
23	13:00	1.19	19.66	29.61	49.20	25.01
24	14:00	1.09	18.03	25.36	43.34	26.90
	erage entration	0.88	15.35	24.85	40.15	20.73

Monitored By

Reviewed By (TM)

Approved By (QM)

Document No. AES/LMS/FRM-110, Date of Issue 01 April, 2022, Revision No. 01



Head Office: Basement, C-3, Jhelum Block, Green Forts-II, Lahore. Phones: +92 42 35450914-15, Fax: +92 42 35450916,

Karachi Office:
Office No. 410, 4th Floor,
Business Avenue, PECHS, Block-6,
Main Shahrah-e-Faisal, Karachi.
Phone: +92 303 3333828

Islamabad Office: Office No. 204, 2nd Floor, Al-Safa Heights - 1 F/11 Markaz Islamabad. Phone: +92 321 6227834

Peshawar Office:
Office No. 1, Forth Floor, Syeds Tower,
Opposite Custom House,
University Road, Peshawar.
Phone: +92 300 0303616







Page 14 of 24





#### **Monitoring Details**

Reference Number AES-15-HB/2022-AA-03 Sampling Point A3, N3, W3 Sampling 33°52'54.18" N **Date of Monitoring** 06-Sep-2022 to 07-Sep-2022 Coordinates 71°29'50.60" **E** 

Parameters	Units	Monitoring Duration	LDL	Average Obtained Concentration	NEQS	Remarks
Nitrogen Dioxide (NO <sub>2</sub> ) *	µg/m³	24Hours	1.00	24.85	80.0	Optimal
Nitrogen Oxide (NO) *	µg/m³	24Hours	1.00	15.35	40.0	Optimal
NO <sub>x</sub> *	µg/m³	24Hours	1.00	40.15	120.0	Optimal
Sulphur Dioxide (SO <sub>2</sub> ) *	µg/m³	24Hours	1.00	20.73	120.0	Optimal
Carbon Monoxide (CO) *	mg/m³	24Hours	0.01	0.88	05.0	Optimal
Particulate Matter (PM <sub>10</sub> ) *	µg/m³	24Hours	1.00	116.41	150	Optimal
Particulate Matter (PM <sub>2.5</sub> ) *	µg/m³	24Hours	1.00	33.15	35	Optimal
Total Particulate Matter (TSP)	μg/m³	24Hours	1.00	171.44	500	Optimal

\*Parameters are approved from KP Environmental Protection Agency

Abbreviations:

Monitored By

LDL= Lower Detection Limit Remarks:

**NEQS=** National Environmental Quality Standards

µg/m³ = Micro Gram per Meter Cube

Optimal = Compliance with Permissible Range

Low = Less Than Permissible Range

Marginal = Close to Extreme Edge

High = Exceeds from Permissible Range

Reviewed By

(TM)

Approved By (QM)

Document No. AES/LMS/FRM-110, Date of Issue 01 April, 2022, Revision No. 01



Head Office: Basement, C-3, Jhelum Block, Green Forts-II, Lahore. Phones: +92 42 35450914-15, Fax: +92 42 35450916,

Karachi Office:
Office No. 410, 4th Floor,
Business Avenue, PECHS, Block-6,
Main Shahrah-Faisal, Karachi.
Phone: +92 303 3333828

Peshawar Office:
Office No. 1, Forth Floor, Syeds Tower,
Opposite Custom House,
University Road, Peshawar.
Phone: +92 300 0303616







Page 15 of 24

Email: info@asianenvirolab.com





#### **Monitoring Details**

Reference Number AES-15-HB/2022-AA-03 A3, N3, W3 Sampling Point Sampling 33°52'54.18" N 06-Sep-2022 to 07-Sep-2022 Date of Monitoring Coordinates 71°29'50.60" **E** 

Sr. No.	Time	Ambient Temperature °C	Wind Direction	Wind Velocity m/s	Humidity %	Pressure (mm of Hg)
1	15:00	40	N	2.85	42	755.45
2	16:00	39	Ν	2.85	44	756.45
3	17:00	38	Ν	3.0	48	754.20
4	18:00	36	Ν	3.15	50	753.71
5	19:00	34	Ν	3.3	51	753.15
6	20:00	34	Ν	3.0	52	752.81
7	21:00	33	NW	2.0	55	751.90
8	22:00	32	W	2.0	58	751.22
9	23:00	31	SW	2.0	58	751.75
10	00:00	30	SW	1.9	60	751.99
11	01:00	30	SW	1.55	62	752.38
12	02:00	29	S	1.2	65	753.20
13	03:00	28	Ν	1.0	68	752.88
14	04:00	28	Ν	1.55	70	751.85
15	05:00	30	Ν	1.6	65	752.15
16	06:00	31	Ν	1.6	64	753.20
17	07:00	33	Ν	1.95	60	753.48
18	08:00	35	Ε	2.0	55	754.65
19	09:00	36	E	2.0	52	755.00
20	10:00	38	NE	2.5	52	755.80
21	11:00	39	NE	2.85	50	752.61
22	12:00	39	NE	2.85	50	752.28
23	13:00	40	NE	2.85	45	752.00
24	14:00	42	NE	2.81	40	754.15

Monitored By

Reviewed By (TM)

Approved By (QM)

Document No. AES/LMS/FRM-110, Date of Issue 01 April, 2022, Revision No. 01



Head Office: Basement, C-3, Jhelum Block, Green Forts-II, Lahore. Phones: +92 42 35450914-15, Fax: +92 42 35450916,

Karachi Office:
Office No. 410, 4th Floor,
Business Avenue, PECHS, Block-6,
Main Shahrah-e-Faisal, Karachi.
Phone: +92 303 3333828

Islamabad Office: Office No. 204, 2nd Floor, Al-Safa Heights - 1 F/11 Markaz Islamabad. Phone: +92 321 6227834

Peshawar Office:
Office No. 1, Forth Floor, Syeds Tower,
Opposite Custom House,
University Road, Peshawar.
Phone: +92 300 0303616







Page 16 of 24





71°29'50.60" E

## **Noise Monitoring Report**

Coordinates

			ina		
nn	on	пог	ma	( e III	15

Sampling Reference Number AES-15-HB/2022-AA-03 A3, N3, W3 Point 33°52'54.18" N Sampling Date of Monitoring 06-Sep-2022 to 07-Sep-2022

Sr. No.	Time	Noise dB(A)*		NEQS
1	15:00	52	Day Time	55
2	16:00	53		
3	17:00	52		
4	18:00	51		
5	19:00	49		
6	20:00	47		
7	21:00	46		
8	22:00	44	Night Time	45
9	23:00	43		
10	00:00	42		
11	01:00	41		
12	02:00	41		
13	03:00	40		
14	04:00	39		
15	05:00	40		
16	06:00	42		
17	07:00	43	Day Time	55
18	08:00	45		
19	09:00	46		
20	10:00	47		
21	11:00	48		
22	12:00	49		
23	13:00	50		
24	14:00	51		

Document No. AES/LMS/FRM-110, Date of Issue 01 April, 2022, Revision No. 01



Head Office: Basement, C-3, Jhelum Block, Green Forts-II, Lahore. Phones: +92 42 35450914-15, Fax: +92 42 35450916,

Monitored By

Karachi Office:
Office No. 410, 4th Floor,
Business Avenue, PECHS, Block-6,
Main Shahrah-e-Faisal, Karachi.
Phone: +92 303 3333828

Islamabad Office: Office No. 204, 2nd Floor, Al-Safa Heights - 1 F/11 Markaz Islamabad. Phone: +92 321 6227834

Reviewed By

(MT)


Peshawar Office:
Office No. 1, Forth Floor, Syeds Tower,
Opposite Custom House,
University Road, Peshawar,
Phone: +92 300 0303616

ISO ISO ISO

Approved By (QM)



Page 17 of 24

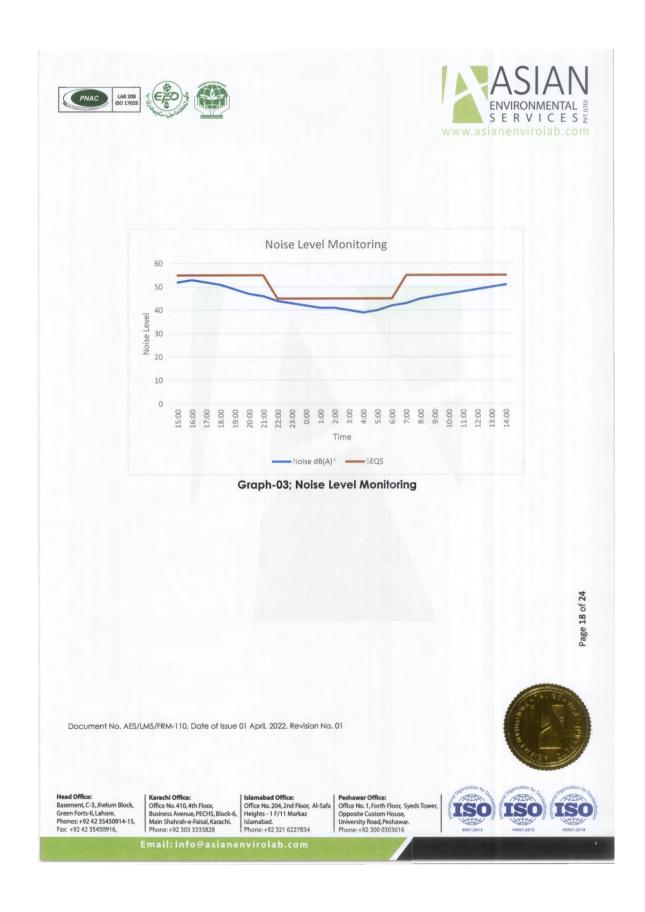





# Location for Ambient Air Monitoring 04 A4, N4, W4

Jamurd



Page 19 of 24

Document No. AES/LMS/FRM-110, Date of Issue 01 April, 2022, Revision No. 01



 Head Office:
 Karachi Office:
 Islamabad Office:

 Basement, C-3, Jhelum Block, Green Forts-II, Lahore.
 Office No. 410, 4th Floor, Business Avenue, PECHS, Block-6, Main Shahrah-e-Faisal, Karachi.
 Islamabad Office:

 Phones: +92 42 35450916,
 Main Shahrah-e-Faisal, Karachi.
 Helghts - 1 F/11 Markaz

 Fax: +92 42 35450916,
 Phone: +92 303 33333828
 Phone: +92 321 6227834

Peshawar Office:
Office No. 1, Forth Floor, Syeds Tower,
Opposite Custom House,
University Road, Peshawar.
Phone: +92 300 0303616









# **Ambient Air Monitoring Report**

### **Monitoring Details**

Reference Number AES-15-HB/2022-AA-04 Date of Monitoring 09-Sep-2022 to 10-Sep-2022 Sampling Point A4, N4, W4 Sampling

Coordinates

33°55'53.36" N 71°32'20.56" E

Sr. No.	Time	CO (mg/m³)	NO (μg/m³)	NO <sub>2</sub> (µg/m³)	NO <sub>x</sub> (µg/m³)	SO <sub>2</sub> (µg/m³)
1	13:45	0.84	12.26	22.20	34.42	28.79
2	14:45	1.12	17.71	24.44	42.10	21.82
3	15:45	0.79	17.08	25.74	42.76	25.70
4	16:45	0.63	19.47	24.21	43.62	16.10
5	17:45	0.93	11.51	22.66	34.13	23.36
6	18:45	1.11	15.01	24.71	39.67	19.77
7	19:45	0.79	13.94	24.94	38.83	22.88
8	20:45	1.00	17.98	28.09	46.00	24.05
9	21:45	0.90	16.29	24.15	40.40	16.55
10	22:45	0.93	11.57	25.91	37.44	23.66
11	23:45	0.75	16.94	19.62	36.52	22.48
12	00:45	0.71	12.28	24.61	36.84	19.85
13	01:45	0.75	11.49	21.84	33.29	20.06
14	02:45	0.84	17.10	22.32	39.37	19.29
15	03:45	0.68	14.15	23.14	37.25	18.97
16	04:45	1.05	12.78	24.58	37.30	17.43
17	05:45	0.73	10.63	23.33	33.92	21.61
18	06:45	0.99	18.59	20.73	39.27	22.99
19	07:45	1.00	15.38	24.00	39.33	22.75
20	08:45	0.76	13.73	24.84	38.52	23.84
21	09:45	1.05	20.37	23.72	44.03	24.24
22	10:45	1.07	19.51	27.31	46.76	24.69
23	11:45	0.77	18.78	26.11	44.83	24.85
24	12:45	0.83	16.24	26.41	42.59	26.23
	verage	0.87	15.45	24.15	39.55	22.17

Monitored By

Reviewed By (TM)

Approved By (QM)

Document No. AES/LMS/FRM-110, Date of Issue 01 April, 2022, Revision No. 01



Head Office: Basement, C-3, Jhelum Block, Green Forts-II, Lahore. Phones: +92 42 35450914-15, Fax: +92 42 35450916,

Office No. 410, 4th Floor, Business Avenue, PECH5, Block-6, Main Shahrah-e-Faisal, Karachi. Phone: +92 303 3333828

Islamabad Office: Office No. 204, 2nd Floor, Al-Safa Heights - 1 F/11 Markaz Islamabad. Phone: +92 321 6227834

Peshawar Office:
Office No. 1, Forth Floor, Syeds Tower,
Opposite Custom House,
University Road, Peshawar.
Phone: +92 300 0303616







Page 20 of 24





## **Ambient Air Monitoring Report**

#### **Monitoring Details**

Reference Number AES-15-HB/2022-AA-04 Sampling Point A4, N4, W4 Sampling 33°55'53.36" N Date of Monitoring 09-Sep-2022 to 10-Sep-2022 Coordinates 71°32'20.56" E

Parameters	Units	Monitoring Duration	LDL	Average Obtained Concentration	NEQS	Remarks
Nitrogen Dioxide (NO <sub>2</sub> ) *	µg/m³	24Hours	1.00	24.15	80.0	Optimal
Nitrogen Oxide (NO) *	µg/m³	24Hours	1.00	15.45	40.0	Optimal
NO <sub>x</sub> *	µg/m³	24Hours	1.00	39.55	120.0	Optimal
Sulphur Dioxide (SO <sub>2</sub> ) *	µg/m³	24Hours	1.00	22.17	120.0	Optimal
Carbon Monoxide (CO) *	mg/m³	24Hours	0.01	0.87	05.0	Optimal
Particulate Matter (PM <sub>10</sub> ) *	µg/m³	24Hours	1.00	121.50	150	Optimal
Particulate Matter (PM <sub>2.5</sub> ) *	µg/m³	24Hours	1.00	32.10	35	Optimal
Total Particulate Matter (TSP)	µg/m³	24Hours	1.00	168.43	500	Optimal

\*Parameters are approved from KP Environmental Protection Agency

Abbreviations:

Monitored By

LDL= Lower Detection Limit Remarks:

NEQS= National Environmental Quality Standards

 $\mu g/m^3$  = Micro Gram per Meter Cube

Optimal = Compliance with Permissible Range Low = Less Than Permissible Range

Marginal Close to Extreme Edge

High = Exceeds from Permissible Range

Reviewed By (TM)

Approved By (QM)

Document No. AES/LMS/FRM-110, Date of Issue 01 April, 2022, Revision No. 01



Head Office: Basement, C-3, Jhelum Block, Green Forts-II, Lahore. Phones: +92 42 35450914-15, Fax: +92 42 35450916,

Karachi Office:
Office No. 410, 4th Floor,
Business Avenue, PECHS, Block-6,
Main Shahrah-e-Faisal, Karachi.
Phone: +92 303 3333828

Islamabad Office: Office No. 204, 2nd Floor, Al-Safa Heights - 1 F/11 Markaz Islamabad. Phone: +92 321 6227834

Peshawar Office:
Office No. 1, Forth Floor, Syeds Tower,
Opposite Custom House,
University Road, Peshawar.
Phone: +92 300 0303616







Page 21 of 24







# **Ambient Air Monitoring Report**

/ina		7
шч	DE	le III P
	ring	ring Del

Reference Number AES-15-HB/2022-AA-04 Sampling Point A4, N4, W4 33°55'53.36" N Date of Monitoring 09-Sep-2022 to 10-Sep-2022

Sampling 71°32'20.56" **E** Coordinates

Sr. No.	Time	Ambient Temperature °C	Wind Direction	Wind Velocity m/s	Humidity %	Pressure (mm of Hg)
1	13:45	44	NE	2.85	50	753.58
2	14:45	42	NE	2.8	50	753.02
3	15:45	41	NE	2.8	53	753.29
4	16:45	40	NE	2.5	55	752.00
5	17:45	38	NE	2.5	55	752.49
6	18:45	36	Ν	2.5	60	753.18
7	19:45	35	Ν	2.0	62	753.75
8	20:45	34	Ν	2.0	64	754.10
9	21:45	33	Ν	1.95	65	754.85
10	22:45	31	N	1.95	65	755.18
11	23:45	30	Ν	1.7	69	755.00
12	00:45	30	Ν	1.7	70	754.65
13	01:45	29	Ν	1.25	68	753.90
14	02:45	29	Ν	1.15	65	753.48
15	03:45	30	N	1.1	60	753.00
16	04:45	30	Ν	1.0	60	752.48
17	05:45	31	Ν	0.9	58	753.69
18	06:45	33	N	0.9	55	753.80
19	07:45	35	Ν	0.88	52	754.01
20	08:45	35	NE	0.85	50	754.49
21	09:45	36	NE	0.9	50	754.88
22	10:45	38	NE	1.0	45	755.00
23	11:45	40	\ NE	1.5	40	754.61
24	12:45	42	NE	2.5	38	754.09
,			- '		1	

Monitored By

Reviewed By (TM)

Approved By (QM)

Document No. AES/LMS/FRM-110, Date of Issue 01 April, 2022, Revision No. 01



Head Office: Basement, C-3, Jhelum Block, Green Forts-II, Lahore. Phones: +92 42 35450914-15, Fax: +92 42 35450916,

Karachi Office: Office No. 410, 4th Floor, Business Avenue, PECHS, Block-6, Main Shahrah-e-Faisal, Karachi. Phone: +92 303 3333828

Islamabad Office: Office No. 204, 2nd Floor, Al-Safa Heights - 1 F/11 Markaz Islamabad. Phone: +92 321 6227834

Peshawar Office:
Office No. 1, Forth Floor, Syeds Tower,
Opposite Custom House,
University Road, Peshawar.
Phone: +92 300 0303616







Page 22 of 24





# **Noise Monitoring Report**

### **Monitoring Details**

Sampling Reference Number AES-15-HB/2022-AA-04 A4, N4, W4 Point 33°55'53.36" N Sampling **Date of Monitoring** 

09-Sep-2022 to 10-Sep-2022 71°32'20.56" **E** Coordinates

Sr. No.	Time	Noise dB(A)*		NEQS
1	13:45	51		100.2
2	14:45	50		
3	15:45	50		
4	16:45	49		
5	17:45	48	Day Time	55
6	18:45	45		
7	19:45	46		
8	20:45	45		
9	21:45	42		
10	22:45	43		
11	23:45	41		
12	00:45	40		
13	01:45	40		
14	02:45	39	Night Time	45
15	03:45	38		
16	04:45	40		
17	05:45	41		
18	06:45	43		
19	07:45	45		
20	08:45	45		
21	09:45	46	Day Time	EE
22	10:45	47	Day Time	55
23	11:45	48		
24	12:45	50		

Monitored By

Reviewed By (MT)

Approved By (QM)

Document No. AES/LMS/FRM-110, Date of Issue 01 April, 2022, Revision No. 01



Head Office: Basement, C-3, Jhelum Block, Green Forts-II, Lahore. Phones: +92 42 35450914-15, Fax: +92 42 35450916,

Karachi Office:
Office No. 410, 4th Floor,
Business Avenue, PECHS, Block-6,
Hain Shahrah-e-Faisal, Karachi.
Phone: +92 303 3333828
Phone: +92 321 6227834


Peshawar Office:
Office No. 1, Forth Floor, Syeds Tower,
Opposite Custom House,
University Road, Peshawar.
Phone: +92 300 0303616







Page 23 of 24

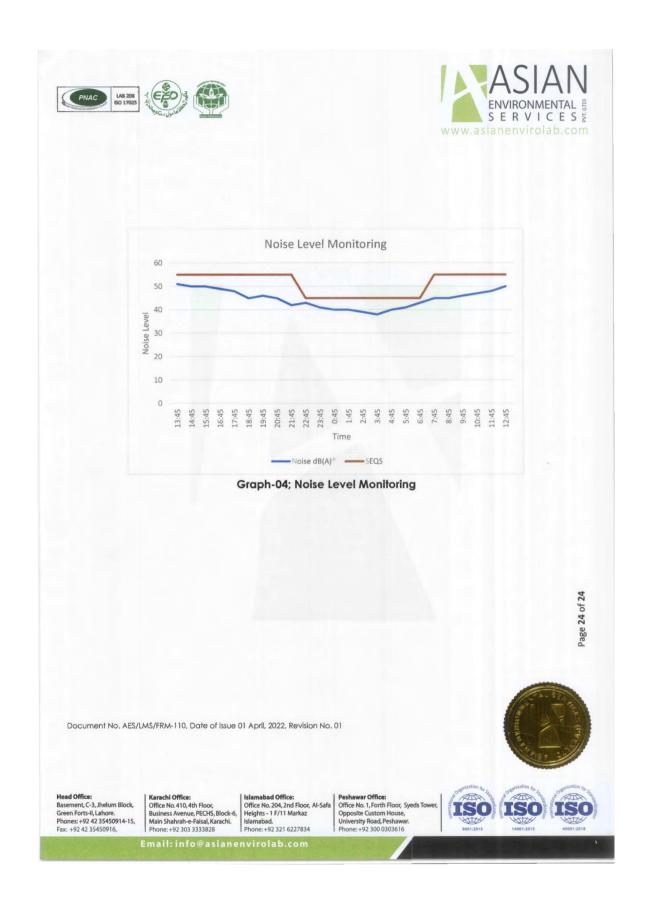





### Sample Detail

Reference No. Nature of Sample Grab/Composite Sampling Date

Completion Date

Analysis

Ground Water Grab 10-09-2022 16-09-2022

Reporting Date Sampling Method Reference Sample Collected by/Sent By Sample Receiving Date Lab Temp & Humidity

16-09-2022 AES/LMS/QSP-014 AES 13-09-2022

24.2°C & 51 % 39 °C & 50 %

Ambient Temperature & Humidity at the Time of Sampling Sample ID AES-GW-07/2022

AES-15-HB/2022-GW-01

Sampling Location

Tubewell Near Site-W3

Client Detail 220KV Jamurd Grid Station And Associated Transmission Line 20km.

	Groun	nd Water Ana	lysis Res	ults		
Parameter	Analysis Method	NEQS	LDL	Result	MU (CL95%)	Remarks
Lab Analysis						
Color*	SMWW 2120 C	≤ 15 TCU	1.0	00	N.A.	Optimal
Taste*	SMWW 2160 C	Non- Objectionable	-	Non- Objectionable	N.A.	Optimal
Odor*	SMWW 2150 B	Non- Objectionable	-	Non- Objectionable	N.A.	Optimal
Turbidity*	SMWW 2130 B	< 5 NTU	1.0	0	N.A.	Optimal
Total Hardness (as CaCO <sub>3</sub> ) **	SMWW 2340 C	< 500 mg/L	0.5	240	± 0.87	Optimal
Total Dissolved Solids (TDS)**	SMWW 2540 C	< 1000 mg/L	5.0	284	± 0.81	Optimal
pH**	SMWW 4500 H+ B	6.5-8.5	0.1	7.54	± 0.70	Optimal
Aluminum (AI)	SMWW 3111 B	≤ 0.2 mg/L	0.001	0.007	N.A.	Optimal
Antimony (Sb)	SMWW 3114 B	≤ 0.005 mg/L	0.0005	0.007	N.A.	Optimal
Arsenic (As)	SMWW 3114 B	≤ 0.05 mg/L	0.0005	< 0.005	N.A.	Optimal
Barium (Ba)	SMWW 3113 B	0.7 mg/L	0.0035	0.0036	N.A.	Optimal
Boron (B)	SMWW 3113 B	0.3 mg/l	0.02	<0.02	N.A.	Optimal
Cadmium (Cd)	SMWW 3113 B	0.01 mg/L	0.00002	<0.006	N.A.	Optimal
Chloride (Cl-)**	SMWW 4500 CI-B	< 250 mg/L	0.5	16	± 1.22	Optimal
Chromium (Cr)	SMWW 3113 B	≤ 0.05 mg/L	0.0004	<0.004	N.A.	Optimal
Copper (Cu)	SMWW 3111 B	2.0 mg/L	0.0015	<0.164	N.A.	Optimal
Cyanide (CN-)*	SMWW 4500 CN-F	≤ 0.05 mg/L	0.1	0	N.A.	Optimal
Fluoride (F-)**	SMWW 4500 F- D	≤ 1.5 mg/L	0.1	0.20	±0.71	Optimal
Lead (Pb)	SMWW 3114 B	≤ 0.05 mg/L	0.005	<0.005	N.A.	Optimal
Manganese (Mn)	SMWW 3113 B	≤0.5 mg/l	0.015	<0.015	N.A.	Optimal
Mercury (Hg)	SMWW 3114 B	≤0.001 mg/L	0.001	<0.001	N.A.	Optimal
Nickel (Ni)	SMWW 3113 B	≤0.02 mg/L	0.06	<0.02	N.A.	Optimal
Nitrate (NO <sub>3</sub> -) *	SMWW 4800 NO3- B	≤ 50 mg/L	0.01	1.41	N.A.	Optimal
Nitrite (NO <sub>2</sub> -) *	SMWW 4500 NO2- B	≤ 3.0 mg/L	0.01	0	N.A.	Optimal

Document No. AES/LMS/FRM-110, Date of Issue 22 June, 2020, Revision No. 01

Head Office: Basement, C-3, Jhelum Block, Green Forts-II, Lahore. Phones: +92 42 35450914-15, Fax: +92 42 35450916,

Karachi Office:
Office No. 410, 4th Floor,
Business Avenue, PECHS, Block-6,
Main Shahrah-e-Faisal, Karachi.
Phone: +92 303 3333828

Islamabad Office:
Office No. 204, 2nd Floor, Al-Safa
Heights - 1 F/11 Markaz
Islamabad.
Phone: +92 321 6227834

Peshawar Office:
Office No. 1, Forth Floor, Syeds Tower,
Opposite Custom House,
University Road, Peshawar.
Phone: +92 300 0303616







Page 1 of 2





#### Sample Detail

Completion Date

Analysis

Sample ID

Client Detail

Reference No. AFS-15-HB/2022-GW-01 Nature of Sample Grab/Composite Sampling Date

Ground Water Grab 10-09-2022 16-09-2022

Sampling Method Reference Sample Collected by/Sent By Sample Receiving Date

Reporting Date

13-09-2022 Lab Temp & Humidity 24.2°C & 51 % Ambient Temperature & Humidity at the Time of Sampling 39 °C & 50 %

> AES-GW-07/2022 Sampling Location

**Tubewell Near** Site-W3

16-09-2022

AES/LMS/QSP-014

220KV Jamurd Grid Station And Associated Transmission Line 20km.

Ground Water Analysis Results								
Parameter	Analysis Method	NEQS	LDL	Result	MU (CL95%)	Remarks		
Selenium (Se)	SMWW 3114 B	0.01 mg/L	0.005	< 0.01	N.A.	Optimal		
Residual Chlorine (Cl <sub>2</sub> )*	SMWW 4500 CI- B	0.5 mg/L	0.1	0	N.A.	Optimal		
Phenolic Compounds (as Phenols) *	SMWW 5530 D	NGVS	0.01	0	N.A.	Optimal		
Zinc (Zn)	SMWW 3113 B	5.0 mg/L		0.054	N.A.	Optimal		
Microbiological Analysis								
Total Coliforms*	SMWW 9222 B	0/ 100 mL CFU	-	0	N.A.	Optimal		
Fecal Coliforms*	SMWW 9222 D	0/ 100 mL CFU	-	0	N.A.	Optimal		

<sup>\*</sup>Parameters are approved from KP Environment Protection Agency.

#### Abbreviations:

NEQS = National Environment Quality Standards TCU = True Color Unit

NTU = Nephelometric Turbidity Unit

Remarks:

Optimal = Compliance with Permissible Range

Marginal = Close to Extreme Edge

Low = Less Than Permissible Range

SMWW = Standard Methods for the examination of Water and Wastewater

MU = Measurement Uncertainty

NGVS = No Guideline Value Set

High = Exceeds from Permissible Range

#### Report Disclaimer

The remaining portion of the sample (s) will be disposed off after 15 days after the issuance date of report from the laboratory unless otherwise instructed (Condition Apply).

This report shall not be reproduced in part/parties

The provided results relate only to the sample prov alues reflect the testing results; decision for usage of report dally depen s on client

(MT)

(QM)

-----End of Report-----

Document No. AES/LMS/FRM-110, Date of Issue 22 June, 2020, Revision No. 01

Head Office: Basement, C-3, Jhelum Block, Green Forts-II, Lahore. Phones: +92 42 35450914-15, Fax: +92 42 35450916.

| Karachi Office: Office No. 410, 4th Floor, Business Avenue, PEC/HS, Block-6, Heights - 1 F/11 Markaz Hainshaharh-e-Faisal, Karachi. | Phone: +92 303 3333828 | Phone: +92 321 6227834

Peshawar Office: Office No. 1, Forth Floor, Syeds Tower, Opposite Custom House, University Road, Peshawar Phone: +92 300 0303616



<sup>\*\*</sup>Parameters are accredited from Pakistan National Accreditation Council.

<sup>\*</sup>Parameters with a holding time of 24 hours or less, samples were transported to the testing lab on the same day for analysis such as microbiological samples.





#### Sample Detail

Grab/Composite

**Completion Date** 

Sampling Date

Analysis

Sample ID

**Client Detail** 

AES-15-HB/2022-Reference No. GW-02 Nature of Sample

Ground Water Grab 10-09-2022 16-09-2022

Reporting Date

Sampling Method Reference Sample Collected by/Sent By Sample Receiving Date

AES 13-09-2022 24.2°C & 51 % Lab Temp & Humidity

16-09-2022

39 °C & 50 %

AES/LMS/QSP-014

Ambient Temperature & Humidity at the Time of Sampling Tap Water of Mosque AES-GW-08/2022 Sampling Location Near Site-W2 220KV Jamurd Grid Station And Associated Transmission Line 20km.

Ground Water Analysis Results								
Parameter	Analysis Method	NEQS	LDL	Result	MU (CL95%)	Remarks		
Lab Analysis								
Color*	SMWW 2120 C	≤15TCU	1.0	0	N.A.	Optimal		
Taste*	SMWW 2160 C	Non- Objectionable	-	Non- Objectionable	N.A.	Optimal		
Odor*	SMWW 2150 B	Non- Objectionable	-	Non- Objectionable	N.A.	Optimal		
Turbidity*	SMWW 2130 B	< 5 NTU	1.0	0	N.A.	Optimal		
Total Hardness (as CaCO <sub>3</sub> ) **	SMWW 2340 C	< 500 mg/L	0.5	260	± 0.87	Optimal		
Total Dissolved Solids (TDS)**	SMWW 2540 C	< 1000 mg/L	5.0	308	± 0.81	Optimal		
pH**	SMWW 4500 H+ B	6.5-8.5	0.1	7.69	± 0.70	Optimal		
Aluminum (AI)	SMWW 3111 B	≤ 0.2 mg/L	0.001	0.006	N.A.	Optimal		
Antimony (Sb)	SMWW 3114 B	≤0.005 mg/L	0.0005	0.007	N.A.	Optimal		
Arsenic (As)	SMWW 3114 B	≤ 0.05 mg/L	0.0005	<0.005	N.A.	Optimal		
Barium (Ba)	SMWW 3113 B	0.7 mg/L	0.0035	0.0035	N.A.	Optimal		
Boron (B)	SMWW 3113 B	0.3 mg/l	0.02	<0.02	N.A.	Optimal		
Cadmium (Cd)	SMWW 3113 B	0.01 mg/L	0.00002	<0.006	N.A.	Optimal		
Chloride (Cl-)**	SMWW 4500 CI-B	< 250 mg/L	0.5	14	± 1.23	Optimal		
Chromium (Cr)	SMWW 3113 B	≤ 0.05 mg/L	0.0004	<0.004	N.A.	Optimal		
Copper (Cu)	SMWW 3111 B	2.0 mg/L	0.0015	<0.164	N.A.	Optimal		
Cyanide (CN-)*	SMWW 4500 CN-F	≤0.05 mg/L	0.1	0	N.A.	Optimal		
Fluoride (F-)**	SMWW 4500 F-D	≤ 1.5 mg/L	0.1	0.15	± 0.71	Optimal		
Lead (Pb)	SMWW 3114 B	≤ 0.05 mg/L	0.005	<0.005	N.A.	Optimal		
Manganese (Mn)	SMWW 3113 B	≤0.5 mg/l	0.015	<0.015	N.A.	Optimal		
Mercury (Hg)	SMWW 3114 B	≤0.001 mg/L	0.001	<0.001	N.A.	Optimal		
Nickel (Ni)	SMWW 31 \3 B	≤0.02 mg/L	0.06	<0.02	N.A.	Optimal		
Nitrate (NO <sub>3</sub> -) *	SMWW 4500 NO3 B	≤ 50 mg/L	0.01	1.81	N.A.	Optimal		

Document No. AES/LMS/FRM-110, Date of Issue 22 June, 2020, Revision No. 01

Head Office: Basement, C-3, Jhelum Block, Green Forts-II, Lahore. Phones: +92 42 35450914-15, Fax: +92 42 35450916,

Karachi Office:
Office No. 410, 4th Floor,
Business Avenue, PECHS, Block-6,
Main Shahrah-e-Faisal, Karachi.
Phone: +92 303 3333828

Islamabad Office:
Office No. 204, 2nd Floor, Al-Safa
Heights - 1 F/11 Markaz
Islamabad.
Phone: +92 321 6227834

Peshawar Office:
Office No. 1, Forth Floor, Syeds Tower,
Opposite Custom House,
University Road, Peshawar.
Phone: +92 300 0303616







Page 1 of 2





#### Sample Detail

AES-15-HB/2022-Reference No. GW-02

Reporting Date

16-09-2022

Nature of Sample Grab/Composite Grab Sampling Date

Ground Water 10-09-2022

Sampling Method Reference Sample Collected by/Sent By Sample Receiving Date Lab Temp & Humidity

AES/LMS/QSP-014 AES 13-09-2022

24.2°C & 51 %

Analysis Completion Date Ambient Temperature & Humidity at the Time of Sampling Sample ID AES-GW-08/2022

16-09-2022

39 °C & 50 % Tap Water of Mosque Sampling Location

Near Site-W2

**Client Detail** 220KV Jamurd Grid Station And Associated Transmission Line 20km.

Ground Water Analysis Results								
Parameter	Analysis Method	NEQS	LDL	Result	MU (CL95%)	Remarks		
Nitrite (NO <sub>2</sub> -) *	SMWW 4500 NO <sub>2</sub> - B	≤ 3.0 mg/L	0.01	0.008	N.A.	Optimal		
Selenium (Se)	SMWW 3114 B	0.01 mg/L	0.005	< 0.01	N.A.	Optimal		
Residual Chlorine (Cl <sub>2</sub> )*	SMWW 4500 CI-B	0.5 mg/L	0.1	0	N.A.	Optimal		
Phenolic Compounds (as Phenols) *	SMWW 5530 D	NGVS	0.01	0	N.A.	Optimal		
Zinc (Zn)	SMWW 3113 B	5.0 mg/L		0.053	N.A.	Optimal		
Microbiological Analysis								
Total Coliforms*	SMWW 9222 B	0/ 100 mL CFU	-	0	N.A.	Optimal		
Fecal Coliforms*	SMWW 9222 D	0/ 100 mL CFU	-	0	N.A.	Optimal		

<sup>\*</sup>Parameters are approved from KP Environment Protection Agency.

#### Abbreviations:

NEQS = National Envir vironment Quality Standards SMWW = Standard Methods for the example.

N.A. = Not Available MU = Measurement Uncertainty

mination of Water and Wastewater
CFU = Colony forming Unit NGVS = No Guideline Value Set

NTU = Nephelometric Turbidity Unit Remarks:

Optimal = Compliance with Permissible Range

Marginal = Close to Extreme Edge

Low = Less Than Permissible Range

High = Exceeds from Permissible Range

#### Report Disclaimer

The remaining portion of the sample (s) will be disposed off ofter 15 days after the issuance date of report from the laboratory unless otherwise instructed (Condition Apply).

This report shall not be reproduced in part/partie

The provided results relate only to the sample provided/col

Malues reflect the testing results; decision for usage of report totally depe s on client. (H) ides

Analyzed By

(MT) 16

-----End of Report-----

(QM)

Approv

Document No. AES/LMS/FRM-110, Date of Issue 22 June, 2020, Revision No. 01

Head Office: Basement, C-3, Jhelum Block, Green Forts-II. Lahore. Phones: +92 42 35450914-15, Fax: +92 42 35450916,

Karachi Office:
Office No. 410,4th Floor,
Business Avenue, PECHS, Block-6,
Main Shahrah-e-Faisal, Karachi.
Phone: +92 303 3333828
| Shamabad. |
Phone: +92 321 6227834

Peshawar Office: Office No. 1, Forth Floor, Syeds Tower, Opposite Custom House, University Road, Peshawar.

Phone: +92 300 0303616



Page 2 of 2

<sup>\*\*</sup>Parameters are accredited from Pakistan National Accreditation Council. \*Parameters with a holding time of 24 hours or less, samples were transported to the testing lab on the same day for analysis such as microbiological samples.





#### Sample Detail

Nature of Sample

Grab/Composite

**Completion Date** 

Sampling Date Analysis

AES-15-HB/2022-GW-03 Reference No.

Ground Water Grab 10-09-2022 16-09-2022

Reporting Date

16-09-2022

Sampling Method Reference Sample Collected by/Sent By Sample Receiving Date

AES/LMS/QSP-014 AES 13-09-2022

24.2°C & 51 %

Ambient Temperature & Humidity at the Time of Sampling 39 °C & 50 %
Sample ID AES-GW-09/2022 Sampling Location Tubewell Nec
Client Detail 220KV Jamurd Grid Station And Associated Transmission Line 20km. Tubewell Near Site-W1

Lab Temp & Humidity

	Groun	d Water Ana	lysis Res	ults		
Parameter	Analysis Method	NEQS	LDL	Result	MU (CL95%)	Remarks
Lab Analysis						
Color*	SMWW 2120 C	≤ 15 TCU	1.0	0	N.A.	Optimal
Taste*	SMWW 2160 C	Non- Objectionable	-	Non- Objectionable	N.A.	Optimal
Odor*	SMWW 2150 B	Non- Objectionable	-	Non- Objectionable	N.A.	Optimal
Turbidity*	SMWW 2130 B	< 5 NTU	1.0	0	N.A.	Optimal
Total Hardness (as CaCO <sub>3</sub> ) **	SMWW 2340 C	< 500 mg/L	0.5	240	± 0.87	Optimal
Total Dissolved Solids (TDS)**	SMWW 2540 C	< 1000 mg/L	5.0	279	± 0.81	Optimal
pH**	SMWW 4500 H+ B	6.5-8.5	0.1	7.64	± 0.70	Optimal
Aluminum (AI)	SMWW 3111 B	≤ 0.2 mg/L	0.001	0.006	N.A.	Optimal
Antimony (Sb)	SMWW 3114 B	≤ 0.005 mg/L	0.0005	0.006	N.A.	Optimal
Arsenic (As)	SMWW 3114 B	≤ 0.05 mg/L	0.0005	<0.005	N.A.	Optimal
Barium (Ba)	SMWW 3113 B	0.7 mg/L	0.0035	0.0035	N.A.	Optimal
Boron (B)	SMWW 3113 B	0.3 mg/l	0.02	<0.02	N.A.	Optimal
Cadmium (Cd)	SMWW 3113 B	0.01 mg/L	0.00002	<0.006	N.A.	Optimal
Chloride (Cl <sup>-</sup> )**	SMWW 4500 CI-B	< 250 mg/L	0.5	14	± 1.23	Optimal
Chromium (Cr)	SMWW 3113 B	≤ 0.05 mg/L	0.0004	<0.004	N.A.	Optimal
Copper (Cu)	SMWW 3111 B	2.0 mg/L	0.0015	<0.164	N.A.	Optimal
Cyanide (CN-)*	SMWW 4500 CN-F	≤ 0.05 mg/L	0.1	0	N.A.	Optimal
Fluoride (F-)**	SMWW 4500 F-D	≤ 1.5 mg/L	0.1	0.33	±0.71	Optimal
Lead (Pb)	SMWW 3114 B	≤ 0.05 mg/L	0.005	<0.005	N.A.	Optimal
Manganese (Mn)	SMWW 3113 B	≤0.5 mg/l	0.015	<0.015	N.A.	Optimal
Mercury (Hg)	SMWW 3114 B	≤ 0.001 mg/L	0.001	<0.001	N.A.	Optimal
Nickel (Ni)	SMWW 3113 B	≤0.02 mg/L	0.06	<0.02	N.A.	Optimal
Nitrate (NO <sub>3</sub> -) *	SMWW 4500 NO3- B	≤ 50 mg/L	0.01	1.03	N.A.	Optimal
Nitrite (NO <sub>2</sub> -) *	SMWW 4500 NO <sub>2</sub> - B	≤ 3.0 mg/L	0.01	0.001	N.A.	Optimal

Document No. AES/LMS/FRM-110, Date of Issue 22 June, 2020, Revision No. 01

Head Office: Basement, C-3, Jhelum Block, Green Forts-II, Lahore. Phones: +92 42 35450914-15, Fax: +92 42 35450916,

Karachi Office:
Office No. 410, 4th Floor,
Business Avenue, PECHS, Block-6,
Main Shahrah-e-Faisal, Karachi.
Phone: +92 303 3333828

Islamabad Office:
Office No. 204, 2nd Floor, Al-Safa
Heights - 1 F/11 Markaz
Islamabad.
Phone: +92 321 6227834

Peshawar Office:
Office No. 1, Forth Floor, Syeds Tower,
Opposite Custom House,
University Road, Peshawar.
Phone: +92 300 0303616





Page 1 of 2





#### Sample Detail

**Client Detail** 

A ES-15-HB/2022-Reference No. GW-03

Reporting Date

16-09-2022

Ground Water Nature of Sample Grab/Composite Grab 10-09-2022 Sampling Date Analysis

Sampling Method Reference Sample Collected by/Sent By Sample Receiving Date

AES/LMS/QSP-014 AES

13-09-2022 24.2°C & 51 %

16-09-2022 Lab Temp & Humidity Completion Date Ambient Temperature & Humidity at the Time of Sampling AES-GW-09/2022 Sample ID Sampling Location

39 °C & 50 % Tubewell Near Site-W1

220KV Jamurd Grid Station And Associated Transmission Line 20km.

Ground Water Analysis Results							
Parameter	Analysis Method	NEQS	LDL	Result	MU (CL95%)	Remarks	
Selenium (Se)	SMWW 3114 B	0.01 mg/L	0.005	< 0.01	N.A.	Optimal	
Residual Chlorine (Cl <sub>2</sub> )*	SMWW 4500 CI- B	0.5 mg/L	0.1	0	N.A.	Optimal	
Phenolic Compounds (as Phenols) *	SMWW 5530 D	NGVS	0.01	0	N.A.	Optimal	
Zinc (Zn)	SMWW 3113 B	5.0 mg/L		0.054	N.A.	Optimal	
Microbiological Analysis							
Total Coliforms*	SMWW 9222 B	0/ 100 mL CFU	-	0	N.A.	Optimal	
Fecal Coliforms*	SMWW 9222 D	0/ 100 mL CFU	-	0	N.A.	Optimal	

<sup>\*</sup>Parameters are approved from KP Environment Protection Agency.

#### Abbreviations:

NEQS = National Environment Quality Standards
TCU = True Color Unit
NTU = Nephelometric Turbidity Unit

N.A. = Not Available MU = Measurement Uncertainty

SMWW = Standard Methods for the examination of Water and Wastewater valiable CFU = Colony forming Unit NGVS = No Guideline Value Set

Remarks:

Optimal = Compliance with Permissible Range

Marginal = Close to Extreme Edge

Low = Less Than Permissible Range

High = Exceeds from Permissible Range

#### Report Disclaimer

The remaining portion of the sample (s) will be disposed at after 15 days after the issuance date of report from the laboratory unless otherwise instructed (Condition Apply).

2

-----End of Report-----

This report shall not be reproduced in part/parties.

The provided results relate only to the sample provided/co

que reflect the testing results; decision for usage of report totally deper s on client

Analyzed By

(MT)

Approved By (QM)

Page 2 of 2

Document No. AES/LMS/FRM-110, Date of Issue 22 June, 2020, Revision No. 01

Head Office: Basement, C-3, Jhelum Block, Green Forts-II, Lahore. Phones: +92 42 35450914-15, Fax: +92 42 35450916.

| Karachi Office: Office No. 410, 4th Floor, Business Avenue, PECHS, Block-6, Heights - 1 F/11 Markaz Hains Hahrah-e-Faisal, Karachi. Phone: +92 303 3333828 | Phone: +92 321 6227834

Peshawar Office: Office No. 1, Forth Floor, Syeds Tower, Opposite Custom House, University Road, Peshawar Phone: +92 300 0303616





<sup>\*\*</sup>Parameters are accredited from Pakistan National Accreditation Council.

<sup>\*</sup>Parameters with a holding time of 24 hours or less, samples were transported to the testing lab on the same day for analysis such as microbiological samples.





#### Sample Detail

Grab/Composite

**Completion Date** 

Sampling Date

Analysis

Sample ID

**Client Detail** 

AES-15-HB/2022-Reference No. GW-04 Nature of Sample

Ground Water Grab 10-09-2022 16-09-2022

Sampling Method Reference Sample Receiving Date

Sample Collected by/Sent By Lab Temp & Humidity

Ambient Temperature & Humidity at the Time of Sampling AES-GW-10/2022 Sampling Location

Reporting Date

24.2°C & 51 % 39 °C & 50 % Tap Water in Mosque Near Site-W4

16-09-2022

AES 13-09-2022

AES/LMS/QSP-014

220KV Jamurd Grid Station And Associated Transmission Line 20km.

THE REAL PROPERTY.	Grour	nd Water Ana	lysis Res	ults		
Parameter	Analysis Method	NEQS	LDL	Result	MU (CL95%)	Remarks
Lab Analysis						
Color*	SMWW 2120 C	≤ 15 TCU	1.0	0	N.A.	Optimal
Taste*	SMWW 2160 C	Non- Objectionable	-	Non- Objectionable	N.A.	Optimal
Odor*	SMWW 2150 B	Non- Objectionable	-	Non- Objectionable	N.A.	Optimal
Turbidity*	SMWW 2130 B	< 5 NTU	1.0	0	N.A.	Optimal
Total Hardness (as CaCO <sub>3</sub> ) **	SMWW 2340 C	< 500 mg/L	0.5	408	± 0.87	Optimal
Total Dissolved Solids (TDS)**	SMWW 2540 C	< 1000 mg/L	5.0	541	± 0.81	Optimal
pH**	SMWW 4500 H+ B	6.5- 8.5	0.1	7.42	± 0.70	Optimal
Aluminum (AI)	SMWW 3111 B	≤ 0.2 mg/L	0.001	0.007	N.A.	Optimal
Antimony (Sb)	SMWW 3114 B	≤0.005 mg/L	0.0005	0.007	N.A.	Optimal
Arsenic (As)	SMWW 3114 B	≤ 0.05 mg/L	0.0005	<0.005	N.A.	Optimal
Barium (Ba)	SMWW 3113 B	0.7 mg/L	0.0035	0.0035	N.A.	Optimal
Boron (B)	SMWW 3113 B	0.3 mg/l	0.02	<0.02	N.A.	Optimal
Cadmium (Cd)	SMWW 3113 B	0.01 mg/L	0.00002	<0.006	N.A.	Optimal
Chloride (Cl-)**	SMWW 4500 CI-B	< 250 mg/L	0.5	32	±1.23	Optimal
Chromium (Cr)	SMWW 3113 B	≤ 0.05 mg/L	0.0004	<0.004	N.A.	Optimal
Copper (Cu)	SMWW 3111 B	2.0 mg/L	0.0015	<0.164	N.A.	Optimal
Cyanide (CN-)*	SMWW 4500 CN-F	≤ 0.05 mg/L	0.1	0	N.A.	Optimal
Fluoride (F-)**	SMWW 4500 F- D	≤ 1.5 mg/L	0.1	0.21	± 0.71	Optimal
Lead (Pb)	SMWW 3114 B	≤ 0.05 mg/L	0.005	<0.005	N.A.	Optimal
Manganese (Mn)	SMWW 3113 B	≤0.5 mg/l	0.015	<0.015	N.A.	Optimal
Mercury (Hg)	SMWW 3114 B	≤0.001 mg/L	0.001	<0.001	N.A.	Optimal
Nickel (Ni)	SMWW 3113/B	≤0.02 mg/L	0.06	<0.02	N.A.	Optimal
Nitrate (NO <sub>3</sub> -) *	SMWW 4500 NO3- B	≤ 50 mg/L)	0.01	2.34	N.A.	Optimal

Document No. AES/LMS/FRM-110, Date of Issue 22 June, 2020, Revision No. 01

Head Office: Basement, C-3, Jhelum Block, Green Forts-II, Lahore. Phones: +92 42 35450914-15, Fax: +92 42 35450916,

Karachi Office:
Office No. 410, 4th Floor,
Business Avenue, PECHS, Block-6,
Main Shahrah-e-Faisal, Karachi.
Phone: +92 303 3333828

Peshawar Office:
Office No. 1, Forth Floor, Syeds Tower,
Opposite Custom House,
University Road, Peshawar.
Phone: +92 300 0303616







42 `Annexure III

Page 1 of 2





#### Sample Detail

Sampling Date Analysis

Sample ID

Completion Date

AES-15-HB/2022-Reference No. GW-04 Nature of Sample Ground Water Grab/Composite

Grab 10-09-2022 16-09-2022

Sampling Method Reference Sample Collected by/Sent By Sample Receiving Date Lab Temp & Humidity

Ambient Temperature & Humidity at the Time of Sampling AES-GW-10/2022 Sampling Location

Reporting Date

24.2°C & 51 % 39 °C & 50 % Tap Water in Mosque

16-09-2022

13-09-2022

AES/LMS/QSP-014

Near Site-W4

AES

**Client Detail** 220KV Jamurd Grid Station And Associated Transmission Line 20km.

	Groun	d Water Anal	ysis Resu	ults	THE TAX	
Parameter	Analysis Method	NEQS	LDL	Result	MU (CL95%)	Remarks
Nitrite (NO <sub>2</sub> -) *	SMWW 4500 NO <sub>2</sub> - B	≤ 3.0 mg/L	0.01	0	N.A.	Optimal
Selenium (Se)	SMWW 3114 B	0.01 mg/L	0.005	< 0.01	N.A.	Optimal
Residual Chlorine (Cl <sub>2</sub> )*	SMWW 4500 CI- B	0.5 mg/L	0.1	0	N.A.	Optimal
Phenolic Compounds (as Phenols) *	SMWW 5530 D	NGVS	0.01	0	N.A.	Optimal
Zinc (Zn)	SMWW 3113 B	5.0 mg/L		0.052	N.A.	Optimal
Microbiological Analysis						
Total Coliforms*	SMWW 9222 B	0/ 100 mL CFU	-	0	N.A.	Optimal
Fecal Coliforms*	SMWW 9222 D	0/ 100 mL CFU	-	0	N.A.	Optimal

<sup>\*</sup>Parameters are approved from KP Environment Protection Agency.

#### Abbreviations:

NEQS = National Environment Quality Standards
TCU = True Color Unit
NTU = Nephelometric Turbidity Unit

Remarks:
Optimal = Compliance with Permissible Range
Marginal = Close to Extreme Edge Low = Less Than Permissible Range

SMWW = Standard Methods for the examination of Water and Wastewater CFU = Colony forming Unit NGVS = No Guideline Value Set

N.A. = Not Available
MU = Measurement Uncertainty

High = Exceeds from Permissible Range

#### Report Disclaimer

The remaining portion of the sample (s) will be disposed off offer 15 days after the issuance date of report from the laboratory unless otherwise instructed

w

End of Report-----

(Condition Apply).
This report shall not be reproduced in part/parties

The provided results relate only to the sample provided/collected. volues reflect the testing results; decision for usage of report totally depends on client.

Analyzed By

Reviewed By (TM)

Approved by

(QM)

Document No. AES/LMS/FRM-110, Date of Issue 22 June, 2020, Revision No. 01

Head Office: Basement, C-3, Jhelum Block, Green Forts-II, Lahore. Phones: +92 42 35450914-15, Fax: +92 42 35450916.

| Karachi Office:
| Office No. 410, 4th Floor, | Business Avenue, PECHS, Block-6, | Heights - 1 F/11 Markaz | Islamabad. | Phone: +92 303 3333828 | Phone: +92 321 6227834 |

Peshawar Office: Office No. 1, Forth Floor, Syeds Tower, Opposite Custom House, University Road, Peshawai Phone: +92 300 0303616



Page 2 of

<sup>\*\*</sup>Parameters are accredited from Pakistan National Accreditation Council. \*Parameters with a holding time of 24 hours or less, samples were transported to the testing lab on the same day for analysis such as microbiological samples.

# **Annexure IV:** Sensitive Receptors

Map ID	Category	Subcategory	Sensitivity	Orientation	Distance ROW	Latitude	Longitude
1	Farmhouse	Farmhouse	Medium	Right	10	33° 56' 2.953"	71° 32' 32.503"
2	Road	Small Blacktop Road	Low	Crossing	0	33° 55' 46.498"	71° 32' 14.403"
3	waterbody	Channel	Medium	Crossing	0	33° 54' 57.012"	71° 31' 28.049"
4	Settlement	Small Size	Medium	Right	50	33° 54' 49.448"	71° 31' 23.668"
5	Settlement	Small Size	Medium	Left	60	33° 54' 40.815"	71° 31' 18.666"
6	Settlement	Small Size	Medium	Both Side	50	33° 54' 31.128"	71° 31' 22.781"
7	Road	Small Blacktop Road	Low	Crossing	0	33° 54' 14.158"	71° 31' 14.751"
8	Settlement	Small Size	Medium	Left	50	33° 53' 37.935"	71° 31' 4.244"
9	Settlement	Small Size	Medium	Right	40	33° 53' 27.916"	71° 31' 8.847"
10	Settlement	Small Size	High	Right	40	33° 53' 4.888"	71° 31' 8.652"
11	Road	Small Blacktop Road	Low	Crossing	0	33° 53' 1.769"	71° 31' 6.119"
12	Settlement	Small Size	Medium	Left	30	33° 52' 53.760"	71° 30' 59.652"
13	Settlement	Small Size	Medium	Right	30	33° 52' 43.158"	71° 30' 57.582"
14	Road	Small Blacktop Road	Low	Crossing	0	33° 51' 23.614"	71° 31' 3.964"
15	Religious Significance	Mosque	High	Right	100	33° 50' 34.658"	71° 29' 51.161"
16	Settlement	Small Size	Medium	Right	40	33° 50' 28.466"	71° 29' 44.779"
17	Settlement	Small Size	Medium	Both Side	30	33° 50' 11.217"	71° 29' 5.357"
18	Religious Significance	Mosque	High	Right	40	33° 50' 6.697"	71° 28' 29.387"
19	waterbody	Nullah	Medium	Crossing	0	33° 50' 7.720"	71° 28' 16.794"
20	Settlement	Small Size	Medium	Right	40	33° 50' 23.508"	71° 27' 55.776"
21	Settlement	Small Size	Medium	Both Side	10	33° 51' 22.078"	71° 23' 52.688"

22	waterbody	Nullah	Medium	Crossing	0	33° 51' 32.180"	71° 23' 15.019"
23	Religious Significance	Mosque	High	Right	10	33° 52' 17.599"	71° 21' 59.006"
24	Road	Small Blacktop Road	Low	Crossing	0	33° 52' 18.039"	71° 21' 58.372"
25	Settlement	Small Size	Medium	Left	30	33° 52' 39.637"	71° 21' 44.666"
26	Settlement	Small Size	Medium	Right	60	33° 52' 44.045"	71° 21' 34.770"
27	waterbody	Nullah	Medium	Crossing	0	33° 53' 27.080"	71° 19' 19.672"
28	Settlement	Small Size	Medium	Both Side	40	33° 54' 12.545"	71° 18' 50.806"
29	Settlement	Small Size	Medium	Both Side	40	33° 54' 59.849"	71° 18' 49.835"
30	Settlement	Small Size	Medium	Right	30	33° 55' 28.216"	71° 19' 13.618"
31	Farmhouse	Farmhouse	Low	Left	60	33° 55' 37.262"	71° 19' 28.176"
32	Road	Blacktop Road	Medium	Crossing	0	33° 55' 44.215"	71° 19' 32.818"
33	Settlement	Small Size	Medium	Both Side	15	33° 56' 10.162"	71° 19' 49.883"

# Annexure V: Ecological Field Data

Table 1: Terrestrial Vegetation

Location ID	Latitude	Longitude	Habiat Гуре		Acacia modesta		Acacia nilotica		Arundo donax		Broussonetia papyrifera		Calotropis procera		Dalbergia sissoo		Datura innoxia		Dodonaea viscosa		Ficus carica		Ficus glomerata		Withania cougelense		Justicia adhatoda		Lantana camara
				Co ver	Co unt	Co ver	Co unt	Co ver	Co unt	Co ver	Co unt	Co ver	Co unt	Co ver	Co unt	Co ver	Coun t	Co ver	Co unt	Co ver	Co unt	Co ver	Co unt	Co ver	Co unt	Co ver	Co unt	Co ver	Co unt
SP -1	33.93 0186	71.54 1678	Agricultur al Fields	0.0 0%	-	0.0 0%	-	0.0 0%	-	0.1 5%	3	0.1 1%	5	0.0 0%	-	0.0 0%	-	0.0 0%	-	0.0 0%	-	0.0 0%	-	0.0 0%	-	0.0 0%	-	0.0 0%	-
SP	33.94	71.38	Agricultur	0.0		0.1		0.2	1.4	1.3	2	0.0		0.0		0.0		0.0		0.0		0.0		0.0		0.0		0.0	
-2 SP	9936 33.95	6669 71.34	al Fields	0%	-	1% 0.0	l	1% 0.0	14	7%	2	0%	-	0%	-	3% 0.0	6	0%	-	0%	-	0%	-	0%	-	0%	-	0%	-
-3	4354	3669	Vegetation	0.0 0%	_	0.0	_	0.0	_	0.0 0%	_	0.0	_	0.0	_	0.0	_	0.0	_	0.0	_	0.1	4	0.0	2	0.0	_	0.0	-
SP	33.85	71.40	Vegetation	0.0		0.0		0.0		0.0		0.0		0.0		0.0		0.0		0.0		0.0		0.0		0.0		0.0	
-4	6138	9163		0%	-	0%	-	0%	-	0%	-	0%	-	0%	-	0%	-	0%	-	0%	-	0%	-	9%	4	0%	-	0%	
SP -5	33.91 2628	71.53 7355	Vegetation	1.2 0%	2	0.4 3%	4	0.0 0%	_	0.0 0%	_	0.0 0%	_	0.0 0%	_	0.0 0%	_	0.0 0%	_	0.0 0%	_	0.0 0%	_	0.0 0%	_	0.0 0%	_	0.0 0%	
SP	33.82	71.48	Vegetation	0.0		0.0		0.0		0.0		0.1		0.0		0.0		0.1		0.0		0.0		0.0		0.0		0.0	
-6	6327	3183	J	0%	-	9%	1	3%	8	0%	-	8%	3	0%	-	0%	-	4%	2	0%	-	0%	-	0%	-	0%	-	0%	-
SP -7	33.86 0915	71.36 6921	Vegetation	0.0 0%	_	0.0 0%		0.0 0%		0.0 0%		0.2 9%	1	0.0 0%		0.0 0%		0.0 0%		0.0 0%		0.0 5%	2	0.0 2%	1	0.2 1%	1	0.0 0%	
SP	33.88	71.30	Vegetation	4.7	-	1.8	-	0.0		0.0	-	0.0	1	0.0	-	0.0	-	0.0	-	0.0	-	0.1	2	0.0	1	0.2	1	0.0	_
-8	6577	4686	· egemmon	7%	5	7%	1	0%	-	0%	-	0%	-	0%	-	0%	-	0%	-	0%	-	5%	7	0%	-	4%	12	0%	-
SP	33.90	71.52	Agricultur	0.0		0.0		0.0		0.9		0.0		0.0		0.0		0.0		1.6		0.0		0.0		0.0		0.0	
-9 SP	4349 33.83	0222 71.45	al Fields	0%	-	0%	-	0%	-	9% 0.0	2	0%	-	8% 0.0	I	0%	-	0%	-	3% 0.0	2	0%	-	0%	-	0%	-	0% 1.5	
-10	5944	2661	Vegetation	0.0	-	0.0	-	0.0	-	0.0	-	0.0	-	0.0	-	0.0	-	0.0	-	0.0	-	4%	3	0.0	-	0.0	-	4%	1
				5.9 6%	7	2.4 9%	7	0.2 4%	22	2.5 1%	7	0.5 7%	9	0.0 8%	1	0.0 3%	6	0.1 4%	2	1.6 3%	2	0.4 4%	16	0.1 1%	7	0.4 5%	13	1.5 4%	1

	Melia azedarach		Morus nigra		Morus alba		Nerium oleander		Parthenium hysterophorus		Populus ciliata		Prosopis juliflora		Ricinus communis		Saccharum sp.		Salix spp.		Tamarix aphylla		Xanthium strumarium		Zizyphus sp.	Total Cover	Total count	Species Count
Cov er	Cou nt	Cov er	Cou nt	Cov er	Cou nt	Cov er	Cou nt	Cov er	Cou nt	Cov er	Cou nt	Cove	Cou nt	Cov er	Cou nt	Cov er	Cou	Cov er	Cou nt	Cov er	Cou nt	Cov er	Cou nt	Cov er	Cou nt			
0.00	III.	0.00	III	0.26	III.	0.00	nt	0.23		2.74	III	0.00	III	0.08	IIt	0.00	III	0.00	III	0.00	III	0.00	III.	0.00	III	3.57		
%	-	%	-	%	2	%	-	%	20	%	4	%	-	%	1	%	-	%	-	%	-	%	-	%	-	%	35	6
4.01	2	0.52 %	2	0.00	_	0.00	_	0.13	20	0.00	_	0.00	_	0.00	_	0.00	_	0.00	_	0.00	_	0.00	_	0.39	2	6.78 %	49	8
0.00	1	0.00		0.00		0.16		0.00		0.00		2.82		0.00		0.00		0.00		0.00		0.00		0.24		3.32		
%	-	%	-	%	-	%	3	%	-	%	-	%	18	%	-	%	-	%	-	%	-	%	-	%	4	%	31	5
0.00		0.00		0.00		0.00		0.00		0.00		6.87	10	0.00		0.00		0.00		0.00		0.00		0.77	2	7.73	10	_
0.00	+	0.00	-	0.00	-	0.00	_	0.01	-	0.00	-	1.62	12	0.00	-	0.00	_	0.00	-	0.00	-	0.00	-	0.75	2	4.00	18	3
%	-	%	-	%	_	%	-	%	6	%	_	%	9	%	-	%	_	%	_	%	-	%	_	%	1	%	22	5
0.00	1	0.00		0.00		0.00		0.00		0.00		0.71		0.00		0.00		0.00		3.19		0.00		0.00		4.33		
%	-	%	-	%	-	%	-	%	-	%	-	%	16	%	-	%	-	%	-	%	2	%	-	%	-	%	32	6
0.00		0.00		0.00		0.00		0.00		0.00		3.81	12	0.00		0.00		0.00		0.00		0.00		0.00		4.38	17	5
0.00	1	0.00	-	0.00	-	0.00		0.00	-	0.00	-	0.08	12	0.00	-	0.41	-	0.00	-	0.00	-	0.00	-	0.00	-	7.52	17	3
%	-	%		%	-	%		%	-	%	-	%	1	%	-	%	2	%	-	%	-	%	-	%	-	%	28	6
0.34	1	0.00		5.77	4	0.00		0.01		0.00		0.09	2	0.00		0.00		3.29	_	0.00		0.00		0.14	1	12.3	24	
%	1	%	-	%	4	%	-	%	6	%	-	%	2	%	-	%	-	%	5	%	-	%	-	%	1	4%	24	9
0.00	_	0.00	-	0.00	-	0.00	_	0.00	-	0.00	-	2.36	11	0.00	-	0.00	-	0.00	-	0.00	-	0.04	2	0.00	_	4.08 %	17	4
4.35		0.52		6.03		0.16		0.39		2.74		18.3		0.08		0.41		3.29		3.19		0.04		2.28		58.0		2
%	3	%	2	%	6	%	3	%	52	%	4	6%	81	%	1	%	2	%	5	%	2	%	2	%	10	5%	273	6

Table 2: Mammals Data

0	ıt	o.	<b>a</b>	Golden Jackal		Cape Hare		Five Striped Palm Squirrel				Sighting		Sign	
Location ID	Habitat	Latitude	Longitude	Canis aureus		Lepus capensis		Funambulus pennantii		Rodents Spp.		Tota/	Species Count	Tota/	Species Count
				Sighting	Sign	Sighting	Sign	Sighting	Sign	Sighting	Sign		Sp		Sp
SP-1	Agricultural Fields	33.930186	71.541678					1				1	1		
SP-2	Agricultural Fields	33.949936	71.386669					6			4	6	1	4	1
SP-3	Vegetation	33.954354	71.343669												
SP-4	Vegetation	33.856138	71.409163					1				1	1		
SP-5	Vegetation	33.912628	71.537355												
SP-6	Vegetation	33.826327	71.483183												
SP-7	Vegetation	33.860915	71.366921				3							3	1
SP-8	Vegetation	33.886577	71.304686	2								2	2		
SP-9	Agricultural Fields	33.904349	71.520222												
SP-10	Vegetation	33.835944	71.452661					1				1	1		
Total				2			3	9		_	4	11	2	7	2

Table 3:: Birds Data

S.NO	Sp	oecies	IUCN Status	CITES				Sai	mpling	Locatio	ns				Total
5.110	Common Name	Sciencetific Name		Appendices	SP-1	SP-2	SP-3	SP-4	SP-5	SP-6	SP-7	SP-8	SP-9	SP-10	1 Otai
1	Lemon-rumped Warbler	Phylloscopus chloronotus	Least Concern											2	2
2	Golden Oriole	Oriolus oriolus	Least Concern							2					2
3	Black Kite	Milvus migrans	Least Concern	II	1					3	7	3		5	19
4	Barn Swallow	Hirundo rustica	Least Concern		15	20				4	10	8	10	15	82
5	Shikra	Accipiter badius	Least Concern	II		1	1								2
6	Crested Lark	Galerida cristata	Least Concern					6			5			8	19
7	Little Green Bee Eater	Merops orientalis	Least Concern					10	6		7	4	10		37
8	Jungle Babbler	Turdoides striata	Least Concern									3			3
9	Common Babbler	Argya caudata	Least Concern			6		4						2	12
10	Common Myna	Acridotheres tristis	Least Concern		8	8			2				6	6	30
11	Bank Myna	Acridotheres ginginianus	Least Concern							8					8
12	Brown Rock Chat	Oenanthe fusca	Least Concern		2		2			2					6
13	Indian Roller	Coracias benghalensis	Least Concern		1										1
14	Black Drongo	Dicrurus macrocercus	Least Concern		1					1	2	2	4		10
15	Rufous Treepie	Dendrocitta vagabunda	Least Concern								1	1			2
16	Purple Sunbird	Cinnyris asiaticus	Least Concern									2			2
17	House Sparrow	Passer domesticus	Least Concern			20	30	6	2	3		8	4		73

18	House Crow	Corvus splendens	Least Concern	3				3	5				6	17
19	White cheeked Bulbul	Pycnonotus leucotis	Least Concern								2			2
20	White-throated Kingfisher	Halcyon smyrnensis	Least Concern									1		1
21	Red-vented Bulbul	Pycnonotus cafer	Least Concern		4		2		2		2	2		12
22	Eurasian Hoopoe	Upupa epops	Least Concern								1			1
23	Graceful Prinia	Prinia gracilis	Least Concern	1										1
24	Common Stonechat	Saxicola torquata	Least Concern		2						2			4
25	Little Egret	Egretta garzetta	Least Concern	8					6					14
26	Laughing Dove	Spilopelia senegalensis	Least Concern	1							1			2
27	White-browed Wagtail	Motacilla maderaspatensis	Least Concern										1	1
28	Spotted Dove	Spilopelia chinensis	Least Concern									2		2
29	Long-tailed Shrike	Lanius schach	Least Concern	1	2						1	2		6
30	Pied Bushchat	Saxicola caprata	Least Concern	3									2	5
31	Paddyfield Pipit	Anthus rufulus	Least Concern	8	10	6		8				6		38
32	Cattle Egret	Bubulcus ibis	Least Concern	15								3		18
	Total			68	73	39	28	21	36	32	40	50	47	434
	Total Spec	eies		14	9	4	5	5	10	6	14	11	9	32


Table 4: Herpetofauna Data

Location ID	Habitat	Latitude	Longitude	Indian Monitor Lizard	Agror Agama	Skittering Frog	Tota/	s Count
Locat	Ha	Lati	Long	Varanus bengalensis	Laudakia agrorensis	Euphlyctis cyanophlyctis	27	Species
SP-1	Agricultural Fields	33.930186	71.541678			2	2	1
SP-2	Agricultural Fields	33.949936	71.386669					
SP-3	Vegetation	33.954354	71.343669					
SP-4	Vegetation	33.856138	71.409163					
SP-5	Vegetation	33.912628	71.537355					
SP-6	Vegetation	33.826327	71.483183		1		1	1
SP-7	Vegetation	33.860915	71.366921					
SP-8	Vegetation	33.886577	71.304686	1			1	1
SP-9	Agricultural Fields	33.904349	71.520222			7	7	1
SP-10	Vegetation	33.835944	71.452661					
Total				1	1	9	11	3

# Annexure VI: IBAT Findings Report

APPENDIX B: FINDINGS OF THE IBAT ASSESSMENT

B.1 220kV Jamrud Substation along with 20 km TL

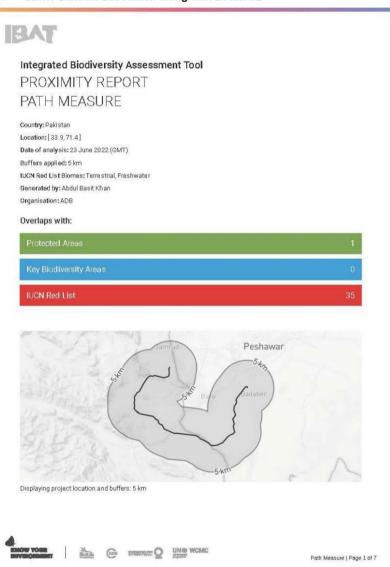



#### About this report

This report presents the results of [29327-31986] proximity analysis to identify the biodiversity features and species which are located within the following buffers: 5 km.

This report is one part of a package generated by IBAT on 23 June 2022 (GMT) that includes full list of all species, protected areas, Key Biodiversity Areas in CSV format, maps showing the area of interest in relation to these features, and a 'How to read BAT reports' document.

WARNING: BAT aims to provide the most up-to-date and accurate information available at the time of analysis. There is however a possibility of incomplete, incorrect or out-of-date information. All findings in this report must be supported by further desktop review, consultation with experts and/or on-the-ground field assessment. Please consult IBAT for any additional disclaimers or recommendations applicable to the information used to generate this report.

Please note, sensitive species data are currently not included in IBAT reports in line with the <u>Sensitive Data Access</u>  $\underline{\textit{Restrictions Policy for the IUCN Red List}}. This relates to sensitive Threatened species and KBAs triggered by sensitive$ 

#### Data used to generate this report

- UNEP-WOMC and IUCN, 2022. Protected Planet: The World Database on Protected Areas (WDPA)[On-line], Cambridge, UK: UNEP-WCMC and IUCN. Available at: www.protectedplanet.net - June 2022
- BirdLife International (on behalf of the KBA Partnership), 2022. Key Biodiversity Areas April 2022.
- IUCN, 2021. IUCN Red List of Threatened Species December 2021.
- IUCN, The IUCN Red List of Threatened Species, Version 2019-3, (2019), https://www.iucnredlist.org
- IUCN. Threats Classification Scheme (Version 3.2). (2019)
- Strassburg, B.B.N., Iribarrem, A., Beyer, F.L. et al. Global priority areas for ecosystem restoration. Nature 586, 724–729 (2020). https://doi.org/10.1038/s41586-020-2784-9











Path Measure | Page 2 of 7



#### Protected Areas

The following protected areas are found within 5 km of the area of interest. For further details please refer to the associated csv file in the report folder.



#### **Key Biodiversity Areas**

The following key biodiversity areas are found within 5 km of the area of interest. For further details please refer to the associated csv file in the report folder.

No KBAs within buffer distance

#### **IUCN Red List of Threatened Species**

The following threatened species are potentially found within 50km of the area of interest.

For the full IUCN Red List please refer to the associated csv in the report folder.

Species Name	Common Name	Taxonomic Group	IUCN Category	Population Trend	Biome
Vanellus gregarius	Sociable Lapwing	AVES	CR	Decreasing	Terrestrial
Gyps bengalensis	White-rumped Vulture	AVES	CR	Decreasing	Terrestrial
Sarcogyps calvus	Red-headed Vulture	AVES	CR	Decreasing	Terrestrial
Hardella thurjii	Crowned River Turtle	REPTIL A	EN	Decreasing	Terrestrial, Freshwater
Manis crassicaudata	Indian Pangolin	MAMMAL A	EN	Decreasing	Terrestrial











Path Measure | Page 3 of 7



Species Name	Common Name	Taxonomic Group	IUCN Category	Population Trend	Biome
Nilssonia gangetica	Indian Softshell Turtle	REPTIL A	EN	Decreasing	Terrestrial, Freshwater
Nifssonia hurum	Indian Peacock Softshell Turtle	REPTILIA	EN	Decreasing	Terrestrial, Freshwater
Oxyura leucocephala	White headed Duck	AVES	EN	Decreasing	Terrestrial, Freshwater
Rynchops albicollis	Indian Skimmer	AVES	EN	Decreasing	Terrestrial, Freshwater
Haliacetus leucoryphus	Pallass Fish eagle	AVES	EN	Decreasing	Terrestrial, Freshwater
Neophron percnopterus	Egyptian Vulture	AVES	EN	Decreasing	Terrestrial, Freshwater
Aquila nipalensis	Steppe Eagle	AVES	EN	Decreasing	Terrestrial
Falco cherrug	Saker Falcon	AVES	EN	Decreasing	Terrestrial, Marine, Freshwater
Tecomella undulata	Desert Teak	MAGNOLIOPSIDA	EN	Decreasing	Terrestrial
Tor putitora		ACT NOPTERYGII	EN	Decreasing	Freshwater
Glyptothorax stocki		ACT NOPTERYGII	EN	Decreasing	Freshwater
Glyptothorax sufii		ACT NOPTERYGII	EN	Decreasing	Freshwater
Batasio pakistanicus		ACT NOPTERYGII	EN	Unknown	Freshwater
Panthera pardus	Leopard	MAMMALIA	VU	Decreasing	Terrestrial











Path Measure | Page 4 of 7



Species Name	Common Name	Taxonomic Group	IUCN Category	Population Trend	Biome
Ursus thibetanus	Asiatic Black Bear	MAMMALIA	VU	Decreasing	Terrestrial
Pangshura tecta	Indian Roofed Turtle	REPTILIA	VU	Decreasing	Terrestrial, Freshwate
Saara hardwickii	Indian Spiny tailed Lizard	REPTIL A	VU	Decreasing	Terrestrial
Marmaronetta angustirostris	Marbled Teal	AVES	VΠ	Decreasing	Terrestrial, Marine, Freshwate
Aythya ferina	Common Pochard	AVES	VU	Decreasing	Terrestrial, Marine, Freshwate
Sterna aurantia	River Tern	AVES	VU	Decreasing	Terrestrial, Marine, Freshwate
Clanga clanga	Greater Spotted Eagle	AVES	VU	Decreasing	Terrestrial, Freshwate
Aquila rapax	Tawny Eagle	AVES	VU	Decreasing	Terrestrial, Freshwate
Aquila heliaca	Eastern mperial Eagle	AVES	VU	Decreasing	Terrestrial, Freshwate
Ovis vignei	Urial	MAMMALIA	VU	Decreasing	Terrestrial
Lissemys punctata	Indian Flapshell Turtle	REPTILIA	VU	Decreasing	Terrestrial, Freshwate
Wallago attu		ACT NOPTERYGII	VU	Decreasing	Freshwate
Bagarius yarrelli		ACT NOPTERYGII	VU	Decreasing	Freshwate











Path Measure | Page 5 of 7



Species Name	Common Name	Taxonomic Group	IUCN Category	Population Trend	Biome
Paraschistura alepidota		ACT NOPTERYGII	VU	Decreasing	Freshwater
Paraschistura microlabra		ACT NOPTERYGII	VU	Unknown	Freshwater
Schistura kohatensis		ACT NOPTERYGII	VU	Decreasing	Freshwater









Path Measure | Page 6 of 7



#### Recommended citation

IBAT Proximity Report. Generated under licence 29327-31986 from the Integrated Biodiversity Assessment Tool on 23 June 2022 (GMT). www.ibat-alliance.org

#### How to use this report

This report provides an indication of the potential biodiversity-related features - protected areas, key biodiversity areas and species - close to the specified location. It provides an early indication of potential biodiversity concerns, and can provide valuable guidance in making decisions. For example, this information can be helpful when assessing the potential environmental risk and impact of a site, categorising investments/projects, preparing the terms of reference for an impact assessment, focusing attention on key species of conservation concern and sites of known conservation value, and reviewing the results of an impact assessment.

The report does not provide details of potential indirect, downstream or cumulative impacts. Furthermore, the report should be regarded as a "first-step", providing a set of conservation values sourced from global data sets, and is not a  $substitute \ for further \ investigation \ and \ due \ diligence, especially \ concerning \ national \ and/or \ local \ conservation \ priorities.$ 











Path Measure | Page 7 of 7

## Annexure VII: Consultation Material

# **Background Information Document**

# 220kV Jamrud Substation along with associated 20 km 220 kV Transmission Line

#### Introduction

The Government of Pakistan (GoP) signed a loan agreement with the Asian Development Bank (ADB) for financial support for the construction of the Power Enhancement Projects in Pakistan.

The overall objective of the project is to increase the power transmission capacity, efficiency, and coverage in Pakistan. It is also meant to increase the confidence of commercial financiers in financing long-term transmission and distribution assets in Pakistan. The specific objectives are:

- Improvement in transmission infrastructure and management.
- Improvement in Energy Market Transparency and efficiency

### 220kV Jamrud Substation along with associated 20 km 220 kV Transmission Line

220kV substation at Jamrud with two 220/132kV, 250 MVA transformers along with allied equipment and accessories.

220kV double circuit transmission line on twin bundle Rail conductor from Jamrud to 500 kV Peshawar (Sheikh Muhammadi) Grid Station (20km)

The layout plan of the substation, which involves various installations of equipment, control room and ancillary facilities are standardized by NTDC. NTDC has developed design parameters for the planning and design of transmission systems in Pakistan. The design parameters are based on standard NTDC's existing specifications and practices for the existing as well as proposed Grid stations and transmission lines.

### **Study Scope**

This IIE is required to prepare to meet the requirements of ADB's SPS 2009 for project and loan approval, IEE study is required to be conducted as the project was categorized as 'B' during a Rapid Environmental Assessment by NTDC.

NTDC will develop an EIA later for meeting local regulations and obtaining approval from KP EPA.

#### Approach to IEE

The Project IEE will ensure, the proposed Project is in compliance with the environmental and social safeguards laid out by ADB and international best practices.

The major components of the IEE include:


- comprehensive baseline studies to characterize the existing socioeconomic and biophysical environment.
- a public consultation process to ensure that project stakeholders are informed of the project development plan and have an opportunity to influence it;

- a comprehensive analysis of the environmental and social impacts of the project, both negative and positive; and,
- so the development of impact mitigation plans and an environmental management plan.

A brief overview of the conceptual components of an IEE process that meets ADB Environment and Social Safeguards, and international standards is given in **Exhibit 2**.

A preliminary list of the potential environmental and social impacts of the Project that will be investigated during the IEE is provided below.


- Damage to vegetation and wildlife in the area.
- © Effluent from the Project impacts the biodiversity and ecological functions.
- © Construction-related impacts such as noise and dust.
- © Dust, noise, vibration, road congestion, and safety hazard from truck traffic carrying construction materials; and,
- Social and ecological impacts of construction-related activities.

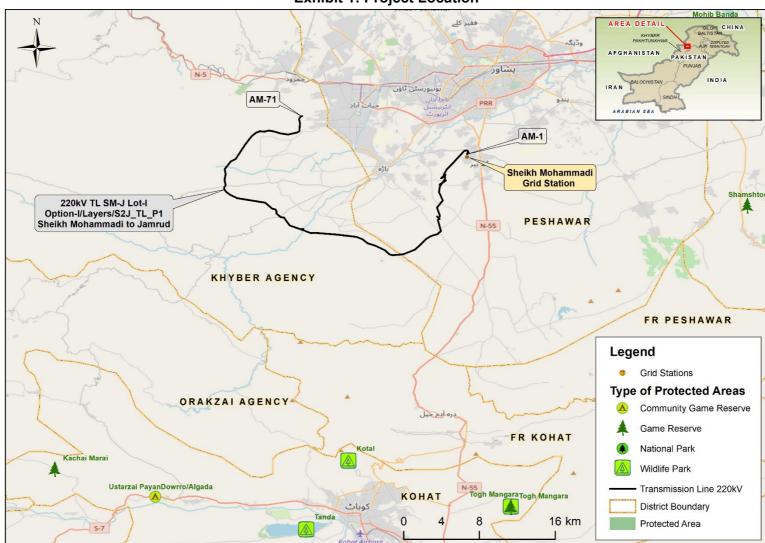

**Exhibit 1: Project Location** 

**Exhibit 2: Conceptual Components of an IEE Process** 

Component	Main purpose	Activities related to Stakeholder Consultations
Scoping	<ul> <li>Identify the issues on which the IEE should focus.</li> <li>Identify project alternatives that should be evaluated during the IEE.</li> </ul>	<ul> <li>Identify institutional and community stakeholders</li> <li>Engage stakeholders and record issues raised</li> <li>Provide feedback to the IEE team to incorporate stakeholders' concerns in baseline investigations and impact assessment</li> </ul>
Baseline investigations	Collect background information on the environmental and social setting of the project.	<ul> <li>Incorporate additional issues raised during the baseline survey</li> </ul>
Impact assessment, studies	<ul> <li>Define the potential impacts of the project</li> <li>Undertake specialist investigations to predict changes to the environment due to the project</li> <li>Determine the significance of the potential impacts</li> <li>Identify measures for the management of the impacts</li> <li>Determine the residual impacts of the project after incorporation of the management measures.</li> <li>Evaluate the overall acceptability of the project (from environmental and social perspectives).</li> </ul>	Assess issues raised by stakeholders
Mitigation Measures and management plan	<ul> <li>The environmental mitigation and monitoring plan will describe the measures proposed to ensure the implementation of the mitigation measures identified during the impact assessment. It will include, for example, specific designs and plans, training requirements, resource requirements, monitoring details (sampling locations, methodology, and frequency), review and reporting requirements and budget.</li> </ul>	<ul> <li>Assess the acceptability and practicability of the proposed mitigation measures</li> </ul>
IEE Report Preparation	After the studies, the IEE team will pull together a detailed assessment of impacts and mitigation measures. This may involve liaison with various specialists to ensure the correct interpretation of information and compilation of the IEE report.	Compilation of draft report
IEE submittal to ADB for decision making	<ul> <li>Submittal and review of the IEE report by ADBs and other interested stakeholders. The reviewers will inform about their decision on the acceptability of the Project from environmental and social perspectives and the conditions of approval for the development</li> </ul>	<ul> <li>respond to the issues and questions raised by ADB and the proponent for finalizing the report.</li> </ul>
For more informat	tion on the IEE contact	
	For Project Proponent Muhammad Irfan	s:



# **Annexure VII: Consultation Logs**

(Community Consultation)

# **Record of the Consultation Meeting**

Stake	holder/s	Community/ Village Fort Slop		
Cons	ultation	Community Consultation (Male)		
Date		September 03,2022		
Time		11:05 am		
Meeti	ng venue	Village Kula Khel		
Attended by and		Fazal Malik	0332-9181092	
conta	ct details	Iqbal Ameen	0307-0525387	
		Rahim Ullah	NA	
		M Shahid	NA	
Cond	Conducted by Romaan Hayat Khattak			
Reco	rded by	Romaan Hayat Khattak		
Revie	ewed by	by		
Langı	uage	Pashto		
propo		Team briefed the objective of the consultation and shared information on the proposed Project its activities and location followed by the recording of opinion expressed by the department.		
Pictur	Picture			
No.	Issues, Concerns and Suggestions			
1	Ensure minimum wastage of crops & orchids. Avoid construction during the peak cropping season i.e. July to Sep			
2	Company workers should take care of the local culture during the installation of T/L.  During the construction phase, labor and general workers should be inducted from the adjoining villages/areas			
3	Employment should be given to local men			
4	Community should be provided early information before the start of work			
i .	1			

# **Record of the Consultation Meeting**

Stakeholder/s	Community/ Village Jhansi Bara
Consultation	Community Consultation (Male)

Date		September 03,2022		
Time		01:05 pm		
Meeti	ng venue	Village Jhansi		
Attended by and		Abdul Aziz	3065949393	
conta	ct details	Kamal Khan	3009358180	
		janbar khan	NA	
		Hazrat Gul	3025769194	
		Muhammad amin	NA	
Cond	ucted by	y Romaan Hayat Khattak		
Reco	orded by Romaan Hayat Khattak			
Revie	Reviewed by			
Language Pashto				
Preamble		Team briefed the objective of the consultation and shared information on the proposed Project, its activities and location followed by the recording of opinion expressed by the department.		
Pictur	Picture			
No.	Issues, Conce	ssues, Concerns and Suggestions		
1	The company	he company should gaurantee to provide jobs to local people		
2	Since the electricity situation is poor in the area, locals hope to have a regular supply of electricity through this project			
3	Outsiders should respect the culture and privacy of the local people			
4	The Project should provide compensation for land, crops, and trees			
5	The Project should help solve local water problems			

# **Record of the Consultation Meeting**

Stakeholder/s	Community/ Village Dora	
Consultation	Community Consultation (Male)	
Date	September 03,2022	
Time	03:00 Pm	
Meeting venue	Village Dora	
Attended by and contact details	Adil Nawaz	0309-2051379
	Sajjad Khan	NA
	Attaullah	0323-5194427

Cond	Conducted by Romaan Hayat Khattak		
Recorded by Romas		Romaan Hayat Khattak	
Revie	ewed by		
Langi	uage	Pashto	
Prear	Preamble  Team briefed the objective of the consultation and shared information o proposed Project, its activities and location followed by the recording opinion expressed by the department.		
Pictu	Picture		
No.	Issues, Concerns and Suggestions		
1	Ensure minimum wastage of crops & orchids. Avoid construction during the peak cropping season i.e. July to Sep		
2	Company workers should take care of the local culture during the installation of T/L  During the construction phase, labor, and general workers should be inducted from the adjoining villages/areas		
3	Employment should be given to local men		
4	Community should be provided early information before the start of work		

# **Record of the Consultation Meeting**

Stakeholder/s	Community/ Village Bazid Khel	
Consultation	Community Consultation (Male)	
Date	September 03,2022	
Time	04:300 Pm	
Meeting venue	Village Bazid Khel	
Attended by and	Ismail	3159297661
contact details	Zahid	NA
	Jadan khan	NA
	Mohammad Sajid	3109917393
Conducted by	Romaan Hayat Khattak	
Recorded by	Romaan Hayat Khattak	
Reviewed by		
Language	Pashto	

Preamble		Team briefed the objective of the consultation and shared information on the proposed Project, its activities and location followed by the recording of opinion expressed by the department.
Picture		
No.	Issues, Conc	erns and Suggestions
1	The land compensation value should be calculated once full project design and plan i share with locals and before the commencement of the project	
2	Locals expect to get electricity at a cheaper rate.	
3	Local people should be preferred for daily wages and any permanent jobs related to the project	
4	In case crops are damanged during construction, it should be compensated	
5	Locals expect the project will improve their roads condition	

Stakeholder/s		Community/ Village Suleman Khel		
Consultation		Community Consultation (Male)		
Date		September 04,2022		
Time		12:00 Pm		
Meeti	ng venue	Village Suleman Khel		
Attend	,	Abdullah Jan	0321-9857293	
conta	ct details	Mohammad Yousaf	0305 3918184	
		Alam Khan	NA	
		Abdul Jalil	NA	
		Usman Ghani	NA	
Conducted by		Romaan Hayat Khattak		
Reco	rded by	Romaan Hayat Khattak		
Revie	wed by			
Langu	uage	Pashto		
Preamble		Team briefed the objective of the consultation and shared information on the proposed Project, its activities and location followed by the recording of opinion expressed by the department.		
Picture				
No.	Issues, Conce	oncerns and Suggestions		
1	Ensure minim season i.e. Ju	nimum wastage of crops & orchids.Avoid construction during the peak cropping July to Sep		
2	Company workers should take care of the local culture during the installation of T/L			
	During the construction phase, labor and general workers should be inducted from the adjoining villages/areas			

3	Employment should be given to local men	
4	Community should be provided early information before the start of work	

Stake	Stakeholder/s Community/ Village Masho Gagar			
Consultation		Community Consultation (Male)		
Date		September 04,2022		
Time		02:00 Pm		
Meeti	ng venue	Village Masho Gagar		
Attended by and		Abdul Mateen		
conta	ct details	Mohammad Yousaf		
		Tariq Jan	03219956030	
		Abdul Wahid		
Conducted by		Romaan Hayat Khattak		
Recorded by		Romaan Hayat Khattak		
Reviewed by				
Langu	uage	Pashto		
Preamble		Team briefed the objective of the consultation and shared information on the proposed Project, its activities and location followed by the recording of opinion expressed by the department.		
Pictur	·e			
No.	Issues, Conce	cerns and Suggestions		
1	Public health	ealth and safety should be ensured		
2	Locals should be hired for job opportunties instead of outsiders			
3	The Project team and workers should respect the local culture and privacy			
4	Crops and trees should not be damaged			
5	Project should not cause damage to any pastures located in the area			

# **Record of the Consultation Meeting**

Stakeholder/s	Community/ Village Fort Slop
Consultation	Community Consultation (Female)
Date	September 03,2022
Time	11:05 am
Meeting venue	Village Kula Khel

Attended by and contact details		Rasheeda	3089392220
		Khayal Meena	NA
		Pat Khela	NA
		Almasa	NA
		Alak Meena	NA
Cond	ucted by	Shumaila Murtaza	
Reco	rded by	Shumaila Murtaza	
Revie	ewed by		
Lang	uage	Pashto	
Preamble		Team briefed the objective of the consultation and shared information on the proposed Project, its activities and location followed by the recording of opinion expressed by the department.	
Pictu	re		
No.	Issues, Conce	erns and Suggestions	
1	Education institutions are in the worst condition in t teachers with a minimal amount of training .There is syllabi in public and private education sectors		
2	Should they r	e area have a major concern about how make some committees for this purpos nent projects like other organization (W	e. As there are committees who work
3	Unemployment is another major social issue in the area as a major part of its younemployed		area as a major part of its youth is
4	Lack of institu	ites that teach technical skills.	

Stakeholder/s	Community/ Village Jhansi		
Consultation	Community Consultation (Female)		
Date	September 03,2022		
Time	01:05 pm		
Meeting venue	Village Jhansi		
Attended by and contact details			
	Meharbana	NA	
	Bas Naza	3336019213	
	Jan Maroo	NA	
	Sajida	NA	

		Awal Khela	NA
Conducted by		Shumaila Murtaza	
Recorded by		Shumaila Murtaza	
Revie	ewed by		
Lang	uage	Pashto	
Preamble		Team briefed the objective of the consultation and shared information on the proposed Project, its activities and location followed by the recording of opinion expressed by the department.	
Picture			
No.	Issues, Conc	erns and Suggestions	
1	Poverty issue	in the community. Large family sizes a	nd very little earning.
2	Women of the area demanded vocational training and education centers for skill learning		d education centers for skill learning.
3	Parents spend a huge amount of money on their children's education, but the jobs are very rare and prove indefinable in today's era. Sadly, the government is not taking any action on the unemployment problem in the area due mismanagement of public funds. The Project should ensure employment opportunities for locals.		the government is not taking any mismanagement of public funds.
4	Well recognized training and technical institutions need to be established		

Stakeholder/s	Community/ Village Dora		
Consultation	Community Consultation (Female)		
Date	September 03,2022		
Time	01:05 pm		
Meeting venue	Village Dora		
Attended by and	Hussan Zari	3479495878	
contact details	Muniba	3329366615	
	Arifa Bibi	NA	
	Lal Zari	NA	
	Jarida Bibi	NA	
Conducted by	Shumaila Murtaza		
Recorded by	Shumaila Murtaza		
Reviewed by			
Language	Pashto		
Preamble	Team briefed the objective of the consultation and shared information on the proposed Project, its activities and location followed by the recording of opinion expressed by the department.		

Picture		
No.	Issues, Concerns and Suggestions	
1	The schools and health sectors should be provided with some funds	
2	Jobs should be created for locals	
3	Locals should be provided with reliable and economical viable electricity supply	
4	The Project should not cut trees and crops in the area	

Stakeholder/s Community/ Village Bazid Khel				
Consultation		Community Consultation (Female)		
Date		September 03,2022		
Time		01:05 pm		
Meeti	ng venue	Village Bazid Khel		
	ded by and ct details			
		Ziyati Gula	3369699566	
		zaman Khda	NA	
		Kaptan Zaro	NA	
		Shameena Bibi	NA	
Conducted by		Shumaila Murtaza		
Reco	rded by	Shumaila Murtaza		
Revie	wed by			
Langu	uage	Pashto		
Preamble		Team briefed the objective of the consultation and shared information on the proposed Project, its activities and location followed by the recording of opinion expressed by the department.		
Pictur	·e			
No.	Issues, Conce	erns and Suggestions		
1	Proper care s	hould be taken for public safety and health		
2	Employment	should be given to local men		
3	Community s	should be provided with early information before the start of work		
4		mpany workers should take care of the local culture during the installation of T/L		
	During the construction phase, labor and general workers should be inducted from the adjoining villages/areas			

# **Record of the Consultation Meeting**

Stake	keholder/s Community/ Village Suleman Khel			
		, ,		
Consultation		Community Consultation (Female)		
Date		September 04,2022		
Time		01:05 pm		
Meetir	ng venue	Village Suleman Khel		
	ded by and	Zartoba	3088143838	
contac	ci details	Nisana	3038966783	
		Robina	NA	
		Hussan Zari	NA	
Conducted by		Shumaila Murtaza		
Recorded by		Shumaila Murtaza		
Revie	wed by			
Langu	ıage	Pashto		
Preamble		Team briefed the objective of the consultation and shared information on the proposed Project, its activities and location followed by the recording of opinion expressed by the department.		
Picture	е			
No.	Issues, Conce	es, Concerns and Suggestions		
1	Government should provide more facilities to investors to increase the investments and helpreduce unemployment.			
2	Reduce the rate of tax.			
3	Allocate more funds for education to increase the literacy rate.			
4	Proper employment should be provided to the local community.			

Stakeholder/s	Community/ Village Masho Gagar		
Consultation	Community Consultation (Female)	Community Consultation (Female)	
Date	September 04,2022		
Time	03:05 pm		
Meeting venue	Village Masho Gagar		
Attended by and contact details			
	Basra	3458245888	
	Rehana	NA	
	Hajia	NA	

		Kishwara	NA
		Shahida NA	
Cond	ucted by	Shumaila Murtaza	
Reco	rded by	Shumaila Murtaza	
Revie	ewed by		
Langı	uage	Pashto	
Prear	nble	Team briefed the objective of the consultation and shared information on the proposed Project its activities and location followed by the recording of opinion expressed by the department.	
Pictur	re		
No.	Issues, Conc	sues, Concerns and Suggestions	
1	Locals live under the threat of getting killed in a blast or by a target killer. While leaving the house, people are not sure whether they will return safely or not. The government should ensure peace and stability in the area.		ey will return safely or not. The
2	<b>Load shedding</b> is a major issue in the area. New power generation facilities should be developed to ensure reliable power supply to the area.		
3	A huge number of Afghan refugees are staying in Pakistan. They live in slums and have no jobs. Government should provide these people with the opportunity to work and to involve in the betterment of the country.		
4	Efforts should be made to eradicate poverty through education, skill development, and job opportunities in society. Maintaining law and order situation in the area.		

# **Institutional Consultation logs**

# **Record of the Consultation Meeting**

Stakeholder/s:	Wildlife Department Khyber Division	
Consultation:	Stakeholder Consultation for 220 KV Jamrud Substation and associated transmission lines at ADB	
Date:	1st September, 2022	
Time:	11:00am	
Meeting Venue:	DFO, Wildlife Khyber	
Attended By:		
Name	Designation Contact #	
Abdul Haleem Khan	DFO Wildlife 03448303119	
HBP Representatives:	Romaan Hayat Khatak (RH), Shumaila Murtaza (SM)	
Stakeholder Representatives:	Abdul Haleem Khan	
Conducted by:	RH, SM	
Recorded by:	SM	

Language:	English, Urdu, Pashto
Preamble:	SM briefed the objective of the consultation and shared information on the proposed Project its activities and location followed by the recording of opinion expressed by the department.

#### Issues, Concerns and Suggestions

Ensure there is minimum damage to natural habitats near the buffer zones of transmission lines

Divisional Forest Officer asked to provide complete details of the project outlines and execution maps, for better understanding. It would be used to visit the sites to get a complete insights regarding species

Compensation for tree losses should be resolved with the landowners. The forest department can play role in calculating the market values

The contractor should engage the local poor communities in ongoing works by providing job opporunities

The contractor should minimize the cutting down of the orchards and trees on as minimum as possible basis.

The Divisional Forest Officer Khyber Wildlife Division offered full support to the project, adding that existing wild fauna will not be much affected. However, the department needs to visit areas specially where poles will be installed to investigate any wildlife presence

Checklist of any wild fauna encountered during the Project implementation should be recorded and subsequently shared with the wildlife department.

### **Record of the Consultation Meeting**

Stakeholder/s:	Forest Department, Khyber Division	
Consultation:	Stakeholder Consultation for 220 kV Jamrud Substation and associated transmission lines at ADB	
Date:	31st August, 2022	
Time:	10:30am	
Meeting Venue:	DFO Forest Department Khyber Division	
Attended By:		
Name	Designation	Contact #
Shakeel Khan	DFO, Forest Department Khyber Division	03009323600
HBP Representatives:	Romaan Hayat Khatak (RH), Shumaila Murtaza (SM)	
Stakeholder Representatives:	Shakeel Khan	
Conducted by:	RH, SM	
Recorded by:	SM	
Language:	English, Urdu	

	SM briefed the objective of the consultation and shared information on the proposed Project its activities and location followed by the recording of opinion expressed by the department.	
Issues, Concerns and Suggestions		

Proper and exact locations for poles installation should be provided, so that the department can estimate the tree loss in the process, only if it falls in their jurisdiction as Govt property

The Divisional Forest officer offer generous support in sorting out trees stewardship and calculation of trees market values on behalf and for communities if needed.

Note down girth and species carefully while estimation of compensation amount

Compensation against the loss of the crops/trees should be paid effectively and timely. The revenue department should be consulted for compensation of damaged as per local rates.

### **Record of the Consultation Meeting**

Stakeholder/s:	National High Way Authority, KP	
Consultation:	Stakeholder Consultation for 220 kV Jamrud Substation and associated transmission lines at ADB	
Date:	31st August, 2022	
Time:	01:30pm	
Meeting Venue:	AD, NHA KP	
Attended By:		
Name	Designation	Contact #
Muhammad Farooq	AD, NHA KP	03138487654
HBP Representatives:	Romaan Hayat Khatak (RH), Shumaila Murtaza (SM)	
Stakeholder Representatives:	Muhammad Farooq	
Conducted by:	RH, SM	
Recorded by:	SM	
Language:	English, Urdu	
Preamble:	SM briefed the objective of the consultation and shared information on the proposed Project its activities and location followed by the recording of opinion expressed by the department.	
Issues, Concerns and Suggestions		
It is suggested to hire local workers during the construction process if suitable for any work		
Before the commencement of the project a proper NoC should be acquired from National Highway Authority		

### **Record of the Consultation Meeting**

Consultation:	Stakeholder Consultation for 220 kV Jamrud Substation and associated transmission lines at ADB		
Date:	31 <sup>st</sup> August, 2022		
Time:	03:30pm		
Meeting Venue:	Foundation for Rural Development (FRD)		
Attended By:			
Name	Designation	Contact #	
Azmat Khan	Chief Executive Officer	03457776661	
HBP Representatives:	Romaan Hayat Khatak (RH), Shumaila Murtaza (SM)		
Stakeholder Representatives:	Azmat Khan		
Conducted by:	RH, SM		
Recorded by:	SM		
Language:	English, Urdu		
Preamble:	SM briefed the objective of the consultation and shared information on the proposed Project its activities and location followed by the recording of opinion expressed by the department.		
Issues, Concerns and Suggestions			
The contractors should conduct a detailed preliminary survey focusing on health-related impacts of the project on the inhabitants of the area, with special emphasis on the electromagnetic waves			
Compensation schemes should be provided timely and based on ground realities			
The negative impact on the environment from the source of power generation and transmission lines should be investigated.			

Stakeholder/s:	Forest Department, Pehsawar Division		
Consultation:	Stakeholder Consultation for 220 kV Jamrud Substation and associated transmission lines at ADB		
Date:	12, September, 2022		
Time:	10:30am		
Meeting Venue:	DFO Forest Department Peshawar Division		
Attended By:	Attended By:		
Name	Designation Contact #		
Tariq Khan	DFO, Forest Department Peshawar Division 03470069496		
HBP Representatives:	Shumaila Murtaza (SM), Zikria Khan (ZK)		
Stakeholder Representatives:	Tariq Khan		
Conducted by:	SM, ZK		

Recorded by:	SM	
Language:	English, Urdu	
Preamble:	SM briefed the objective of the consultation and shared information on the proposed Project its activities and location followed by the recording of opinion expressed by the department.	
Issues, Concerns and Suggestions		
We have 2 plantation projects going on in "Masho Gagar" and "Sulyman khel Canal". At present we do not see any particular objection regarding this area. We want our team member Mr.Usman (Subdivision Forest officer) to visit the area with your team. After the visit we will decide what suggestions we will be made for the IEE.		
The contractor will inform the locals before commencing the construction works		

Stakeholder/s:	Irrigation Department, Peshawar/Khyber	
Consultation:	Stakeholder Consultation for 220 kV Jamrud Substation and associated transmission lines at ADB	
Date:	12, September, 2022	
Time:	01:30pm	
Meeting Venue:	Irrigation Department, Peshawar/Khyber	
Attended By:		
Name	Designation	Contact #
Eng. Kalsoom , Hussain Ali	Deputy Director, Scientist	0301891127
HBP Representatives:	Shumaila Murtaza (SM), Zikria Khan (ZK)	
Stakeholder Representatives:	Eng. Kalsoom, Hussain Ali	
Conducted by:	SM	
Recorded by:	SM	
Language:	English, Urdu	
Preamble:	SM briefed the objective of the consultation and shared information on the proposed Project its activities and location followed by the recording of opinion expressed by the department.	
Issues, Concerns and Suggestions		
In this TL we don't see any h project	narm in our projects so we don't have any cor	ncerns regarding this
Efforts should be made to ensemble Project should not cause any	sure peace and stability in the area. risk to stability in the area	

# **Record of the Consultation Meeting**

Environmental Protection Agency ,Khyber / Peshawar	
--	--

Consultation:	Stakeholder Consultation for 220 kV Jamrud Substation and associated transmission lines at ADB		
Date:	9 <sup>th</sup> , September, 2022		
Time:	02:30am		
Meeting Venue:	Environmental Protection Agency ,Khyber / P	eshawar	
Attended By:			
Name	Designation	Contact #	
Adil Khan	AD, EPA	03449291248	
HBP Representatives:	Shumaila Murtaza (SM),		
Stakeholder Representatives:	Adil Khan		
Conducted by:	SM		
Recorded by:	SM		
Language:	English, Urdu		
Preamble:	SM briefed the objective of the consultation and shared information on the proposed Project its activities and location followed by the recording of opinion expressed by the department.		
Issues, Concerns and Sugges	stions		
Many problems have arisen due to tribal conflicts like Sepah Bara which are exemplified in the PCSP CASA 1000 project. It is a good move that you are consulting the local people of the area before starting the project.			
Dust and noise should be mir	nimum near the residential areas		

Stakeholder/s:	CECOS university Peshawar		
Consultation:	Stakeholder Consultation for 220 kV Jamrud Substation and associated transmission lines at ADB		
Date:	8th , September, 2022		
Time:	02:30am		
Meeting Venue:	CECOS university Peshawar		
Attended By:			
Name	Designation Contact #		
Miss Imaan	Head of Department, CECOS University Peshawar		
HBP Representatives:	Shumaila Murtaza (SM),		
Stakeholder Representatives:	Miss Imaan		
Conducted by:	SM		

Recorded by:	SM	
Language:	English, Urdu	
Preamble:	SM briefed the objective of the consultation and shared information on the proposed Project its activities and location followed by the recording of opinion expressed by the department.	
Issues, Concerns and Suggestions		
Power shortage is a major issue. Consistent and economical power supply should be provided to the area		
There is a lot of power crisis in our country. It is good to reduce power shortage through such projects.		

Stakeholder/s:	Govt. High School Qambar Khel Bara.Khyber		
Consultation:	Stakeholder Consultation for 220 kV Jamrud Substation and associated transmission lines at ADB		
Date:	8th , September, 2022		
Time:	11:30am		
Meeting Venue:	Govt. High School Qambar Khel Bara.Khyber		
Attended By:			
Name	Designation	Contact #	
Musafir Shah	Headmaster	03339118231	
HBP Representatives:	Shumaila Murtaza (SM), Zikria Khan (ZK)		
Stakeholder Representatives:	Musafir Shah		
Conducted by:	SM		
Recorded by:	SM		
Language:	English, Urdu		
Preamble:	SM briefed the objective of the consultation and shared information on the proposed Project its activities and location followed by the recording of opinion expressed by the department.		
Issues, Concerns and Sugge	stions		
	nsmission lines should be kept safe from any sise the yield and quality of crops	sort of contaminants,	
There should be no damage something should be done.	e to the property of our area and for the we	II-being of the area,	

### **Annexure VIII: Dust Management Plan**

Every effort to minimize dust pollution on the site must be undertaken. The contractor must implement the following measures with regards to the management of dust on site:

The most important dust control measure is achieved by maintaining as much of the vegetative cover as possible (the method of securing panels with minimal excavations supports this measure).

The recommendations made with regard to the demarcation of no-go areas are important in this regard.

- Construction vehicles must adhere to speed limits and minimization of haul roads must be implemented
- During dry, dusty periods haul roads should be kept dampened to prevent excess dust. No potable water may be used for damping haul roads
- All vehicles used to deliver or remove loose material (sand, soil, gravel etc.) to and from the site must be covered with a 60% shade cloth to avoid dust blowing from the vehicle
- As an alternative, products such as Road Environment Dust Suppressants (REDS) would be recommended to minimize the use of water to control dust pollution. This is to be determined by the contractor during construction as required, and
- Exposed stockpile materials must be adequately protected against the wind (covered) and should be sited in consideration of the prevailing wind conditions.

Apart from those measures detailed above, the following additional measures must be implemented:

- Dust nuisances shall comply with the applicable standards according to the Occupational Health and Safety plan. The contractor shall be solely responsible for the control of dust arising from the contractor's operations and for any costs against the Employer for damages resulting from dust
- The contractor shall take all reasonable measures to minimize the generation of dust as a result of construction activities to the satisfaction of the Client)
- Removal of vegetation shall be avoided until such time as soil stripping is required and similarly exposed surfaces shall be re-vegetated or stabilized as soon as is practically possible
- Excavation, handling, and transport of erodible materials shall be avoided under high wind conditions or when a visible dust plume is present
- During high wind conditions the site manager, with input from the contractor, must evaluate the situation and make recommendations as to whether dust damping measures are adequate, or whether work should cease altogether until the wind speed drops to an acceptable level
- Where possible, soil stockpiles shall be located in sheltered areas where they
  are not exposed to the erosive effects of the wind. Where erosion of stockpiles

- becomes a problem, erosion control measures shall be implemented at the discretion of the site manager
- Vehicle speeds shall not exceed 40km/h along dust roads or 20km/h when traversing unconsolidated and non-vegetated areas
- Appropriate dust suppression measures shall be used when dust generation is unavoidable, e.g. dampening with water or use of REDS, particularly during prolonged periods of dry weather in summer. Such measures shall also include the use of temporary stabilizing measures (e.g. chemical soil binders, straw, brush packs, clipping etc.)
- Straw stabilization shall be applied at a rate of one bale per 10m² and harrowed
  into the top 100mm of top material for all completed earthworks (i.e. all those
  areas that are not hard surfaced as part of the Solar Facility). This is only
  relevant to areas disturbed through the construction activities (such as cable
  trenches) and not areas where vegetation remains intact, and
- Should water be used for dust suppression on gravel roads, it must be of quality compliant with the General Special Effluent Standards (31/03/2009): Temperature: max.25°C, pH: between 5.5 & 7.5 and conductivity: not be increased more than 15% above the intake water & not exceed 250 milliSiemens per meter (determined at 25°C). The water used for dust suppression must be sourced from a licensed resource.

### **Annexure IX: Chance Finds Procedure**

#### CHANCE FIND PROCEDURES

The proposed project may involve deep excavation. Therefore the possibility of chance find is not ignorable. In case of any chance find, the contractor will immediately report through Supervision Consultant to Directorate General (DG) of Archeological Department, Punjab to take further suitable action to preserve those antiques or sensitive remains. Representative of the DG will visit the site and observed the significance of the antique, artifact and Cultural (religious) properties and significance of the project. The report will be prepared by representative and will be given to the DG. The documentation will be completed and if required suitable action will be taken to preserve those antiques and sensitive remains.

In case any artifact, antiques and sensitive remains are discovered, chance find procedures should be adopted by contractor(s) as follows:

- Stop the construction activities in the areas of chance find;
- Delineate the discovered site or area;
- Consult with the local community and provincial Archeological Department;
- The suggestion of the local communities and the concerned authorities will be suitably incorporated during taking the preventive measures to conserve the antique, artifact and cultural (religious) properties;
- Secure the site to prevent any damage or loss of removable objects. In case of removable antiquities or sensitive remain, a night guard should be arranged until the responsible local authorities take over; and
- After stopping work, the contractor(s) must immediately report the discovery to the Resident Engineer.

### **Annexure X: Traffic Management Plan**

The Construction Contractor will develop a traffic management plan covering the following headings.:

**Table of Contents** 

- 1 Overview
- 1.1 Introduction
- 1.2 Purpose of this Plan
- 1.3 Legislative Requirements
- 2 Project Overview
- 2.1 Works Overview
- 3 Location of Works
- 3.1 Road Occupancy Approval
- 4 Existing Conditions
- 4.1 <add area/location/event>
- 5 Project Impacts to Traffic & Transport
- 5.1 Work Hours
- 5.2 Operating Conditions
- 5.3 Impact on Traffic Flow
- 5.4 Impacts on Transport
- 5.5 Parking
- 5.6 Emergency Services
- 5.7 Pedestrians
- 5.8 Cyclists
- 5.9 Heavy Vehicles
- 5.10 Resident/Business Impacts
- 5.11 Construction Site Entry/Exit
- 6 Traffic Control Devices
- 6.1 Signage and Infrastructure
- 6.2 Line Marking
- 6.3 Speed Zoning
- 6.4 Intelligent Transport System (ITS) Devices
- 6.4.1 Traffic Signal Modifications
- 6.4.2 Temporary Traffic Signals
- 6.4.3 Variable Message Signs (VMS)
- 6.4.4 Radar Activated Speed Sign
- 6.4.5 Live Tracking Resources
- 6.3 Incident Response / Management
- 7 Risk Assessment
- 8 Communications Strategy
- 8.1 Worksite Communications
- 8.2 Stakeholder Works Notifications
- 8.3 Emergency Services Notification
- 9 Contact Details
- 9.1 Key Contacts
- 9.2 Onsite Contacts
- 10 References
- 11 Abbreviations & Definitions
- 12 Appendices

Appendix 1 - Traffic Plans

Appendix 2 – Detour Map

Appendix 3 – Road Closure Map

Appendix 4 – Parking Restriction Map

Appendix 5 – Heavy Vehicle Detour Map

Appendix 6 – Pedestrian Detour Map

# Annexure XI: Waste Management Plan

#### CONSTRUCTION WASTE MANAGEMENT PLAN

Construction waste material consists mainly of concrete, masonry, limestone, sandstone, metal, and wood, depending on the construction type. In building waste, a larger percentage of paper, plastic, etc. is expected due to packaging materials and the wood retired from formwork and scaffolding. This is in addition to significant amounts of concrete, masonry and metal materials.

### 1.0 Origins and Causes of Construction Waste

Origins of waste	Causes of waste		
Contractual	<ul> <li>Errors in contract documents</li> <li>Contract documents incomplete at commencement of construction</li> </ul>		
Design	<ul> <li>Design changes</li> <li>Design and detailing complexity</li> <li>Design and construction detail errors</li> <li>Unclear/unsuitable specification</li> <li>Poor coordination and communication (late information, last minute client requirements, slow drawing revision and distribution)</li> </ul>		
Procurement	<ul> <li>Ordering errors (i.e., ordering items not in compliance with specification)</li> <li>Over allowances (i.e., difficulties to order small quantities)</li> <li>Supplier errors</li> </ul>		
Transportation	<ul> <li>Damage during transportation</li> <li>Difficulties for delivery vehicles accessing construction sites</li> <li>Insufficient protection during unloading</li> <li>Inefficient methods of unloading</li> </ul>		
On-site  Management and Planning  Lack of on-site waste management plans  Improper planning for required quantities  Delays in passing information on types and sizes of and components to be used  Lack of on-site material control  Lack of supervision			
Material storage	<ul> <li>Inappropriate site storage space leading to damage or deterioration</li> </ul>		

Origins of waste	Causes of waste		
	<ul> <li>Improper storing methods</li> <li>Materials stored far away from point of application</li> </ul>		
Material handling	<ul> <li>Materials supplied in loose form</li> <li>On-site transportation methods from storage to the point of application</li> <li>Inadequate material handling</li> </ul>		
Site operation	<ul> <li>Accidents due to negligence</li> <li>Unused materials and products</li> <li>Equipment malfunction</li> <li>Poor craftsmanship</li> <li>Use of wrong materials resulting in their disposal</li> <li>Time pressure</li> <li>Poor work ethics</li> </ul>		
Residual	<ul> <li>Waste from application processes (i.e., over preparation of mortar)</li> <li>Off-cuts from cutting materials to length</li> <li>Waste from cutting uneconomical shapes</li> <li>Packaging</li> </ul>		
Other	<ul><li>Weather</li><li>Vandalism</li><li>Theft</li></ul>		

### 2.0 Construction Waste Management Plan

### 1) Waste Management Goals

To establish that this project shall generate at least 50% less waste into landfills and the processes shall be employed to ensure that this goal is met. These shall include prevention of damage to materials to be incorporated into the work due to mishandling, improper storage, contamination, inadequate protection or other factors as well as minimizing poor quantity estimation, as well as through building design.

### 2) Responsibility

- The Project Director shall be responsible for the implementation of the administrative portions of this program, including the notification of subcontractor management, the training of the site supervisor and the onsite posting of this plan.
- The site supervisor will be responsible for the implementation of the onsite portions of this
  program including the training of subcontractor personnel.

#### 3) Waste Prevention Planning

- In addition to other requirements specified herein it is a requirement for the work of this
  project that the contractor comply with the applicable city waste disposal requirements.
- Of the inevitable waste that is generated, the waste materials designated in this
  specification shall be salvaged for reuse and or recycling where practical and possible.
- Project Construction Documents: The General Contractor will contractually require all subcontractors to comply with these recycling guidelines. A copy of this "Construction Waste Management Plan" will accompany all subcontractor agreements and require subcontractor participation.
- The "Construction Waste Management Plan" shall be implemented and executed as follows and as on the chart:
  - Salvageable materials will be diverted from disposal where feasible.
  - There will be a designated area on the construction site reserved for materials that can be recycled.
  - · Areas shall be marked to designate what recycle materials are to be stored there.
  - Hazardous waste will be managed by a licensed hazardous waste vendor.

#### 4) Communication & Education Plan

- This Construction Waste Management Plan will be posted onsite.
- Each subcontractor will be made aware of the intent of this project with respect to reduction of waste and recycling.
- · Onsite recycling containers and/or areas will be plainly marked.
- The subcontractor will be expected to make sure all their crews comply with the Waste Management Plan.
- All recycling containers/areas will be clearly marked.
- · Lists of acceptable/unacceptable materials will be posted at the site.
- All subcontractors will be informed in writing of the importance of non-contamination with other materials or trash.

#### 5) Motivation Plan

The General Contractor will conduct a pre-award meeting for subcontractors. Subcontractors under consideration will be required to attend the meeting to review project goals and requirements with the project team. Attendance will be a prerequisite for award of subcontracts. This document will be an attachment to every subcontract. Copies of the attachment will be posted prominently at the job site.

### 6) Expected Project Waste, Disposal, and Handling

The following chart identifies waste materials expected on this project, their expected disposal methods and handling procedures. New items may be added as needed.

Material	Quantity	Disposal Method	Handling Procedure
Land clearing debris		Keep separate for reuse and or wood sale. Separate topsoil and rock for future landscaping use.	Keep separated in designated areas onsite.
Clean dimensional wood and palette wood		Keep separate for reuse by on- site construction or by site employees for either heating stoves or reuse in home projects. May be offered to public.	Keep separated in designated areas onsite.
Plywood, OSB, particle board		Reuse onsite when possible, landfill or recycle off site.	Keep separated in designated areas onsite. Place in "Trash" container.
Painted or treated wood		Reuse, off site recycle, landfill.	Keep separated in designated areas onsite. Place in "Trash" container.
Concrete		Recycle when possible.	
Concrete Masonry Units		Keep separate for re-use by on-site construction or by site employees.	Keep separated in designated areas onsite.
Metals		Recycle off site when possible. Separate copper wire when possible.	Keep separated in designated areas onsite. Place in "Metals" container.
Paint		Reuse onsite.	Keep separated in designated areas onsite
Insulation		Reuse, landfill.	
Flooring	75	Reuse, landfill.	0.
Carpet and pad		Reuse or recycle with carpet manufacturer	
Glass		Glass Bottles: recycle locally.	Keep separated in designated areas onsite.

Material	Quantity	Disposal Method	Handling Procedure
Plastics		Plastic Bottles: recycle locally; be aware of plastics that are acceptable to recycle facility.	Keep separated in designated areas onsite.
Beverage		Recycle locally	Keep separated in designated areas onsite.
Cardboard		Recycle locally	Keep separated in designated areas onsite.
Paper and newsprint		Recycle locally	Keep separated in designated areas onsite.

### 7) Waste Disposal Company

To be determined

a) Contact:

### 8) Recycle Hauler

To be determined

- b) Contact:
- e) Some or all recycle may be hauled by the builder.

### 9) Possible recycle locations and acceptable materials

- i) Coordinate with companies which are registered with local Municipality that accept materials for recycle; and
- ii) Using the above as a resource, a list will be kept indicating local opportunities for recycle of expected materials. New locations should be added as needed.

# Annexure XII: Occupational Health, Safety, and Environment (OHSE) Management Plan

The Construction Contractor will develop an OSHE plan covering the following headings.:

- 1. Introduction
- 1.1 Purpose of the Plan
- 1.2 Applicability
- 1.3 Leadership Commitment
- 1.4 Project HSSE Objectives and Targets
- 2. Project Description
- 2.1 Scope of Work
- 3. Key Personnel and Health and Safety Responsibilities
- 3.1 General
- 3.2 Specific Roles and Responsibilities
- 4. Risk and Hazard Analysis and Control Measures
- 5. HSSE Requirements
- 5.1 General HSSE Requirements
- 5.2 General Standard Operating Procedures
- 5.3 Forms and checklists
- 5.4 Toolbox Talk
- 5.5 Documentation
- 6. Personal Protective Equipment
- 7. HSSE Training
- 8. Internal and External Communication
- 8.1 Communication Procedures
- 9. Emergency Preparedness and Response
- 9.1 Field Team
- 9.2 Hospital/ Clinics
- 9.3 Emergency Contact
- 9.4 Emergency Response Equipment
- 9.5 Emergency Response Procedure

# Annexure XIII: COVID-19 Management Plan

COVID-19 Health and Safety Management Plan

Project Name \_\_\_\_\_

### **Table of Contents**

1.	Introd	duction	1
	1.1	Coronaviruses (CoV), COVID-19, and How It Spread?	1
	1.2	Purpose, Scope, and Applicability of COVID-19 H&S Plan	1
	1,3	Frequency	2
	1.4	Distribution and Actions	2
2.	Work	place Risk Assessment	3
3.	Proce	edures and Guidelines – Managing Risk	5
	3.1	Communication and Awareness	5
	3.2	Personal Hygiene and Respiratory Etiquette	7
	3.3	Personal Protective Equipment	
	3.4	Access and Movement to/from Construction Site	
	3.5	Compartmentalization	8
	3.6	Site Operation	8
	3.7	Meetings and Travelling	10
	3.8	Equipment Cleaning and Sanitizing	11
	3.9	Working Remotely	11
	3.10	Cleaning Protocol	12
		3.10.1 Cleaning/disinfection	
		3.10.2 On Entering the Room.	12
		3.10.3 Cleaning of Communal Areas and Staff Workspaces	13
		6.6.4 Cleaning and disinfection of reusable equipment	13
4.	Detec	tion and Response Measures	14
	4.1	Screening at the Entry of Construction Site	14
	4.2	Response Measures	14
	4.3	Health Monitoring	15
5.	Resp	onsibilities	16
	5.1	Contractors and Subcontractors Management	16
	5.2	FHS Team/ Site Managers	16

Table of Contents

01/04/22

### COVID-19 Health and Safety Plan

	5.3	Employees	17
	5.4	Corrective Actions and Response Strategy	18
6.	SOP	Auditing and Training	19
7.	Key	Rules during Travel and Stop Overs	20
8.	References		22
Forn	ns:		
Forn	n A:	Information to Include in Leaflet	
Forn	n B:	Hand-Washing Guide	
Forn	n C:	Guidelines on Worker Accommodation	
Forn	n D:	Daily Temperature Checklist for Employees	
Forn	n E:	Daily Temperature Checklist for Visitors	
Forn	n F:	Cleaning and Disinfecting Checklist	
Forn	n G:	Nearby Covid-19 Facilities	

Table of Contents

01/04/22

#### 1. Introduction

#### 1.1 Coronaviruses (CoV), COVID-19, and How It Spread?

- A large family of viruses that cause a variety of illnesses including the common cold, Middle East Respiratory Syndrome (MERS-CoV), and Severe Acute Respiratory Syndrome (SARS-CoV).<sup>1</sup>
- In late 2019, a new coronavirus not seen previously in humans was identified as the cause of human illness in China and given the name 2019-nCoV. By late January 2020, the outbreak declared a public health emergency of international concern by the World Health Organization (WHO).<sup>2</sup>
- The Coronavirus Disease of 2019 is called COVID-19.3
- The CoV spread by human-to-human transmission via respiratory droplets. The median incubation period from exposure to symptoms onset is 4–5 days.<sup>4</sup>

#### 1.2 Purpose, Scope, and Applicability of COVID-19 H&S Plan

- 5. The purpose of COVID-19 Health and Safety Plan (COVID-19 H&S Plan) is to guide contractors and their staff and implement procedures to slow and stop transmission, prevent outbreaks and delay spread; to minimize the impact of epidemic diseases on health systems and project operations. This SOP has been tailored considering the recent coronavirus (COVID-19) outbreak.
- The COVID-19 H&S Plan is a guidelines document providing standard operating procedures(SOP) for undertaking construction activities at the active and plan subprojects under Second Power Transmission Enhancement Investment Program.
- The COVID-19 H&S Plan must be adhered to by all contractors, subcontractors, and its employees, its visitors, and any person that interacts with employees.
- This Plan applies to all epidemic diseases. The World Health Organization has now confirmed the coronavirus as a pandemic; however, this SOP will be applicable for

1 Ibid

\* Ibid

01/04/22

https://relief.unboundmedicine.com/relief/view/Coronavirus-Guidelines/2355000/all/Coronavirus Disease 2019 COVID 19 #1

<sup>2</sup> Ibid

all epidemic outbreaks due to its greater scope and applicability in the prevention of disease transmission.

#### 1.3 Frequency

The SOP in this plan must always be followed until an outbreak is no longer considered a public health emergency by WHO.

#### 1.4 Distribution and Actions

- The COVID-19 H&S Plan will be made part of the respective health and safety plans (HSP) and emergency response plans (ERP) of the contractors and subcontractors.
- The HSP and ERP are standard elements of the environmental management plan (EMP), and now these need to be updated addressing COVID-19 health risks.
- 12. Broadly, the steps in this process include:
  - The contractor's HSP and ERP should be aligned with this COVID-19 H&S Plan.
  - . The contractors' HSP and ERP should be reviewed by the PMU.
  - The recommendation of the review (i.e. approval of the updated HSP and ERP or additional strengthening required etc.) will be forwarded to PMU for clearance.
  - The PMU will then advise the Construction Contractors and also ADB Project Officer to be informed.

01/04/22

#### 2. Workplace Risk Assessment

- 13. The risk of work-related exposure to COVID-19 depends on the probability of coming into close (less than 1 metre) or frequent contact with people who may be infected with COVID-19 and through contact with contaminated surfaces and objects.
- 14. The following risk levels may be useful in carrying out a workplace risk assessment for exposure to COVID-19 and planning for preventive measures in non-healthcare workplaces.
- 15. Low exposure risk jobs or work tasks without frequent, close contact with the general public and other co-workers, visitors, clients or customers, or contractors, and that do not require contact with people known to be or suspected of being infected with COVID-19. Workers in this category have minimal occupational contact with the public and other co-workers.
- 16. Medium exposure risk jobs or work tasks with close, frequent contact with the general public, or other co-workers, visitors, clients or customers, or contractors, but that do not require contact with people known to be or suspected of being infected with COVID-19. In areas where COVID-19 cases continue to be reported, this risk level may be applicable to workers who have work-related frequent and close contact with the general public, visitors, or customers in high-population-density work environments (e.g. food markets, bus stations, public transport, and other work activities where physical distancing of at least 1 metre may be difficult to observe), or work tasks that require close and frequent contact between co-workers. In areas without community transmission of COVID-19, this scenario may include frequent contact with persons returning from areas with community transmission.
- 17. High exposure risk jobs or work tasks with high potential for close contact with people who are known or suspected of having COVID-19, as well as contact with objects and surfaces possibly contaminated with the virus. Examples of such exposure scenarios outside of health facilities include the transportation of persons known or suspected to have COVID-19 in enclosed vehicles without separation between the driver and the passenger, providing domestic services or home care for people with COVID-19, and contact with dead bodies of persons who were known or suspected of having COVID-19 at the time of their death.

01/04/22

- 18. In the same work setting there may be jobs with different levels of risk, and different jobs or work tasks may have similar levels of exposure. Therefore, the risk assessment should be carried out for each specific work setting and each job or group of jobs. For each risk assessment, it is prudent to consider the environment, the task, the threat, if any (e.g. for frontline staff), and resources available, such as personal protective equipment.
- 19. Some workers may be at higher risk of developing severe COVID-19 illness because of age or pre-existing medical conditions; this should be considered in the risk assessment for individuals. Essential public services, such as security and police, food retail, accommodation, public transport, deliveries, water and sanitation, and frontline workers may be at an increased risk of exposure to occupational hazards for health and safety.
- 20. Employers, managers and EHS staff, in consultation with workers, should carry out and regularly update the risk assessment for work-related exposure to COVID-19, preferably with support of occupational health services.

01/04/22

#### 3. Procedures and Guidelines - Managing Risk

- 21. Health measures can slow the transmission and spread of infectious diseases. These measures can take the form of personal protective equipment, social distancing, and travel-related interventions.
- 22. The following areas should be given consideration:
  - · Communication and Awareness
  - · Personal Hygiene and Respiratory Etiquette
  - · Personal Protective Equipment (PPE)
  - · Access and Movement to/from Construction Site
  - Compartmentalization
  - Site Operation
  - · Meeting and Traveling
  - · Environmental Cleaning
  - Working Remotely

#### 3.1 Communication and Awareness

- 23. Clear signage is posted at entry points on the construction site and outline the commitment of the contractor to maintain health and safety measures during the COVID-19 crisis.
- 24. A display board at entry points of construction site showing daily statistics of COVID-19 in the locality, province, and in Pakistan using government official updates from appropriate jurisdictions' public health authorities.
- Worksite policies as they relate to the COVID-19 crisis are communicated to workers and made available on site.
- 26. A clear signboard to show: All workers exercise the following recommended practices for reducing the risk of transmission:
  - · Avoid touching eyes, nose and mouth with unwashed hands;

01/04/22

- · When coughing or sneezing:
  - Cough or sneeze into a tissue or the bend of your arm, not your hand;
  - Dispose of any tissues you have used as soon as possible in a lined wastebasket and wash your hands afterward;
  - Use face mask all time
  - Clean and disinfect frequently touched objects and surfaces, including all reusable personal protective equipment (PPE).
- Do not share personal items or supplies such as phones, pens, notebooks, tools, PPE, etc.;
- Use and remove PPE with care, being mindful of which surfaces may be contaminated. Individuals must clean their hands after handling any used PPE;
- · Avoid common physical greetings, such as handshakes;
- · Maintain a minimum physical distance of two meters from others; and
- Wash hands often with soap and water for at least 20 seconds after using the
  washroom, before handling food, after blowing the nose, coughing, or
  sneezing, and before smoking. If hands are not visibly soiled, and soap and
  water are unavailable, alcohol-based hand sanitizer can be used.
- 27. Additional sanitary measures are implemented on-site: handwashing stations with a posted hand washing protocol, hand sanitizer stations, provision of disinfectant wiping products. These types of facilities are made available at site entries, exits, washrooms, eating areas, offices, and any other areas with commonly touched surfaces.

01/04/22

 The EHS team can develop informative handouts about COVID-19 Risk Management and distribute it among the employees and visitors (Form A).

Uniform signage for workers to provide clear messaging



#### 3.2 Personal Hygiene and Respiratory Etiquette

- Every employee must follow a certain standard of self-hygiene and precaution, especially when in company premises or busy areas.
- It is the responsibility of the Employee to inform EHS Manager in case they have come in contact with a person traveling from an infected area.
- Every employee must use hand sanitizer whenever entering office premises.
   These and tissue boxes can be found in numerous locations
- 32. Employees must use the hand sanitizer before using the biometric device.
- Frequent and thorough hand washing is recommended and better illustrated in Form B.

#### 3.3 Personal Protective Equipment

- 34. Face masks are required for all staff and those in their vicinity. Please see Govt of Pakistan's Guidelines for Mandatory use of facemask, document 17-06, 13-June-2020 on how to use mask properly.
- https://covid.gov.pk/new\_guidelines/14June2020\_20200613\_Guidelines\_for\_Ma ndatory\_use\_of\_face\_mask\_(urdu)\_1704.pdf
- Providing disposable gloves for service staff is mandatory at all construction sites, camps and field offices.

01/94/22

37. The persons who showing any symptoms include soreness of the throat, sneezing, runny nose, coughing, body aches, frequent headaches, and fever should not be allowed to go to work or public places such as kitchen, dining area, mosque, etc.

#### 3.4 Access and Movement to/from Construction Site

- Wherever possible, workers travel to site using individual modes of transportation
   (e.g., personal vehicle or bicycle). Additional parking arrangements are made as required.
- Entry and exiting of the worksite is monitored and controlled to ensure that the minimum physical distancing is not broken when shifts begin and end.
- All non-essential individuals are not permitted access to the site.

#### 3.5 Compartmentalization

- 41. The construction site is to be segregated to the extent possible in zones or other methods to keep different crews/trades physically separated at all time. This promotes physical distancing and supports the containment of propagation should it arise.
- 42. Eating is restricted to clearly identified dedicated eating areas with handwashing stations, cleaning and disinfectant materials, and adequate space to maintain minimum physical distancing.
- 43. Upper limits are put on the number of people allowed in each zone and in facilities like washrooms, trailers, and eating areas at once to allow for the recommended minimum physical distancing.
- One-way staircases are established wherever practical to minimize worker contact.
- 45. Freight elevators are operated/occupied by only one individual at a time or where feasible, by respecting the minimum physical distancing guidelines.
- At residential camp sites, accommodation for workers should be provided as per the guidelines in Workers Accommodation Plan (Form C).

#### 3.6 Site Operation

47. The number of in-person meetings is minimized. If required, meetings should involve only necessary individuals and include six people or fewer. Minimum physical distancing is maintained, and meetings are held in open spaces when possible.

01/04/22

- The worksite is rearranged to reduce high-traffic areas and allow for the minimum physical distancing.
- 49. Site teams are encouraged to put forward split/alternating shifts to avoid extensive intermingling. Voluntary shift offset and implementing time gaps between shifts are highly encouraged.
- 50. Alternate arrangements are made as necessary to ensure workers avoid breaking the minimum physical distance with others for prolonged periods. When this is not feasible, plans are made to minimize the duration of the task. For any work that ultimately must be done in close-proximity, a procedure is formalized outlining the required PPE and all steps to be taken to minimize risk.
- Where work is done in crews, the work is planned to minimize or eliminate the crossover of workers between crews.
- 52. Project teams stagger break and lunch schedules to minimize the number of people in close proximity to one another. Enclosed lunchrooms are only made available during inclement weather.
- Work schedules are adjusted to provide time for proper cleaning and disinfecting as required.
- 54. Delivery zones are clearly identified and limited to receivers and deliverers only.
- 55. When possible, nothing is passed between the deliverer and the receiver (e.g. shipment documents and pens for signatures). Deliveries are unloaded solely by receivers using proper PPE, while deliverers remain in their vehicles.
- 56. When working in spaces currently occupied (e.g. private residences), the minimum physical distancing with any occupants is strictly enforced. Where possible, workers and occupants are segregated in different rooms.
- 57. Non-emergency work should not be done in any occupied spaces where an occupant is suspected to have contracted COVID-19 or is under self-isolation (per the directions of the applicable authorities). Emergency work can be carried out provided workers are equipped with nitrile gloves, Tyvek suits or coveralls, and facial/ respiratory protection.

01/04/22

58. Hands and tools are thoroughly cleaned before entering the workplace and after leaving, and any surfaces or equipment in the occupied space are disinfected before work is done on them.

#### 3.7 Meetings and Travelling

- 59. Any unnecessary meetings and traveling should be avoided. Using alternatives such as online meetings is recommended and employees should refrain from interacting with people who have been recently traveling to vulnerable areas.
- 60. Similarly, the travel of staff for meetings to vulnerable areas should be postponed.
- All workers and employees are advised to maintain a minimum 1.5-meter distance from one another.
- Workers and employees should also refrain from shaking hands or hugging anyone.
- Dining breaks shall be rescheduled at different times, in smaller groups to avoid crowding in the dining areas.
- It is encouraged that you keep your own mug/glass with you throughout the day and use only that.
- 65. See Section 7 for more details on traveling protocols.



01/04/22

#### 3.8 Equipment Cleaning and Sanitizing

- 66. The concern will be provided rubbing alcohol, or a suitable disinfectant as well as sterile gloves to wipe down equipment and commonly touched surfaces and objects every morning.
- 67. All door handles, railings, ladders, switches, controls, eating surfaces, shared tools and equipment, taps, toilets, and personal workstation areas are wiped down at least twice a day with a disinfectant, such as disinfectant wipes. Individuals are responsible for cleaning and disinfecting their workstations.
- 68. The implementation of cleaning procedures, safety prevention measures must be conducted twice a day to prevent any contamination. This will but is not limited to the following areas:
  - Commonly touched surfaces such as vehicle'steering, vehicles' gear, and door handles, tools, chairs, tables, etc.
  - . Workstations including keyboards, mice, telephones, desk surfaces
  - · Biometric devices
  - Metal surfaces including door handles, knobs in and outside the office (includes main/rear exit)
  - Kitchen surfaces
  - · Kitchen cutlery and utensils (before washing)
  - Washrooms including the soap dispenser, hand dryer dyer, and other commonly touched surfaces
  - · Staplers, hole punchers, remotes, headphones, and other shared equipment.
- 69. Additional sanitary measures are implemented on-site: handwashing stations with a posted hand washing protocol, hand sanitizer stations, provision of disinfectant wiping products. These types of facilities are made available at site entries, exits, washrooms, eating areas, offices, and any other areas with commonly touched surfaces.

#### 3.9 Working Remotely


- Where practical, all office employees supporting a project work remotely.
- 71. Meetings are held through teleconferencing or videoconferencing.

01/04/22

# 3.10 Cleaning Protocol

#### 3.10.1 Cleaning/disinfection

- 72. Housekeeping staff undertaking the cleaning with detergent and disinfectant.
- Perform hand hygiene then put on a plastic glove before and deaning disinfection task
- 74. Dispose of used gloves in designated place/bin only.

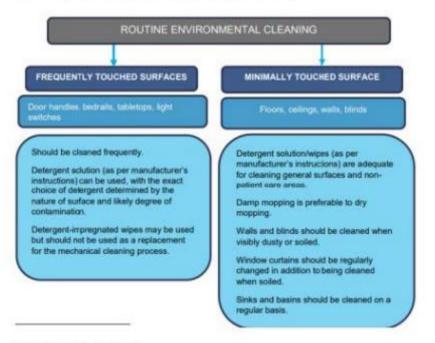

#### 3.10.2 On Entering the Room

- Keep the door dosed when using detergent and disinfection products, you may open a windowif required.
- All other personal items such as papers, pens, picture frames, etc. should be kept in drawers.

01/04/22

# 3.10.3 Cleaning of Communal Areas and Staff Workspaces

- 77. Wipe the surfaces with either a combined detergent disinfectant solution at a dilution of 1000 parts per million (ppm or 1 m/l) which is equal to one-quarter teaspoon of chlorine per 4 glasses of water.
- Commercially available chlorine or alcohol-based disinfectant spray can be used as an alternative. This applies to benchtops and chairs.
- For equipment, disinfect with commercial alcohol-based cleaners safe for computer surfaces.
- 80. Use disposable cloths, paper rolls, or disposable mop heads to clean and disinfect all hard surfaces, floors, chairs, door handles, or reusable non-invasive care equipment or sanitary fittings in the room, following one of the 2 options below:
  - Use a combined detergent disinfectant solution at a dilution of 1m/l as described above or a commercial disinfectant spray.
  - Follow the manufacturer's instructions for dilution, application, and contact times for all detergents and disinfectants.



# 6.6.4 Cleaning and disinfection of reusable equipment

 Clean and disinfect any reusable non-invasive care equipment, such as Punch machines, staplers, pens, etc., that are in the room before their removal. Clean all reusable equipment systematically.

0904/22

## 4. Detection and Response Measures

# 4.1 Screening at the Entry of Construction Site

- 82. Before entering the site, individuals must confirm that:
  - They are not currently exhibiting flu-like symptoms such as fever, tiredness, coughing, or congestion;
  - . They have not returned from outside of Pakistan within the past 14 days;
  - To the best of their knowledge, they have not been in contact with someone with a confirmed or probable case of COVID-19; and
  - . They have not been working on a site that was shut down due to the virus.

Responses are to be kept private and treated as sensitive medical information.

- Individuals who are at increased risk of serious illness (due to age, pregnancy or other medical condition) are not to be permitted on site.
- 84. Workers who are not authorized to access the site are to be safely transported directly back home, or to a preferred location of self-isolation. When unable to do so themselves, a vehicle and driver will be arranged for them.
- 85. When transporting a potentially ill individual, both driver and passenger are to be given masks and nitrile gloves. The passenger is to sit in the backseat, and the driver is to open and close the doors for them.

#### 4.2 Response Measures

- 86. Possible Case of COVID-19
  - Individuals who have been potentially exposed to the virus, or who are exhibiting flu-like symptoms such as fever, tiredness, coughing, or congestion are instructed to;
    - Not come to work;
    - Contact their supervisor and/or human resources department;
    - Stay at home and self-isolate; and
    - Contact local health authorities for further direction.
  - · Such individuals are required to follow the directions of the local health

01/04/22

- authority and may not return to work until given approval by the proper health authorities.
- Individuals who begin to display flu-like symptoms on site are instructed to
  avoid touching anything, take extra care to contain coughs and sneezes, and
  return home immediately to undergo self-isolation as directed by the local
  health authority.
- All areas on-site potentially infected by a confirmed or probable case are barricaded to keep individuals two meters away until the area is properly cleaned and disinfected.

# 4.3 Health Monitoring

- 87. An infrared thermometer should be made available, and temperatures of all people entering the offices, work areas, premises will be checked and recorded in a log every day (Form D).
- 88. A separate log will be kept for staff and visitors (Form E).
- 89. Employees should proactively communicate any concerns or symptoms they may be experiencing and not rely on the company to identify and prevent the transmission of infectious diseases.

01/04/22

# 5. Responsibilities

#### 5.1 Contractors and Subcontractors Management

- Make sure resources including financial resources required for the implementation
  of the plan available
- Must also ensure adequate stock of hand sanitizers and face masks are present for all offices, camps, and construction sites.

#### 5.2 EHS Team/ Site Managers

- Responsible for ensuring housekeeping inspections are completed following this
   SOP.
- 93. This includes making sure the inspection checklist is completed daily (Form F).
- The team is also responsible for supervising housekeeping staff and making sure all equipment and areas are routinely disinfected.
- 95. Every construction project shall make proper arrangements for uninterrupted building services including but not restricted to, electricity, fuel, water supply, water disposal and sanitation, communication links, washrooms with hand hygiene and shower facility and with proper and adequate supply of soaps and disinfectants.
- Workers should not use biometric attendance machines or crowd during attendance, entry or exit to the premises of the construction site.
- 97. Ensure the availability of the thermal gun at the entry and exit of the construction site and no worker should be allowed without getting his/her temperature checked.
- 98. Site manager must maintain a register of all contact details with NID number and addresses of all present at the site in case a follow up or tracing and tracking of contacts is required at a later stage.
- Develop the employee roaster to decrease the number of people on the site very day.
- 100. Split the shifts of the workers in morning and evening with limit of each shift to 8 working hours.

01/04/22

- 101. Every worker must change into standard working attire at the time of commencement of duty and change back to their regular dress after taking shower when their duty hours end.
- 102. Non-essential work trainings must be postponed avoiding gathering of people.
- 103. Ensure the physical distance by creating more than one route of entry and exit to the site.
- 104. Instruct the workers to inform the EHS manager (or authorities) if,
- 105. They develop any symptoms of cough, flu or fever.
- 106. They have been exposed to someone suspected or confirmed with COVID 19.
- 107. They have met someone who has a travel history of COVID 19 endemic country.
- 108. They have travelled in last couple of days or plan to travel soon
- 109. Do not allow any worker at the construction site who has the symptoms.
- 110. The lunch breaks and stretch breaks of the workers must be staggered to avoid the clustering of workers. Workers must not sit at less than 2 meters distance while having meals and while any other activity requiring interpersonal communications.
- 111. In the wake of current restrictions on transportations site mangers will ensure safe transport arrangements for worker which should not be crowded and should have social distancing in place during the entire process from pickups till drops at destination.
- A list of COVID-19 medical facilities should be kept update along the contact information in Form G.
- 113. For more details please visit Govt of Pakistan's Guidelines for Health & Safety of Building & Construction Workers during COVID-19 Outbreak, Document 11-01, 11-April-2020.

https://covid.gov.pk/new\_guidelines/01June2020\_20200411\_Guidelines for the health\_ & safety of building & construction workers\_1101.pdf.

# 5.3 Employees

114. To follow the procedures and preventative guidelines in this SOP and to maintain a certain level of precaution.

01/04/22

- 115. Employees must monitor their health, wear face masks if showing signs of a compromised immune system.
- 116. Disinfect equipment underuse and living areas routinely.
- 117. Report any symptoms immediately to EHS Team.

#### 5.4 Corrective Actions and Response Strategy

- 118. If the EHS team determines that the cleaning does not pass the examination, the cleaning procedure and inspections are repeated.
- 119. Upon daily temperature recordings (Form D and Form E), the following response strategy will be implemented (With consideration of a ~0.5 Degree Celsius uncertainty of measurements):
- 120. Employees who have symptoms of acute respiratory illness are recommended to stay room/ home and not come to work until they are free of fever. The signs of a fever, and any other symptoms for at least 24 hours, without the use of fever-reducing or other symptom-altering medicines (e.g. cough suppressants).
- 121. Employees should notify their supervisor and stay home if they are sick.
- 122. Ensure that contractor and subcontractor sick leave policies are flexible and consistent with public health guidance and that employees are aware of these policies.
- 123. Do not require a healthcare provider's note for employees who are sick with acute respiratory illness to validate their illness or to return to work, as healthcare provider offices and medical facilities may be extremely busy and not able to provide such documentation in a timely way.
- 124. Contractors and subcontractors should maintain flexible policies that permit employees to stay home to care for a sick family member.
- 125. The contractor and subcontractor should be aware that more employees may need to stay at home to care for sick children or other sick family members than is usual.
- 126. Work from home for 2-3 days, and address fever and any other symptoms till status is more evident or symptoms subside.
- 127. Consult with and update the EHS team regarding your bill of health. Take medical leave; get examined by a doctor and tested for the virus.

01/04/22

# 6. SOP Auditing and Training

- 128. Contractors are to conduct periodic audits (frequency to be determined based on a project scale and scope) to verify that the appropriate measures have been implemented and are maintained.
- 129. EHS Team should arrange frequent awareness training sessions for employees and maintain a record.
- 130. Competence evaluations and repetition of training will be conducted as necessary to ensure the protection and continuance of this SOP.

01/04/22

# 7. Key Rules during Travel and Stop Overs

- 131. Avoid travelling if you have cough, fever/ flu like symptoms.
- 132. Persons having co morbidities (Diabetes, Heart conditions, Asthma), and persons older than 50 years of age should not travel unless very necessary.
- 133. Be sure to cover the mouth and nose with a mask (N-95) if not readily available, use a face mask.
- 134. Wash your hands often with soap and water for at least 20 seconds especially after you have been in a public place, or after blowing your nose, coughing, or sneezing.
- 135. Make sure distance of 2 meters between individuals.
- 136. Avoid mass gatherings
- 137. Avoid handshakes.
- 138. Avoid touching surfaces that may be frequently touched by other passengers, e.g. handles, seatback latches, seat belt buckles. Once touched, use a sanitizer to clean your hands as above.
- 139. Try using online check-in before moving.
- 140. Avoid touching surface, cards, machines; once touched, use a hand sanitizer to clean your hands.
- 141. Safety protocols should be followed at luggage check-in to ensure the safety of staff and passengers.
- 142. Avoid hugs and greeting styles which make you unnecessary close to each other.
- 143. Keep an alcohol-based hand rub in the car all time. Regularly and thoroughly clean your hands with an alcohol-based hand rub or wash them with soap and water.
- 144. Avoid touching surfaces such as door handle, shelf, tools, equipment, etc. unnecessarily and use disinfectant before having any food and drinks.
- 145. Make sure you and the people around you, follow good respiratory hygiene. This means covering your mouth and nose with your bent elbow or tissue when you cough or sneeze. Then dispose of the used tissue immediately.
- 146. Try to dedicate separate pairs of clothes for fieldwork.

01/04/22

- 147. Choose a hotel room which is well ventilated and well cleaned.
- 148. Ask the hotel services to replace the covers and blankets on arrival.
- 149. Try to take your towels and wipes during field visits.
- 150. Disinfect the doorknobs and side tables after entering the room every time.
- 151. Take good care of hygiene in your room and surroundings.
- 152. Avoid allowing any hotel staff for any room services during the stay.
- 153. Keep minimum interaction with other guests or staff during the stay.
- 154. Regularly and thoroughly clean your hands with an alcohol-based hand rub or wash them with soap and water.
- 155. Regularly disinfect the area of stay and your frequently used stuff like keys, door handles, etc.
- 156. Avoid touching surfaces such as door handle, shelf, tools, equipment, etc. unnecessarily and use disinfectant before having any food and drinks.
- 157. Stay informed on the latest developments about COVID-19. Follow the advice given by your healthcare provider, your national and local public health authority, or your employer on how to protect yourself and others from COVID-19.
- 158. Ensuring availability of disposable cups, glasses, and plates for drinks and meals and their disposable after one-time-use.
- 159. More details, see Govt of Pakistan's Guidelines for Health Guidelines for Domestic Air Travel During COVID 19 Outbreak, document 29-03, 30-August-2020. https://covid.gov.pk/new\_guidelines/31August2020\_20200830\_Guidelines\_for\_Domestic\_Air\_Travel\_2903.pdf

01/04/22

#### 8. References

- COVID-19 Standardized Protocols for All Canadian Construction Sites, Version4, April 16, 2020 (https://www.cca-acc.com/wp-content/uploads/2020/04/CCA-COVID-19-Standardized-Protocols-for-All-Canadian-Construction-Sites-04-16-20.pdf.
- World Health Organization, 2020. Considerations for public health and social measures in the workplace in the context of COVID-19. Geneva. (https://www.who.int/publications-detail/considerations-for-publichealth-and-social-measures-in-the-workplace-in-the-context-of-covid-19)
- Working safely during COVID-19 in construction and other outdoor work, Guidance for employers, employees, and the self-employed. (https://assets.publishing.service.gov.uk/media/5eb961bfe90e070834b6675f/working-safely-duringcovid-19-construction-outdoors-110520.pdf)
- Govt of Pakistan's Guidelines Social Distancing during COVID 19 Outbreak, document06/01, March 26, 2020. https://covid.gov.pk/new\_guidelines/01June2020\_20200326\_Guidelines\_for\_ Soial\_Distancing\_0601.pdf
- Govt of Pakistan's Guidelines for Mandatory use of facemask, document 17-06, 13-June-2020. https://covid.gov.pk/new\_guidelines/14June2020\_20200613\_Guidelines\_for\_ Mandatory\_use\_of\_face\_mask\_(urdu)\_1704.pdf
- Govt of Pakistan's Guidelines for Cleaning & Disinfection of Environmental Surfaces in Wake of COVID-19, document 02-04, 24-July-2020. https://covid.gov.pk/new\_guidelines/26July2020\_20200724\_Guidelines\_for\_ Cleaning\_\_Disinfection\_of\_Environmental\_Surfaces\_0204.pdf
- Govt of Pakistan's Guidelines for Health Guidelines for Domestic Air Travel
   During COVID 19 Outbreak, document 29-03, 30-August-2020.
   https://covid.gov.pk/new\_guidelines/31August2020\_20200830\_Guidelines\_for\_Domestic\_Air\_Travel\_2903.pdf
- Govt of Pakistan's Guidelines for Health & Safety of Building & Construction

01/04/22 22

Workers during COVID-19 Outbreak, Document 11-01, 11-April-2020, https://covid.gov.pk/new\_guidelines/01June2020\_20200411\_Guidelines\_for\_t he\_health\_&\_safety\_of\_building\_&\_construction\_workers\_1101.pdf

01/04/22 23

#### Form A: Information to Include in Leaflet

#### 1. Wear Mask at Project Sites or busy areas.

When working at the project site and moving outside, be sure to cover the mouth and nose with a mask.

#### 2. Avoid Shaking Hands.

Try to avoid unnecessary handshakes especially with strangers.

#### 3. No Hugs

Avoid hugs and greeting styles that make you unnecessarily close to each other.

#### 4. Maintain Social Distancing (at least 2 meters/6 feet)

Maintain at least a 2-meter distance between yourself and other personnel during unavoidable meetings and gatherings. Maintain 2 meters from anyone who is coughing or sneezing.

#### 5. Avoid Social Gathering.

Avoid social gatherings of a small and large group for example meetings, family festivals, wedding ceremonies, political, religious and social gatherings, etc. Chances of spreading viruses in such gatherings are much higher.

#### 6. Wash Hands Frequently.

Regularly and thoroughly clean your hands with an alcohol-based hand rub or wash them with soap and water thoroughly.

#### 7. Reduce outdoor/outgoing Activities.

Reduce everyday routine activities with friends, also teach your family members and close friends these safety measures to take care of meeting outside people, especially if someone came from the virus affected city/area or country.

# 8. Do Proper Disinfection.

Regularly disinfect the area of your office and home as well as your frequently used stuff like keys, door handles, etc.

# 9. Avoid Touching Stuff in Public Places Unnecessarily.

Avoid touching surfaces such as door handle, shelf, tools, equipment etc. unnecessarily and use disinfectant before having any food and drinks.

#### 10. Practice Respiratory Hygiene.

Make sure you and the people around you, follow good respiratory hygiene. This means covering your mouth and nose with your bent elbow or tissue when you cough or sneeze. Then dispose of the used tissue immediately.

# 11. Seek Medical Care Early.

Stay home if you feel unwell. If you have a fever, cough, and difficulty breathing, seek medical attention, and call in advance. Follow the directions of your local health authority.

01/04/22

# 12. Stay Informed.

Stay informed on the latest developments about COVID-19. Follow the advice given by your healthcare provider, your national and local public health authority, or your employer on how to protect yourself and others from COVID-19.

01/04/22 25

# Form B: Hand-Washing Guide

use towel



01/04/22 2

#### Form C: Guidelines on Worker Accommodation

This document contains Worker Accommodation Plan (WAP) for the Project which covers guidelines, the standards and practices to be used in the design and management of workers accommodation by NTDC, its contractors and subcontractors.

The WAP shall largely be implemented by the Construction Contractor and subcontractors

The scope and applicability of the WAP is limited to the design and management of the worker accommodations provided during the construction phase of the Project.

NTDC and its contractors shall ensure sufficient resources are allocated on an on-going basis to achieve the effective implementation of the worker accommodation plan.

#### Regulatory Requirements for WAP

Laws applicable to the WAP include the following:

- Constitution of Pakistan that provides for humane conditions of work (Article 37(e)).
- Factories Act 1934 requirements for occupational health and safety at the workplace:
- Building Code of Pakistan. The Building Code of Pakistan (2008) provides the
  requirements for safety to be included in the design of buildings in Pakistan.
   The Building Code of Pakistan Fire Safety Provisions (2016) provide the
  requirements for fire prevention, life safety in relation to fire and fire protection
  of buildings and building-like structures.

# Accommodation Planning and Arrangement

Worker accommodations will be located within the Project site and will be provided during the construction phase of the Project. The worker accommodations will encompass areas where it shall not interfere with the construction activities.

Alongside the construction planning, the Construction Contractor (CC) along with the Project Management Unit (PMU) of NTDC, shall conduct a space assessment of accommodations.

01/04/22

Average minimum space of usual standards ranges from 10 to 12.5 cubic meters (volume) or 4 to 5.5 square meters (surface) per person will be provided throughout the construction period. Minimum ceiling height of 2.1 meters shall be provided.

Other specifications including building construction standards and fire safety will be managed according to the Building Code of Pakistan.

Drinking water complying with the provincial Environmental Quality Standards shall be provided at the worker accommodations.

Sewage and waste disposal system will be provided residential facilities in accordance with the regulatory requirements. As septic tanks will be constructed for management of sewage from the residential area and grease traps will be constructed to manage sewage from kitchen/mess.

Health and hygiene facilities will be provided against cold, heat, damp, biological hazards (disease-carrying animals), noise, vibration, food security and fire.

Washing facilities are will be provided as required. For sanitation septic tanks will be constructed on the campsite as per guidelines.

Employees will be provided with first aid training to cope up with emergency situations at the camp, in addition to emergency response at the workplace. Basic health care facility at the Project site and ambulance services shall be available.

If required, the project site during construction shall be encompassed by walls to limit impact on communities and ensure camp security.

All workers will be provided with an employee identity card and no person will be allowed to enter in the worker accommodations area without identification, or prior approval through security for visitors and other employees.

Standby generators to be located away from the communities towards the backside of Project site and also away from Worker Accommodation.

#### Inspection

A standard checklist on the workers' accommodation should be developed by the CC on cleanliness of the rooms, kitchen, toilets, open areas and disposal sites. The checklist will be used for the daily compliance of the cleanliness condition.

01/04/22

Project Manager of the CC will conduct an ongoing assessment of the accommodation requirement and the residual requirements for upcoming staffing.

The responsible staff of HSE of the CC will prepare monthly inspection report based on the inspection checklists and keep records and submissions along with other submissions to NTDC.

01/04/22

Form D: Daily Temperature Checklist for Employees

	- 1								_	HEP	Emp	loye	e ren	elo ess	nure	(14)	Cities	SACHE	-			_									_	
Month:										-	inspected By:												Si	Signature:								
	1	2	3	4	5	8	7	8	9	10	11	12	13	14	35	76	17	78	79	20	21	22	23	24	25	26	27	28	29	30	-	
Name	- 00																-vs															
		$\vdash$	_				$\vdash$					Н			Т							$\overline{}$			$\vdash$						r	
	-	$\vdash$	-	-	H		-		H	-		Н							H						-	-	-				-	
					L			_					_		L				L						_						L	
					L																											
		Т	Г		П				Г			П			Т			П	Г						$\Box$						r	
	_	$\vdash$	H	$\vdash$	Н	H	H	-	H	-		Н	-	-	H	H	-	-	H		-			-		-	-		-	-	H	
	-	$\perp$	_	$\vdash$	L	_	L			_		L							L					-	L			L			L	
		$\vdash$	t																						$\vdash$						r	

98472

COVID-19 Health and Safety Plan

Form E: Daily Temperature Checklist for Visitors

rspected by:				Date: dd/mm/yy				
No	Name	Time	Temperature Recorded *G	Follow-up Action				
t.								
2								
3								
4								
5								
6								
7.								
В								
9								
10.								
11.								
10. 11. 12								
13.								
14								
15.								
18.								
17.								

16422

# Form F: Cleaning and Disinfecting Checklist

Month:							Inspected by:												71	Signature:											
8#	Activity	7	2	3	4	5	6	7	8	2	10	11	72	13	14	15	75	17	18	19	20	21	22	23	24	25	26	27	28	29	30
1	Sweep and wash all hard surface flooring	Г						Г																							Г
2	Spot clean all interior glass.																				1								5		
3	Clean and sentize open cleak surfaces			Г				Г														Г				Г					Γ
4	Clean and sanitize keyboard, mouse, and telephone			Г				Г	0				30								- 5					Г	11.7				Г
5	Dust computer monitors		Г	П	т	П	Г	П	Г	П	П	П							П			П	П	П	П	П	П	П	П		Г
0	Spot clean walls																														Г
7	Clean and sanitize all touchpoints																														Г
8	Empty and reline waste receptacles																														
9	Spot clean receptacles inside and out							Г																							
10	Recycle paper waste																														
11	Detail floor edges, corners, and underlidesk																														
12	Dust all vertical surfaces																														Г
13	Dust window coverings																		2.7												
14	Clean all waits and glass																														
15	Clean between walls and furniture																				- 1										Г
12	Signature/ Initial					- 2					-	- 3															- 1				П

916472

# Form G: Nearby Covid-19 Facilities

To be updated by Contractor's EHS Manager/ Site Managers.

01/04/22 33

# **Annexure XIV: Tree Plantation Plan**

# The Tree Plantation Plan

the For	rest and		nent of Sindh. A			vith the district office of will be planted in lieu of
The Pla	an should	d cover the follo	wing:			
				in consultation with ted by the local Fore		offices.
Trees i	Recomm	ended				
The red	commen	ded trees from I	Forest Departme	ent should be mentic	ned in the fo	llowing details.
	#	Local Name	Scientific Name	Recommended Number and Size	Per Unit Cost	Total Cost (PKR)
	1		12			
-	3			-		-
8	3		1			
The Co				ect Will be Complete	d in	Years.
1.	First Ye	ar				
Total_		numb	er of Trees will I	be planted in first ye	ar of project	implementation.
	First Ye					
Total _		numb	er of Trees will	be planted in second	year of imple	ementation.
3.	First Ye	ear				
Total _	- Pg-	numb	er of Trees will I	be planted in second	year of imple	ementation.
4.	Rehabi	litation Year				
Total _		numb	er of Trees will	be planted during de	mobilization	and rehabilitation
period	of the pi	roject implemen	tation.			

Measures for Maintenance of the Planted Trees

Finally, the Construction Contractor has to list the measures taken for the maintenance of the planted trees including regular watering and protection from animals, and removal by locals.

Annexure XIV 124

						vith the district office of will be planted in lieu of
the exp	pected _	affe	cted trees.			
The Pla	an should	d cover the follo	wing:			
1.	The tre	e plantation site	s. were chosen	in consultation with	local Forest C	Offices.
		(8)		ted by the local Fore		
Troos	Recomm	andad				
The re	commen	ded trees from	Forest Departme	ent should be mentic	ned in the fo	llowing details.
	#	Local Name	Scientific Name	Recommended Number and Size	Per Unit Cost	Total Cost (PKR)
8	1		1	J.Ec		
	2					
	3					
The Co				ect Will be Complete	d in	Years.
1.	First Ye	ear				
Total _		numb	per of Trees will	be planted in first ye	ar of project	implementation.
2.	First Ye	ear				
Total _		numb	er of Trees will	be planted in second	l year of imple	ementation.
3.	First Ye	ear				
Total _	-	numb	er of Trees will	be planted in second	l year of imple	ementation.
		ilitation Year				
				be planted during de	emobilization	and rehabilitation
period	of the p	roject implemer	itation.			

Measures for Maintenance of the Planted Trees

Finally, the Construction Contractor has to list the measures taken for the maintenance of the planted trees including regular watering and protection from animals, and removal by locals.

Annexure XIV 125

# Annexure XV: Resource Conservation Plan

#### RESOURCE CONSERVATION PLAN

#### 1. INTRODUCTION

The most of the resources in this world are finite and non-renewable in nature. We are completely dependent on these resources to fulfill all our daily requirements. Therefore, sustainable development calls for the need to conserve resources in a way that meet our needs of present generation as well as future generation, especially the non-renewable resources.

#### 2. OBJECTIVE OF THE PLAN

The Resource Conservation Plan is intended to make an effort towards achieving sustainable development. The objective of the resource conservation plan is to:

- · Minimize the use of natural resources; and
- Mitigate and prevent pollution contaminating the natural resources.

#### 3. PLANNING

Careful estimations of quantities of material, fuel, water and energy required directly or indirectly shall be done to avoid excessive or unnecessary wastage of these materials. In addition to this, pollution prevention strategies shall also be devised to prevent contamination of resources.

- The estimations include the following:
  - Estimation of construction material required for the project;
  - Estimation of fuel consumption for construction machinery, construction vehicles and generators;
  - · Estimations of the energy requirements during all the stages of the project; and
  - Estimations of water consumption for construction activities and construction camp sites.
- Strategies shall be planned to reduce loads on the identified resources to be consumed;
- Best management practices shall be devised to control or reduce pollution resulting from the activities during different stages of the project; and
- An inspector shall be assigned responsibility to oversee the ongoing activities to check the compliance of the planned strategies.

## 4. EXECUTION OF THE PLAN

The planned strategies shall be implemented to conserve the natural resources including but not limited to the following:

#### Material

- Material supplied shall be in conformance with the estimated quantities and excess material shall be returned to the supplier;
- Material wastage shall be avoided by using best management practices;
- Waste produced during the project execution shall be disposed off safely to the designated disposal sites through approved contractors; and
- Reuse of the materials shall be appreciated.

#### Energy

- Reduce trips and optimize routes to and from the construction site for all kinds of activities;
- Regular maintenance of equipment and vehicles to avoid leaks and sustain efficient fuel consumption;
- Switch off idle equipment and vehicles to avoid wastage of fuel:
- Minimize warm up time, unnecessary acceleration and deceleration of the construction equipment and vehicles:
- Avoid unnecessary burning of fuel for cooking in construction camps;

- Avoid unnecessary use of heating and cooling systems during extreme weathers events;
- Construction shall start in early hours of the day to avoid heat in summers and utilization of day light; and
- Alternate energy sources shall be considered for electricity generations during construction and operation to conserve fossil fuel as it is non-renewable resource.

#### Water

- Avoid using potable water for sprinkling, curing and washing of equipment and vehicles. Surface water or treated effluent can be used instead;
- Wastage of water should be controlled through providing proper valves and through controlling pressure of the water;
- Unnecessary equipment washings should be avoided;
- Awareness amongst workers shall be raised to conserve water and immediately report for any leaks detected; and
- Ensure protection of canal water from contamination resulting from construction activities.

#### Pollution

- Emissions shall be reduced and controlled as far as possible and direct discharges to air shall be avoided by strictly adhering to the mitigation measures outlined in EIA report;
- Waste water shall not be discharged directly and must be managed as per the recommendations
  presented in EIA; and
- Construction and demolition waste, and municipal solid waste shall not be dumped and burnt openly, and shall be handled according to the preventative measure given in EIA study.

#### 5. CHECKING AND CORRECTIVE ACTIONS

C & W shall bind the construction contractor through contract agreement to comply with the strategies outlined in the Resource Conservation Plan. The Environmental Committee shall also appoint an Inspector who shall monitor the daily onsite activities and shall report any issues and concerns raised in relation to Resource Conservation Plan. The inspector shall recommend adequate corrective actions to mitigate the issues raised.

# Annexure XVI: Site Specific EMP

The Construction Contractor will develop a SSEMP covering following headings.:

# **TABLE OF CONTENTS**

#### 1. INTRODUCTION

- 1.1 Background
- 1.2 Project Management Unit (PMU)
- 1.3 Facility Management Consultants (FMC)
- 1.4 Purpose and Applicability of SSEMP
- 1.5 Project Implementation
- 1.6 Environmental Assessment And Approvals

#### 2. DEFINITION OF BOUNDARIES

- 2.1 Segment 1 TL between Tower No. 1 and Tower No.
- 2.2 Segment 2 TL between Tower No. xx and Tower No.

#### 3. SENSITIVE RECEPTORS AND ENVIRONMENTAL VALUES

- 3.1 Segment 1 Sensitive Receptors and Environmental Values
- 3.2 Segment 2 Sensitive Receptors and Environmental Values

#### 4. CONSTRUCTION ACTIVITIES

#### 5. RISK ASSESSMENT

- 5.1 Segment 1 Risk Assessment and Environmental Management Measures
- 5.2 Segment 2 Risk Assessment and Environmental Management Measures

#### 6. SITE PLANS

## 7. ENVIRONMENTAL WORK PLANS

- 7.1 Environmental Training
- 7.2 Environmental Mitigation Plan
- 7.3 Worker Accommodation Plan
  - 7.3.1 Regulatory Requirements for WAP
  - 7.3.2 Accommodation Planning and Arrangement
- 7.4 Waste Management Plan
- 7.5 Vibration Management Plan,
- 7.8 Traffic Management Plan,
- 7.9 Camp Management Plan
- 7.10 Resource Conservation Plan
- 7.11 Emergency Response Plan
- 7.12 Chance Finds Procedure
- 7.13 COVID-19 Management Plan
- 7.14 Dust Management Plan

#### 8. MONITORING

- 8.1 Responsibilities
- 8.2 Review And Reporting
  - 8.2.1 Monitoring and Reporting
  - 8.2.2 Updates

# 9. CHANGE MANAGEMENT

# Appendices

- Appendix A: Project IEE
- Appendix B: Sensitive Receptors & Environmental Values
- Appendix C: Photographs

# Annexure XVII: Worker Accommodation Plan

The Worker Accommodation Plan (WAP) for the Project covers guidelines, standards and practices to be used in the design and management of workers' accommodation by Proponent, its contractors and subcontractors. The WAP shall largely be implemented by the CC. The scope and applicability of the WAP are limited to the design and management of the worker accommodations provided during the construction phase of the Project. Proponent and its contractors will ensure sufficient resources are allocated on an ongoing basis to achieve the effective implementation of the worker accommodation plan.

# **Accommodation Planning and Arrangement**

Worker accommodations will be located within the Project site and will be provided during the construction phase of the Project. The worker accommodations will encompass areas where it shall not interfere with the construction activities. Alongside the construction planning, the CC along with the Project Management Unit (PMU) of Proponent, shall conduct a space assessment of accommodations.

- The average minimum space of usual standards ranges from 10 to 12.5 cubic meters (volume) or 4 to 5.5 square meters (surface) per person will be provided throughout the construction period. A minimum ceiling height of 2.1 meters shall be provided.
- Other specifications including building construction standards and fire safety will be managed according to the Building Code of Pakistan.
- Drinking water complying with the provincial Environmental Quality Standards shall be provided at the worker accommodations.
- The sewage and waste disposal system will be provided in residential facilities
  following the regulatory requirements. As septic tanks will be constructed for the
  management of sewage from the residential area and grease traps will be
  constructed to manage sewage from the kitchen/mess.
- Health and hygiene facilities will be provided against cold, heat, dampness, biological hazards (disease-carrying animals), noise, vibration, food security, and fire.
- Washing facilities are will be provided as required. For sanitation, septic tanks will be constructed on the campsite as per guidelines.
- Employees will be provided with first aid training to cope with emergencies at the camp, in addition to emergency response at the workplace. Basic health care facilities at the Project site and ambulance services will be available.
- If required, the project site during construction may be encompassed by walls to limit the impact on communities and ensure camp security.
- All workers will be provided with an employee identity card and no person will be allowed to enter the worker accommodations area without identification, or prior approval through security for visitors and other employees.
- Standby generators to be located away from the communities towards the backside of the Project site and away from Worker Accommodation.

# Inspection

A standard checklist on the workers' accommodation should be developed by the CC on the cleanliness of the rooms, kitchen, toilets, open areas and disposal sites. The checklist will be used for the daily compliance of the cleanliness condition.

The project manager of the CC will conduct an ongoing assessment of the accommodation requirement and the residual requirements for upcoming staffing.

The responsible staff of HSE of the CC will prepare monthly inspection reports based on the inspection checklists and keep records and submissions along with other submissions to Proponent.

# **Annexure XVIII: Emergency Response Plan**

#### Emergency Response Plan

#### Introduction

Emergency management can be defined as the organization, coordination and implementation of a range of measures to prevent, mitigate, respond to, overcome and recover from the consequences of emergency events affecting the community, its assets and the environment.

#### 2. Purpose of Plan

This plan intends to provide a framework for safety and security to infrastructure, people and vehicles. It assigns responsibility to organizations and individuals for carrying out specific actions at projected times and places in an emergency situation that exceeds the capability or routine responsibility of any one agency.

The emergency response plan provides guidance to:

- Prevent any potential sources causing hazard to the resources during all stages of the project
- Coordinate between various organizations to take actions in case of emergencies;
- Protect people and property in emergencies and disasters;
- Develop procedures to respond to the emergencies efficiently;
   Identify and ensure availability of personnel, equipment, facilities, supplies, and other resources for use in order to provide timely and efficient response and recovery operations;
- Confirm that measures taken in an incident are adequate to recover the affected resources or further improvements are needed.

#### 3. Planning

# i. Emergency Response Team

A group/team shall be dedicated to identify and control potential emergencies during the construction and operation of the project. The roles and responsibilities of the group members shall be clearly defined.

The primary responsibilities of the group are described below:

- Identify the potential hazard or risk sources that can lead to emergency situations; Ensure availability of adequate resources, procedures and communication system to deal with the identified emergency situations;
- Ensure awareness and training of the staff to facilitate implementation of the emergency
- Maintaining the records of any previous incidents; and
- Post-event analysis to bridge the gaps of the existing risk prevention procedures.
- The emergency response team shall include but not limited to the following;
  - Team Leader
  - 2. Safety Engineer
  - Reporting officer/Inspector 3.

#### Team Leader

- Approve/ modify devised measures to prevent or mitigate the risks associated with the identified risk sources
- Arrange resources for dealing with potential emergencies including, financial, equipments and personnel required to deal with emergencies.
- Assure that the Emergency Response plan is adequate, effective and can be implemented practically.


#### Safety Engineer

- Analyze the Identified risk sources and devise measures to prevent or mitigate the risks in close consultation with the Team Leader;
- Develop and implement the Emergency Response Procedures, in case of the possible emergencies arise;
- Ensure effective internal and external communication; and
- Provide regular trainings and arrange drills to make people aware of dealing with emergencies.

#### Reporting officer/Inspector

- Regular inspections of the site, to identify potential risks associated with equipments, materials and work practices;
- Anybody from the site can notify the reporting officer about potential risk and/or near misses on the site;
- Record any identified risks and mitigation measures to control the identified risk, and
- Notify the issue and control measures taken thereby to the safety engineer.

The designation, roles and responsibilities of each member shall be clearly defined and communicated to the employees. An outline of the framework of responsibilities is presented in the following organizational chart:

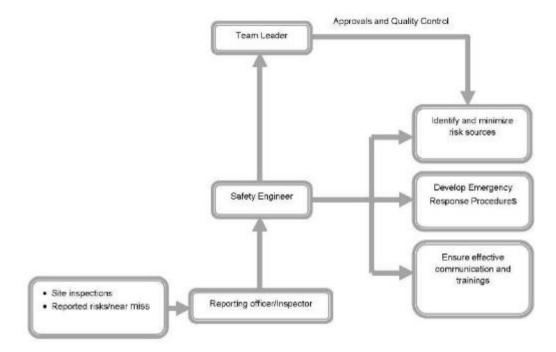

#### ii. Hazard Identification

A comprehensive identification and evaluation of the hazards/risks likely to cause an emergency shall be done by Emergency Response Team (ERT). Major potential emergencies identified in road projects are as follows:

- Structural failure
- Disruption of Utility (Power, Water, Telecommunications, Gas, etc)
- Accidents
- · Vehicle accident
- Fog
- Smoke
- Power/equipment failure or Vandalism
- Fire
- Earthquake
- Terrorism including bombing
- Disease Outbreak

#### iii. Prevention and Mitigation

The ERT shall work to eliminate or reduce the impact of identified emergencies and increasing the resilience of an affected community to recover from the consequences of such events. These activities include:

- Design considerations to control flooding, earthquakes and adequate lightening for fog etc.;
- Regular inspection and maintenance of construction machinery and the structural integrity;
- Review of work schedules based on weather updates; and
- · Security controls based on political situations.

#### 4. Emergency Preparedness

The ERT shall be prepared with all necessary resources and the personnel's shall be trained regularly

#### i. Resources

#### Finance and administration

The financial resources shall be reserved for dealing with any emergencies arising on site during construction and operation. Responsibilities of the person managing the resources in case of emergencies shall be clearly defined and the required resources shall be adequate and updated regularly.

#### Equipment

All the necessary equipment needed in an event of emergencies shall be made available, as a minimum, the equipment needed include;

- Personal Protective Equipment
- Alarms/ Warnings
- Fire extinguishers
- · Crowd control, flashlights, signs, barricades
- First Aid Facility
- Detection instruments, e.g. personal alarm kits, smoke detection instruments
- Tools to fix minor vandalism

# Communication

All external and internal communication systems shall be made available. Local emergency numbers shall be clearly posted and communicated to the personnel involved in construction and during operation.

The local emergency numbers are given below, which shall be regularly updated.

#### **Emergency Numbers**

#### Services

- 1 Edhi Ambulance
- 2 Emergency Police
- 3 Bomb Disposal

- 4 Rescue
- 5 Fire Brigade Center
- 6 Hospital Civil(casualties)

# **Trainings**

Personnel shall be made aware of the importance of safety, potential emergencies and how to respond in case of emergencies. One day training and mock exercise shall be done to prepare, the personnel to deal with emergencies.

#### 5. Emergency Response

Response includes actions taken to reduce the impacts of an emergency event, and to limit the threat to life, property and the environment.

The emergencies can be dealt with:

- On-Site Management of the situation
- Off-site coordination to arrange necessary resources to support the on-site management
- Providing advice and reports of the situation to stakeholders

#### i. Emergency Response Procedure:

Any person can report about an emergency, an on-site worker, an outside agency, or the public. Circumstances change during the course of an emergency in different events, thus, the procedure will vary as per the specific situation on ground. However, a basic action plan to be followed in an emergency is discussed below. This order of response is applicable to almost any emergency and should be followed in sequence.

# Assess the situation:

The most important thing to do in case of emergency is to stay calm and avoid panic. Assess the situation, the cause and most immediate requirement to control, limit and/or manage the immediate, ongoing, or further damage.

# Immediate control:

The most senior person on the scene should take control and contact, or delegate someone to contact emergency services as posted and communicated by ERT and inform the reporting officer of ERT and explain the situation. The area of emergency shall be restricted by barricades, tapes and adequate signage, if and as required.

# Protection from further losses:

- 1. Once the site is restricted, to provide protection and reduce further losses, the source causing the emergency shall be controlled including equipments, materials, environment and accident scene from continuing damage or further hazards to the area and people. e.g. suppress fire, prevent objects from falling, shut down equipment or utilities, and take other necessary measures as required depending upon the type of emergency.
- 2. Provide first aid if required or in doing so.
- Designate people to emergency duties, e.g. assign personnel to guide emergency services on arrival.
- 4. Headcount People/personnel to identify any missing persons.
- People/ personnel shall be directed to safe location.
- Arrange diversions for the traffic to reduce disturbance to the flow of traffic, if and as far as possible.
- Preserve the accident scene until experts mark it safe; only disturb what is essential to maintain life or relieve human suffering and prevent immediate or further losses.

#### ii. Communication:

# Emergency service providers:

The emergency service providers' needs to be kept informed of the situation. On site, personnel from the emergency services shall be guided towards the emergency scene, brief about the event, ongoing and potential hazards and cause(s), if known.

# Emergency Response Team and Management:

Members of ERT shall be immediately informed and the management shall also be kept informed.

# Public:

Timely notifications to public shall be disseminated through electronic and print media depending upon the requirement and urgency of the emergency so that they can adopt alternate routes and avoid the hazards associated with the emergency encountered.

## **Utilities:**

In case of disruption of utilities, the utility control authorities shall be immediately contacted to control the situation.

# 6. Recovery:

Emergency affected individuals, communities and infrastructure shall be restored in terms of emotional, economic, and physical well-being including the following as a minimum:

- · A detailed analysis and assessment of causes of emergency, extent of damage and gaps if any, in managing the emergency;

  Recovery/replacement of the assets and infrastructure;
- Reinstatement of disrupted services;
- Road and bridge repairs;
- Updation of safety arrangements and Emergency response procedures to ensure better safety and security in any other arising emergencies.

# **Annexure XIX: Fire Management and Protection Plan**

- Step 1: Designate a Responsible Person:
- Step 2: Action on Discovering Fire
- Step 3: Designate Exit Routes:
- Step 4: Designate the Assembly Area:
- Step 5: Designate Additional Duties:
- Reporting emergencies:
- Accounting for staff:
- First Aid:
- Step 6: Training:
- Step 7: Periodic review:
- How and When to Use a Fire Extinguisher?

Annexure XIX 136

# Annexure XX: Construction Noise and Vibration Management Plan

# Objective

This management plan defines the measures to control and limit noise emissions and vibration levels, at residential properties and other sensitive receptors in the vicinity of the Project.

# **General Requirements**

Best Practicable Means (BPM) of noise control will be applied during construction works to minimize noise (including vibration) at neighboring residential properties and other sensitive receptors arising from construction activities

The general principles of noise management are given below:

#### Control at source:

- Equipment noise emissions limits for equipment brought to the site.
- Equipment method of directly controlling noise e.g. by retrofitting controls to plant and machinery.
- Equipment indirect method of controlling noise e.g. acoustic screens.
- Equipment indirect method of controlling noise e.g. benefits and practicality of using alternative construction methodology to achieve the objective e.g. vibratory piling techniques or hydro-demolition as opposed to more conventional but noisier techniques; selection of quieter tools/machines; application of quieter processes.

# Control across the site by:

- Administrative and legislative control,
- · Control of working hours,
- Control of delivery areas and times,
- Careful choice of compound location,
- Physically screening site,
- Control of noise via Contract specification of limits,
- Noise Monitoring, to check compliance with noise level limits, cessation of works until an alternative method is found.
- Many of the activities which generate noise can be mitigated to some degree by careful operation of machinery and the use of tools. This may best be addressed by toolbox talks and site inductions.

The maintenance of good community relations is vital. Experience shows that construction noise has the potential to cause disturbance but can be tolerated if prior warning and explanation have been given to residents. In particular advice regarding the nature of construction works, the duration of the works and mitigation measures to be implemented can help to reduce people's reaction to noise.

Contractors will consult local residents/communities regarding works and give them details of a responsible appointed person on site who will be able to deal with queries.

Annexure XX 137

Construction working hours should be carefully managed. All works should take place between normal working hours 07:30 and 18:30, Monday to Friday with the exception of restricted works.

#### **Noise and Vibration Control Measures**

In addition to the specific requirements of the Local Authority, the Contractor will be required to adopt the following more specific measures:

#### **Control measures**

Without prejudice to the other requirements of this section, the Contractor shall comply with the recommendations set out in BS5228:2009 and in particular with the following requirements:

- Vehicles and the mechanical plant will be maintained in a good and effective working order and operated in a manner to minimize noise emissions. The contractor will ensure that all plant complies with the relevant statutory requirements;
- HGV and site vehicles will be equipped with broadband, non-tonal reversing alarms;
- Compressor, generator and engine compartment doors will be kept closed and plant turned off when not in use;
- All pneumatic tools will be fitted with silencers/mufflers;
- Care would be taken when unloading vehicles to avoid unnecessary noise;
- The use of particularly noisy plant will be limited, i.e. avoiding the use of particularly noisy plants early in the morning;
- Restrict the number of plant items in use at any one time;
- Plant maintenance operations will be undertaken at distance from noise-sensitive receptors;
- Reduce the speed of vehicle movements;
- Ensure that operations are designed to be undertaken with any directional noise emissions pointing away from noise-sensitive receptors;
- When replacing an older plant, ensure that the quietest plant available is considered:
- Drop heights will be minimized when loading vehicles with rubble;
- Vehicles should be prohibited from waiting within the site with their engines running or located in waiting for areas away from sensitive receptors;
- Local hoarding, screens or barriers should be erected to shield particularly noisy activities;

Piling will be carried out with the method that minimizes both noise and the transmission of vibration to sensitive receptors

#### **Vibration Mitigation**

Vibration levels due to percussive piling are predicted to be approximately 1.0 mm/s Peak Particle Velocity (PPV) at the nearest residential properties on Wyberton Low Road which falls at the threshold of effects significant adverse effects due to vibration. Comparatively, piles installed using a vibratory piling rig are predicted to result in vibration levels exceeding 1.5mm/s PPV at the same location.

Press piling shall therefore be adopted by the contractor to minimize vibration levels during Piling along the right bank in conjunction with pre-auguring and jetting depending on ground conditions. Vibration levels at properties due to press piling including pre-auguring are predicted to be less than 0.2mm/s at 23m. Vibration levels due to the use of vibratory rollers at 10 m from the works are predicted to be approximately 1.5 mm/s PPV.

### Noise and vibration monitoring


A regular program of noise and vibration monitoring shall be implemented as a minimum following Appendix C of this document.

The Contractor will submit the proposed method, the frequency and the location of the monitoring site to the Planning Authority for agreement before commencing works. Proposed monitoring requirements and locations are detailed in Appendix C. Noise baseline levels will be agreed upon prior to commencement of construction.

#### Reference:

https://proaccionaau.blob.core.windows.net/media/4gbpg4vk/ctp-noise-and-vibration-management-plan.pdf.

# Annexure XXI: Calibration Certificate of Noise and Air Quality Measuring Instruments

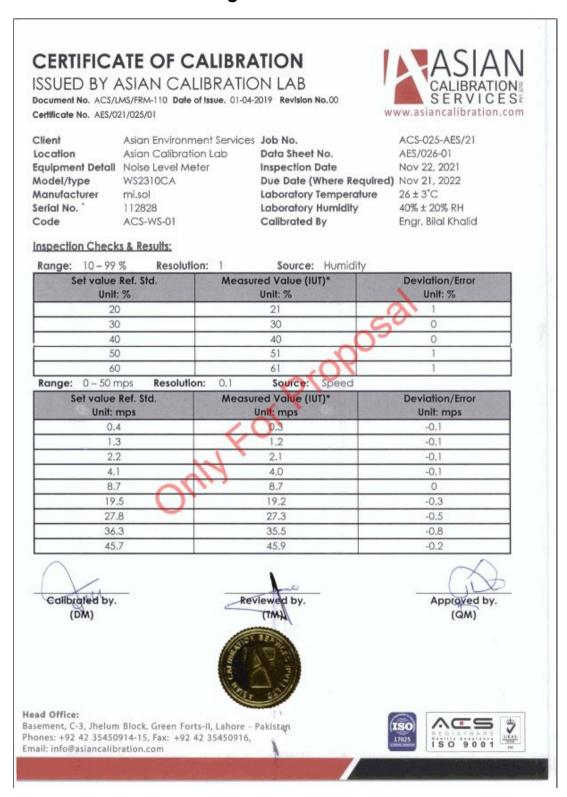

ISSUED BY ASIAN CALIBRATION LAB

Document No. ACS/LMS/FRM-110 Date of Issue. 01-04-2019 Revision No.00 Certificate No. AES/021/025/01



Wind Direction speed (wind tunnel speed at 20mps)

True Direction	Indicated (*)
N	359
E	088
S	376
W	268

Range: 35-1300 hPa Resolution: 0.1 Source: Pressure

Set value Ref. Std. Unit: hPa	Measured Value (IUT)* Unit: hPa	Deviation/Error Unit: hPa
1100	1100.4	0.4
1000	1000.4	0.4
950	950.4	0.4
800	800.4	0.4
300	300.3	0.3
200	200.2	0.2
100	100.1	0.1
50	50.1	0.1

Resolution: 0.1 Range: 0 - 60 °C Source: Temperature

Set value Ref. Std. Unit: °C	Measured Value (IUT)* Unit: °C	Deviation/Error Unit: °C
3.3	3.4	0.1
14.3	14.4	0.1
25.4	25.4	0
35.2	35.3	0.1
45.0	45.2	0.2
55.0	56.1	0.1









Head Office:

Basement, C-3, Jhelum Block, Green Forts-II, Lahore - Pakistan Phones: +92 42 35450914-15, Fax: +92 42 35450916,

Email: info@asiancalibration.com





ISSUED BY ASIAN CALIBRATION LAB

Document No. ACS/LMS/FRM-110 Date of Issue, 01-04-2019 Revision No.00 Certificate No. AES/021/025/01



#### Instrument Under Test

- Instrument was new and good in condition.
- Adjustment is carried out and measurement in this certificate are as obtained figures.
- . The above instrument has been calibrate against the standards maintained in the instrument's division of ACS lab.
- Observed correction for anemometer are indicated above (acceptable limits of tolerance ± 0.1 mps upto 5.5 mps and ±2% beyond.

#### Reference / Calibration Standard

The weather station has been calibrated against thermocouple calibrator make GE Druck DPI821, Digital pressure indicator Sr no 51501374 of Druck Uk make, Digital thermometer & Digital Hygrometer make Extech /445814. which are traceable to certificates No. APCIC/PL (361)/ILO#938/29.05.19, APCIC/TL (907)/ILO#938/29.05.19, APCIC/TL (034)/ILO#764/24.12.19 and APCIC/TL (066)/ILO#764/24.12.19of PCSIR Laboratory Pakistan.

#### Note(s):

- This certificate provides traceability of measurements to recognised international/national standard and to units of measurements realizes to recognised international/national standard laboratories.
- This certificate may not be reproduced, except in full, without prior written approval of the laboratory

Calibrated by. (DM)

Reviewed by. (MT)

-- End of Certificate-----

Approved by. (QM)



Head Office:

Basement, C-3, Jhelum Block, Green Forts-II, Lahore - Pakistan Phones: +92 42 35450914-15, Fax: +92 42 35450916,

Email: info@asiancalibration.com





## ISSUED BY ASIAN CALIBRATION LAB

Document No. ACS/LMS/FRM-110 Date of Issue. 01-04-2019 Revision No.00 Certificate No. AES/020/027/12



Client Asian Enviro Services. Job No. ACS-027-AES/20 Asian Enviro Services Lab Data Sheet No. Location AES/027-12 Equipment Detail Air Quality monitor Calibration Date Oct 2, 2021 Model/type AF22E/ Sulfur Dioxide Analyzer Due Date (Where Required) Oct 1, 2022 Manufacturer Environment SA Laboratory Temperature 26 ± 3°C Serial No. ` 313AS Laboratory Humidity 40% ± 20% RH Code ACS-AES-12 Calibrated By Engr. Bilal Khalid

#### Calibration Results:

Range: 0-20.002 ppm Resolution: 0.001

Calibration Point (%FS)	Set value Ref. Std. Unit: ppm	Measured Value (IUT)* Unit: ppm	Deviation/Error Unit: ppm
0.0	0.000	Olodo	0.00
20.0	5.418	5.418	0.00
40.0	8.837	8.838	0.01
60.0	15.255	15.25	-0.01
80.0	20.673	20.6%3	-0.12

#### Instrument Under Test

- Instrument was used and good in condition.
- Adjustment is carried out and measurement in this certificate are as obtained figures.

#### Reference / Calibration Standard

The air quality monitor O342e e has been calibrated against reference standard id ID#ACS-INST-12 which is traceable to certificates No. APCIC/TL (20)/ILO#98/47.10.20 of PCSIR Laboratory Pakistan. Note(s):

 This certificate pravides traceability of measurements to recognised international/national standard and to units of measurements realizes to recognised international/national standard laboratories.

Trips certificate may not be reproduced, except in full, without prior written approval of the laboratory.

Calibrated by.

Reviewed by. (TM) Approved by.

-----End of Certificate-----



#### Head Office:

Basement, C-3, Jhelum Block, Green Forts-II, Lahore Pakista Phones: +92 42 35450914-15, Fax: +92 42 35450916, Email: info@asiancalibration.com 150



## ISSUED BY ASIAN CALIBRATION LAB

Document No. ACS/LMS/FRM-110 Date of Issue. 01-04-2019 Revision No.00

Certificate No. AES/020/027/06

ASIAN CALIBRATION SERVICES WWW.asiancalibration.com

Client Location

Code

Asian Enviro Services

Equipment Detail Air Quality monitor
Model/type CO12e

Model/type Manufacturer Serial No. `

Environment SA 269SA

269SA ACS-AES-06

Asian Enviro Services Lab

Air Quality monitor

Calibration Date

College Parts (Wisser

 Data Sheet No.
 AES/027-06

 Calibration Date
 Oct 2, 2021

 Due Date (Where Required)
 Oct 1, 2022

 Laboratory Temperature
 26 ± 3°C

 Laboratory Humidity
 40% ± 20% RF

Calibrated By

Job No.

40% ± 20% RH Engr. Bilal Khalid

ACS-027-AES/20

#### Calibration Results:

Range: 0-42.092 ppm Resolution: 0.0001

Calibration Point (%FS)	Set value Ref. Std. Unit: ppm	Measured Value (IUT)* Unit: ppm	Deviation/Error Unit: ppm
0.0	0.000	0.000	0.00
20.0	8.418	8.547	0.19
40.0	16.837	16,847	0.11
60.0	25.255	25,257	-0.02
80.0	33,673	33.851	-0.12
100.0	420.092	42.095	0.01

#### Instrument Under Test

- Instrument was used and good in condition.
- Adjustment is carried out and measurement in this certificate are as obtained figures.

#### Reference / Calibration Standard

The air quality monitor O342s e has been calibrated against reference standard id ID#ACS-INST-44 which is traceable to certificates No. APCIC/ML (44)/ILO#98/47.10.20 of PCSIR Laboratory Pakistan. Note(s):

 This certificate provides traceability of measurements to recognised international/national standard and to units of measurements realizes to recognised international/national standard laboratories.

This certificate may not be reproduced, except in full, without prior written approval of the laboratory.

Calibrated by.

Reviewed by.

of Certificate-----

Approved by.

**Head Office:** 

Basement, C-3, Jhelum Block, Green Forts-II, 18460- - Pakistan Phones: +92 42 35450914-15, Fax: +92 42 35450916,

Email: info@asiancalibration.com



Page 1 of 1

## ISSUED BY ASIAN CALIBRATION LAB

Document No. ACS/LMS/FRM-110 Date of Issue. 01-04-2019 Revision No.00 Certificate No. AES/020/027/05



Client Asian Enviro Services.
Location Asian Enviro Services Lab
Equipment Detail Air Quality monitor
Model/type AC32e Que Date (Wher Laboratory Tem)

Environment SA Lab 389SA Lab ACS-AES-05 Cal

 Job No.
 ACS-027-AES/20

 Data Sheet No.
 AES/027-05

 Calibration Date
 Oct 2, 2021

 Que Date (Where Required)
 Oct 1, 2022

 Laboratory Temperature
 26 ± 3°C

 Laboratory Humidity
 40% ± 20% RH

 Calibrated By
 Engr. Bilal Khalid

#### Calibration Results:

Serial No. `

Code

Range: 0-0.3895 ppm Resolution: 0.0001

Calibration Point (%FS)	Set value Ref. Std. Unit: ppm	Measured Value (1UT)* Unit: ppm	Deviation/Error Unit: ppm
0.0	0.0000	0.0000	0.18
20.0	0.0779	0.0799	0.24
40.0	0.1558	0.1560	0.19
60.0	0.2337	0.2387	0.18
100.0	0.3895	0,3848	-0.02

#### Instrument Under Test

- Instrument was used and good in condition.
- Adjustment is carried out and measurement in this certificate are as obtained figures.

### Reference / Calibration Standard

The air quality monitor AC32 e has been calibrated against reference standard id ID#ACS-INST-17 which is traceable to certificates No. APCIC/TL (78)/ILO#32/13.10.20 of PCSIR Laboratory Pakistan. Note(s):

This certificate provides traceability of measurements to recognised international/national standard and to units of measurements realizes to recognised international/national standard laboratories.

This defilicate may not be reproduced, except in full, with the prior written approval of the laboratory.

Calibrated by.

Reviewed by.

Approved by. (QM)

-----End of Certificate-----



Head Office:

Basement, C-3, Jhelum Block, Green Forts-II, Lahore - Pakistan Phones: +92 42 35450914-15, Fax: +92 42 35450916, Email: info@asiancalibration.com 

## ISSUED BY ASIAN CALIBRATION LAB

Document No. ACS/LMS/FRM-110 Date of Issue. 01-04-2019 Revision No.00 Certificate No. AES/020/027/04



Client Asian Enviro Services. Job No. ACS-027-AES/20 Location Asian Enviro Services Lab Data Sheet No. AES/027-04 Equipment Detail Air Quality monitor Calibration Date Oct 2, 2021 Due Date (Where Required) Oct 1, 2022 Model/type Mp101M Environment SA Manufacturer Laboratory Temperature 26 ± 3°C Serial No. ' 362SA Laboratory Humidity 40% ± 20% RH Code ACS-AES-04 Calibrated By Engr. Bilal Khalid

#### Calibration Results:

kunge. 10000 pg/1	Resolution, 0,0001	source. FIN TO, FIN 2.4	
Calibration Point (%	Set value Ref. Std. Unit: µg/m³	Measured Value (IUT)* Unit: µg/m³	Deviation/Error Unit: µg/m³
0.0 from HEPA filte	o.0000	-0.0001	-0.03

D14 10 D14 0

#### Instrument Under Test

Instrument was used and good in condition.

Panas: 10000 ug/m3 Pasalution: 0.0001 Source:

Adjustment is carried out and measurement in this certificate are as obtained figures.

#### Reference / Calibration Standard

The air quality monitor Mp101M has been calibrated against reference standard id ID#ACS-INST-021 which is traceable to certificates No. APCIC/DL (62N)/ILO#64/24.12.19 of PCSIR Laboratory Pakistan.

#### Note(s):

- This certificate provides traceability of measurements to recognised international/national standard and to units of measurements realizes to recognised international/national standard laboratories.
- This certificate may not be reproduced, except in full, without prior written approval of the laboratory.

Calibrated by. (DM)

Reviewed by. (TM)

Approved by. (QM)

-----End of Certificate-----



Head Office:

Basement, C-3, Jhelum Block, Green Forts-II, Lahore - Pakistan Phones: +92 42 35450914-15, Fax: +92 42 35450916,

Email: info@asiancalibration.com



Page 1 of 1 ISO 9001

## ISSUED BY ASIAN CALIBRATION LAB

Document No. ACS/LMS/FRM-110 Date of Issue, 01-04-2019 Revision No.00 Certificate No. AES/021/027/07

CALIBRATIONE SERVICESE www.asiancalibration.com

Engr. Bilal Khalid

Client Asian Enviro Services.
Location Asian Enviro Services Lab
Equipment Detail Stack Emission Analyser
Model/type 340

 Model/type
 340

 Manufacturer
 Testo

 Serial No. `
 6164345

 Code
 ACS-AES-07

 Job No.
 ACS-027-AES/21

 Data Sheet No.
 AES/027-07

 Calibration Date
 Sep 2, 2021

 Due Date (Where Required)
 Sep 1, 2022

 Laboratory Temperature
 26 ± 3°C

 Laboratory Humidity
 40% ± 20% RH

#### Calibration Results:

Range: 100 °C Resolution: 0.1 Source Ambient Air Temperature

Set value Ref. Std. Unit: °C	Measured Value (IUT)* Unit: °C	Deviation/Error Unit: °C
100.0	100.0	±0.0

Calibrated By

Range: 100 °C Resolution: 0.1 Source Flue Gas Temperature

Set value Ref. Std. Unit: °C		Measured Value (IUT)* Unit: °C	Deviation/Error Unit: °C
100.0	$\top$	100.0	±0.0
Panae: 8 hPa Perolution:	0.1	Source Pressure	

kange: onra kesolulloi	i. U.I Source Flessure	
Set value Ref. Std.	Measured Value (IUT)*	Deviation/Error
Unit: hPa	Unit: hPa	Unit: hPa
8.00	7,98	-0.02

Range: 0 - 5% Resolution: 0.01 Source 02

Set value Ref. Std. Unit: %	Measured Value (IUT)* Unit: %	Deviation/Error Unit: %
0.0	0.00	0
2.51	2.55	+0.04
5.01	5.02	+0.01

Calibrated by.

Reviewed by. (TM) Approved by.



#### Head Office:

Basement, C-3, Jhelum Block, Green Forts-II, Lahore - Pakistan Phones: +92 42 35450914-15, Fax: +92 42 35450916,

Email: info@asiancalibration.com





ISSUED BY ASIAN CALIBRATION LAB

Document No. ACS/LMS/FRM-110 Date of Issue. 01-04-2019 Revision No.00 Certificate No. AES/021/027/07



#### Calibration Results:

Range: 100-700 ppm Resolution: 1 Source CO Set value Ref. Std. Measured Value (IUT)\* Deviation/Error Unit: ppm Unit: ppm Unit: ppm 102 100 +2 399 -2 401 701 702 +1

Range: 100-1000 ppm Resolution: 1 Source SO2

Set value Ref. Std. Unit: ppm	Measured Value (IUT)*		Deviation/Error Unit: ppm
100	96	5	-4
1000	979	-	-21

#### Instrument Under Test

- Instrument was used and good in condition.
- Adjustment is carried out and measurement in this certificate are as obtained figures.

#### Reference / Calibration Standard

The stack emission analyser has been calibrated against reference standard id ID#ACS-INST-39 which is traceable to certificates No. APCIC/ML (40)/ILO#98/47.10.20 of PCSIR Laboratory Pakistan.

- This certificate provides traceability of measurements to recognised international/national standard and to units of measurements realizes to recognised international/national standard laboratories.
- This certificate may not be reproduced, except in full, without prior written approval of the laborato

Calibrated by

(DM)

Reviewed by.

(TM)

(GW)

-----End of Certificate-----

Head Office:

Basement, C-3, Jhelum Block, Green Forts-II, Lahore - Pakistan Phones: +92 42 35450914-15, Fax: +92 42 35450916,

Email: info@asiancalibration.com





Page 2 of 2

ISSUED BY ASIAN CALIBRATION LAB

Document No. ACS/LMS/FRM-110 Date of Issue, 01-04-2019 Revision No.00 Certificate No. AES/020/027/04



Client Asian Enviro Services. Location Asian Enviro Services Lab Equipment Detail Air Quality monitor

Model/type Mp101M Manufacturer Environment SA Serial No.

362SA ACS-AES-04 Job No. ACS-027-AES/20 Data Sheet No. AES/027-04 Calibration Date Oct 4, 2021 Due Date (Where Required) Oct 3, 2022 Laboratory Temperature 26 ± 3°C Laboratory Humidity 40% ± 20% RH Engr. Bilal Khalid Calibrated By

#### Calibration Results:

Code

Range: 10000 µg/m<sup>3</sup> Resolution: 0.0001 Source: PM 10 PM 25

range: 10000 pg/111	Resolution. C.CCC	000100. 111110/11112.0	
Calibration Point (%FS)	Set value Ref. Std. Unit: µg/m³	Measured Value (IUT)* Unit: µg/m³	Deviation/Error Unit: µg/m³
0.0 from HEPA filter	0,0000	-0,0001	-0.03

#### Instrument Under Test

- Instrument was used and good in condition.
- Adjustment is carried out and measurement in this certificate are as obtained figures.

#### Reference / Calibration Standard

The air quality monitor Mp101M has been calibrated against reference standard id ID#ACS-INST-021 which is traceable to certificates No. APCIC/DL (62N)/ILO#64/24.12.19 of PCSIR Laboratory Pakistan.

#### Note(s):

- This certificate provides traceability of measurements to recognised international/national standard and to units of measurements realizes to recognised international/national standard laboratories.
- This certificate may not be reproduced, except in full, without prior written approval of the laboratory.

Calibrated by. (DM)

Reviewed by. (MI)

Approved by. (QM)

-----End of Certificate-----



#### Head Office:

Basement, C-3, Jhelum Block, Green Forts-II, Lahore - Pakistan Phones: +92 42 35450914-15, Fax: +92 42 35450916,

Email: info@asiancalibration.com



Page 1 of 1 ISO 9001



#### ISSUED BY ASIAN CALIBRATION LAB

Document No. ACS/LMS/FRM-110 Date of Issue. 01-04-2019 Revision No.00 Certificate No. AES/021/028/07



Client Asian Enviro Services. Job No.
Location Asian Enviro Services Lab
Equipment Detail SO2 Gas Detector Calibration Date

Model/type QC-904

Manufacturer Oceanus

Serial No. ` 190805002001

Code ACS-AES-07

Job No. ACS-027-AES/21
Data Sheet No. AES/028-07
Callbration Date Nov 22, 2021
Due Date (Where Required) Nov 21, 2022
Laboratory Temperature 26 ± 3 °C
Laboratory Humidity 40% ± 20% RH
Callbrated By Engr. Bilal Khalid

#### Calibration Results:

Range: 0-20 ppm Resolution: 0.1

Calibration Point (ppm)	Set value Ref. Std. Unit: ppm	Measured Value (IUT)* Unit: ppm	Deviation/Error Unit: ppm
0.0	0.0	0.0	0.0
2.0	2.0	1.9	0.1

#### Instrument Under Test

- Instrument was used and good in condition.
- Adjustment is carried out and measurement in this certificate are as obtained figures.

#### Reference / Calibration Standard

The Indoor Air Monitor (SO2 Gas Detector) has been calibrated against reference standard id ID#ACS-INST-44 which is traceable to certificates No. APCIC/ML (44)/ILO#98/47.10.20 of PCSIR Laboratory Pakistan.

#### Note(s):

- This certificate provides traceability of measurements to recognised international/national standard and to units of measurements realizes to recognised international/national standard laboratories.
- This certificate may not be reproduced, except in full, without prior written approval of the laboratory

Calibrated by.

(DM)

Reviewed by.

(TM)

Approved by.



Head Office:

Basement, C-3, Jhelum Block, Green Forts-II, Lahore - Pakistan Phones: +92 42 35450914-15, Fax: +92 42 35450916,

Email: info@asiancalibration.com

150 17025

ACS ISO 9001



Page 1 of 1

## ISSUED BY ASIAN CALIBRATION LAB

Document No. ACS/LMS/FRM-110 Date of Issue. 01-04-2019 Revision No.00 Certificate No. AES/021/025/01



Client Asian Environment Services Job No. ACS-025-AES/21 Asian Calibration Lab Location Data Sheet No. AES/026-01 Equipment Detail Noise Level Meter Inspection Date Nov 22, 2021 BSWA 308 Due Date (Where Required) Nov 21, 2022 Model/type Manufacturer BSWA TECH Laboratory Temperature 26 ± 3°C Serial No. ` 580036 Laboratory Humidity 40% ± 20% RH Code ACS-NM-01 Calibrated By Engr. Bilal Khalid

#### Inspection Checks & Results:

Range: 93.8 dB Resolution: 0.1 Source: Sound

Set value Ref. Std. Unit: dB	Measured Value (IUT)* Unit: dB		Deviation/Error Unit: dB
93.8	93.8	0	0.0
93.8	93.8	60	0.0
93.8	93.8		0.0

Level Linearity

Range: 20 – 134 dB Resolution: 0.1 Source: Flectrical

Set value Ref. Std. Unit: dB	Measured Value (IUT)* Unit dB	Deviation/Error Unit: dB	
20	20.2	0.2	
21	21.1	0.1	
22	22.2	0.2	
23	23.2	0.2	
24	24.1	0.1	
25	25.1	0.1	
30	30.2	0.2	
40	40,0	0.0	
50	50.0	0.0	

Calibrated by.

Reviewed by.

Approved by.



Head Office:

Basement, C-3, Jhelum Block, Green Forts-II, Lahore - Pakistan Phones: +92 42 35450914-15, Fax: +92 42 35450916,

Email: info@asiancalibration.com





ISSUED BY ASIAN CALIBRATION LAB

Document No. ACS/LMS/FRM-110 Date of Issue, 01-04-2019 Revision No.00 Certificate No. AES/021/025/01



Range: 20-134 dB Resolution: 0.1 Source: Electrical

Set value Ref. Std. Unit: dB	Measured Value (IUT)* Unit: dB	Deviation/Error Unit: dB	
60	60.0	0.0	
70	70.0	0.0	
80	80.0	0.0	
89	89.0	0.0	
90	90.0	0.0	
91	91.0	0.0	
92	92.0	0.0	
93	93.0	0.0	
94	94.0	0.0	
95	95.0	0.0	
96	96.0	0.0	
97	97.0	0.0	
98	98.0	0.0	
99	99.0	0.0	
100	100.0	0.0	
110	110.0	0.0	
120	120,0	0.0	
130	130.0	0.0	
131	131.0	0.0	
132	132.0	0.0	
133	133.0	0.0	
134	134.0	0.0	

Calibrated by.

Reviewed by.



Head Office:

Basement, C-3, Jhelum Block, Green Forts-II, Lahore - Pakistan Phones: +92 42 35450914-15, Fax: +92 42 35450916,

Email: info@asiancalibration.com





Approved by.

(QM)

## ISSUED BY ASIAN CALIBRATION LAB

Document No. ACS/LMS/FRM-110 Date of Issue. 01-04-2019 Revision No.00 Certificate No. AES/021/025/01



- · Instrument was new and good in condition.
- Adjustment is carried out and measurement in this certificate are as obtained figures.
- The above instrument has been calibrated against the standards maintained in the instrument's division of ACS lab.

#### Reference / Calibration Standard

The Noise Level Meter has been calibrated against Noise calibrator make BSWA BK4231 which is traceable to certificates No. APCIC/PL (3611/ILO#938, of PCSIR Laboratory Pakistan.

#### Note(s):

- This certificate provides traceability of measurements to recognised international/national standard and to units of measurements realizes to recognised international/national standard laboratories.
- This certificate may not be reproduced, except in full, without prior written approval of the laboratory.

Calibrated by. (DM)

Reviewed by (TM)

d of Certificate-----

Approved by. (QM)



#### Head Office:

Basement, C-3, Jhelum Block, Green Forts-II, Lahore - Pakistan Phones: +92 42 35450914-15, Fax: +92 42 35450916,

Email: info@asiancalibration.com





www.asiancalibration.com

## CERTIFICATE OF CALIBRATION

ISSUED BY ASIAN CALIBRATION LAB

Document No. ACS/LMS/FRM-110 Date of Issue. 01-04-2019 Revision No.00

Certificate No. AES/021/030/09

Asian Enviro Services. Job No. ACS-027-AES/21 Location ACS Lab Data Sheet No. AES/030-09 Equipment Detail LUX meter Calibration Date Nov 22, 2021 Model/type LM-200LED Due Date (Where Required) Nov 21, 2022 AMPROBE Site Temperature 23.8 °C ± 3°C

Manufacturer 50% ± 20% RH Serial No. 18050461 Site Humidity ACS-AES-09 Calibrated By Engr. Abdur Rehman Code

Calibration Results:

Client

Range: 540 - 2586 LUX Resolution: 50.0 Source: LUX

Set value Ref. Std. Unit: LUX	Measured Value (IUT)* Unit: LUX	Deviation/Error Unit: LUX
540	542	2.0
845	850	5.0
1241	1250	9.0
2037	2050	13.0
2586	2600	14.0

#### Instrument Under Test

Instrument was used and good in condition.

Adjustment are carried out and measurement in this certificate are as obtained figures.

#### Reference / Calibration Standard

The LUX Meter has been calibrated against Master LUX Meter which is traceable to the certificate no. ACS/LMS/FRM-LUX.M-01 of ACS

. This certificate provides traceobility of measurements to recognised international/national standard and to units of measurements realizes to recognised international/national standard laboratories.

This pertificate may not be reproduced, except in full, without prior written approval of the laboratory.

Calibrated by.

(DM)

Reviewed by. (MT)

-----End of Certificate-----

Approved by. (QM)



Head Office:

Basement, C-3, Jhelum Block, Green Forts-II, Lahore - Pakistan Phones: +92 42 35450914-15, Fax: +92 42 35450916,

Email: info@asiancalibration.com







Page 1 of 1

## ISSUED BY ASIAN CALIBRATION LAB

Document No. ACS/LMS/FRM-110 Date of Issue. 01-04-2019 Revision No.00 Certificate No. AES/021/029/08



Client Asian Enviro Services.
Location Asian Enviro Services Lab
Equipment Detail NO2 Gas Detector Calibration Date
Model/type QC-904 Due Date (Wher
Manufacturer Oceanus Laboratory Temp
Serial No. 190805002002 Laboratory Hum
Code ACS-AES-08 Calibrated By

 Job No.
 ACS-027-AES/21

 Data Sheet No.
 AES/029-08

 Calibration Date
 Nov 22, 2021

 Due Date (Where Required)
 Nov 21, 2022

 Laboratory Temperature
 26 ± 3 °C

 Laboratory Humidity
 40% ± 20% RH

 Calibrated By
 Engr. Bilal Khalid

#### Calibration Results:

Range: 0-20 ppm Resolution: 0.1

Calibration Point (ppm)	Set value Ref. Std. Unit: ppm	Measured Value (IUT)* Unit: ppm	Deviation/Error Unit: ppm
0.0	0.0	0.0	0.0
1.3	1.3	1.3	0.0

#### Instrument Under Test

- Instrument was used and good in condition.
- Adjustment is carried out and measurement in this certificate are as obtained figures.

#### Reference / Calibration Standard

The Indoor Air Monitor (NO2 Gas Detector) has been calibrated against reference standard id ID#ACS-INST-45 which is traceable to certificates No. APCIC/ML (45)/ILO#98/47.10.20 of PCSIR Laboratory Pakistan.

#### Note(s):

- This certificate provides traceability of measurements to recognised international/national standard and to units of measurements realizes to recognised international/national standard laboratories.
- This cartificate may not be reproduced, except in full, without prior written approval of the laboratop.

Calibrated by. (DM) Reviewed by.

Approved by. (QM)

-----End of Certificate-----



Head Office:

Basement, C-3, Jhelum Block, Green Forts-II, Lahore - Pakistan Phones: +92 42 35450914-15, Fax: +92 42 35450916, Email: info@asiancalibration.com 150 17025

Page 1 of 1