October 2015

# BAN: Third Urban Governance and Infrastructure Improvement (Sector) Project – Habiganj Roads-Drains Improvement Subproject (Phase 1)

Prepared for the Local Government Engineering Department (LGED), Government of Bangladesh and for the Asian Development Bank.

This initial environmental examination is a document of the borrower. The views expressed herein do not necessarily represent those of ADB's Board of Directors, Management, or staff, and may be preliminary in nature. Your attention is directed to the "terms of use" section of this website.

In preparing any country program or strategy, financing any project, or by making any designation of or reference to a particular territory or geographic area in this document, the Asian Development Bank does not intend to make any judgments as to the legal or other status of any territory or area.

# ATTACHMENT 2: IEEs for ROAD AND DRAIN

**Road-Drain Improvement Sub-Project** 

# Package Nr: UGIIP-III-I/ HABI/UT+DR/01/2015 (Lot-1,2)

# HABIGANJ POURASHAVA

**OCTOBER 2015** 

Prepared by: MDS Consultants

# **Initial Environmental Examination**

October 2015

BAN: Third Urban Governance and Infrastructure Improvement (Sector) Project-Habiganj Roads-Drains Improvement Subproject (Phase-1)

Prepared for the Local Government Engineering Department (LGED), Government of Bangladesh and for the Asian Development Bank.

# **CURRENCY EQUIVALENTS** (as of 26<sup>th</sup> October 2015)

Currency Unit	=	BDT
BDT1.00	=	\$0.01286
\$1.00	=	BDT77.75

#### ABRREVIATIONS

ADB AP DoE DPHE EARF ECA ECC ECR EIA EMP ETP GRC GRM IEE LCC LGED MLGRDC O&M PMO PPTA REA		Environmental Conservation Act environmental clearance certificate Environmental Conservation Rules environmental impact assessment environmental management plan effluent treatment plant grievance redressal cell grievance redress Mechanism initial environmental examination location clearance certificate
	-	
	_	
	_	•
RP	-	resettlement plan
SPS	—	Safeguard Policy Statement
ToR	-	terms of reference

# **GLOSSARY OF BANGLADESHI TERMS**

ghathartal-khal-khas, khash-katcha-lakh, lac-madrasha-mouza-parashad-pourashava-pucca-thana-	10 million (= 100 lakh) boat landing station nationwide strike/demonstration called by opposition parties drainage ditch/canal belongs to government (e.g. land) poor quality, poorly built 100,000 Islamic college community area government-recognized land area authority (pourashava) municipality good quality, well built, solid police station sub district
----------------------------------------------------------------------------------------------	--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

#### WEIGHTS AND MEASURES

ha	_	hectare
km	_	kilometre
m	_	meter
mm	—	millimetre

#### NOTES

(i) In this report, "\$" refers to US dollars.(ii) —BDT refers to Bangladeshi Taka

## PREFACE

The premises of this Sub-Project appraisal Report (Spar) are the MDS Consultant services presentation of an analysis of data and conclusions, together with its appendices.

The key elements of the IEE Report focus on: Assessment of Compliance Guidelines of Environment Safeguards according to ADB and GoB policy.

#### DISCLAIMER

This Report has been prepared by Management Design and Supervision Consultant (MDS) and is part of the Terms of Reference for the CONTRACT FOR CONSULTANCY SERVICES. Contract No. UGIIP-III/S/MDS/2014. Management Design and Supervision Consultant (MDS) Consultancy Services of ADB and OFID assisted Third Urban Governance & Infrastructure Improvement (Sector) Project (UGIIP-III), Loan No. 3142 BAN (SF). Between Government of the People's Republic of Bangladesh, Local Government Engineering Department (LGED) and Joint Venture of SMEC International Pty Ltd with Aqua Consultant & Associates Ltd, ACE Consultants Limited in Association with Environment, Agriculture and Development Services Ltd.

This Report owned by the GoB (with executing Agency LGED), using any part or modifying this Report requires the express written permission of GoB.

The views expressed in this report do not necessarily reflect the official views of the ADB, OFID and GoB. In preparing any country program or strategy, financing any project, or by making any designation of or reference to a particular territory or geographic area in this document, the Asian Development Bank does not intend to make any judgments as to the legal or other status of any territory or area.

#### SPECIAL THANKS

We would like to express thanks to LGED executing agency for cooperation, directions and suggestions during preparation of this Report.

EXEC	CUTIVE SUMMARY	1
Ι.	INTRODUCTION	5
Α.	Purpose of the Report	5
В.	Extent of the IEE Study	7
II.	POICY, LEGAL AND ADMINISTRATIVE FRAMWORK	8
Α.	ADB Policy	8
В.	GOB National Policy	8
C.	Government of Bangladesh Environmental Assessment Procedures	9
III.	DESCRIPTION OF THE SUBPROJECTS	.11
Α.	The Study Area	11
В.	Indigenous People Safeguard	11
Α.	Existing Condition and Need for the Project	13
В.	Proposed Components	14
IV.	DESCRIPTION OF THE ENVIRONMENT	.24
Α.	Methodology Used for the Baseline Study	24
В.	Physical Characteristics	24
С.	Biological Characteristics	25
D.	Socioeconomic Characteristics	25
Ε.	Historical, Cultural and Archaeological Characteristics	26
V.	ASSESSMENT OF ENVIRONMENTAL IMPACTS AND SAFEGUARDS	.28
Α.	Methodology	28
В.	Screening out Areas of No Significant Impact	28
C.	Anticipated Impacts and Mitigation Measures – Planning and Design Phase	29
D.	Anticipated Impacts and Mitigation Measures – Construction Phase	
Ε.	Anticipated Impacts and Mitigation Measures – Operations & Maintenance Phase	32
F.	Cumulative Impact Assessment	39
VI.	INFORMATION DISCLOSURE, CONSULTATION, AND PARTICIPATION	.40
Α.	Public Consultation Conducted	
В.	Future Consultation and Disclosure	
VII.	GRIEVANCE REDRESS MECHANISM	
VIII.	ENVIRONMENTAL MANAGEMENT PLAN (EMP), BANDARBAN POURASHAVA.	
C.	Institutional Arrangement	
D.	Safeguard Implementation Arrangement	
E.	Institutional Capacity Development Program	
F.	Staffing Requirement and Budget	
IX.	MONITORING AND REPORTING	
Х.	FINDINGS, RECOMMENDATIONS AND CONCLUTIONS	
A.	Findings	
B.	Recommendations	
С.	Conclusions	
XI.	Appendix-1 View on Photographs	
XII.	Appendix-2 Environment Clearance Certificate	
XIII.	Appendix-3 Rapid Environmental Assessment (REA) Checklist	
XIV.	Appendix-4 Levels of Service for Proposed Interventions- Roads and Drains	
XV.	Appendix-5 Sample Outline Traffic Management Plan	
XVI.	Appendix-6 Public Consultation	
XVII.	Appendix-7 Special Condition for Environment Code of Practice (ECOP)	122

## CONTENTS

## LIST OF TABLES

Table 1: Subprojects and Components Proposed in UGIIP-III	6
Table 2: Applicable Government of Bangladesh Environmental Legislations	9
Table 3: Likely Government of Bangladesh Classification of Habiganj Pourashava Roads &	દ્ર
Drains Subproject	10
Table 4: Existing roads & Drains and their conditions in Habiganj Pourashava	13
Table 5: Proposed Roads and Drains for Rehabilitation/Construction in Habiganj	
Pourashava	15
Table 6: Fields in which the Subproject Components Not Expected to Have Significant	
Impacts	28
Table 7: Site and Design Considerations to Meet EARF Environmental Criteria	29
Table 8: Possible Actions to Mitigate against Project Effects of Climate Change and Improv	ve
Climate Resilience for Road and Drain	31
Table 9: Anticipated Impacts and mitigation Measures at Construction and Operations &	
Maintenance Phase	33
Table 10: Environment al Management and Monitoring Plan – Prior, During, and Post	
Construction Phase	48
Table 11: Environmental Management and Monitoring Plan – O&M Phase	63
Table 12: Training Program for Environmental Management	67
Table 13: Indicative Cost of EMP Implementation	69
Table 14 : Indicative Cost of EMP Implementation – Per Source of Funding	71

# LIST OF FIGURES

Figure 1: Pourashava under UGIIP –III	
Figure 2: Proposed Roads & Drains Works in Habiganj Poura	ashava18
Figure 3: Typical Cross-Section of Bituminous Carpeting Roa	ad 19
Figure 4: Typical Cross-Section of CC Road	
Figure 5: Typical Reinforced Cement Concrete U-drain	
Figure 6: Habiganj District Map	Error! Bookmark not defined.
Figure 7: Habiganj Pourashava in Habiganj sadar Upazila	Error! Bookmark not defined.
Figure 8: Project Grievance Redress Mechanism	
Figure 9 : Safeguards Implementation Arrangement	

#### EXECUTIVE SUMMARY

- 1. The Government of Bangladesh (GOB) has undertaken the Third Urban Governance and Infrastructure and Improvement (Sector) Project (UGIIP-III) with financial assistance from the Asian Development Bank (ADB) ADB Loan NR-3142 BAN (SF)/1626P OFID together with co-financing from OFID to improve governance and urban service provision in selected 31 (thirty one) pourashavas over a period of 6 years (2014 to 2020). The overall objective of the Project is the construction, rehabilitation, expansion and implementation of subprojects of essential existing infrastructure and utility facilities for the urban sector of Bangladesh; to develop a well-structured augmentation/rehabilitation program and implement according to prioritization.
- 2. Under the PPTA project for UGIIP-III, Environmental assessment and review framework (EARF) were prepared and the same were endorsed by both the funding agencies and GoB to be adopted for implementation of the UGIIP-III project. The frameworks specified the screening procedures and the guidelines for identifying the APs, estimating the compensation and assistance to be paid for the losses, grievance redress mechanism, preparation of IEE and EIA and the institutional requirements for monitoring the implementation of environmental safeguard aspects of the project. The IEE of Habiganj Pourashava has been prepared following the PPTA format.
- 3. Variety of subprojects have been undertaken under UGIIP-III, potential environmental impacts of a local nature can be expected and cover a wide spectrum. Accordingly, the criteria for selection or exclusion of subprojects address concerns related to potential significant or irreversible negative environmental impacts.
- 4. Potential environmental impacts stem from poor or improper location, planning and design practice. Construction impacts in a local setting and within the local community can be significant, even though of short duration and limited extent.
- 5. Government of Bangladesh (GOB) law and ADB policy require that the environmental impacts of development projects be identified and assessed as part of the planning and design process, and that action be taken to reduce those impacts to acceptable levels. This is done through the screening/impact assessment process, which has become an integral part of all ADB lending operations, project development and implementation.
- 6. The Habiganj Pourashava roads & Drains subproject is one of the subprojects proposed under UGIIP III. ADB requires the consideration of environmental issues in all aspects of the Bank's operations, and the requirements for environmental assessment are described in ADB's Safeguard Policy Statement (SPS), 2009. This Initial Environmental Examination (IEE) study was carried out based on the feasibility study and preliminary engineering designs prepared during project preparation and have been finalized during detailed design stage to reflect any changes and latest subproject designs.
- 7. Categorization: An environmental assessment using ADB's Rapid Environmental Assessment (REA) checklist for roads & drains (Appendix 3) was conducted and results of the assessment show that the subproject is unlikely to cause significant adverse impacts. Habiganj Pourashava roads & drains subproject is classified as environmental category B as per ADB SPS. This initial environmental examination (IEE) has been prepared in accordance with ADB SPS's requirements for environment category B projects and provides mitigation and monitoring measures to ensure no significant impacts as a result of the subproject.
- 8. The project has been classified as environment 'Category B' by criteria in the Environment Policy of the ADB and Environmental Assessment Guidelines (November 2002) as applied by the ADB Urban Development Division, South Asia Department.

Category B projects are "judged to have some adverse environmental impacts, but of lesser degree and/or significance than those for category A projects." As a result "an initial environmental examination (IEE) is required to determine whether or not significant environmental impacts warranting an EIA are likely."

- 9. As per DOE, GOB, most of the project under UGIIP-III have been categorized as Orange-A and Orange-B. Water treatment plant, water distribution line laying/relaying/extension, landfill/dumping ground, and bus and truck terminals are in Red Category.
- 10. DOE has issued an Environment Clearance Certificate for UGIIP-III subprojects which fall under Orange A and Orange B Categories vide letter DOE/ clearance/5444/2015/256 dated 21.05.2015. Accordingly, only Red Category subprojects require the Environmental Assessment process including EIA for Environmental Clearance.
- 11. Considering all the above following steps were adopted by the MDS Consultant's team for Environmental Safeguard compliance
  - (i) 1. Review of the available Environmental safeguard documents and categorization of the project as per ADB and GOB guidelines.
  - (ii) 2. Separate Consultation with MDS team members, PMO staffs and PIU staffs to explain the importance of the safeguards.
  - (iii) 3. Separate Workshop on safeguard policies for all Municipal Engineers, EE and AE of all the Pourashavas under UGIIP-III
  - (iv) 4. Screening and re-categorization of each and every scheme with the help of REA checklist transect walk and public consultation for individual schemes during visit to individual project scheme sites.
  - (v) 5. Preparation of sector subproject IEE for each sector subproject for each Pourashava.
  - (vi) 6. Preparation of TOR for conduction of EIA to get environmental clearance from DOE, GOB for Red category projects.
- 12. Implementation arrangements; Local Government Engineering Department (LGED) and Department of Public Health Engineering (DPHE) are the executing agencies (EA). LGED is responsible for providing support and guidance to pourashavas concerning performance criteria and pourashava development planning. Department of Public Health Engineering (DPHE) will provide support in water supply and sanitation schemes. Implementation activities will be overseen by a Project Management Office (PMO). The participating pourashavas are the implementing agencies, with a project implementation unit (PIU) within the pourashava structure. Consultant teams are responsible for (i) detailed engineering design, contract documents preparation and safeguards facilitation; (ii) project management and administration support; (iii) assistance in supervising construction; (iii) strengthening of local governance, conducting required studies/surveys and (iv) awareness raising on behavioral change in water, sanitation and solid waste management activities.
- 13. Description of the environment: Subproject components are located in Habiganj Pourashava urban area or in its immediate surroundings which were developed into urban land uses. The subproject sites are located in existing right of ways (ROWs) and government-owned land. There are no protected areas, Cultural heritage site, wetlands, mangroves, or estuaries in or near the subproject location. There are no forest areas within or near Habiganj Pourashava.
- 14. Environmental management: An environmental management plan (EMP) is included as part of this IEE, which includes (i) mitigation measures for environmental impacts during implementation; (ii) an environmental monitoring program, and the responsible entities for mitigating, monitoring, and reporting; (iii) public consultation and information

disclosure; and (iv) grievance redress mechanism. A number of impacts and their significance were reduced through mitigation measures in the preliminary design stage. The EMP will form part of the civil work bidding and contract documents.

- 15. Locations and siting of the proposed infrastructures were considered to further reduce impacts. The concepts considered in the design of the Habiganj Pourashava roads & drains subproject are: (i) locating facilities on government-owned land to avoid the need for land acquisition and relocation of people; (ii) prioritizing rehabilitation over new construction using public right of ways (ROWs), and taking all possible measures in design and selection of site or alignment to avoid resettlement impacts; (iii) avoiding where possible locations that will result in destruction/disturbance to historical and cultural places/values; (iv) avoiding tree-cutting where possible; (v) ensuring all planning and design interventions and decisions are made in consultation with local communities and reflecting inputs from public consultation and disclosure for site selection.
- 16. During the construction phase, impacts mainly arise from (i) disturbance of residents, businesses, and traffic; (ii) need to manage excess construction materials and spoils; and (iii) community and workers health and safety. These are common impacts of construction in urban areas, and there are well developed methods for their mitigation. Measures such as conducting work in lean season and minimizing inconvenience by adopting best construction methods will be employed. Traffic management will be necessary during excavation works on busy roads. In the operational phase, all facilities and infrastructure will operate with routine maintenance, which should not affect the environment. Facilities will need to be repaired from time to time, but environmental impacts will be much less than those of the construction period as the work will be infrequent, affecting small areas only.
- 17. Mitigation measures have been developed to reduce all negative impacts to acceptable levels and will be assured through a program of environmental monitoring. The monitoring program will include observations on and off-site, document checks and interviews with workers and beneficiaries. The PMO will submit semi-annual monitoring reports to ADB which will include a detailed review of EMP implementation, including corrective actions taken.
- 18. Consultation, disclosure and grievance redress: The stakeholders were involved in developing the IEE through discussions on-site and public consultation, after which views expressed were incorporated into the IEE and in the planning and development of the subproject. The IEE will be made available at public locations in the pourashava and will be disclosed to a wider audience via the ADB and LGED project websites. The consultation process will be continued and expanded during project implementation to ensure that stakeholders are fully engaged in the project and have the opportunity to participate in its development and implementation. A grievance redress mechanism is described within the IEE to ensure any public grievances are addressed quickly.
- 19. Monitoring and reporting: The PMO, PIU (Habiganj pourashava), and Management Design and Supervision Consultants (MDSC) will be responsible for safeguard monitoring. The MDSC will submit monthly monitoring reports to PMO, and the PMO will send semi-annual monitoring reports to ADB. ADB will post the semi-annual environmental monitoring reports on its website as part of its disclosure requirements.
- 20. Conclusions and recommendations: The citizens of Habiganj Pourashava will be the major beneficiaries of this subproject. The proposed subproject is unlikely to cause significant adverse impacts and net environmental benefits to citizens of Habiganj Pourashava will be positive. The potential impacts that are associated with design, construction and operation can be mitigated to standard levels without difficulty through proper engineering design and the incorporation or application of recommended mitigation measures and procedures.

21. Based on the findings of the IEE, there are no significant impacts and the classification of the subproject as Category "B" is confirmed. No further special study or detailed environmental impact assessment (EIA) needs to be undertaken to comply with ADB SPS, 2009.

## I. INTRODUCTION

#### A. Purpose of the Report

- 22. Bangladesh has a population of approximately 162 million and has experienced increased rapid urbanization with the growth of many secondary towns over the last three decades. About 28 per cent of the total population now lives in urban areas where the population growth rate is much higher than the overall national growth rate. With the present high increase-trend in urban population, it is justifiably anticipated that by year-2020, such populace will constitute nearly 40 percent of the national aggregate. One principal cause of such rapid growth is the presence of better opportunities spanning economic, communication, education, health and other social aspects in the urban areas. It is worth noting that by one account, in countries of Bangladesh's standing, around 55-60% of a country's aggregate economic activities takes place within the urban confines.
  - These municipalities include: Three (3) sample PSs are : 1) Naogaon 2) Magura and 3) Lalmonirhat
  - Seven (7) non-sample priority PSs are: 4) Kishoreganj, 5) Muktagacha, 6) Netrokona,
    7) Sherpur, 8) Bera, 9) Charghat and 10) Rajbari.
  - The remaining twenty one PSs (target PSs) are: 11) Chapai Nababganj, 12) Habiganj, 13) Moulvibazar, 14) Laxmipur, 15) Chhatak, 16) Joypurhat, 17) Laksam, 18) Shahjadpur 19) Rangamati, 20) Ishwardi, 21) Meherpur, 22) Nabinagar, 23) Panchagar, 24) Jessore, 25) Bandarban, 26) Khagrachori, 27) Kotalipara, 28) Nilphamari, 29) Chuadanga and 30) Benapole 31) Tungipara.
- 23. The Habiganj Pourashava roads & drains subproject is one of the subprojects proposed under UGIIP III. ADB requires the consideration of environmental issues in all aspects of the Bank's operations, and the requirements for environmental assessment are described in ADB's Safeguard Policy Statement (SPS), 2009. This Initial Environmental Examination (IEE) study was carried out based on the feasibility study and preliminary engineering designs prepared during project preparation and have been finalized during detailed design stage to reflect any changes and latest subproject designs.
- 24. **Categorization:** An environmental assessment using ADB's Rapid Environmental Assessment (REA) checklist for roads & drains (Appendix 3) was conducted and results of the assessment show that the subproject is unlikely to cause significant adverse impacts. Habiganj Pourashava roads & drains subproject is classified as environmental category B as per ADB SPS. This initial environmental examination (IEE) has been prepared in accordance with ADB SPS's requirements for environment category B projects and provides mitigation and monitoring measures to ensure no significant impacts as a result of the subproject.
- 25. The Project Log Frame gives the project goal as: sustained improvements in the urban environment and quality of life in participating municipalities by 2020. The project purpose is: expanded access to and usage of urban infrastructure and services, and improvement in urban governance in all participating municipalities by 2020. The objectively verifiable indicators are:
  - Improved citizen perception of the urban environment, municipal services and quality of life
  - Improved quality and standard of urban infrastructure and municipal services

26. UGIIP-III represents the continued development of the ADB approach to urban development in Bangladesh. It is a valuable model for comparison with other approaches and for replication by other agencies and in other countries. UGIIP-III has broad goals such as developing infrastructure facilities, and improving services, urban governance, accountability, the urban environment and quality of life. UGIIP-III will improve infrastructure through roads, water supply, sanitation, solid waste management, drainage and municipal facilities subprojects.

#### **Project Types Identified for Implementation**

27. Infrastructure subprojects proposed under UGIIP-III encompass a variety of types of urban infrastructure and services including those shown in Table 1.

Table 1: Subprojects and Components Proposed in UGIIP-III			
Water Supply	Source Augmentation	Deep Tube Wells (Hand Pump)	
		Deep Tube Wells (Production Pump	
	Distribution	Piping, Valves and Fittings	
	Treatment	Water Treatment (Iron and Arsenic	
		Removal)	
	Storage	Elevated Tank	
	System improvement	Repair/Replacement of Lines	
		Bulk Water Meters	
		Domestic water meter	
Sanitation	Community Facility	Community Toilets	
	Public Facility	Public Toilets	
	Septic tank	Vacuum Units	
Solid Waste	Disposal/waste	Disposal Alternatives	
Management	collection	Neighbourhood Collection	
	Waste transfer	Community Storage Bins	
		Dump Trucks/Rickshaw	
	Waste disposal	Transfer Station	
		Access Road to Landfill	
		Landfill Facility	
		Treatment/Composting	
Urban Drainage	Roadway Drainage	Roadside Drains	
-	Area drainage	Outfall	
		Main Drain	
		Secondary and Tertiary Drains	
		Retention Pond	
Urban Transport &	Roadway Provision	Bridge Replacement	
communication		Drainage/Culverts	
		Roadway Widening/Resurfacing	
Slum	System improvement	Repair/Replacement of Lines	
	Community Facility	Community Toilets	
	Septic tank	Vacuum Units	
Public use facilities	Municipal facilities	Market/Community Centres	
		Municipal and Kitchen Markets	
		Improvement of Slaughterhouses	
		Bus and Truck Terminals	

Table 1: Subprojects and Components Proposed in UGIIP-III

#### **Potential Impacts from Activities**

- 28. A Sector Initial Environmental Examination (SIEE) has been conducted for the overall UGIIP-III project during the PPTA and subproject IEEs was prepared for each of the PS subprojects identified during the PPTA. The SIEE sought to identify any regional and cumulative impacts that may result from the sector intervention. Cumulative impacts were all in the social or human development sphere of the environment, and all were found to be positive. No direct cumulative or regional potential negative impact of the project activities on environmental resources and values was detected.
- 29. From the variety of subprojects undertaken under UGIIP-III, potential environmental impacts of a local nature can be expected and cover a wide spectrum. In general these were determined not to be significant or irreversible, and precautionary measures have been taken (and incorporated into guidance, management plans and implementation frameworks) to avoid or reduce them. Even the criteria for selection or exclusion of subprojects address potential significant or irreversible negative environmental impacts.
- 30. The ADB has categorized UGIIP-III project as Category B and following its normal procedure has determined that an IEE will be conducted for each municipality subproject submission. The impacts of subprojects will be assessed according to ADB requires the consideration of environmental issues in all aspects of the Bank's operations, and the requirements for environmental assessment are described in ADB's Safeguard Policy Statement (SPS), 2009.
- 31. UGIIP-III the impact will be improved living environment in project towns. The outcome will be improved municipal service delivery and urban governance in project towns. Project towns are pre-selected 31 towns to be supported in an integrated manner under the project. UGIIP-III will improve existing and provide new municipal infrastructures including (i) roads; (ii) drainages; (iii) water supply system; (iv) solid waste management facilities; (v) slaughterhouses; (vi) markets, community center/auditorium, bus and truck terminals and river ghats; (vii) public toilets; and (viii) others such as provision for street lighting and improvement of slums.

#### B. Extent of the IEE Study

32. Government of Bangladesh (GOB) law and ADB policy require that the environmental impacts of development projects are identified and assessed as part of the planning and design process, and that action is taken to reduce those impacts to acceptable levels. This is done through the environmental assessment (EA) process, which has become an integral part of lending operations and project development and implementation.

### II. POICY, LEGAL AND ADMINISTRATIVE FRAMWORK

#### A. ADB Policy

- 33. ADB requires the consideration of environmental issues in all aspects of ADB's operations, and the requirements for environmental assessment are described in ADB SPS, 2009. This states that ADB requires environmental assessment of all ADB investments.
- 34. **Screening and categorization:** The nature of the environmental assessment required for a project depends on the significance of its Environmental impacts, which are related to the type and location of the project, the sensitivity, scale, nature and magnitude of its potential impacts, and the availability of cost-effective mitigation measures. Projects are screened for their expected environmental impacts and are assigned to one of the following 4(Four) categories:
  - (i) Category A. Projects could have significant adverse environmental impacts. An EIA is required to address significant impacts.
  - (ii) Category B. Projects could have some adverse environmental impacts, but of lesser degree or significance than those in category A. An IEE is required to determine whether significant environmental impacts warranting an EIA are likely. If an EIA is not needed, the IEE is regarded as the final environmental assessment report.
  - (iii) Category C. Projects are unlikely to have adverse environmental impacts. No EIA or IEE is required, although environmental implications are reviewed.
  - (iv) Category FI. Projects involve a credit line through a financial intermediary or an equity investment in a financial intermediary. The financial intermediary must apply an environmental management system, unless all projects will result in insignificant impacts.
- 35. This Initial Environmental Examination (IEE) study for Habiganj pourashava roads and drains sub-project was carried out based on the feasibility study and preliminary engineering designs prepared during project preparation and have been finalized during detailed design stage to reflect any changes and latest subproject designs.
- 36. **Environmental management plan:** An EMP, which addresses the potential impacts and risks identified by the environmental assessment, shall be prepared. The level of detail and complexity of the EMP and the priority of the identified measures and actions will be commensurate with the project's impact and risks.
- 37. **Public disclosure:** ADB will post the following safeguard documents on its website. Relevant information from these documents will also be disclosed in local communities in a form and language understandable and accessible to the public.
  - (i) for environmental category A projects, draft EIA report at least 120 days before Board consideration;
  - (ii) final or updated EIA and/or IEE upon receipt; and
  - (iii) environmental monitoring reports submitted by the Project Management Office (PMO) during project implementation upon receipt.

#### B. GOB National Policy

38. Implementation of all subprojects will be governed by the environmental acts, rules, policies, and regulations of the Government of Bangladesh. These regulations impose restrictions on the activities to minimize/mitigate likely impacts on the environment. Many of these are cross-sectorial and several of them are directly related to environmental issues. The most important of these are the Environment Conservation Act, 1995 (ECA, 1995), and the Environment Conservation Rules (ECR, 1997).

39. Table-2 presents specific requirements for the Habiganj Pourashava roads & drains subproject. Provides the environmental standards for air, surface water, groundwater, drinking water, emissions, noise and vehicular exhaust.

Legislation	Requirements for the Project	Relevance
Environmental Conservation Act of 1995 and amendments in 2000, 2002 and 2010	<ul> <li>Restriction on operation and process, which can be continued or cannot be initiated in the ecologically critical areas</li> <li>Regulation on vehicles emitting smoke harmful to the environment</li> <li>Remedial measures for injuries to ecosystems</li> <li>Standards for quality of air, water, noise and soil for different areas for various purposes and limits for discharging and emitting waste</li> <li>Environmental guidelines</li> </ul>	The provisions of the act apply to the entire subproject in the construction and operation and maintenance (O&M) phases.
Environmental Conservation Rules of 1997 and amendments in 2002 and 2003	<ul> <li>Environmental clearances</li> <li>Compliance to environmental quality standards</li> </ul>	The subproject is categorized as Orange-B and requires location clearance certificate (LCC) and environmental clearance certificate (ECC). All requisite clearances from DoE shall be obtained prior to commencement of civil works.
Forest Act of 1927 and amendments (2000)	<ul> <li>Clearance for any felling, extraction, and transport of forest produce</li> </ul>	Considered in subproject preparation and implementation.
Bangladesh Climate Change Strategy and Action Plan of 2009	<ul> <li>Ensure existing assets is put in place to deal with the likely impacts of climate change.</li> <li>Enhance the capacity government ministries, civil society and private sector to meet the challenge of climate change</li> </ul>	Considered in subproject preparation and implementation.
Bangladesh Labor Law of 2006	<ul> <li>Compliance to the provisions on employment standards, occupational safety and health, welfare and social protection, labor relations and social dialogue, and enforcement</li> <li>Prohibition of employment of children and adolescent</li> </ul>	Considered in the EMP.

 Table 2: Applicable Government of Bangladesh Environmental Legislations

#### C. Government of Bangladesh Environmental Assessment Procedures

40. Under ECA, 1995 and ECR, 1997 industrial units and projects are classified into four categories according to "their site and impact on the environment" and size of investment, and each category (Green, Orange-A, Orange-B and Red) requires a

different level of environmental assessment as a prerequisite for the Department of Environment (DoE) in granting the LCC and ECC that allow the project to proceed.

41. As per Schedule 1 of ECA, 1995 Habiganj Pourashava roads & drains subproject is likely to be classified as Orange-B category (Table 3). Thus ECC is required from the DoE prior to commencement of the subproject.

Table 3: Likely Government of Bangladesh Classification of Habiganj PourashavaRoads & Drains Subproject

SI no	Subproject	Component	Equivalent in Schedule I of ECR	DoE Classification
1.	Roads, and Drains	Road provisions (include Road Rehabilitation/Constructi on, road resurfacing, road signs, intersection, T-Junction, Sharp bend improvement & RCC Drain Construction )	(Rehabilitation/Construc tion and extension of road (feeder road, local road) & RCC Drain Construction	Orange – B

- 42. Rule 7 of the ECR, 1997 indicates that the application for ECC must be made to the relevant DoE Divisional Officer, and the application for Orange-B category projects will include the following:
  - (i) Completed Application for ECC, and the appropriate fee;
  - (ii) Report on the feasibility of the project;
  - (iii) Report on the IEE for the project;
  - (iv) Report on the environmental management plan (EMP);
  - (v) No objection certificate from the local authority;
  - (vi) Emergency plan relating to adverse environmental impact and plan for mitigation of the effect of pollution; and
  - (vii) Outline of the relocation and rehabilitation plan (where applicable).
- 43. DoE has 30 days to respond to receipt of the ECC application for an Orange-B category project.
- 44. This IEE will serve the basis for the ECC application and will be supplemented to fulfil any additional government requirements.

### **III. DESCRIPTION OF THE SUBPROJECTS**

#### A. The Study Area

- 45. Habiganj Pourashava is located at 24.3750°N 91.4167°E and has an area of 9.05 sq km. Habiganj was part of the state of Nasirabad, which was established by Sipahisalar Syed Nasiruddin with its capital at Taraf. At present, it is a district of Sylhet Division. The Pourashava has 09 wards.
- 46. This report contains the Initial Environmental Examination (IEE) for the roads & drains sector improvement subproject, in Habiganj Pourashava and Habiganj sadar Upazillas, Habiganj District under Sylhet Division (Figure 1). It discusses the potential environmental impacts and mitigation measures relating to the location, design, construction and operation of physical works proposed under these 28(twenty eight) schemes, in one package namely UGIIP-III-I/HABI/UT+DR/01/2015 (Lot-1,2).
- 47. Subproject components are located in Habiganj pourashava urban area or in its immediate surroundings which were converted into urban use for many years ago, and there is no natural habitat left at these sites. The subproject sites are located in government-owned land. There are no protected areas, wetlands, mangroves, or estuaries in or near the subproject location. There are no forest areas within or near Habiganj Pourashava. The location map is shown as Figure 1.

#### B. Indigenous People Safeguard

48. Indigenous People Planning Framework (IPPF) is required to provide guidance and appropriate mitigation measures to the ethnic minority (advise). Out of 31 Pourashavas taken up under UGIIP-III, there is possibility of affecting indigenous people only in Bandarban, Rangamati, Khagrachari, Moulavibazar, Sherpur, Panchagar, Muktagacha and Chapainawabganj Pourashava etc. The project activities are located only within the urban areas and no ethnic communities/indigenous people's communities will be affected by the project activities. So preparation of Indigenous People Plan (IPP) document following IPPF will not be required.

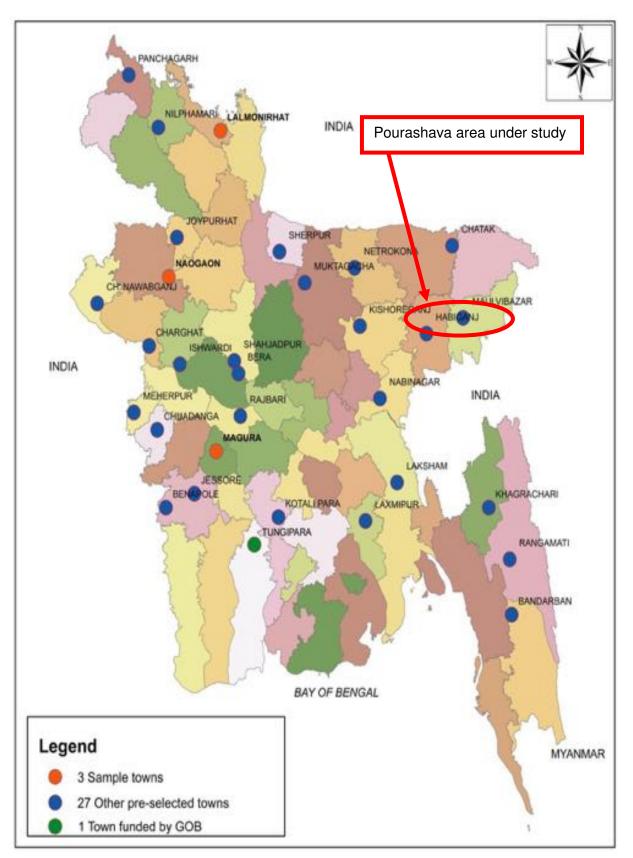


Figure 1: Pourashava under UGIIP -III

#### A. Existing Condition and Need for the Project

- 49. Habiganj Pourashava has a road and drain network of a total length of road 120.60 km and drain 58.01 km. Most of these roads & drains have uneven-rough surface, damaged topping and pavement sides, narrow in width and without roadside footpath and thus incapable of accommodating road traffic. The road surfaces are worn out partly and in some cases entirely. Though the Pourashava is not flood prone but as the houses nearby roads are much higher than the roads, the water from houses cause water logging on the roads because of insufficiency in number of drains for drainage of water especially during rainy season. Justifiably, they call for intervention varying from normal significant maintenance to large improvement/reconstruction. Table 4 presents a summary of the existing roads & drains and their conditions in the PS.
- 50. The total length of the roads & drains in Habiganj Pourashava is 120.60 km & 58.01 km and generally fall in to four roads categories: BC road, HBB road, RCC road and earthen road and three drains categories; RCC drain, Brick drain, Earthen drains. Existing roads & drains conditions in Habiganj Pourashava are given in Table 4.

Table 4: Existing roads & Drains and their conditions in Habiganj Pourashava
------------------------------------------------------------------------------

SI	Road type	Length in km	Existing condition
1	BC Road	28.50	Around 65% in bad condition
2	HBB Road	32.60	Around 70% in bad condition
3	RCC Road	36.25	Around 40% in bad condition
4	WBM Road	-	
5	Earthen Road	23.25	Around 85% in bad condition
	Total	120.60	Overall condition of the roads is not good

SI	Drain type	Length in km	Existing condition
1	RCC Drain	18.90	Around 40% in bad condition
2	Brick Drain	15.70	Around 70% in bad condition
3	Earthen Drain	23.50	Around 80% in bad condition
	Total	58.10	Overall condition of the drains is not good



Pourashava road and drain with very badly damaged surface and displaying poor maintenance

#### **B.** Proposed Components

- 51. Figure 2 shows the locations of the proposed roads and drains in the Habiganj pourashava.
- 52. Roads necessary for improvement/construction were surveyed by the project consultants during the sub-project preparation stage and an inventory of required works was conducted with the assistance of the pourashava engineers considering (i) all necessary issues and findings such as existing conditions, type, formation level (rise), widening, shoulder/footpath, side-drain, cross-drain/culvert, etc; (ii) roads with high target beneficiaries; and (iii) strategically important roads that have good linkage in the development of road communication networks. The identified roads were finalized through the workshop organized in the pourashava in the presence of the mayor, councilors, Engineers and invited officials from relevant organizations.
- 53. To accommodate climate change related inundation and annual floods, each road was assessed against whether: (i) existing crest level is 600 millimeters (mm) above existing normal flood level; (ii) road embankments are protected against annual floods; and (iii) drainage is adequate to accommodate rainfall runoff. Appendix 4 outlines proposed standards and additional climate change measures for level of service for proposed roads & drains.
- 54. The major considerations adopted for design were as follows: (i) LGED's road design manual and standards followed. The road design type 6 for BC pavement was considered, with some modifications; (ii) guidelines on climate change resilience and adaptation measures (Appendix 3) were studied and accommodated as necessary; and (iii) existing bitumen finished surface (BFS) and HBB roads were considered for improvement with CC or reinforced cement concrete (RCC)pavement where necessary, with modified design standard. In general, the following are the major features of the roads and design guidelines:
  - (i) The roads lying on low level of lands are vulnerable to flood water and/or rainwater and hence require CC/RCC surface instead of asphalt surface. Roads lying on low-lands with heavy traffic loads will be improved with RCC and DBC surface works.
  - (ii) The roads with poor quality of side drains will be improved along with side drain improvement by replacing the existing brick-drains with RCC drains to withstand heavy traffic loads.
- 55. Table 5 presents the proposed roads & drains for improvement / construction in Habiganj Pourashava Figures 3 to 5 show the typical sections of different types of road & drain that may be used in the subproject. This IEE covers fifteen roads with total length of 9.856 km and thirteen drains with total length of 6.085 km (Phase-I, Table 5) to be improvement/construction under Phase 1 (see implementation schedule). This IEE has been updated with the final roads and drains designs.

SI	Name of Scheme	PDP	Road	Drain	Existing Condition	Remarks
No		No.	L(m)	L(m)	(all roads & drains)	
	UGIIP-III-I/HABI/UT+DR/01/2015 (Lot-1,2)					
1	Improvement of RCC & BC road at Umednagar area infront of Ex Councilor Samchu Mia house to Baniyachong Road Ch 0.00-420.00m by RCC & at Ch 420.00-560.00m by BC	1001	560			No Impact
2	Construction of RCC raod at Umednagar area starting from Baniyachong Road to Bacchu Mia house . Ch.0.00-235 and connecting RCC Road from Bacchu Mia House to Umed Naggar Moktob Road. Ch.0.00-75m.	1188	310			No Impact
3	Imorovement of Kalibari Cross Road from Back Road to R&H Road by BC. Ch0.00-200.00m	1192	200			No Impact
4	(Part-A): Improvement of RCC road at Children Park area starting from R&H Road to Cinema Hall by RCC Ch.0.00-360m (Part-B):Connecting Road by RCC Ch.0.00-60m and (Part-C): Connecting Road Starting from R&H Road to old khowari Embankment Road by BC Ch.0.00-370m	1021	790			Minor Impact (water logging occurred 3-4 days)
5	Improvement of Back road starting from Smashan Ghat road to Chowdhury Bazar Narikel Hata Road by BC Ch. 1735-2560m.	1023	825		Overall condition of the existing roads is bad condition. All	Minor Impact (water logging occurred 4-5 days)
6	Improvement of Road at Jungle Bohula area starting from Intabad Jungle Bohula Road to Masulia Akhra by RCC Ch. 0.00-525.00m	1025	525		proposed road Width 3.0m or above	No Impact
7	Improvement of Court Station Road by BC starting from Baby Stand Point to Bye Pass Road by RCC Ch 0.00-430.00m	1041	430			No Impact
8	Improvement of BC road at Back Road Starting from J.K.H.K High School to Baby Stand Point at Ch.0.00-550m.	1043	550			No Impact
9	Improvement of RCC road at Mohonpur area starting from infront of Nozir Market to Byepass road at Ch 0.00-676.00m & Ch.00-150m	1040	826			No Impact
10	Improvement of Mahmudabad road by BC and partially RCC (Front of Anantapur road to machulia Diabetic Hospital at Ch.00-1200m	1053	1200			No Impact
11	Construction of RCC road at Qureshnagar area starting from old Passport Office to Late Adv. Rahat Chowdhury house. Ch 0.00-510.00m	1058	510			No Impact
	Ro	ad(lot-1)=	6726			

Table 5: Proposed Roads and Drains for Rehabilitation/Construction in Habiganj Pourashava.

SI No	Name of Scheme	PDP No.	Road L(m)	Drain L(m)	Existing Condition	Remarks
NU		NO.	L(III)	L(III)	(all roads & drains)	
12	Construction of RCC drain at Umednagar area starting from Baniyachong Road to Kotu Mia house via Bacchu Mia house Ch 35.00-235.00m.	D-1188		200		No Impact
13	Construction of RCC drain beside the Kalibari Cross Road at Ch0.00-200.00m	D-1192		200		No Impact
14	Part-A: :Construction of RCC drain at Children Park area starting from RHD road to existing cross drain (Ch00-360m) . Part-B: :Construction of RCC drain at Children Park area starting from RHD road to existing cross drain (main drain) (Ch.00-60m).	D-1021		420	Overall condition of the existing drains is bad condition. Out fall connected to	Minor Impact (water logging occurred 3-4 days)
15	Construction of RCC Drain Starting from infront of Nozir Market to existing Culvert Ch.200-400m	D-1040		200	Existing drain to khowai river	No Impact
16	Construction of RCC drain starting from existing drain at Queshnagar near old Passport Office to existing Drain Ch. 80-250m, Link-01 drain Ch.300-420m & Link-02, drain Ch.420-510m.	D-1058		380		No Impact
		Drain	(Lot-1)	1400		
17	Improvement of BC road at Umednagar area starting from Nabiganj Road to Gouranga Shil house. Ch 0.00-525.00m	1004	525			No Impact
18	Improvement of BC road at Boglabazar area starting from infront of BOC road to Khorshed Mia's mill. Ch 200-715.00m	1009	515		Querell condition of	No Impact
19	Part-A: Improvement of road starting from main road to near Mr. Bahar Ali house by RCC (Ch00-270m). Part-B: Improvement of road starting from Back road to near Sankar Mudak house By BC (Ch.00-555m).	1010	825		Overall condition of the existing roads is bad condition. All	No Impact
20	Part-A: Improvement of road starting from Khowain Bahd road to Horipur road by RCC (Ch.00-715). Part-B: Improvement of road starting from Chowdhuri bazar Jame Mosjid to Main road by BC (Ch.00-395m). Part-C: Improvement of connecting road strarting from main road to Chowdhuri bazar govt. primary school by BC (Ch.00-155).	1014	1265		proposed road Width 3.0m or above	No Impact
	Rc	ad (Lot-2)	3130			
21	Construction of RCC drain at Left side of Main Road starting from Chowdhury Bazar Traffic Point to Nursing Institute.Ch.00-1730m.	D- 1187(01)		1725		No Impact
22	Construction of RCC drain at Right side of Main Road starting from Chowdhury Bazar Traffic Point to Nursing Institute.Ch.00-1730m.	D- 1187(02)		1730	Overall condition of	No Impact

SI No	Name of Scheme	PDP	Road	Drain	Existing Condition	Remarks
INO		No.	L(m)	L(m)	(all roads & drains)	
23	Construction of RCC drain at Chirakandi area starting from Popy Store to outfull at Khowi River. Ch 0.00-210.00m	D-1191		210	the existing drains is bad condition.	No Impact
24	Construction of RCC drain at Cenema Hall Area Starting from Sultania Library to Old Khowai River Ch0.00-320.00m	D-1193		320	Out fall connected to No Impact Existing drain to	
25	Construction of RCC drain starting infront Mr. Ripon house to existing drain at Etimkhna Road Ch.0.00-150m. & Link-Ch.0+200-0+150m.	D-1194		200	khowai river.	No Impact
26	Construction of RCC drain at Rajnagar area starting from infront of Councilor Lovely Sultana house to existing drain drain near Rajnagar Grave Yard Road Ch. 0.00-100.m.	D-1195		100		No Impact
27	Construction of RCC drain at Shaesta Nagar Area from Sardar Bari to Grave Yard Ch 0.00-300.00m	D-1197		300		No Impact
28	Construction of RCC drain Starting from infront of Eng. Bahadur Alam house to existing Drain near santinagar Poil Road Ch.0.00-100m	D-1198		100		No Impact
	Drain (Lot-2)		4685			
	Gross Total(Lot-1,2) = 9856		6085			

#### Implementation Schedule

- 56. Implementation of UGIIP-3 is split up into 3 phases: (i) 1st phase = 24 months or 2 years; (ii) 2nd phase = 30 months or 2.5 years; and (iii) 3rd phase = 24 months or 2 years
- 57. Fifteen existing roads and thirteen drains (**9.856 km & 6.085 km**) will be implemented under Phase 1, while the remaining roads and drains will be implemented in the succeeding phases. Preliminary design of Phase 1 roads and drains has been done by pourashava and has been finalized during detailed design stage. It is estimated that construction period for Phase 1 implementation will cover 24 months.


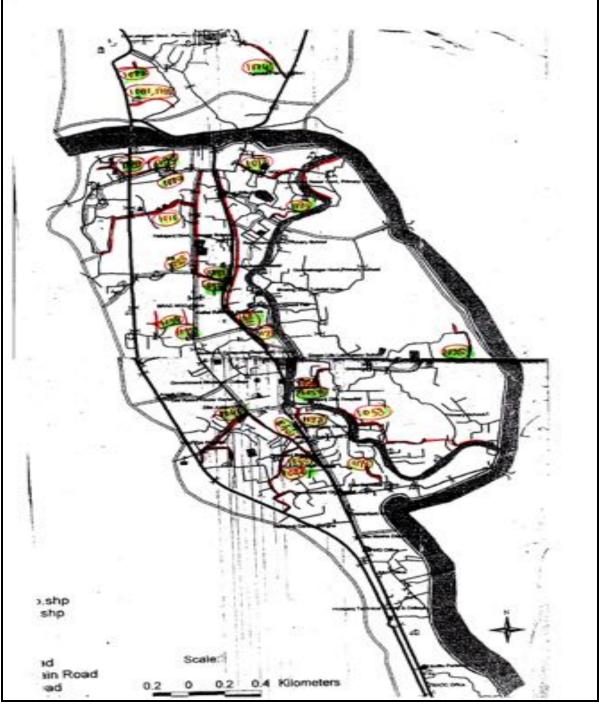


Figure 2: Proposed Roads & Drains Works in Habiganj Pourashava

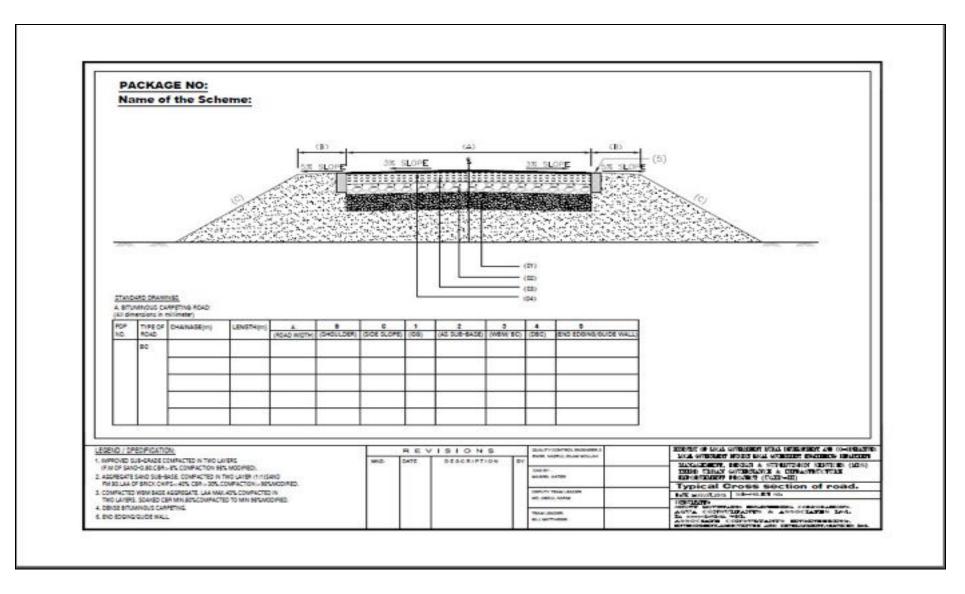

#### Figure 3: Typical Cross-Section of Bituminous Carpeting Road

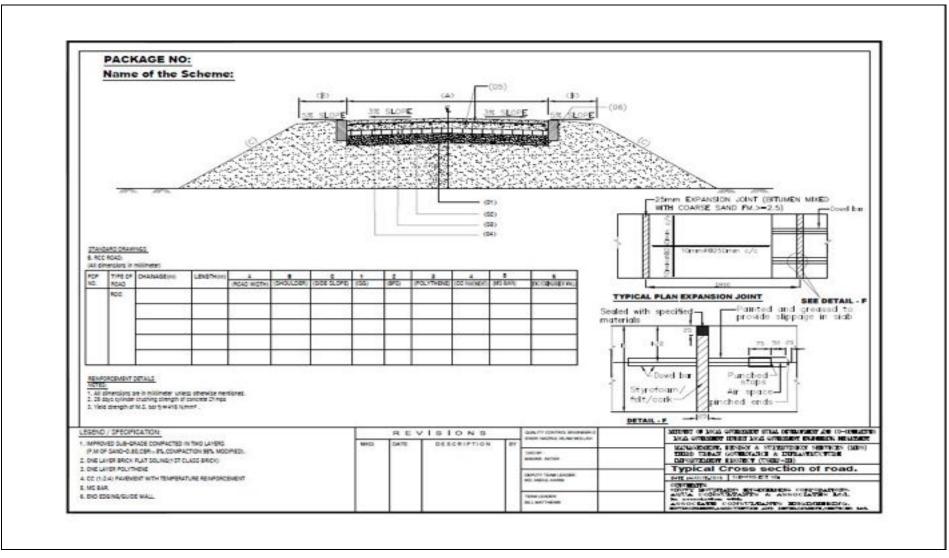


Figure 4: Typical Cross-Section of CC Road

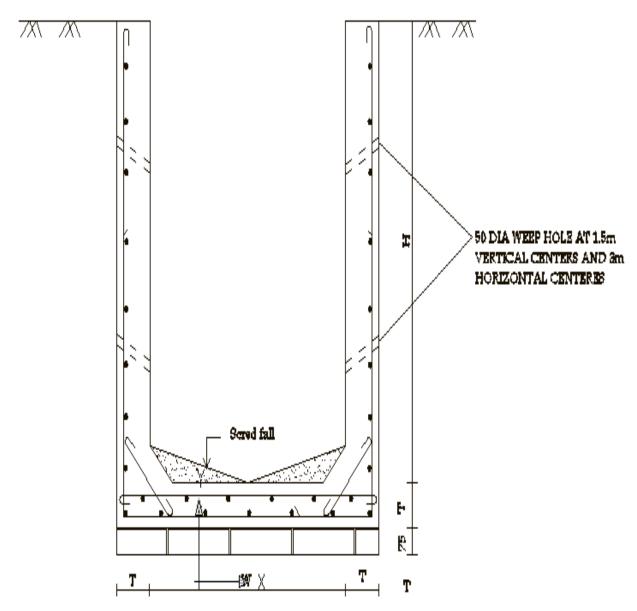


Figure 5: Typical Reinforced Cement Concrete U-drain



Figure 3: Habiganj District Map

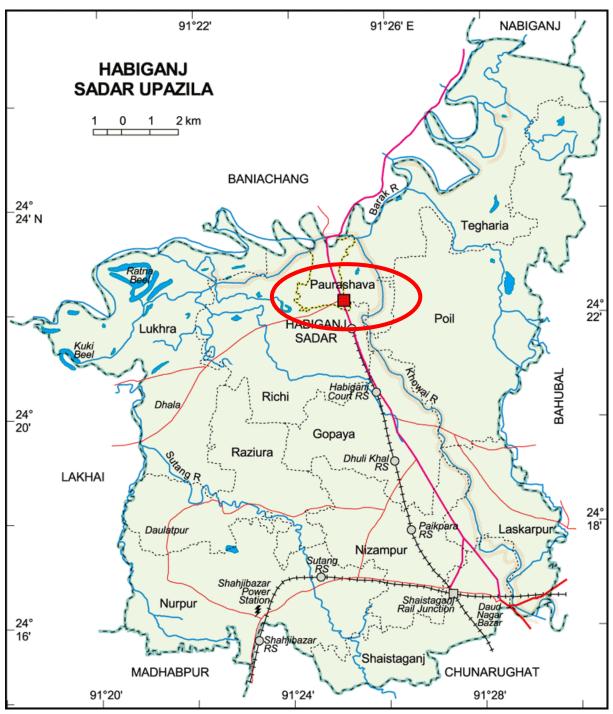


Figure 4: Habiganj Pourashava in Habiganj sadar Upazila

## **IV. DESCRIPTION OF THE ENVIRONMENT**

#### A. Methodology Used for the Baseline Study

- 58. Data collection and stakeholder consultations: Data for this study has been primarily collected through comprehensive literature survey, discussion with stakeholder agencies, and field visits to the proposed subproject sites. The literature survey broadly covered the following:
  - (i) subproject details, reports, maps, and other documents available with the ADB and PPTA consultants, MDS consultants, LGED, and Habiganj pourashava;
  - (ii) relevant acts and extraordinary gazettes, and guidelines issued by Government of Bangladesh agencies; and
  - (iii) literature on land use, soil, geology, hydrology, climate, socioeconomic profiles, and environmental planning documents collected from Government of Bangladesh agencies and websites.
- 59. Several visits to the subproject sites were made to assess the existing environment (physical, biological, and socioeconomic) and gather information with regard to the proposed sites and scale of the proposed subproject. Demographic information, archaeological and religious places, densely populated pockets, and settlements were gathering from PDP and other documents.
- 60. Data analysis and interpretation: The data collected was analyzed and interpretations made to assess the physical, biological, and socioeconomic features of the project area. The relevant information is presented in the succeeding paragraphs.
- 61. **Updating during detailed design phase:** The IEE including specific description of the environment and corridor of impact has been updated as necessary based on the final roads and drains design and alignments.

#### B. Physical Characteristics

- 62. Topography, soil and Geology: Habiganj topography is naturally flat plain and hill area. According to the Bangladesh Geological Survey map, Habigani is a part of Syllet Basin and formation is of marshy clay and peat. The Khowai River contains fine sand and stone with a high quantity of silt. Geology of Habiganj is presented in. Habiganj Pourashava was established in 1881 as Class-C Pourashava consisting with 09 wards. During the British Raj, Habiganj was established as a Thana (police precinct) in 1790, under Dhaka district (1779-1793). Until 1896, Habiganj's administrative centre was in Court Andar, Laskarpur. On 12 September 1874 it came under Sylhet district (part of Assam). Habiganj was declared as subdivision in 1867. On 7 April 1893, according to the Notification no. 273 of Assam Provincial Government, Habiganj Thana (Administrative unit) was established. Habigani was rejoined with East-Bengal (now Bangladesh) in 1911. Then the Office of the Circle Officer (Development) was established in 1960. Finally on 1 March 1984 Habiganj was established as a District. Sheikh Liaguat Ali is the current chairman of Habiganj. The Khowai River passes by the side of the Pourashava. Many people from outside come here for trade. The importance of trade and business is increasing day-by-day.
- 63. **Climatic conditions:** The climate of the Pourashava area is observably moderate and mild, with relatively equable temperature and high humidity owing to plenty of rainfall. Habiganj Sadar is located at 24.3750°N 91.4167°E. It has 38977 units of house hold and total area 253.74 km<sup>2</sup>.Mean annual rainfall is 1800.9 mm, which is higher than the average rainfall of the country, with most of it occurring in 5 monsoon months (between May to September). It constitutes around 86% of the aggregate precipitation. In the

winter months of December-January, at times, temperature comes down substantially that at times adds to the woe of the dwellers.

- 64. **Surface water and other bodies of water:** The khowai River passes through the Pourashava. The surrounding area is flat plain and hilly with panoramic view. The Pourashava town is situated at the valley of the plain, hills and thus subjected to flush flood. Some of the areas are low-lying. The area is subjected to other natural calamities like land- slide as well. Habiganj Pourashava is connecting by good rail, road communication system with the neighboring districts but its internal road communication is not up to the mark. There are large numbers of ponds, ditches, low lying agricultural lands as low pockets in Habiganj which act as retention basin to delay the maximum floods in the monsoon.
- 65. **Air quality:** As there are no major industries in Habiganj the main sources of air pollution are vehicles and non-point sources such as open burning. There are currently +no air quality monitoring stations are in operation within the pourashava limit. The baseline air quality will be measured by the subproject contractors prior to commencement of work. The results will be provided in the updated IEE and all other measurements during implementation will be reported as part of EMP implementation.
- 66. **Acoustic environment:** Subproject components are in the built-up part of Habiganj Pourashava with residential, commercial, and institutional establishments. The volume of traffic that passes through these sections is not significant and traffic jams are not frequent. However vehicular movement can be considered as major cause of noise pollution. The baseline noise level will be measured by the subproject contractors prior to commencement of work. The results will be provided in the updated IEE and all other measurements during implementation will be reported as part of EMP implementation.

#### C. Biological Characteristics

- 67. **Flora and fauna:** Subproject components are located in Habiganj urban area or in its immediate surroundings which were converted into urban use for years ago, and there is no natural habitat left at these sites. Animals and plants in the subproject area are those commonly found in urban and built-up areas. No endangered/protected species of either flora or fauna are found in the pourashava or its immediate surroundings.
- 68. **Protected areas:** There are no protected forests, wetlands, mangroves, or estuaries in or near the subproject area.

#### D. Socioeconomic Characteristics

- 69. **Area and population**. Habiganj pourashava occupies an area of 9.05 km2 with population of 73522 (BSS 2011) of which male population is 38990 and female population 34532. It is divided into 9 wards. The rate of increase of population is 5.07% which is higher than the national rate of increase of 1.39% (BSS 2008). Density of population is 8123 person/ sq. Km.
- 70. Land use: The study of the land use pattern is based on extensive physical survey which was accomplished through GPS system. Total Non-core area: 7.71 sq km (76.33% of total area). Total Core Area: 2.39 sq km (23.67% of total area); % of total population in non core area (49.47%); % of total population in core area 50.53%); % of total HH in non core area (49.57%); % of total HH in core area (50.43%).
- 71. Existing provisions for pedestrians and other forms of transport: Habiganj Pourashava has an aggregate 120.60km road and 58.10 km drain network. Observably, most of these roads have uneven-rough surface, damaged topping and pavement sides owing to lack of maintenance, mostly narrow in width, hence incapable of accommodating generated traffic. While visiting different roads, the team observed that the surfaces are worn out partly and in some cases entirely. Justifiably, they call for

intervention varying from normal significant maintenance to large improvement / construction. The overall road condition of Habiganj pourashava is already presented in Table 5.

- 72. Being on the Dhaka-Habiganj National Highway, a huge number of buses and trucks move both ways, through Habiganj. The pourashava has a fairly large one bus terminal. But over the years, there appears to have been very little attention paid to its repair, maintenance and management. There is no government-owned truck terminal in Habiganj. Currently, trucks are promiscuously parked for loading and unloading at different points of the pourashava, disrupting urban life.
- 73. **Drainage:** The proposed sub-project consists of 5 drains schemes of interventions in Habiganj Pourashava that stand included under the 1st phase of the implementation of UGIIP III. The scopes of the said Drainage are briefly described below. The scopes of the said Drainage are briefly described below. It goes without saying that provision of a functional drainage system is an imperative for a Model Town. With this view in the perspective, efforts will be there to improve the drainage system in the Pourashava to ease water-logging and its related congestion in the town. The current sub-project includes 10 (ten) RCC Drains picked up on a priority basis consequent upon discussion with the Poura authority. According to the implementation time-schedule, all these drains will be completed within the 1st phase (2 years). From the above depiction, it will be evident that in all 10 drains will be included in the current sub-project.
- 74. The MDS team has visited a large section of the pourashava core area after a rainfall and found many water-logged area. Drainage system in these areas were inadequate, hence could not properly ease such congestion. In some areas drains were found without any outfall and congestion caused by solid waste dumping and earth filling led to the virtual closure of the drains. The pourashava as well as the general people agreed that some of the drains were built without any outfall and improper gradient and proper checking of construction-time invert levels.
- 75. **Other existing amenities for community welfare.** The pourashava appears to grow with an unplanned development. Major installations, commercial and residential areas grow along the main highway and roads in the pourashava. The town has a literacy rate of Habiganj Sadar has an average literacy rate of 30.6% (7+ years), and the national average of 32.4% literate. It has institutions: Educational institutions situated in and around Habiganj include 14 Primary School, 1 Government college, 5 Madrasha and 2 Degree College. Others Poura area total 12 banks and 11 NGOs. There are 1 telephone exchange, and 1 Post office, and 95% of the houses have electricity.

#### E. Historical, Cultural and Archaeological Characteristics

76. All the reported prehistoric records of Bangladesh are associated with the Lalmai hills and the higher areas of Sylhet, Habiganj, and Chittagong and Madhupur tract. The prehistoric site of Chaklapunji tea garden, near Chandirmazar of Chunarughat. Habiganj has also revealed a significant number of prehistoric tools from the bed of a small ephemeral stream (water remains here only for a few hours after rainfall) known as Balu nadi (river). Angularity and freshness of the fossil wood artifacts suggest that they did not come from a great distance and probably came from nearby hillocks. Typologically, technologically, and morphometrically, the artifacts are more or less the same as those found in the Lalmai area. The Fossil wood assemblages of Lalmai and Chaklapunji can be classified into two groups: Pre-neolithic assemblages without polished tools (hand axes, cleavers, scrapers, chopping tools, points etc.); Neolithic assemblages (hand adzes, polished Celts, awls etc.). Battle of Bara Bhuiyans and Mughal. Habiganj is the historical place where the Mukti Bahini started their first guerrilla movement against oppression of Pakistani Army. War at Teliapara Tea Garden.

- 77. In Baniachang a battle occurred between Anwar Khan (the Zamindar of Sylhet) and Hussain Khan (Baro-Bhuyans of Baniachang with the Mughal army in the 17th century, which can be found in the Bahrastan-i-Gayebi. Fort of Putijuri
- 78. Khwaja Osman (Afghan king) left Bukai Nagar Fort and established a shelter at Putijuri on the foot of the Giripal. He also established a fort at Putijuri, which was extremely important for defense. The Mughal army took the advantage when Khwaja Osman's brother was absent from the fort, and finally defeated the Khwaja Osman's army at the village called Dhalamvapur, Maulvi Bazar District.[citation needed]. Indian National Congress. In 1336, a devastating flood occurred as a result of a broken dam in Manipur. This flood is popularly known as the 'White Water Flood'. An earthquake on 12 June 1897 caused many deaths. The proposed ten roads and nine drains are not within nor adjacent to these sites.
- 79. On 4 April 1971, during Bangladesh Liberation War the senior army officers assembled at the headquarters of 2nd East Bengal at Teliapara, a semi hilly area covered by tea gardens where General MAG Osmani, Lieutenant Colonel Abdur Rob, Lieutenant Colonel Salahuddin Mohammad Reja, Major Kazi Nuruzzaman, Major Khaled Mosharraf, Major Nurul Islam, Major Shafat Jamil, Major Mainul Hossain Chowdhury, and others were present.
- 80. **Ecological Resources:** The ecological setting is mostly with wetland, homestead and roadside vegetation, etc. Homestead vegetation has a positive effect on improvement of soil moisture through the shading and mulching process. Trees growing at homesteads also provide easy access to fuel wood, fodder and other products. A large number of multipurpose trees (fruit, timber, fodder, medicine) are grown in the area. The most common among them are jackfruit, mango, lemon, banana, etc. Some Mangrove vegetation has been noticed in the area. Two major types of fauna viz. terrestrial and aquatic fauna have been identified in and around the area.
- 81. **Birds, Wildlife and Wetland Habitats:** Other than common birds like crows, sparrows, shaliks, cuckoos etc. and some domestic cattle, no wild animals inhabit the area. Wildlife that fully depends on the terrestrial land throughout their whole life for shelter, food, nesting, breeding and producing offspring is called terrestrial fauna. The main types of terrestrial fauna are amphibian, reptile, bird and mammal. Aquatic habitats are common in the project area due to the numerous freshwater lowlands, ponds, wetlands and rivers coursing through the area. Fish diversity in rivers and streams is decreasing due to heavy pollution in the aquatic bodies from industrial effluent.

#### V. ASSESSMENT OF ENVIRONMENTAL IMPACTS AND SAFEGUARDS

#### A. Methodology

- 82. Issues for consideration have been raised by the following means: (i) input from interested and affected parties; (ii) desktop research of information relevant to the proposed subproject; (iii) site visits; and (iv) evaluation of proposed design scope as per Consultants study and potential impacts.
- 83. The corridors of impact considered include: (i) existing alignment and width of roads to be rehabilitated/improvement; and (ii) existing ROWs. No additional land is required beyond the ROWs. Categorization of the subproject and formulation of mitigation measures have been guided by ADB's REA Checklist for Roads & drains (Appendix-3) and ADB SPS, 2009.

#### B. Screening out Areas of No Significant Impact

84. From the and detailed designs, and results of the rapid environmental assessment, it is clear that implementation of Habiganj Pourashava roads & drains subproject will not have major negative impacts because activities will be localized/site-specific and short in duration. Moreover, the corridors of impact of the subproject will be on existing public ROWs, and construction will be conducted within a relatively small area. Because of these there are several aspects of the environment that are not expected to be affected by the subproject (Table 6).

Environmental components	Anticipated impacts
Topography, landforms, geology and soils	Required amount of materials will not cause alteration of topography, landforms, geology and soils. Erosion hazard is insignificant as trenching and excavation works will be conducted only during construction stage (short-term) and specific to sites along public ROWs.
Climate	Short-term production of dust is the only effect on atmosphere. However, impact is short-term, site- specific and within a relatively small area. There are well developed methods for mitigation.
Biodiversity	Activities being located in the built-up area of Bandarban pourashava will not cause direct impact on biodiversity values as identified flora and fauna are those commonly found in built up areas. The construction activities do not anticipate any cutting of trees.
Geology and seismology	Small excavation will not be large enough to affect
Surface water	No river, lakes, pond will be affected
Groundwater	Only surface water will be used for construction
Fisheries & aquatic biology	No river, lake, or pond will be affected
Wildlife and rare or endangered species	Project roads are not located in any ecological sensitive area
Coastal resources	Roads are not in a coastal area
Development of agriculture, minerals and tourism	None of these developments is near the site
Population and communities	Construction will not affect population number, location or composition

#### Table 6: Fields in which the Subproject Components Not Expected to Have Significant Impacts

- 85. In the roads and drains sector subproject **UGIIP-III-I/HABI/UT+DR/01/2015 (lot-1,2)** there are minor impacts that result from the planning, design or location, because:
  - (i) These are road improvements confined within the existing road boundary.
  - (ii) There is no acquisition of land
  - (iii) There is no tree cut
  - (iv) Water logging occurred at rainy season(PDP-1021, 1023)
  - (v) Some schemes widening both side so, no environmental Impact
  - (vi) Some subproject schemes needed Pala siding
  - (vii) There is no impact on permanent and temporary structures
  - (viii) Road alignment is neither passing through nor connecting any ecological sensitive area like forests, reserve forest, National Park or wildlife sanctuary.
  - (ix) Road alignments are not located in any ecological sensitive area so there is no impact on wildlife, or rare and endangered species.
  - (x) There is no impact on water body
  - (xi) There is no impact on any water supply source like tube wells/hand pumps, wells, etc.
  - (xii) There is no impact on any community structure
  - (xiii) There is no impact on irrigation structures
  - (xiv) There is no impact on religious structures
  - (xv) There are no historical/archaeological sites in the alignment
  - (xvi) Most of the schemes of the packages are relatively small and involve straightforward construction and operation, so impacts will be mainly localised and not significant
  - (xvii) Most of the predicted impacts are associated with the construction process, and are produced because that process is invasive, involving trenching and other excavation. However the routine nature of the impacts means that most can be easily mitigated
  - (xviii) Infrastructure will be installed and constructed in public rights-of-way, easements, Drains and properties held by the Pourashava, hence land acquisition and encroachment on private property will not occur.
  - (xix) These are Drain improvements confined within the existing Drain boundary.
  - (xx) Drain alignment is neither passing through nor connecting any ecological sensitive area like forests, reserve forest, National Park or wildlife sanctuary.
  - (xxi) Drain alignments are not located in any ecological sensitive area so there is no impact on wildlife, or rare and endangered species.

#### C. Anticipated Impacts and Mitigation Measures – Planning and Design Phase

86. **Subproject selection criteria:** The project environmental assessment and review framework specifies environmental criteria to avoid or minimize adverse impacts during the identification and finalization of road subproject. Table 7 summarizes criteria and design considerations as per final design.

SI No	Components	Environmental Selection Guidelines	Remarks
1.	Overall selection guideline	<ul> <li>i. Comply with all requirements of relevant national and local laws, rules, and guidelines.</li> <li>ii. Avoid/minimize where possible locations in protected areas, including notified reserved forests or biodiversity conservation hotspots</li> </ul>	<ul> <li>Requisite LCC and ECC to be obtained prior to commencement of works</li> <li>Not present in Habiganj pourashava</li> </ul>

#### Table 7: Site and Design Considerations to Meet EARF Environmental Criteria

SI No	Components	Environmental Selection Guidelines	Remarks
		(wetlands, national reserves, forest reserves, and sanctuaries).	
		iii. Avoid possible locations that will result in destruction/disturbance to historical and cultural places/values.	Use of "chance find" procedures in the EMP that include a pre-approved management and conservation approach for materials that may be discovered during project implementation.
		iv. Avoid tree-cutting where possible. Retain mature roadside trees which are important/valuable or historically significant. If any trees have to be removed, plant two new trees for every one that is lost.	-Permit for tree-cutting to be obtained by contractor/sprier to commencement of work -Compensatory plantation for trees lost at a rate of 2 trees for every tree cut, in addition to tree plantation as specified in the design, will be implemented by the contractor, who will also maintain the saplings for the duration of his contract.
		v. Ensure all planning and design interventions and decisions are made in consultation with local communities and include women. Reflect inputs from public consultation and disclosure for site selection.	- All consultations during project preparation are documented and concerns expressed by public addressed in the IEE.
		vi. Synchronize all road improvement and pipe laying works (to extent possible) to minimize disturbance and optimize use of resources (e.g., water pipes laid prior to road improvements).	-Considered in the design
2.	Roads and Drains improvement	<ul> <li>Include the provision of new or improved storm water drainage to remove the increased runoff caused by increasing the road surface area</li> </ul>	-Considered in the design
		<ul> <li>ii. Include tree planting alongside roads to provide a natural barrier to noise and visual impacts, and include additional man-made barriers where suitable for public safety.</li> </ul>	-included in the EMP

-	Improve Climate Resilience for Road and Drain							
Α.	Climate Change	Mitigation Measures						
	Effect							
1.	Increased rainfall quantity and runoff Increased frequency of storms	allocation, etc.						
В.	Impact Factor							
1.	Construction materials' quality	<ul> <li>Choose most durable materials possible, even if higher cost, e.g. concrete, high quality bricks.</li> <li>Monitor and control construction quality</li> </ul>						
2.	Rising temperatures	<ul> <li>Execute works during most favourable times of year and day.</li> <li>Monitor and control preparing, placing and curing concrete and mortar, to ensure placement, etc., during most favourable times.</li> <li>Use plain high-quality un-rendered brickwork and high quality cement mortar in preference to rendered low-grade bricks</li> <li>Use sulphate resisting cement in vulnerable locations (higher heat gain during curing) or cement containing fly ash (less heat gain, so preferred).</li> </ul>						
3.	Runoff	<ul> <li>Use trapezoidal section side drains with small low-flow section (cunette) for low flows</li> <li>Line side drains to achieve higher discharge velocities without increasing risk of scour, etc.</li> </ul>						

## Table 8: Possible Actions to Mitigate against Project Effects of Climate Change and Improve Climate Resilience for Road and Drain

Source: MDS Consultants team.

# D. Anticipated Impacts and Mitigation Measures – Construction Phase

- 87. In the case of this subproject (i) most of the individual elements are relatively small and involve straightforward construction, so impacts will be mainly localized and not greatly significant; (ii) most of the predicted impacts are associated with the construction process, and are produced because that process is invasive, involving excavation and earth movements; and (iii) being located in the built-up area of the pourashava, will not cause direct impact on biodiversity values.
- 88. **Construction method:** Trenches will be dug by backhoe digger, supplemented by manual digging where necessary. Excavated soil will be placed nearby, and the materials (brought to site on trucks and stored on unused land nearby) will be placed in the trench by crane or using a small rig. The infrastructures will be constructed manually according to design specifications. Any excavated road will be reinstated.

- 89. There is sufficient space for a staging area, construction equipment, and stockpiling of materials. However, the contractor will need to remove all construction and demolition wastes on a daily basis.
- 90. Although construction of these project components involves quite simple techniques of civil work, the invasive nature of excavation and the project sites in built-up areas of Habiganj where there are a variety of human activities, will result to impacts to the environment and sensitive receptors such as residents, businesses, and the community in general. These anticipated impacts are short-term, site-specific and within a relatively small area. There are no impacts that are significant or complex in nature, or that need an in-depth study to assess the impact. Thus, Habiganj roads & drains subproject is unlikely to cause significant adverse impacts. The potential adverse impacts that are associated with construction activities can be mitigated to acceptable levels with the following mitigation measures (Table 9).

# E. Anticipated Impacts and Mitigation Measures – Operations & Maintenance Phase

- 91. In the operations and maintenance (O&M) phase, the roads and drains will operate with routine maintenance, which should not affect the environment. Routine repairs and unblocking of side drains will be very small in scale, to conducted manually by small teams of men with simple equipment (shovels, wheelbarrows, etc.) and works will be very short in duration, thus will not cause significant physical impacts. Traffic may be interrupted temporarily but this work will be very small in scale, infrequent, and short in duration, so there will be no economic or other implications. The infrastructures will need to be repaired from time to time, but environmental impacts will be much less than those of the construction period as the work will be infrequent, affecting small areas only. O&M will be the responsibility of Habiganj Pourashava local authority, which will be given training by this project.
- 92. To maintain the safety of workers and road-users, such work should be coordinated with the local police department so that adequate warning signs and traffic diversions can be set up when necessary. Debris/sediments from drainages need to be collected and disposed at a designated site such as the landfill. It is important that the designated disposal site's base is of a non-permeable membrane in order to prevent leach ate that can contaminate the soil and groundwater. The potential adverse impacts that are associated with O&M activities can be mitigated to acceptable levels with the following mitigation measures (Table 9).

SI	Potential Environmental Issues	Duration/	Magnitude	Mitigation Measures & Method	Responsibility
No		Extent			
1.	Sub-Project Impacts				
1.1	Loss of land for the construction of Third Urban Governance Improvement Sector Project (UGIIP-III)	Permanent	Major	• No land acquisition and resettlement impacts are anticipated as the proposed project shall be restricted to the existing government land available with PS.	PIU/ PMO (LGED)
1.2	Lack of sufficient planning to assure long term sustainability of the improvements	Permanent	Minor	• The sub-project design shall include adequate provisions for ensuring effective maintenance and protection of the created assets so as to ensure the long term sustainability of the sites.	PIU/ PMO (LGED)
1.3	EMP Training	Not applicable	Not applicable	• PMO will provide training to contractors onsite specific EMP highlighting waste management and OHS, GRM and reporting	PIU/ PMO (LGED)
1.4	Sire-EMPs	Not applicable	Not applicable	• Develop Site-EMPs, responding to all clauses and requirements of this EMP, and including sub- plans such as Spill Management Plan, Waste Management Plan, Temporary Traffic Management Plan, Occupational Health and Safety Plan, Soil Erosion Control Plan, and others.	MDS/Contractor
2.	Construction Stage				
2.1	Excavation of material to fill will change drainage, air & soil quality, topography at extraction site	Permanent	Minor	<ul> <li>Excess material from other project site should be used to fill the excavated site.</li> <li>Grading of the site should be done properly to minimize the problem</li> <li>Site may be used for ground water recharge pit/ small fish pond act.</li> </ul>	MDS/ Contractor
2.2	Transportation of material could create dust	Temporary	Minor	<ul> <li>Use tarpaulins to cover sand when carried on trucks</li> <li>Spray ramps and soil stockpiles with water in dry weather</li> </ul>	MDS /Contractor
2.3	Dust could be blown from soil stockpiled on site	Temporary	Minor	• Excavation schedule should match with the filling, so that dug material can be used immediately without stockpiling	Contractor

# Table 9: Anticipated Impacts and mitigation Measures at Construction and Operations & Maintenance Phase

SI No	Potential Environmental Issues	Duration/ Extent	Magnitude	Mitigation Measures & Method	Responsibility
2.4	Rain may collect in dug areas and wash soil off stockpiles	Temporary	Minor	Conduct excavation and ground works in dry season	Contractor
2.5	Some owners will lose land needed for the subproject	Permanent	Minor	<ul> <li>Purchase land as described in Resettlement Framework</li> <li>Avoid taking &gt;10% of the total land of any occupant</li> </ul>	LGED/MDS
2.6	Some business premises may need to be removed	Permanent			PIU/ PMO (LGED)
2.7	2.7 Shops that remain close may lose Temporary income if access is difficult for customers		Minor	<ul> <li>Compensate owners/tenants for lost business income</li> <li>Keep road closure minimum (Frequency and distribution)</li> <li>Maintain vehicle and pedestrian access when possible</li> <li>Develop and apply protocol to protect chance find (excavation observed by archaeologist; stop work if finds are suspected; state authority to plan appropriate action )</li> </ul>	PIU/ PMO (LGED), MDS and contractor
2.8	People living nearby may be disturbed by Air quality, noise, dust	Temporary	Minor	<ul> <li>Inform community of work in advance; address concerns</li> <li>Plan work with community ; avoid work at sensitive times</li> <li>Avoid conducting noise-generating activities at night</li> <li>Reduce dust by spraying soil and covering with tarpaulins</li> <li>Use modern vehicles / machinery and maintain as specified</li> <li>Monitor air quality</li> </ul>	Contractor
2.9	Workers and the public are at risk from accidents on site	Temporary	Minor	<ul> <li>Prepare and implement a site Health and Safety Plan that includes measures to :</li> <li>Exclude the public from site</li> </ul>	Contractor

SI No	Potential Environmental Issues	Duration/ Extent	Magnitude	Mitigation Measures & Method	Responsibility
		LAUR		<ul> <li>Ensure that workers use Personal Protective Equipment (PPE)</li> <li>Provide Health &amp; Safety Training for all personnel;</li> <li>Follow documented procedures for all site activities;</li> <li>Keep accident reports and records</li> </ul>	
2.10	Construction Camp and stock yard	Temporary	Minor	<ul> <li>Design all infrastructure to avoid locations of sensitive locations</li> <li>Camp location and material handling methodology should be submitted to MDS for approval</li> </ul>	Contractor
2.11	Economic benefits if local people are employed in Contractor's workforce	Temporary	Minor	Contractor goal to employ at least 50% of workforce from communities in vicinity of work site	MDS / Contractor
2.12	Road and rail traffic will be disrupted by construction work	Temporary	Minor	<ul> <li>Plan work with road, rail and town authorities and police</li> <li>Keep road closures to a minimum</li> <li>Maintain safe passage of vehicles/pedestrians at all times</li> <li>Provide effective diversions &amp; alternative routes if needed</li> <li>Conduct work that requires road and railway closure at times when traffic volume is low</li> <li>Conduct work near railway at times when trains are fewer</li> <li>Schedule material deliveries for periods of low traffic</li> </ul>	Contractor
2.13	Existing infrastructure could be damaged by construction	Permanent	Major	• Determine locations of water pipes, electricity pylons, etc and design scheme to avoid damage	MDS
2.14	Roads/people may be disturbed by repeated excavation	Temporary	Minor	<ul> <li>Integrate subprojects to conduct excavation at same time Provide temporary access when necessary</li> </ul>	MDS / Contractor
2.15	Ground disturbance could damage archaeological and historical remains	Permanent	Major	Request state and local archaeological	MDS/LGED

SI No	Potential Environmental Issues	Duration/	Magnitude	Mitigation Measures & Method	Responsibility
		Extent		<ul> <li>authorities to assess archaeological potential of the site</li> <li>Select alternatives if site has medium – high potential</li> <li>Include state and town historical authorities as subproject stakeholders to benefit from their expertise</li> </ul>	
2.16	Plantation along the road side	Permanent	Major	• Plantation at the toe of the road along the road using local tree species	Contractor
2.17	Quality of life	Permanent	Major	Quality of life will improve if the road is maintained on regular basis by LGED	PIU/ PMO (LGED)
2.18	Workers health and safety at risk when conducting road repairs	Temporary	Minor	<ul> <li>Coordinate with police – provide warning signs/ diversions</li> <li>Arrange for readily available first aid unit including an adequate supply of sterilized dressing materials and appliances</li> <li>Ensure that all site personnel have a basic level of H&amp;S training.</li> <li>Provide medical insurance coverage for workers.</li> </ul>	PIU/ PMO (LGED)
2.19	HIV/AIDs Awareness	Temporary	Major	<ul> <li>The Contractor through the PIU will link with state health programs on HIV/AIDS and other communicable diseases awareness. All the construction labours will be provided orientation for awareness on HIV/AIDs and other sexually transmitted diseases at the time of deployment.</li> </ul>	MDS/Contractor
2.20	Environmental conditions	Permanent	Major	<ul> <li>Environmental conditions will improve if the road and trees are maintained on regular basis by LGED</li> </ul>	PIU/ PMO (LGED)
3.	Pre-construction activities by contractor				
3.1	Construction site – Location, Selection, Design and Layout	Temporary	Moderate	• Construction site layout will be submitted by the Contractor no later than30 days from the start of construction for approval of the PS. The layout will illustrate the location of sanitation facilities, storage areas, gates, temporary lodging, water	LGED/MDS/Co ntractor

SI No	Potential Environmental Issues	Duration/ Extent	Magnitude	Mitigation Measures & Method	Responsibility
				supply, diesel gen set, canteen, first aid, health care and day crèche facilities among others.	
3.2	Drinking water availability and water arrangement	Temporary	Severe	<ul> <li>The Contractor will be responsible for the arrangement of water in every workplace at suitable and easily accessible place for the whole construction period. Sufficient supply of potable water is to be provided and maintained. If the drinking water is obtained from an intermittent public water supply then, storage tanks will be provided.</li> <li>Monitoring water quality according to the environmental management plan.</li> </ul>	LGED/Contract or
3.3	Identification of disposal sites	Permanent	Major	• Location of disposal sites will be finalized in consultation with local authority and confirm that: disposal of the material does not impact the natural drainage courses or surface water bodies or low lying areas and that no endangered / rare flora is impacted by such materials	LGED/Contracto r
3.4	Site clearance activities including delineation of construction areas	Temporary	Moderate	• Commencements of site clearance activities shall be undertaken after obtaining necessary permissions from PS to minimize environmental impacts. The area utilized for construction and camp activities shall be restored to their former conditions after project completion.	PIU/Contractor PIC/TSC
4.	Operations and Maintenance stage				
4.1	Quality of life	Permanent	Major	Quality of life will improve if the road is maintained on regular basis by LGED	PIU/ PMO (LGED)
4.2	Water quality	Temporary	Minor	<ul> <li>Take all precautions to prevent run-off into streams, watercourses, or irrigation system. Install temporary silt traps or sedimentation basins along drainage leading to the water bodies.</li> <li>Remove all debris/sediments immediately.</li> <li>Dispose debris/sediments at a designated site such as landfill</li> </ul>	PIU/ PMO (LGED)
4.3	Air quality	Temporary	Minor	Use tarpaulins to cover soils, sand and other loose material.	PIU/Contractor PIC/TSC

SI No	Potential Environmental Issues	Duration/ Extent	Magnitude	Mitigation Measures & Method	Responsibility
4.4	Worker safety at risk when conducting road repairs/improvement	Temporary	Minor	<ul> <li>Coordinate with police-provide warning signs/diversions</li> <li>Produce and implement a O&amp;M health and safety (H&amp;S) plan which include measures as: (i) excluding the public from worksites; (ii) ensuring all workers are provided with and required to use personal protective equipment (reflector zed vests, footwear, gloves, goggles and masks) at all times; (iii) providing (H&amp;S) training for all site personnel; (iv) documenting</li> </ul>	PIU/ PMO (LGED)
4.5	Environmental conditions	Permanent	Major	<ul> <li>Environmental conditions will improve if the road and trees are maintained on regular basis by LGED</li> </ul>	PIU/ PMO (LGED)

# F. Cumulative Impact Assessment

- 93. The cumulative impact assessment examined the interaction between the subproject's residual effects (i.e., those effects that remain after mitigation measures have been applied) and those associated with other past, existing, and reasonably foreseeable future projects or activities. The interaction of residual effects associated with multiple projects and/or activities can result in cumulative impacts, both positive and negative. The project's potential cumulative effects were considered with respect to valued components in environmental and socioeconomic categories, in four areas:
  - (i) of any potential residual project effects that may occur incrementally over time;
  - (ii) consideration of other known relevant projects or activities within the specified study area boundaries, even if not directly related to the project;
  - (iii) potential overlapping impacts that may occur due to other developments, even if not directly related to the proposed subproject; and
  - (iv) future developments that are reasonably foreseeable and sufficiently certain to proceed.
- 94. The project has identified the valued components as air quality, acoustic environment, socioeconomic and socio-community components, and human health and safety. There are no foreseeable projects that will overlap with the subproject. The spatial boundary of the subproject is the area along the corridor of impact (alignment and width of the roads and ROWs) and the temporal boundary can be considered as the whole Habiganj pourashava.
- 95. It is recommended that infrastructures be (i) designed to the current best practice standard and notified Government of Bangladesh codes; (ii) built that the floods do not damage them; and (iii) side drains are to be kept free from wastes and siltation. Short-term negative impacts are the same with or without climate change measures except that with climate change measures there are increased demand for construction materials and more time to complete the works. No negative cumulative impact and the potential long-term environmental impacts are positive; including mainstreaming climate risk reduction into infrastructure development ensures subprojects infrastructure are less vulnerable to floods, storm surge, landslides and impacts of other extreme weather events.
- 96. **Air quality:** Emissions of common air contaminants and fugitive dust may be elevated in proximity to active work sites during construction and O&M phases, these impacts will be short-term and localized to the immediate vicinity of roads, drains and . Greenhouse gas (GHG) emissions may increase as a result of the subproject activities (i.e., vehicle and equipment operation, concrete production, disposal of excavated material, land-filling of residual wastes). Given the subproject's relatively minor contribution to common air contaminants and GHG emissions during construction, the overall significance rating of both these potential residual effects is considered to be negligible.
- 97. Acoustic environment: Noise levels during construction and O&M activities in immediate proximity of work sites are expected to increase. The duration of exposure will be relatively brief and imperceptible. The exposure represents a temporary, localized, adverse residual effect of low significance for affected receptors. While building damage due to ground vibrations is unlikely, there may be annoyance to spatially located receptors during construction and O&M activities. The overall significance rating of potential residual effects is considered to be negligible.
- 98. **Socioeconomic and socio-community:** Concerns on existing provisions for pedestrians and other forms of transport will occur spatially during construction and O&M activities. Traffic movement along the roads, drains will be improved once the activities are completed. Since the subproject will be improvement of existing infrastructures, it will

not conflict with existing or planned land use. However, following improvement in infrastructures and services, added residential developments, commercial, and business facilities and increased densities are expected to develop and enhance Habiganj pourashava. This can be considered a long-term cumulative benefit of the subproject.

- 99. Given the scale of the project it is likely that local people will obtain at least temporary socio-economic benefits, by gaining employment in the construction workforce, and thus raising their levels of income. These benefits can bring wider social gains if they are directed at vulnerable groups.
- 100. Upon completion of the project, the socio-community will be the major beneficiaries of this subproject. The citizens, businesses, and communities in Habiganj Pourashava will be provided with reliable and climate-resilient roads resulting to enhanced safety, cost savings, and economic growth. Benefits for all Habiganj Pourashava citizens include: safer travel, reduced congestion, reduced fuel usage, reduced vehicle maintenance costs, job creation and related positive economic impact, and improved quality of life. These are considered a long-term cumulative benefit.
- 101. **Community and workers health and safety:** No adverse residual effects to human health will occur as a result of construction or O&M activities, and mitigation measures are in place to ensure public and worker safety, and will be closely monitored. While exposure to elevated noise levels, fugitive dust and common air pollutants will occur in proximity to work sites, due to their short-term and localized nature, these effects are expected to be minor and insignificant with no measurable effects on human health.
- 102. Therefore the project will benefit the general public by contributing to the long-term improvement of municipal services and community livability in Habiganj pourashava.

# VI. INFORMATION DISCLOSURE, CONSULTATION, AND PARTICIPATION

# A. Public Consultation Conducted

- 103. The public participation process included (i) identifying interested and affected parties (stakeholders); (ii) informing and providing the stakeholders with sufficient background and technical information regarding the proposed development; (iii) creating opportunities and mechanisms whereby they can participate and raise their viewpoints (issues, comments, and concerns) with regard to the proposed development; (iv) giving the stakeholders feedback on process findings and recommendations; and (v) ensuring compliance to process requirements with regards to the environmental and related legislation.
- 104. Public consultations and focus group discussions (FGDs) were conducted by MDS team on September 12.09.2015. The objective of the meetings was to appraise the stakeholders about environmental impacts of the proposed subproject and safeguards to mitigate the same. A questionnaire was designed and environmental information was collected. Key respondents included project-affected persons, who may suffer temporary access disruptions during construction activities, shopkeepers/businessmen from the subproject area, and daily commuters consulted randomly. Issues discussed and feedback received along with details of date, time, location, and list of participants are given in Appendix 6. The environmental concerns and suggestions made by the participants were listed, and discussed, and suggestions accordingly incorporated in the EMP. These include speedy construction works to ensure low impacts to community during road closures and local employment.

# B. Future Consultation and Disclosure

105. The Project has already organized consultation training program for all staff working in UGIIP-III, consultants and Pourashava staff on safeguard policies. The aim of the consultation programme was to inform all stakeholders about the importance of the safeguard policies and their implementation at the design construction and operation stage. Field consultations were conducted with local people. Consultations by the PIU supported by the RES and the PMO include the following:

#### 106. Consultation during detailed design:

- Focus-group discussions(FGD)with affected persons and other stakeholders (including women's groups, NGOs and CBOs) to hear their views and concerns, were conducted and concerns were addressed in subproject design
- Structured consultation meetings with the institutional stakeholders (government bodies and NGOs) to discuss and approve key aspects of the subproject

#### 107. Consultation during construction:

- Public meetings with affected communities to discuss and plan work programs and allow issues to be raised and addressed once construction has started
- Smaller-scale meetings to discuss and plan construction work with individual communities to reduce disturbance and other impacts, and provide a mechanism through which stakeholders can participate in subproject monitoring and evaluation.


#### 108. Subproject disclosure:

- Public information campaigns (via newspaper, TV and radio) to explain the subproject to the wider city population and prepare them for disruption they may experience once the construction programme is underway;
- Public disclosure meetings at key subproject stages to inform the public of progress
- Formal disclosure of completed subproject reports by making copies available at convenient locations in the study towns, informing the public of their availability, and providing a mechanism through which comments can be made.
- 109. For the benefit of the community, relevant information from the IEE will be translated in the local language and made available at (i) offices of executing and implementing agencies, (ii) area offices, (iii) consultant teams' offices; and (iv) contractor's campsites. It will be ensured that the hard copies of IEE are kept at places which are conveniently accessible to people, as a means to disclose the document and at the same time creating wider public awareness. An electronic version of the IEE will be placed in the official website of executing and implementing agencies and the ADB website after approval of the IEE by ADB.
- 110. A project-specific grievance redress mechanism (GRM) will be established to receive, evaluate, and facilitate the resolution of AP's concerns, complaints, and grievances about the social and environmental performance at the level of the project. The GRM will aim to provide a time-bound and transparent mechanism to voice and resolve social and environmental concerns linked to the project.

#### VII. GRIEVANCE REDRESS MECHANISM

- 111. **Common GRM**: A common GRM will be in place for social, environmental, or any other grievances related to the project; the resettlement plans (RPs) and IEEs will follow the GRM described below, which is developed in consultation with key stakeholders. The GRM will provide an accessible and trusted platform for receiving and facilitating resolution of affected persons' grievances related to the project. The multi-tier GRM for the project is outlined below, each tier having time-bound schedules and with responsible persons identified to address grievances and seek appropriate persons' advice at each stage, as required.
- 112. Pourashava-wide public awareness campaigns will ensure that awareness on grievance redress procedures is generated through the campaign. The project implementation unit (PIU) and governance improvement and capacity development consultants (GICDC) will conduct pourashava-wide awareness campaigns to ensure that poor and vulnerable households are made aware of grievance redress procedures and entitlements, and will work with the PMO and management, design and supervision consultants (MDSC) to help ensure that their grievances are addressed.
- 113. Affected persons (APs) will have the flexibility of conveying grievances/suggestions by dropping grievance redress/suggestion forms in complaints/suggestion boxes that have already been installed by project pourashavas or through telephone hotlines at accessible locations, by e-mail, by post, or by writing in a complaints register in pourashava offices. Careful documentation of the name of the complainant, date of receipt of the complaint, address/contact details of the person, location of the problem area, and how the problem was resolved will be undertaken. The project management office (PMO) safeguard officer will have the overall responsibility for timely grievance redress on environmental and social safeguards issues and for registration of grievances, related disclosure, and communication with the aggrieved party through the PIU designated safeguard focal person.
- 114. **Grievance redress process:** In case of grievances that are immediate and urgent in the perception of the complainant, the contractor and MDSC on-site personnel will provide the most easily accessible or first level of contact for quick resolution of grievances. Contact phone numbers and names of the concerned PIU safeguard focal person and contractors, will be posted at all construction sites at visible locations.
  - a. **1**<sup>st</sup> **Level Grievance:** The phone number of the PIU office should be made available at the construction site signboards. The contractors and PIU safeguard focal person can immediately resolve on-site in consultation with each other, and will be required to do so within 7 days of receipt of a complaint/grievance.
  - b. 2<sup>nd</sup> Level Grievance: All grievances that cannot be redressed within 7 days at field/ward level will be reviewed by the grievance redress cell (GRC) headed by Panel Mayor of the pourashava with support from PIU designated safeguard focal person and MDSC regional environment and resettlement specialists. GRC will attempt to resolve them within 15 days. The PIU designated safeguard focal person will be responsible to see through the process of redress of each grievance.
  - c. **3**<sup>rd</sup> Level Grievance: The PIU designated safeguard focal person will refer any unresolved or major issues to the PMO safeguard officer and MDSC national environmental and resettlement specialists. The PMO in consultation with these officers/specialists will resolve them within 30 days.
- 115. Despite the project GRM, an aggrieved person shall have access to the country's legal system at any stage, and accessing the country's legal system can run parallel to accessing the GRM and is not dependent on the negative outcome of the GRM.

- 116. In the event that the established GRM is not in a position to resolve the issue, the affected person also can use the ADB Accountability Mechanism (AM) through directly contacting (in writing) the Complaint Receiving Officer (CRO) at ADB headquarters or the ADB Bangladesh Resident Mission (BRM). The complaint can be submitted in any of the official languages of ADB's DMCs. The ADB Accountability Mechanism information will be included in the PID to be distributed to the affected communities, as part of the project GRM.
- 117. **Recordkeeping:** Records of all grievances received, including contact details of complainant, date the complaint was received, nature of grievance, agreed corrective actions and the date these were effected and final outcome will be kept by PIU. The number of grievances recorded and resolved and the outcomes will be displayed/disclosed in the PMO office, pourashava office, and on the web, as well as reported in monitoring reports submitted to ADB on a semi-annual basis.
- 118. **Periodic review and documentation of lessons learned:** The PMO safeguard officer will periodically review the functioning of the GRM in each pourashava and record information on the effectiveness of the mechanism, especially on the project's ability to prevent and address grievances.
- 119. **Costs:** All costs involved in resolving the complaints (meetings, consultations, communication and reporting/information dissemination) will be borne by the concerned PIU at pourashava-level; while costs related to escalated grievances will be met by the PMO. Cost estimates for grievance redress are included in resettlement cost estimate

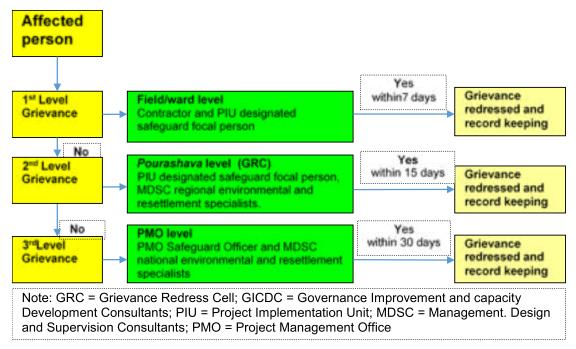

# Figure 8: Project Grievance Redress Mechanism

#### VIII. ENVIRONMENTAL MANAGEMENT PLAN (EMP), HABIGANJ POURASHAVA

- 120. The purpose of the environmental management plan (EMP) is to ensure that the activities are undertaken in a responsible, non-detrimental manner with the objectives of: (i) providing a proactive, feasible, and practical working tool to enable the measurement and monitoring of environmental performance on-site; (ii) guiding and controlling the implementation of findings and recommendations of the environmental assessment conducted for the project; (iii) detailing specific actions deemed necessary to assist in mitigating the environmental impact of the project; and (iv) ensuring that safety recommendations are complied with.
- 121. A copy of the EMP must be kept on work sites at all times. This EMP will be included in the bid documents and will be further reviewed and updated during implementation. The EMP will be made binding on all contractors operating on the site and will be included in the contractual clauses. Non-compliance with, or any deviation from, the conditions set out in this document constitutes a failure in compliance.
- 122. For civil works, the contractor will be required to (i) establish an operational system for managing environmental impacts (ii) carry out all of the monitoring and mitigation measures set forth in the EMP; and (iii) implement any corrective or preventative actions set out in safeguards monitoring reports that the employer will prepare from time to time to monitor implementation of this IEE and EMP. The contractor shall allocate a budget for compliance with these EMP measures, requirements and actions.

#### C. Institutional Arrangement

123. **Executing and implementing agencies:** The Local Government Engineering Department (LGED) and the Department of Public Health Engineering (DPHE), both under the Local Government Division (LGD) of the Ministry of Local Government, Rural Development and Cooperatives (MLGRD&C) and having extensive experience in managing urban and water supply projects financed by ADB, are the executing agencies of the project. The participating pourashavas are the implementing agencies.

# D. Safeguard Implementation Arrangement

- 124. **Project management office:** A PMO has been established for the overall management of the project. The PMO is headed by Project Director (PD) supported by officials including three project managers in charge of (i) municipal infrastructure (excluding water supply and sanitation), (ii) water supply and sanitation, and (iii) governance improvement and capacity development, respectively. the PMO will receive support from national environmental specialist and national resettlement specialist on the MDSC team. Key tasks and responsibilities of the PMO safeguard (environment) officer are as follows:
  - confirm existing IEEs/EMPs are updated based on detailed designs, and that new IEEs/EMPs are prepared in accordance with the EARF and subproject selection criteria related to safeguards;
  - (ii) confirm whether IEEs/EMPs are included in bidding documents and civil works contracts;
  - (iii) provide oversight on environmental management aspects of subprojects and ensure EMPs are implemented by project implementation unit (PIU) and contractors;
  - (iv) establish a system to monitor environmental safeguards of the project, including monitoring the indicators set out in the monitoring plan of the EMP;
  - (v) facilitate and confirm overall compliance with all government rules and regulations regarding site and environmental clearances, as well as any other

environmental requirements (e.g., location clearance certificates, environmental clearance certificates, etc.), as relevant;

- (vi) supervise and provide guidance to the PIUs to properly carry out the environmental monitoring and assessments as per the EARF;
- (vii) review, monitor, and evaluate the effectiveness with which the EMPs are implemented, and recommend necessary corrective actions to be taken as necessary;
- (viii) consolidate monthly environmental monitoring reports from PIUs and submit semi-annual monitoring reports to ADB;
- (ix) ensure timely disclosure of final IEEs/EMPs in locations and form accessible to the public; and
- (x) address any grievances brought about through the grievance redress mechanism in a timely manner.
- 125. **Project implementation unit:** The participating pourashavas have established PIUs within the pourashava structure. The PIUs will (i) be responsible for land acquisition; (ii) take necessary action for obtaining rights of way; (iii) plan, implement and monitor public relations activities, gender mainstreaming initiatives and community participation activities at pourashava level; (iv) disseminate information related to the project to the public and media; (v) ensure compliance with loan covenants concerning safeguards measures; and (vi) facilitate implementation of safeguards plans. The PIUs will each designate a Safeguard Officer and will receive assistance from the assigned MDSC regional environmental specialist to:
  - (i) update IEEs/EMPs during detailed design stage and prepare new IEEs/EMPs in accordance with the EARF;
  - (ii) conduct environmental compliance audit of existing facilities as per Item of ADB SPS, 2009;
  - (iii) include IEEs/EMPs in bidding documents and civil works contracts;
  - (iv) comply with all government rules and regulations;
  - (v) take necessary action for obtaining rights of way;
  - (vi) oversee implementation of EMPs including environmental monitoring by contractors;
  - (vii) take corrective actions when necessary to ensure no environmental impacts;
  - (viii) submit monthly environmental monitoring reports to PMO,
  - (ix) conduct continuous public consultation and awareness;
  - (x) address any grievances brought about through the Grievance Redress Mechanism in a timely manner as per the IEEs; and
  - (xi) organize an induction course for the training of contractors preparing them on EMP implementation, environmental monitoring requirements related to mitigation measures; and taking immediate actions to remedy unexpected adverse impacts or ineffective mitigation measures found during the course of implementation.
- 126. **Project Management, Design and Supervision Consultants (MDSC):** MDSC has been engaged to work closely with and advise the PMO, to be involved in project supervision including monitoring during construction phase. The MDSC has one national environmental specialist and three regional environmental specialists as well as one national resettlement specialist and three regional resettlement specialists. The MDSC national environmental specialist will, but not limited to:
  - (i) work under the general supervision of the team leader and the deputy team leader;

- (ii) review the environmental guidelines and requirement of the government of Bangladesh and ADB SPS, 2009, environmental subproject selection guidelines and EARF;
- (iii) Guide the implementation of future subprojects;
- (iv) provide technical support to the PMO and PIUs including review and update of EARF and guidelines for specific type of subprojects and assist in preparing terms of reference for environmental assessment;
- (v) assist and guide the MDSC regional environmental specialists to provide support to environmental management functions including updating subproject IEEs in respect to EMP;
- (vi) assist in preparing IEEs and in monitoring impact and mitigation measures associated with subprojects;
- (vii) assist PIUs and MDSC regional environmental specialists working in the steps for preparing the EIA/IEE, capacity building and training, preparation of guidelines and procedure and subproject specific guidance;
- (viii) provide support and guidance to PIUs in undertaking environmental monitoring
- (ix) support PMU in submitting semi-annual environmental monitoring reports to ADB;
- (x) facilitate in grievance redress and corrective actions;
- (xi) train PIU officials regarding environmental requirement and issues; and
- (xii) perform any other task assigned by the team leader, deputy team leader and the project director.
- 127. The MDSC regional environmental specialists will, but not limited to:
  - (i) work under the supervision and guidance of the team leader, deputy team leader and MDSC national environmental specialist;
  - (ii) assist PIUs in preparing and updating IEEs including EMPs in accordance with the EARF, and assist in monitoring impact and mitigation measures associated with subprojects including implementation of EMPs by contractors;
  - (iii) assist in preparation of IEEs and in the environmental review of subproject consisting of screening at pourashava level by PIU through a committee formed with municipal mayor as chairman and representatives from DOE, LGED and other relevant district office as members;
  - (iv) assist PIUs in the steps for preparing EIA/IEE, capacity building and training, preparation of guidelines and procedure and subproject specific guidance;
  - support PIU in environmental monitoring and submit monitoring reports to PMU as inputs into the semi-annual monitoring report submitted to ADB;
  - (vi) undertake mitigation measures and other specific measures in the construction contract;
  - (vii) facilitate in grievance redress and corrective actions;
  - (viii) follow subproject selection guidelines and EARF to ensure compliance with the environmental guidelines and requirement of the Government of Bangladesh and ADB SPS, 2009;
  - (ix) support PMO and MDSC national environment specialist by providing data, information and all other requested assistance;
  - (x) train PIU officials regarding environmental issues
  - (xi) perform any other task assigned by MDSC national environment specialist, team leader, deputy team leader and the project director.
- 128. **Civil works contracts and contractors:** EMPs are to be included in bidding and contract documents and verified by the PIUs and PMO. The contractor will be required to designate an environmental supervisor to (i) coordinate with MDSC on updating the IEE/EMP based on detailed designs, and (ii) ensure implementation of EMP during civil

works. Contractors are to carry out all environmental mitigation and monitoring measures outlined in their contract table 10.

129. **Governance Improvement and Capacity Development Consultants (GICDC):** The PMO and PIUs will require support on a range of activities related to governance improvement and capacity development of pourashavas. The GICDC will support PMO and PIUs in implementing urban government improvement action plan (UGIAP) by providing capacity development, community mobilization and other facilitation services. There are 4 GICDC regional offices consisting of 4 regional coordinators at each regional office. There are 2 ccommunity mobilizers in each project pourashava. The regional coordinators are assisting the pourashavas and the community mobilizers in the activities related to community participation and inclusive development. The community mobilizers have been posted at the pourashava and (i) are working maintaining close liaison with the mayor, councilors, pourashava staffs and communities, (ii) providing assistance and support to PIU regarding planning and implementation of citizen awareness and participation activities, urban planning, equity and inclusiveness of women and urban poor. The GICDC also have a training specialist who is responsible for identifying and coordinating capacity building activities at pourashava level Figure 10

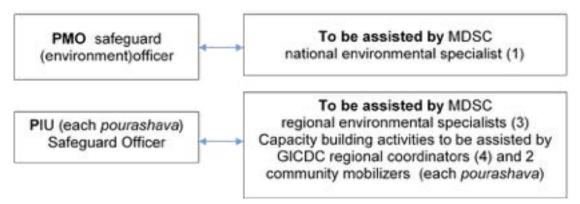


Figure 9 : Safeguards Implementation Arrangement

Field	Impacts	Mitigation Measures	Responsible for Implementation	Monitoring Indicator	Frequency of Monitoring	Cost and Source of Funds
1. Prior to Constr	uction Activities	L	L			
Consents, permits, clearances, no objection certificate (NOC), etc.	Failure to obtain necessary consents, permits, NOCs, etc can result to design revisions and/or stoppage of works	<ul> <li>Obtain all necessary consents, permits, clearance, NOCs, etc. prior to start of civil works.</li> <li>Acknowledge in writing and provide report on compliance all obtained consents, permits, clearance, NOCs, etc.</li> <li>Include in detailed design drawings and documents all conditions and provisions if necessary</li> </ul>	Project management unit (PMO), project implementing unit (PIU), Management Design Supervision Consultants (MDSC)	• Incorporated in final design and communicated to contractors.	• Prior to award of contract	<ul> <li>No cost required. Cost of obtaining all consents, permits, clearance, NOCs, etc. prior to start of civil works responsibility of PMO and PIU.</li> <li>Mitigation measures are included as part of TOR of PMO, PIU,</li> </ul>
Updating of IEE based on detailed design	Site-specific impacts not identified, mitigation measures not appropriate and sufficient to address impacts	<ul> <li>Update IEE and EMP based on detailed design</li> <li>Ensure updated EMP is provided to contractors</li> <li>Relevant information disclosed</li> </ul>	РМО	• Updated IEE and EMP reviewed, approved and disclosed	• Upon completion of detailed design	MDSC • No additional cost required
Existing utilities	Disruption of services.	<ul> <li>Identify and include locations and operators of these utilities in the detailed design documents to prevent unnecessary disruption of services during construction activities</li> <li>Require construction contractors to prepare a contingency plan to include actions to be done in case of unintentional interruption of services.</li> <li>Require contractors to prepare spoils management plan (see Appendix 4 for outline) and traffic management plan (see Appendix 5 for sample)</li> </ul>	PMO, PIU, MDSC, Contractors	<ul> <li>List of affected utilities and operators;</li> <li>Bid document to include requirement for a contingency plan for service interruptions (example provision of water if disruption is more than 24 hours), spoil management plan (see Appendix 4 for outline), and traffic management plan</li> </ul>	spoils management plan: Twice (once after first	<ul> <li>No cost required.</li> <li>Mitigation measures are included as part of TOR of PMO, PIU, MDSC. And in contract documents.</li> </ul>

# Table 10: Environment al Management and Monitoring Plan – Prior, During, and Post Construction Phase

Field	Impacts	Mitigation Measures	Responsible for Implementation	Monitoring Indicator	Frequency of Monitoring	Cost and Source of Funds
				(see Appendix 5 for sample)		
Construction work camps, hot mix plants, stockpile areas, storage areas, and disposal areas.	Disruption to traffic flow and sensitive receptors	• Determine locations prior to award of construction contracts.	PMO, PIU, and MDSC	<ul> <li>List of selected sites for construction work camps, hot mix plants, stockpile areas, storage areas, and disposal areas.</li> <li>Written consent of landowner/s (not lessee/s) for reuse of excess spoils to agricultural land</li> </ul>	• During detailed design phase	<ul> <li>No cost required.</li> <li>Mitigation measures are included as part of TOR of PMO, PIU, and MDSC.</li> </ul>
Sources of Materials	Extraction of materials can disrupt natural land contours and vegetation resulting in accelerated erosion, disturbance in natural drainage patterns, ponding and water logging, and water pollution.	• Prepare list of approved quarry sites and sources of materials	PMO, PIU, and MDSC	<ul> <li>List of approved quarry sites and sources of materials;</li> <li>Bid document to include requirement for verification of suitability of sources and permit for additional quarry sites if necessary.</li> </ul>	• During detailed design phase, as necessary with discussion with detailed design engineers and PIUs	<ul> <li>No cost required.</li> <li>Mitigation measures are included as part of TOR of PMO, PIU, and MDSC.</li> </ul>
EMP Implementation Training	Irreversible impact to the environment, workers, and community	• Project manager and all key workers will be required to undergo EMP implementation including spoils management, Standard operating procedures (SOP) for construction works; health and safety (H&S), core labor laws, applicable environmental laws, etc	Construction Contractor	<ul> <li>Proof of completion (Safeguards Compliance Orientation)</li> <li>Posting of proof of completion at worksites</li> <li>Posting of EMP at worksites</li> </ul>	• During detailed design phase prior to mobilization of workers to site	<ul> <li>Cost of EMP Implementation Orientation Training to contractor is the responsibility of PMO and PIU.</li> <li>Other costs responsibility of contractor.</li> </ul>

Field	Impacts	Mitigation Measures	Responsible for Implementation	Monitoring Indicator	Frequency of Monitoring	Cost and Source of Funds
Topography, landforms, geology and soils	Significant amount of gravel, sand, and cement will be required for this subproject. Extraction of construction materials may cause localized changes in topography and landforms. The impacts are negative but short- term, site-specific within a relatively small area and reversible by mitigation measures.	<ul> <li>Utilize readily available sources of materials. If contractor procures materials from existing burrow pits and quarries, ensure these conform to all relevant regulatory requirements.</li> <li>Borrow areas and quarries (If these are being opened up exclusively for the subproject) must comply with environmental requirements, as applicable. No activity will be allowed until formal agreement is signed between PIU, landowner and contractor.</li> </ul>	Construction Contractor	• Records of sources of materials	• Monthly by PIU	• Cost for implementation of mitigation measures responsibility of contractor.
Water quality	Trenching and excavation, run-off from stockpiled materials, and chemical contamination from fuels and lubricants may result to silt- laden runoff during rainfall which may cause siltation and reduction in the quality of adjacent bodies of water. The impacts are negative but short- term, site-specific within a relatively small area and	<ul> <li>Prepare and implement a spoils management plan (see Appendix 4 for outline).</li> <li>Prioritize re-use of excess spoils and materials in construction activities. If spoils will be disposed, consult with Habiganj local authority on designated disposal areas.</li> <li>All earthworks must be conducted during dry season to the maximum extent possible to avoid the difficult working conditions that prevail during monsoon season such as problems from runoff.</li> <li>Location for stockyards for construction materials shall be identified at least 300m away from watercourses. Place storage areas for fuels and lubricants away from any drainage leading to water bodies.</li> <li>Take all precautions to minimize the wastage of water in the construction activities.</li> </ul>	Construction Contractor	<ul> <li>Areas for stockpiles, storage of fuels and lubricants and waste materials;</li> <li>Number of silt traps installed along trenches leading to water bodies;</li> <li>Records of surface water quality inspection;</li> <li>Effectiveness of water management measures;</li> <li>No visible degradation to nearby drainages, <i>khals</i> or water bodies due to construction activities</li> </ul>	<ul> <li>Visual inspection by PIU and supervision consultants on monthly basis</li> <li>Frequency and sampling sites to be finalized during detailed design stage and final location of subproject components</li> </ul>	• Cost for implementation of mitigation measures responsibility of contractor.

Field	Impacts	Mitigation Measures	Responsible for Implementation	Monitoring Indicator	Frequency of Monitoring	Cost and Source of Funds
	reversible by mitigation measures.	<ul> <li>Take all precautions to prevent entering of wastewater into streams, watercourses, or irrigation system. Install temporary silt traps or sedimentation basins along the drainage leading to the water bodies.</li> <li>Ensure diverting storm water flow during construction shall not lead to inundation and other nuisances in low lying areas.</li> <li>While working across or close to any water body, the flow of water must not be obstructed. Ensure no construction materials like earth, stone, or appendage are disposed of in a manner that may block the flow of water of any watercourse and cross drainage channels.</li> <li>Monitor water quality according to the environmental management plan.</li> </ul>				
Air quality	Conducting works at dry season and moving large quantity of materials may create dusts and increase in concentration of vehicle-related pollutants (such as carbon monoxide, sulfur oxides, particulate matter, nitrous oxides, and hydrocarbons) which will affect people who live and work near the sites. The impacts are negative but short-	<ul> <li>Damp down exposed soil and any sand stockpiled on site by spraying with water when necessary during dry weather;</li> <li>Use tarpaulins to cover soils, sand and other loose material when transported by trucks.</li> <li>Unpaved surfaces used for haulage of materials within settlements shall be maintained dust-free.</li> <li>Arrangements to control dust through provision of windscreens, water sprinklers, and dust extraction systems shall be provided at all hot-mix plants, batching plants and crushers (if these establishments are being set up exclusively for the subproject).</li> <li>Monitor air quality.</li> </ul>	Construction Contractor	<ul> <li>Location of stockpiles;</li> <li>Number of complaints from sensitive receptors;</li> <li>Heavy equipment and machinery with air pollution control devices;</li> <li>Certification that vehicles are compliant with air quality standards.</li> </ul>	<ul> <li>Visual inspection by PIU and supervision consultants on monthly basis</li> <li>Frequency and sampling sites to be finalized during detailed design stage and final location of subproject components</li> </ul>	• Cost for implementation of mitigation measures responsibility of contractor.

Field	Impacts	Mitigation Measures	Responsible for Implementation	Monitoring Indicator	Frequency of Monitoring	Cost and Source of Funds
	term, site-specific within a relatively small area and reversible by mitigation measures.					
Acoustic environment	Construction activities will be on settlements, along and near schools, and areas with small-scale businesses. Temporary increase in noise level and vibrations may be caused by excavation equipment, and the transportation of equipment, and the transportation of equipment, and people. However, the proposed subproject will follow existing ROW alignment and impact is short- term, site-specific and within a relatively small area. The impacts are negative but short-term, site- specific within a relatively small area and reversible by mitigation measures.	<ul> <li>Involve the community in planning the work program so that any particularly noisy or otherwise invasive activities can be scheduled to avoid sensitive times.</li> <li>Plan activities in consultation with Habiganj local authority so that activities with the greatest potential to generate noise are conducted during periods of the day which will result in least disturbance.</li> <li>Use of high noise generating equipment shall be stopped during night time.</li> <li>Horns should not be used unless it is necessary to warn other road users or animals of the vehicle's approach;</li> <li>Utilize modern vehicles and machinery with the requisite adaptations to limit noise and exhaust emissions, and ensure that these are maintained to manufacturers' specifications at all times.</li> <li>All vehicles and equipment used in construction shall be fitted with exhaust silencers. Use silent-type generators (if required).</li> <li>Monitor noise levels. Maintain maximum sound levels not exceeding 80 decibels (DBA) when measured at a distance of 10 m or more from the vehicle/s.</li> <li>If it is not practicable to reduce noise levels to or below noise exposure limits, the contractor must post warning signs in the noise hazard area must wear hearing protection.</li> </ul>	Construction Contractor	<ul> <li>Number of complaints from sensitive receptors;</li> <li>Use of silencers in noise-producing equipment and sound barriers;</li> <li>Equivalent day and night time noise levels</li> </ul>	<ul> <li>Visual inspection by PIU and supervision consultants on monthly basis</li> <li>Frequency and sampling sites to be finalized during detailed design stage and final location of subproject components</li> </ul>	Cost for implementation of mitigation measures responsibility of contractor.

Field	Impacts	Mitigation Measures	Responsible for Implementation	Monitoring Indicator	Frequency of Monitoring	Cost and Source of Funds
		• Identify any buildings at risk from vibration damage and avoiding any use of pneumatic drills or heavy vehicles in the vicinity. Complete work in these areas quickly.				
Aesthetics B. Biological Cf	The construction activities do not anticipate any cutting of trees but will produce excess excavated earth (spoils), excess construction materials, and solid waste such as removed concrete, wood, packaging materials, empty containers, spoils, oils, lubricants, and other similar items. The impacts are negative but short- term, site-specific within a relatively small area and reversible by mitigation measures.	<ul> <li>Prepare the Debris Disposal Plan</li> <li>Remove all construction and demolition wastes on a daily basis.</li> <li>Coordinate with Habiganj local authority for beneficial uses of excess excavated soils or immediately dispose to designated areas Avoid stockpiling of any excess spoils</li> <li>Suitably dispose of collected materials from drainages, unutilized materials and debris either through filling up of pits/wasteland or at pre-designated disposal locations.</li> <li>All vehicles delivering fine materials to the site and carrying waste debris for disposal shall be covered to avoid spillage of materials. All existing roads used by vehicles of the contractor, shall be kept clear of all dust/mud or other extraneous materials dropped by such vehicles.</li> <li>Lighting on construction sites shall be pointed downwards and away from oncoming traffic and nearby houses.</li> <li>In areas where the visual environment is particularly important or privacy concerns for surrounding buildings exist, the site may require screening. This could be in the form of shade cloth, temporary walls, or other suitable materials prior to the beginning of construction.</li> <li>The site must be kept clean to minimize the visual impact of the site. Manage solid waste according to the following preference hierarchy: reuse, recycling and disposal to designated areas;</li> </ul>	Construction Contractor	<ul> <li>Number of complaints from sensitive receptors;</li> <li>Worksite clear of hazardous wastes such as oil/fuel</li> <li>Worksite clear of any wastes, collected materials from drainages, unutilized materials and debris</li> <li>Transport route and worksite cleared of any dust/mud</li> </ul>	<ul> <li>Visual inspection by PIU and supervision consultants on monthly basis</li> <li>Frequency and sampling sites to be finalized during detailed design stage and final location of) subproject components</li> </ul>	Cost for implementation of mitigation measures responsibility of contractor.

Field	Impacts	Mitigation Measures	Responsible for Implementation	Monitoring Indicator	Frequency of Monitoring	Cost and Source of Funds
Biodiversity	Activities being located in the built- up area of Habiganj pourashava. There are no protected areas in or around subproject sites, and no known areas of ecological interest. There are no trees at the site that need to be removed.	<ul> <li>Check if tree-cutting will be required during detailed design stage. No trees, shrubs, or groundcover may be removed or vegetation stripped without the prior permission of the environment management specialist.</li> <li>If during detailed design cutting of trees will be required, compensatory plantation for trees lost at a rate of 2 trees for every tree cut, in addition to tree plantation as specified in the design, will be implemented by the contractor, who will also maintain the saplings for the duration of his contract.</li> <li>All efforts shall be made to preserve trees by evaluation of minor design adjustments/ alternatives (as applicable) to save trees.</li> <li>Special attention shall be given for protecting giant trees and locally-important trees (with religious importance) during implementation.</li> <li>Prevent workers or any other person from removing and damaging any flora (plant/vegetation) and fauna (animal) including fishing in any water body in the subproject vicinity.</li> <li>Prohibit employees from poaching wildlife and cutting of trees for firewood.</li> </ul>	Construction Contractor	<ul> <li>PMO and PIU to report in writing the number of trees cut and planted if tree-cutting will be required (to be determined during detailed design stage)</li> <li>Number of complaints from sensitive receptors on disturbance of vegetation, poaching, fishing, etc.</li> </ul>	<ul> <li>Visual inspection by PIU and supervision consultants on monthly basis</li> <li>Frequency and sampling sites to be finalized during detailed design stage and final location of) subproject components</li> </ul>	Cost for implementation of mitigation measures responsibility of contractor.
Existing	ic Characteristics Road closure is not	• Prepare and implement a Traffic	Construction	• Traffic route during	Visual	Cost for
provisions for pedestrians and other forms of transport	Road closure is not anticipated. Hauling of construction materials and operation of equipment on-site can cause traffic problems. However, the proposed subproject will follow existing	<ul> <li>Prepare and implement a framic Management Plan (see Appendix 5 for sample)</li> <li>Plan transportation routes so that heavy vehicles do not use narrow local roads, except in the immediate vicinity of delivery sites.</li> <li>Maintain safe passage for vehicles and pedestrians throughout the construction period.</li> <li>Schedule truck deliveries of construction materials during periods of low traffic volume.</li> </ul>	Contractor	<ul> <li>Traffic route during construction works including number of permanent sign ages, barricades and flagmen on worksite as per Traffic Management Plan (see Appendix 5 for sample);</li> <li>Number of complaints from</li> </ul>	<ul> <li>Visual inspection by PIU and supervision consultants on monthly basis</li> <li>Frequency and sampling sites to be finalized during detailed design stage and final</li> </ul>	Cost for implementation of mitigation measures responsibility of contractor.

Field	Impacts	Mitigation Measures	Responsible for Implementation	Monitoring Indicator	Frequency of Monitoring	Cost and Source of Funds
	ROW alignment. The impacts are negative but short- term, site-specific within a relatively small area and reversible by mitigation measures.	<ul> <li>Erect and maintain barricades, including signs, markings, flags and flagmen informing diversions and alternative routes when required.</li> <li>Notify affected sensitive receptors by providing sign boards informing nature and duration of construction activities and contact numbers for concerns/complaints.</li> <li>Leave spaces for access between mounds of soil.</li> <li>Provide walkways and metal sheets where required to maintain access across for people and vehicles.</li> <li>Increase workforce in front of critical areas such as institutions, place of worship, business establishment, hospitals, and schools.</li> <li>Consult businesses and institutions regarding operating hours and factoring this in work schedules. Ensure there is provision of alternate access to businesses and institutions during construction activities, so that there is no closure of these shops or any loss of clientage.</li> <li>Ensure any damage to properties and utilities will be restored or compensated to</li> </ul>		sensitive receptors; • Number of sign ages placed at project location • Number of walkways, sign ages, and metal sheets placed at project location	location of) subproject components	
Socio-economic status	Subproject components will be located in government land and existing ROWs thus there is no requirement for land acquisition or any resettlements. Manpower will be required during the 12 months	<ul> <li>pre-work conditions.</li> <li>Employ at least 50% of labor force from communities in the vicinity of the site. This will have the added benefit of avoiding social problems that sometimes occur when workers are imported into host communities, and avoiding environmental and social problems from workers housed in poorly serviced camp accommodation.</li> <li>Secure construction materials from local market.</li> </ul>	Construction Contractor	<ul> <li>Employment records;</li> <li>Records of sources of materials</li> <li>Records of compliance to Bangladesh Labor Law of 2006 and other applicable standards</li> </ul>	<ul> <li>Visual inspection by PIU and supervision consultants on monthly basis</li> <li>Frequency and sampling sites to be finalized during detailed design</li> </ul>	• Cost for implementation of mitigation measures responsibility of contractor.

Field	Impacts	Mitigation Measures	Responsible for Implementation	Monitoring Indicator	Frequency of Monitoring	Cost and Source of Funds
	construction stage. This can result to generation of contractual employment and increase in local revenue. Thus potential impact is positive and long- term.				stage and final location of) subproject components	
Other existing amenities for community welfare	Although construction of subproject components involves quite simple techniques of civil work, the invasive nature of excavation and the subproject sites being in built-up areas of Habiganj pourashava where there are a variety of human activities, will result to impacts to the sensitive receptors such as residents, businesses, and the community in general. Excavation may also damage existing infrastructure (such as water distribution pipes, etc) located	<ul> <li>Provide safety barriers near any trenches, and cover trenches with planks during non work hours.</li> <li>Obtain details from pourashava nature and location of all existing infrastructure, and plan excavation carefully to avoid any such sites to maximum extent possible;</li> <li>Integrate construction of the various infrastructure subprojects to be conducted in</li> </ul>	Construction Contractor	• Utilities Contingency Plan Number of complaints from sensitive receptors	<ul> <li>Visual inspection by PIU and supervision consultants on monthly basis</li> <li>Frequency and sampling sites to be finalized during detailed design stage and final location of) subproject components</li> </ul>	Cost for implementation of mitigation measures responsibility of contractor.

Field	Impacts	Mitigation Measures	Responsible for Implementation	Monitoring Indicator	Frequency of Monitoring	Cost and Source of Funds
	alongside the roads. The impacts are negative but short-term, site- specific within a relatively small area and reversible by mitigation measures.	<ul> <li>works shall not disturb local water users.</li> <li>If construction work is expected to disrupt users of community water bodies, notice to the affected community shall be served 7 days in advance and again 1 day prior to start of construction.</li> <li>Ensure any damage to properties and utilities will be restored or compensated to pre-work conditions.</li> </ul>				
Community health and safety	Construction works will impede the access of residents and businesses in limited cases. The impacts are negative but short- term, site-specific within a relatively small area and reversible by mitigation measures. Poor safety signage and lack of barriers at work site and trenches will create hazard to pedestrians and children.	<ul> <li>Provide safety signage at all sites visible to public</li> <li>Provide safety barriers near any trenches, and cover trenches with planks during non work hours.</li> <li>Contractor's activities and movement of staff will be restricted to designated construction areas.</li> <li>Locations of hot-mix plants, batching plants and crushers (if these establishments are being set up exclusively for the subproject) shall be located at least 100 m away from the nearest dwelling preferably in the downwind direction.</li> <li>Consult with Habiganj local authority on the designated areas for stockpiling of, soils, gravel, and other construction materials.</li> <li>If the contractor chooses to locate the work camp/storage area on private land, he must get prior permission from the environment management specialist and landowner.</li> <li>Use small mechanical excavators to attain faster trenching progress. For rock and concrete breaking, use non-explosive blasting chemicals, silent rock cracking chemicals, and concrete breaking chemicals.</li> <li>Under no circumstances may open areas or the surrounding bushes be used as a toilet facility.</li> <li>Recycling and the provision of separate</li> </ul>	Contractor	<ul> <li>Number of permanent signages, barricades and flagmen on worksite as per Traffic Management Plan (see Appendix 5 for sample);</li> <li>Number of complaints from sensitive receptors;</li> <li>Number of walkways, signages, and metal sheets placed at project location</li> <li>Agreement between landowner and contractors in case of using private lands as work camps, storage areas, etc.</li> </ul>	inspection by PIU and	Cost for implementation of mitigation measures responsibility of contractor.

Field	Impacts	Mitigation Measures	Responsible for Implementation	Monitoring Indicator	Frequency of Monitoring	Cost and Source of Funds
		waste receptacles for different types of waste				
		shall be encouraged.				
		• A general regard for the social and				
		ecological well-being of the site and adjacent				
		areas is expected of the site staff. Workers				
		need to be made aware of the following				
		general rules: (i) no alcohol/drugs on site; (ii)				
		prevent excessive noise; (iii) construction staff				
		are to make use of the facilities provided for				
		them, as opposed to ad hoc alternatives (e.g.				
		fires for cooking, the use of surrounding				
		bushes as a toilet facility); (iv) no fires				
		permitted on site except if needed for the				
		construction works; (v) trespassing on				
		private/commercial properties adjoining the				
		site is forbidden; (vi) other than pre-approved				
		security staff, no workers shall be permitted to				
		live on the construction site; and (vii) no				
		worker may be forced to do work that is				
		potentially dangerous or that he/she is not				
		trained to do.				
		<ul> <li>Interested and affected parties need to be</li> </ul>				
		made aware of the existence of the				
		complaints book and the methods of				
		communication available to them. The				
		contractor must address queries and				
		complaints by: (i) documenting details of such				
		communications; (ii) submitting these for				
		inclusion in complaints register; (iii) bringing				
		issues to the national/regional environmental				
		specialist's attention immediately; and (iv)				
		taking remedial action as per national/regional				
		environment specialist's instruction.				
		• The contractor shall immediately take the				
		necessary remedial action on any				
		complaint/grievance received by him and				
		forward the details of the grievance along with				
		the action taken to the national/regional				
		environmental specialist within 48 hours of				

Field	Impacts	Mitigation Measures	Responsible for Implementation	Monitoring Indicator	Frequency of Monitoring	Cost and Source of Funds
Workers health and safety	There is invariably a safety risk when construction works such as excavation and earthmoving are conducted in urban areas. Workers need to be mindful of the occupational hazards which can arise from working in height and excavation works. Potential impacts are negative and long-term but reversible by mitigation measures.	<ul> <li>receipt of such complaint/grievance.</li> <li>Comply with requirements of Government of Bangladesh Labor Law of 2006 and all applicable laws and standards on workers H&amp;S.</li> <li>Ensure that all site personnel have a basic level of environmental awareness training. If necessary, the environmental management specialist and/or a translator shall be called to the sites to further explain aspects of environmental or social behavior that are unclear.</li> <li>Produce and implement a site health and safety (H&amp;S) plan which include measures as: (i) excluding the public from worksites; (ii) ensuring all workers are provided with and required to use personal protective equipment (reflectorized vests, footwear, gloves, goggles and masks) at all times; (iii) providing (H&amp;S) training for all site personnel; (iv) documenting procedures to be followed for all site activities; and (v) maintaining accident reports and records.</li> <li>Arrange for readily available first aid unit including an adequate supply of sterilized dressing materials and appliances</li> <li>Maintain necessary living accommodation and ancillary facilities in functional and hygienic manner in work camps. Ensure (i) uncontaminated water for drinking, cooking and washing, (ii) clean eating areas where workers are not exposed to hazardous or noxious substances; and (iii) sanitation facilities are available at all times.</li> <li>Provide M&amp;S orientation training to all new workers;</li> <li>Provide H&amp;S orientation training to all new workers to ensure that they are apprised of the basic site rules of work at the site,</li> </ul>	Contractor	<ul> <li>Site-specific H&amp;S Plan</li> <li>Equipped first-aid stations</li> <li>Medical insurance coverage for workers</li> <li>Number of accidents</li> <li>Records of supply of uncontaminated water</li> <li>Condition of eating areas of workers</li> <li>Record of H&amp;S orientation trainings</li> <li>Use of personal protective equipment</li> <li>% of moving equipment outfitted with audible back-up alarms</li> <li>Permanent sign boards for hazardous areas</li> <li>Signage's for storage and disposal areas</li> <li>Condition of sanitation facilities for workers</li> </ul>	inspection by	Cost for implementation or measures responsibility or contractor.

Field	Impacts	Mitigation Measures	Responsible for Implementation	Monitoring Indicator	Frequency of Monitoring	Cost and Source of Funds
		<ul> <li>personal protective protection, and preventing injuring to fellow workers;</li> <li>Provide visitor orientation if visitors to the site can gain access to areas where hazardous conditions or substances may be present. Ensure also that visitor/s do not enter hazard areas unescorted;</li> <li>Ensure the visibility of workers through their use of high visibility vests when working in or walking through heavy equipment operating areas;</li> <li>Ensure moving equipment is outfitted with audible back-up alarms;</li> <li>Mark and provide sign boards for hazardous areas such as energized electrical devices and lines, service rooms housing high voltage equipment, and areas for storage and disposal. Signage shall be in accordance with international standards and be well known to, and easily understood by workers, visitors, and the general public as appropriate; and</li> <li>Disallow worker exposure to noise level greater than 85 DBA for duration of more than 8 hours per day without hearing protection. The use of hearing protection shall be enforced actively.</li> </ul>				
	tural, and Archaeolog	pical Characteristics				
Physical and cultural heritage	Habiganj Pourashava was established in 1881. Lalmai hills and the higher areas of Sylhet, Habiganj, and Chittagong and Madhupur tract. The prehistoric site of Chaklapunji tea garden, near Chandirmazar of Chunarughat. Habiganj	<ul> <li>All fossils, coins, articles of value of antiquity, structures and other remains of archaeological interest discovered on the site shall be the property of the government.</li> <li>Prevent workers or any other persons from removing and damaging any fossils, coins, articles of value of antiquity, structures</li> </ul>	Construction Contractor	• Records of chance finds	<ul> <li>Visual inspection by PIU and supervision consultants on monthly basis</li> <li>Frequency and sampling sites to be finalized during detailed design stage and final</li> </ul>	Cost for implementation of mitigation measures responsibility of contractor.

Field	Impacts	Mitigation Measures	Responsible for Implementation	Monitoring Indicator	Frequency of Monitoring	Cost and Source of Funds
	has also revealed a significant number of prehistoric tools from the bed of a small ephemeral stream (water remains here only for a few hours after rainfall) known as Balu nadi (river). However, Construction works will be on existing roads and in built- up areas of Habiganj thus risk for chance finds is low.				location of) subproject components	
E. Others	· · · · · ·	-				
Submission of EMP implementation report	Unsatisfactory compliance to EMP	<ul> <li>Appointment of supervisor to ensure EMP implementation</li> <li>Timely submission of monitoring reports including pictures</li> </ul>	Construction contractor	<ul> <li>Availability and competency of appointed supervisor</li> <li>Monthly report</li> </ul>	<ul> <li>Monthly monitoring report to be submitted by PIU to PMO</li> <li>PMO to submit semi- annual monitoring report to ADB</li> </ul>	Cost for implementation of mitigation measures responsibility of contractor.
3. Post-construc				<b></b>		
Post- construction clean-up	Damage due to debris, spoils, excess construction materials	<ul> <li>Remove all spoils wreckage, rubbish, or temporary structures (such as buildings, shelters, and latrines) which are no longer required; and</li> <li>All excavated roads shall be reinstated to original condition.</li> <li>All disrupted utilities restored</li> <li>All affected structures rehabilitated/compensated</li> <li>The area that previously housed the</li> </ul>	Construction Contractor	• PMO/CSS report in writing that (i) worksite is restored to original conditions; (ii) camp has been vacated and restored to pre-project conditions; (iii) all construction related structures not relevant to O&M are removed;	Prior to turn- over of completed works to pourashava	Cost for implementation of mitigation measures responsibility of contractor.

Field	Impacts	Mitigation Measures	Responsible for Implementation	Monitoring Indicator	Frequency of Monitoring	Cost and Source of Funds
		<ul> <li>construction camp is to be checked for spills of substances such as oil, paint, etc. and these shall be cleaned up.</li> <li>All hardened surfaces within the construction camp area shall be ripped, all imported materials removed, and the area shall be top soiled and regressed using the guidelines set out in the revegetation specification that forms part of this document.</li> <li>The contractor must arrange the cancellation of all temporary services.</li> <li>Request PMO/CSS to report in writing that worksites and camps have been vacated and restored to pre-project conditions before acceptance of work.</li> </ul>		and (iv) worksite clean-up is satisfactory.		

# Table 11: Environmental Management and Monitoring Plan – O&M Phase

Field	Impacts	Mitigation Measures	Responsible for Implementation	Monitoring Indicator	Frequency of Monitoring	Cost and Source of Funds
A. Physical C		<b>—</b> 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1		NI. S. M. I.	Duration	
Water quality	Run-off from debris/sediments from repair and maintenance of road and bridge which may cause siltation and reduction in the quality of adjacent bodies of water. The impacts are negative but short-term, site-specific within a relatively small area and reversible by mitigation measures.	<ul> <li>Take all precautions to prevent run-off into streams, watercourses, or irrigation system. Install temporary silt traps or sedimentation basins along drainage leading to the water bodies.</li> <li>Remove all debris/sediments immediately.</li> <li>Dispose debris/sediments at a designated site such as landfill.</li> </ul>	Habiganj pourashava	• No visible degradation to nearby drainages, <i>khals</i> or water bodies due to construction activities	Duration of repair works	<ul> <li>Included in O&amp;M cost</li> </ul>
Air quality	Moving debris/sediments may create dusts during dry season. The impacts are negative but short-term, site-specific within a relatively small area and reversible by mitigation measures.	• Use tarpaulins to cover soils, sand and other loose material.	Habiganj pourashava	• No of complaints from sensitive receptors	Duration of repair works	<ul> <li>Included in O&amp;M cost</li> </ul>
Acoustic environment	Temporary increase in noise level and vibrations. The impacts are negative but short-term, site- specific within a relatively small area and reversible by mitigation measures.	<ul> <li>Plan activities in consultation with Habigang local authority so that activities with the greatest potential to generate noise are conducted during periods of the day which will result in least disturbance.</li> <li>Identify any buildings at risk from vibration damage and avoiding any use of pneumatic drills or heavy vehicles in the vicinity. Complete work in these areas quickly.</li> </ul>	Habiganj pourashava	• No complaints from sensitive receptors	Duration of repair works	Included in O&M cost
	Characteristics		·		•	-
Biodiversity	Activities in the built-up area of Habiganj pourashava. There are no protected areas in or around subproject sites, and no known areas of ecological interest.	<ul> <li>No trees, shrubs, or groundcover may be removed or vegetation stripped without the prior permission.</li> <li>Prevent workers or any other person from removing and damaging any flora (plant/vegetation) and fauna (animal).</li> </ul>	Habiganj pourashava	• No of complaints from sensitive receptors	Duration of repair works	<ul> <li>Included in O&amp;M cost</li> </ul>
	omic Characteristics		· · · · · · · · ·			
Existing	Road closure is not anticipated.	Maintain safe passage for vehicles and	Habiganj pourashava	• No of	Duration of	<ul> <li>Included</li> </ul>

Field	Impacts	Mitigation Measures	Responsible for Implementation	Monitoring Indicator	Frequency of Monitoring	Cost and Source of Funds
provisions for pedestrians and other forms of transport	Traffic may be interrupted temporarily. The impacts are negative but short-term, site- specific within a relatively small area and reversible by mitigation measures.	<ul> <li>pedestrians during maintenance activities.</li> <li>Erect and maintain barricades, including signs, markings, flags and flagmen informing diversions and alternative routes when required.</li> <li>Notify affected sensitive receptors by providing sign boards informing nature and duration of maintenance activities and contact numbers for concerns/complaints.</li> <li>Leave spaces for access between mounds of soil.</li> <li>Provide walkways and metal sheets where required to maintain access across for people and vehicles.</li> <li>Increase workforce in front of critical areas such as institutions, place of worship, business establishment, hospitals, and schools.</li> <li>Consult businesses and institutions regarding operating hours and factoring this in work schedules.</li> <li>Ensure any damage to properties and utilities will be restored or compensated to pre-work conditions.</li> </ul>		complaints from sensitive receptors	repair works	in O&M cost
Workers health and safety	Workers need to be mindful of the occupational hazards working in confined spaces such as closed drains. Potential impacts are negative and long-term but reversible by mitigation measures.	<ul> <li>Comply with requirements of Government of Bangladesh Labor Law of 2006 and all applicable laws and standards on workers H&amp;S.</li> <li>Ensure that all site personnel have a basic level of H&amp;S training.</li> <li>Produce and implement a O&amp;M H&amp;S plan which include measures as: (i) excluding the public from worksites; (ii) ensuring all workers are provided with and required to use personal protective equipment (reflectorized vests, footwear, gloves, goggles and masks) at all times; (iii) providing H&amp;S training for all site personnel;</li> </ul>	Habiganj pourashava	<ul> <li>No of complaints from sensitive receptors</li> <li>No of complaints from workers related to O&amp;M activities</li> <li>Zero accident</li> </ul>	Duration of repair works	Included in O&M cost

Field	Impacts	Mitigation Measures	Responsible for Implementation	Monitoring Indicator	Frequency of Monitoring	Cost and Source of Funds
		<ul> <li>(iv) documenting procedures to be followed for all site activities; and (v) maintaining accident reports and records.</li> <li>Arrange for readily available first aid unit including an adequate supply of sterilized dressing materials and appliances</li> <li>Provide H&amp;S orientation training to all new workers to ensure that they are apprised of the basic site rules of work at the site, personal protective protection, and preventing injuring to fellow workers;</li> <li>Ensure the visibility of workers through their use of high visibility vests when working in or walking through heavy equipment operating areas;</li> <li>Mark and provide sign boards. Signage shall be in accordance with international standards and be well known to, and easily understood by workers, visitors, and the general public as appropriate.</li> <li>Disallow worker exposure to noise level greater than 85 dBA for a duration of more than 8 hours per day without hearing protection. The use of hearing protection shall be enforced actively.</li> </ul>				
· · · · · · · · · · · · · · · · · · ·	Cultural, and Archaeological Char				<b>y</b>	*
Physical and cultural heritage	Habiganj pourashava was established in 1881. Lalmai hills and the higher areas of Sylhet, Habiganj, and Chittagong and Madhupur tract. The prehistoric site of Chaklapunji tea garden, near Chandirmazar of Chunarughat. Habiganj has also revealed a significant number of prehistoric tools from the bed of a small ephemeral stream (water remains here only for a few hours after rainfall) known as Balu nadi (river).	<ul> <li>All fossils, coins, articles of value of antiquity, structures and other remains of archaeological interest discovered on the site shall be the property of the government.</li> <li>Prevent workers or any other persons from removing and damaging any fossils, coins, articles of value of antiquity, structures and other remains of archaeological interest.</li> <li>Stop work immediately to allow further investigation if any finds are suspected.</li> </ul>	Habiganj pourashava	Records of chance finds	Duration of repair works	Included in O&M cost

Field	Impacts	Mitigation Measures	Responsible for Implementation	Monitoring Indicator	Frequency of Monitoring	Cost and Source of Funds
	However, construction works will					
	be on existing roads and in built-					
	up areas of Habiganj thus risk for					
	chance finds is low.					

#### E. Institutional Capacity Development Program

130. The MDSC national and regional environmental specialists are responsible for trainings on environmental awareness and management in accordance with both ADB and government requirements. Specific modules customized for the available skill set will be devised after assessing the capabilities of the target participants and the requirements of the project. Typical modules would be as follows: (i) sensitization; (ii) introduction to environment and environmental considerations in water supply and wastewater projects; (iii) review of IEEs and integration into the project detailed design; (iv) improved coordination within nodal departments; and (v) monitoring and reporting system. The contractors will be required to conduct environmental awareness and orientation of workers prior to deployment to work sites. The proposed training project along with the frequency of sessions is presented in Table 12.

Items	Pre-construction/prior to construction	Constructio	n
Training Title	Orientation workshop	Orientation program/ workshop for contractors and supervisory staffs	Experiences and best practices sharing
Purpose	To aware the participants of the environmental safeguard requirements of ADB and GOB and how the project will meet these requirements	To build the capacity of the staffs for effective implementation of the designed EMPs aimed at meeting the environmental safeguard compliance of ADB and GOB	To share the experiences and best practices aimed at learning lessons and improving implementatio n of EMP
Contents	<ul> <li>Module 1: Orientation <ul> <li>ADB Safeguards Policy</li> </ul> </li> <li>Statement <ul> <li>Government of Bangladesh</li> <li>Environmental Laws and</li> <li>Regulations</li> </ul> </li> <li>Module 2: Environmental Assessment Process <ul> <li>ADB environmental process,</li> <li>identification of impacts and mitigation measures, formulation of an environmental management plan (EMP), implementation, and monitoring requirements</li> <li>Review of environmental assessment report to comply with ADB requirements</li> <li>Incorporation of EMP into the project design and contracts</li> </ul> </li> </ul>	<ul> <li>Roles and responsibilities of officials/contractors/cons ultants towards protection of environment</li> <li>Environmental issues during construction</li> <li>Implementation of EMP</li> <li>Monitoring of EMP implementation</li> <li>Reporting requirements</li> </ul>	Experiences on EMP implementatio n – issues and challenges Best practices followed
Duration	1 day	1 day	1 day on a regular period to be determined

#### Table 12: Training Program for Environmental Management

Items Pre-construction/prior to Con		Constructio	struction		
			by PMO, PIUs, and PMSC		
Participants	LGED, DPHE, PMO, and PMO staffs (technical and environmental) involved in the project implementation		PMO /PIUs Contractors		

#### F. Staffing Requirement and Budget

- 131. Costs required for implementing the EMP will cover the following activities:
  - (i) Updating IEE, preparing and submitting reports and public consultation and disclosure;
  - (ii) Application for environmental clearances; and
  - (iii) Implementation of EMP, environmental monitoring program and long-term surveys.
- 132. The infrastructure involved in each scheme is generally straightforward and will take between three and nine months to build. Environmental monitoring during construction will also be straightforward and will involve periodic site observations and interviews with workers and others, plus checks of reports and other documents. This will be conducted by MDSC environmental management specialist assisted by the PMO environment officer. The environmental management specialist will use the IEE as necessary and perform tasks as specified in the TOR. Therefore no separate budget required for MDSC environment management specialist.
- 133. The cost of mitigation measures and surveys during construction stage will be incorporated into the contractor's costs, which will be binding on him for implementation. The surveys will be conducted by the contractors.
- 134. The operation phase mitigation measures are again of good operating practices, which will be the responsibility of Habiganj pourashava. All monitoring during the operation and maintenance phase will be conducted by LGED and DPHE, therefore, there are no additional costs. The indicative costs of EMP implementation are shown in Tables 13 and 14 (by source of funds).

### Table 13: Indicative Cost of EMP Implementation

	Particulars	Stages	Unit	Total Number	Rate (Taka)	Cost (Taka)	Cost covered by
Α.	Mitigation Measures						
1.	Compensatory plantation measures	Construction	Per tree				Civil works contract
В.	Monitoring Measures						
1.	Air quality monitoring	- Pre-construction - Construction	Per location	2	30,000	60,000	Civil works contract
2.	Noise levels monitoring	- Pre-construction - Construction	Per location	20	10,000	200,000	Civil works contract
С	Capacity Building						
1.	(i) Orientation workshop for officials involved in the project implementation on ADB Safeguards Policy Statement, Government of Bangladesh environmental laws and regulations, and environmental assessment process; (ii) induction course contractors, preparing them on EMP implementation and environmental monitoring requirements related to mitigation measures; and taking immediate action to remedy unexpected adverse impacts or ineffective mitigation measures found during the course of implementation; and (iii) lessons learned information sharing	Module 1 – immediately upon engagement of the MDSC environmental specialists Module 2 – prior to award of civil works contracts (twice a year for 4 years) Module 3 – prior to start of Phase 2 and upon completion of the project	lump sum		Module 1 - 150000 Module 2 - 150000 Module 3 - 150000	450,000	Covered under MDSC contract
D.	Consultants Costs						
1.	MDSC national environmental specialist (1 person)	Responsible for environmental safeguards of the project	person months (spread over entire project implementatio n period)	40 person months	225000 per person month	90,00000	Remuneration and budget for travel covered in the MDSC contract
2.	MDSC regional environmental specialists (3 persons)	Responsible for environmental safeguards of the project	person months (spread over entire project implementatio n period)	40 each = 120 person- months	152,000 per person- month	18,240,000	Remuneration and budget for travel covered in the MDSC contract
E.	Administrative Costs						
1.	Legislation, permits, and agreements	Permit for excavation, tree-cutting	Lump sum		50,000	50,000	These consents

	Particulars	Stages	Unit	Total Number	Rate (Taka)	Cost (Taka)	Cost covered by
		permits, etc					are to be obtained by contractor at his own expense.
		Environmental assessment and environmental clearances as per ECA and ECR requirements Obtaining right of way clearances with related national agencies.	Lump sum		100,000	100,000	Pourashava cost for municipal infrastructures
F.	Other Costs						
1.	Public consultations and information disclosure	Information disclosure and consultations during preconstruction and construction phase, including public awareness campaign through media	As per requirement	Lump sum		300,000	Covered under MDSC contract
2.	GRM implementation	Costs involved in resolving complaints (meetings, consultations, communication, and reporting/information dissemination)		Lump sum		450,000	PMO/PIU cost
3.	Any unanticipated impact due to project implementation	Mitigation of any unanticipated impact arising during construction phase and defect liability period		Lump sum	Contracto r's liability	As per insurance requirement	Civil works contract – contractor's insurance

	Particulars	Stages	Unit	Total Number	Rate (Taka)	Cost (Taka)	Cost covered by
A. C	ontractors	4		i		.÷\$	
1.	Compensatory plantation measures	Construction	Per tree				Civil works contract
2.	Air quality monitoring	- Pre-construction - Construction	Per location	2	30,000	60,000	Civil works contract
3.	Noise levels monitoring	- Pre-construction - Construction	Per location	20	10,000	200,000	Civil works contract
4.	Legislation, permits, and agreements	Permit for excavation, tree-cutting permits, etc	Lump sum		50,000	50,000	These consents are to be obtained by contractor at his own expense.
5.	Any unanticipated impact due to project implementation	Mitigation of any unanticipated impact arising during construction phase and defect liability period		Lump sum	Contractor 's liability	As per insurance requirement	Civil works contract – contractor's insurance
	Subtotal					310,000	
B. M	IDSC	-					
1.	Public consultations and information disclosure	Information disclosure and consultations during preconstruction and construction phase, including public awareness campaign through media	As per requirement	Lump sum		300,000	Covered under MDSC contract
2.	(i) Orientation workshop for officials involved in the project implementation on ADB Safeguards Policy Statement, Government of Bangladesh environmental laws and regulations, and environmental assessment process; (ii) induction course contractors, preparing them on EMP implementation and environmental monitoring requirements related to mitigation measures; and taking immediate action to remedy unexpected adverse impacts or ineffective	Module 1 – immediately upon engagement of the MDSC environmental specialists Module 2 – prior to award of civil works contracts (twice a year for 4 years) Module 3 – prior to start of Phase 2 and upon completion of the project	lump sum		Module 1 – 150,000 Module 2 – 150,000 Module 3 – 150,000	450,000	Covered under MDSC contract

## Table 14 : Indicative Cost of EMP Implementation – Per Source of Funding

	Particulars	Stages	Unit	Total Number	Rate (Taka)	Cost (Taka)	Cost covered by
	mitigation measures found during the course of implementation; and (iii) lessons learned information sharing						
3.	MDSC national environmental specialist (1 person)	Responsible for environmental safeguards of the project	person months (spread over entire project implementatio n period)	40 person months	225,000 per person month	90,00000	Remuneration and budget for travel covered in the MDSC contract
4.	MDSC regional environmental specialists (3 persons)	Responsible for environmental safeguards of the project	person months (spread over entire project implementatio n period)	40 each = 120 person- months	152000 per person- month	18,240,000	Remuneration and budget for travel covered in the MDSC contract
	Subtotal					27,990,000	
C. A	dministrative Cost (Recurring) – PMO						
1.	Legislation, permits, and agreements	Environmental assessment and environmental clearances as per ECA and ECR requirements Obtaining right of way clearances with related national agencies.	Lump sum		100,000	100,000	Pourashava cost for municipal infrastructures
2.	GRM implementation	Costs involved in resolving complaints (meetings, consultations, communication, and reporting/information dissemination)		Lump sum		1,000,000	PMO/PIU cost
	Subtotal					1,100,000	

#### IX. MONITORING AND REPORTING

- 135. PMO will monitor and measure the progress of EMP implementation. The monitoring activities will correspond with the project's risks and impacts, and will be identified in the EIAs/IEEs for the projects. In addition to recording information on the work and deviation of work components from original scope PMO, PIUs, and MDSC will undertake site inspections and document review to verify compliance with the EMP and progress toward the final outcome. Corrective actions to be taken quickly and reported in monitoring reports.
- 136. MDSC will submit monthly monitoring and implementation reports to PMO, who will take follow-up actions, if necessary. PMO will submit semi-annual monitoring reports to ADB. The suggested monitoring report format is in Appendix 9. Subproject budgets will reflect the costs of monitoring and reporting requirements. For projects likely to have significant adverse environmental impacts during operation, reporting will continue at the minimum on an annual basis. Monitoring reports will be posted in a location accessible to the public.
- 137. LGED and DPHE will document monitoring results, identify the necessary corrective actions, reflect them in a corrective action plan, and for each quarter, will study the compliance with the action plan developed in the previous quarter. Compliance with loan covenants will be screened by ADB.
- 138. ADB will review project performance against the commitments as agreed in the legal documents. The extent of ADB's monitoring and supervision activities will be commensurate with the project's risks and impacts. Monitoring and supervising of social and environmental safeguards will be integrated into the project performance management system. ADB will monitor projects on an ongoing basis until a project completion report is issued. ADB will carry out the following monitoring actions to supervise project implementation:
  - (i) conduct periodic site visits for projects with adverse environmental or social impacts;
  - (ii) conduct supervision missions with detailed review by ADB's safeguard specialists/officers or consultants for projects with significant adverse social or environmental impacts;
  - (iii) review the periodic monitoring reports submitted by EAs to ensure that adverse impacts and risks are mitigated, as planned and as agreed with ADB;
  - (iv) work with EAs to rectify to the extent possible any failures to comply with their safeguard commitments, as covenanted in the legal agreements, and exercise remedies to re-establish compliance as appropriate; and
  - (v) (v)prepare a project completion report that assesses whether the objective and desired outcomes of the safeguard plans have been achieved, taking into account the baseline conditions and the results of monitoring.

### X.FINDINGS, RECOMMENDATIONS AND CONCLUTIONS

139. The environmental status of the proposed road and drain improvement/rehabilitation has been assessed. Issues related to involuntary resettlement were assessed and will be reported in the Social Sector Assessment for the subprojects.

### A. Findings

- 140. The Habiganj Pourashava road and drain improvement subprojects are designed to improve the quality of life of residents and to enhance the town's role as a market, services, and manufacturing centre. Moreover, urban residents and the rural residents in surrounding hinterland will benefit from improved roads allowing better access to urban markets and social services provided in the Project towns. The town economy will benefit from enhanced productivity as a result of health improvement, time savings in as well as from increased urban efficiency arising from improved roads.
- 141. During subproject design, community meetings were held with beneficiaries to discuss sanitation, poverty, resettlement, affordability issues, and environmental concerns. Socioeconomic surveys obtained information and individual views on current situations and future preferences.
- 142. The process described in this document has assessed the environmental impacts of the proposed road improvements. Potential negative impacts could not be identified in construction and operation of the improved infrastructure, and no impacts were identified as being due to either design or location. Mitigation measures have been developed to reduce all negative impacts to acceptable levels. These were discussed with specialists responsible for the engineering aspects, and as a result some measures have already been included in the outline designs and contract documents for the infrastructure. These include locating all the facilities within the ROW of existing roads, to avoid the need to acquire land / new ROW or relocation of people.
- 143. There were limited opportunities to provide environmental enhancements, but certain measures were included. For example it is proposed that the subproject:
  - Employ in the workforce people who live in the vicinity of the construction site to provide them with a short-term economic gain; and
  - Plant large-growing trees at the periphery of the site by the contractor to mask it from view and give it a more natural and pleasing appearance.
- 144. These and the other mitigation and enhancement measures are summarized in Table 9, which also shows the location of the impact, the body responsible for the mitigation, and the program for its implementation.
- 145. The improved roads will provide a more efficient and effective transport route, which should improve the overall economy by reducing time spent idle in traffic by delivery vehicles, employees and customers.
- 146. Table 9 also assesses the effectiveness of each mitigation measure in reducing each impact to an acceptable level. This is shown as the level of significance of the residual impact (remaining after the mitigation is applied). This shows that all impacts will be rendered at least neutral (successfully mitigated), and that certain measures will produce a benefit (in addition to the major benefits provided by the operating schemes).
- 147. Mitigation will be assured by a program of environmental monitoring conducted during both construction and operation to ensure that all measures are provided as intended, and to determine whether the environment is protected as envisaged. This will include observations

on and off site, document checks, and interviews with workers and beneficiaries, and any requirements for remedial action will be reported to the PMO.

#### B. Recommendations

148. Two straight recommendations need to be followed to ensure that the environmental impacts of the subproject are successfully mitigated. These are that LGED should ensure:

- All mitigation, compensation and enhancement measures proposed in this IEE report and in the Resettlement Framework for the LGED are implemented in full, as described in these two documents; and
- The Environmental Monitoring Plan proposed in table 10, 11 of this report and the internal and external monitoring proposed in the Resettlement Framework are also implemented in full.

#### C. Conclusions

- 149. The overall conclusion is that if the mitigation, compensation and enhancement measures are implemented in full, there should be no significant negative environmental impacts as a result of location, design, construction or operation of the subproject. There should in fact be some benefits from recommended mitigation and enhancement measures, and major improvements in guality of life individual and public health once the subproject is in operation.
- 150. All required issues have been assessed to the best of our knowledge and no further studies are required to comply with ADB procedures or the laws of GOB.

#### XI. Appendix-1 View on Photographs



### PHOTOGRAPH OF HABIGANJ POURASHAVA ROADS & DRAINS

View of road PDP-1002

View of road PDP-1001



View of road PDP-1004



View of road PDP-1009



View of road PDP-1014



View of road PDP-1021



View of road PDP-1021



View of road PDP-1041



View of drain PDP-1188



View of road PDP-1053



View of drain PDP-1192



View of drain PDP-1021



View of road & drain PDP-1040



View of road & drain PDP-1058

#### XII. Appendix-2 Environment Clearance Certificate

Government of the People's Republic of Bangladesh Department of Environment Head Office, Paribesh Bhaban E-16, Agargaon, Sher-e-Bangla Nagar, Dhaka-1207 www.doe.gov.bd Memo No: DoE/Clearance/5444/2015/ 256 Date: 2]/05/2015 Subject: Site Clearance for Third Urban Governance and Infrastructure Improvement (Sector) Project (UGIIP-III).

Ref: Your Application dated 31/03/2015

With reference to the above mentioned subject, the Department of Environment (DOE) hereby accords the Site Clearance to the Third Urban Governance and Infrastructure Improvement (Sector) Project (UGIIP-III) subject to fulfilling the following terms and conditions.

- This clearance shall only be applicable for the development of the infrastructure of the said project.
- 2. Proper and adequate facilities for road rehabilitation component must be ensured.
- Drainage should be made in such a way that any solid waste cannon be discharged in the drain and drainage level should be such that it will properly drain water during extreme climatic condition.
- Local Government Engineering Department (LGED) shall submit a comprehensive Environmental Impact Assessment (EIA) report considering the overall activity of the said Project especially, the the red category components under ECR, 1997 in accordance with the TOR and time schedule to the Department of Environment (DOE).
- Without approval of EIA report by the Department of Environment, Local Government Engineering Department (LGED) shall not be able to open L/C in favor of importable machineries.
- Without obtaining Environmental Clearance, Local Government Engineering Department (LGED) shall not start the operation of the project.
- Rehabilitation of human settlement or compensation for any sort of activity which will incur damage or loss of public or private property shall be addressed as per Government or Bangladesh rules and regulations.
- Local Government Engineering Department (LGED) shall submit the EIA along with a filled-in application for Environmental Clearance in prescribed form, the feasibility report, the applicable fee in a treasury chalan and the no objection certificates (NOCs) from the local authorities to the head office of DOE in Dhaka with a copy to the concerned divisional offices of DOE.

 This clearance is valid for one year from the date of issuance and Local Government Engineering Department (LGED) shall apply for renewal to the Head Office of DOE at least 30 days ahead of expiry.

This Clearance Certificate has been issued with the approval of the appropriate authority.

21.05,2415

(Syed Nazmul Absan) Director (Environmental Clearance) Phone # 8181778

Project Director Third Urban Governance and Infrastructure Improvement (Sector) Project (UGIIP-III) Level-12, LGED Bhaban, Sher-E-Bangla Nagar Agargaon, Dhaka-1207.

### Copy Forwarded to :

- 1) PS to Secretary, Ministry of Environment and Forests, Bangladesh Secretariat, Dhaka.
- Director, Department of Environment, Dhaka/Chittagong/Rajshahi/Khulna/Sylhet/Barisal Regional/Divisional/Metropolitan Office.
- Assistant Director, Office of the Director General, Department of Environment, Head Office, Dhaka.

### XIII. Appendix-3 Rapid Environmental Assessment (REA) Checklist

### Rapid Environmental Assessment (REA) Checklist for Screening of Road Sub-Project

$\succ$ This checklist is to be prepared to support the environmental classification of a project. It is to be					
attached to the environmental categorization form that is to be prepared and submitted to the					
LEGD / MDS Consultant					
> This checklist is to be completed with the assistance of an Environment Specialist in a Regional					
Department.					
> This checklist focuses on environmental issues and concerns. To ensure that social dimensions					
are adequately considered, refer also to ADB checklists and handbooks on (i) involuntary					
resettlement, (ii) indigenous peoples planning, (iii) poverty reduction, (iv) participation, and (v)					
gender and development.					
> Answer the questions assuming the "without mitigation" case. The purpose is to identify potential					
impacts. use the "remarks" section to discuss any anticipated mitigation measures.					
Name of Pourashava : Habiganj					
Name of Sector : Infrastructure of (Road) Improvement.					
Sub-Project : Improvement of RCC & BC road at Umednagar area infront of Ex Councilor					
/Scheme Samchu Mia house to Baniyachong Road Ch 0.00-420.00m by RCC & at Ch					
420.00-560.00m by BC					

SCREENING QUESTIONS		Mark	Remarks			
	YES	NO	nemarks			
A. Sub -Project Location : Weather the project area is adjacent to or within any of the fo						
environmentally sensitive area :						
1. Cultural heritage site		✓				
2. Protected Area		✓				
3. Wetland		✓				
4. Mangrove		✓				
5. Estuary		✓				
6. Protected Buffer area		✓				
7. Middle of protective areas		✓				
8. Specially protective biodiversity area		✓				
B. Sub -Project Particulars :						
1. Road length < 20 Km.	✓		L= 560m			
2. Road length > 20 Km.		✓				
3. Landslide		✓				
4. Location of Electric poles		✓				
5. Widening of Road Formation.	vi)	✓				
6. Repair /Improvement of road.	~		Improvement of RCC & BC road			
7. Road length within /abutting permanent Wetland.		✓				
8. Road constructed along river or irrigation canal		✓				
9. Road crossing any stream, canal, river.		✓				
<b>10.</b> Increase no. of Road Cross- drainage Structure.	vii)	✓				

SCREENING QUESTIONS	CREENING QUESTIONS Tick Mark		Pomorko
	YES	NO	Remarks
<b>11.</b> Occurrence record of flood on either side of the Road.		~	
12. Tree Cutting on the Road alignment		✓	
<b>13.</b> Plantation scope on the Road sides.		✓	
C. Potential Environmental Impacts: Will the Sub-	Project	causes	S
1) Any change of landscape due to road construction?		~	
2) Occupancy the land from any protective areas.		✓	
<b>3)</b> Alteration of surface water hydrology of waterways crossed by roads, resulting in increased sediment in streams by increased soil erosion due to road construction?	~		Some problem can arise during construction period.
<b>4)</b> Surface water contamination from workers' camp and chemicals used in construction site?		✓	
<b>5)</b> Local air pollution due to rock crushing, cutting etc. and chemicals from asphalt processing?		~	
6) Noise and vibration due to blasting and other civil works?	~	viii)	Proper attention during construction period
7) Road blocking and temporary flooding due to land excavation during the rainy season?		~	
8) Traffic disturbance due to construction materials transport and wastes?	~		Temporary problem during construction period
<b>9)</b> Temporary silt runoff due to construction?		$\checkmark$	
<b>10)</b> Inconveniences in living condition and upper respiratory problems or stress for the people?		~	
<b>11)</b> Chemical hazardous condition for the proposed road with construction of the existing road?		~	
<b>12)</b> Poor sanitation and solid waste disposal in construction camp/ site which may transmit communicable diseases from workers to the local populations?	~		Local labour will be engaged
<b>13)</b> Creation of temporary breeding of mosquitoes?		~	
<b>14)</b> Dislocation and compulsory resettlement of people living in ROW (right-of-way)?		~	
<b>15)</b> Noise and air pollution due to increase of traffic volume?	~		Dust will be suppressed through water spraying
<b>16)</b> Increased risk of water pollution from oil, grease, spills etc from vehicles/ other equipment's during road construction?		<b>√</b>	
<b>17)</b> Contamination of water due to solid waste disposal during road construction?		✓	
<b>18)</b> Health and safety hazards to workers from toxic gases which may emission from hot mix plant and bitumen?		✓ ✓	
<b>19)</b> Chance of spread of water born diseases?		✓	
<b>20)</b> Social conflicts between construction workers from other areas and community workers?	~		local people will be informed and award.
21) Chance of spread of HIV/ AIDS and STD?		✓	

	This checklist is to be prepared to support the environmental classification of a project. It is to be attached to the environmental categorization form that is to be prepared and submitted to the LEGD / MDS Consultant					
This checklist is Department.	This checklist is to be completed with the assistance of an Environment Specialist in a Regional Department.					
adequately consi indigenous peopl ➤ Answer the que	der <u>es j</u> stio	es on environmental issues and concerns. To ensure that social dimensions are ed, refer also to ADB checklists and handbooks on (i) involuntary resettlement, (ii) planning, (iii) poverty reduction, (iv) participation, and (v) gender and development. ns assuming the "without mitigation" case. The purpose is to identify potential marks" section to discuss any anticipated mitigation measures.				
Name of Pourash						
Name of Sector	:	Infrastructure (Road) Improvement.				
Sub-Project	:	Construction of RCC raod at Umednagar area starting from Baniyachong				
/Scheme		Road to Bacchu Mia house. Ch.0.00-235 and connecting RCC Road from				
		Bacchu Mia House to Umed Naggar Moktob Road. Ch.0.00-75m.				

SCREENING QUESTIONS	Tick N	<i>l</i> lark	Remarks				
	YES	NO	nemaiks				
A. Sub -Project Location : Weather the project area is adjacent to or within any of the following environmentally sensitive area :							
1. Cultural heritage site		✓					
2. Protected Area		✓					
3. Wetland	x)	✓					
4. Mangrove		~					
5. Estuary		✓					
6. Protected Buffer area		✓					
7. Middle of protective areas		~					
8. Specially protective biodiversity area		✓					
B. Sub -Project Particulars :							
1. Road length < 20 Km.	✓		L= 310m				
2. Road length > 20 Km.		✓					
3. Landslide		✓					
4. Location of Electric poles		~					
5. Widening of Road Formation.	K)	✓					
6. Repair /Improvement of road.	✓		Construction of RCC road				
7. Road length within /abutting permanent Wetland.		✓					
8. Road constructed along river or irrigation canal (km).		✓					
9. Road crossing any stream, canal, river.		✓					
<b>10.</b> Increase no. of Road Cross- drainage Structure.	ki)	~					
<b>11.</b> Occurrence record of flood on either side of the Road.		✓					
12. Tree Cutting on the Road alignment		✓					
13. Plantation scope on the Road sides.		✓					

This checklist is	to	be prepared to support the environmental classification of a project. It is to be			
attached to the	attached to the environmental categorization form that is to be prepared and submitted to the				
LEGD / MDS Co	ons	ultant			
This checklist is	to	be completed with the assistance of an Environment Specialist in a Regional			
Department.					
This checklist for	ocu	ses on environmental issues and concerns. To ensure that social dimensions			
		onsidered, refer also to ADB checklists and handbooks on (i) involuntary			
		ndigenous peoples planning, (iii) poverty reduction, (iv) participation, and (v)			
gender and dev	<i>,</i>				
U	Answer the questions assuming the "without mitigation" case. The purpose is to identify potential				
	impacts. use the "remarks" section to discuss any anticipated mitigation measures.				
Name of Pourasi	Name of Pourashava : Habiganj				
Name of Sector	:	Infrastructure (Road) Improvement.			
Sub-Project	:	Improvement of Kalibari Cross Road from Back Road to R&H Road by BC.			
/Scheme		Ch0.00-200.00m			

SCREENING QUESTIONS	Tick N	<i>l</i> lark	Remarks
	YES	NO	Remarks
A. Sub -Project Location : Weather the project area is a	adjacen	t to or	within any of the following
environmentally sensitive area :			
1. Cultural heritage site		✓	
2. Protected Area		√	
3. Wetland		~	
4. Mangrove		✓	
5. Estuary		~	
6. Protected Buffer area		~	
7. Middle of protective areas		~	
8. Specially protective biodiversity area		~	
B. Sub -Project Particulars :			
1. Road length < 20 Km.	✓		L= 200m
2. Road length > 20 Km.		✓	
3. Landslide		✓	
4. Location of Electric poles		✓	
5. Widening of Road Formation.	xii)	✓	
6. Repair /Improvement of road.	✓		Improvement of BC road
7. Road length within /abutting permanent Wetland.	xiii)	~	
8. Road constructed along river or irrigation canal		✓	
9. Road crossing any stream, canal, river.		~	
<b>10.</b> Increase no. of Road Cross- drainage Structure.	xiv)	✓	
<b>11.</b> Occurrence record of flood on either side of the Road.		~	
12. Tree Cutting on the Road alignment		✓	
13. Plantation scope on the Road sides.		✓	

This checklist is	This checklist is to be prepared to support the environmental classification of a project. It is to be				
attached to the	attached to the environmental categorization form that is to be prepared and submitted to the				
LEGD / MDS Co	ons	ultant			
This checklist is	s to	be completed with the assistance of an Environment Specialist in a Regional			
Department.					
are adequately resettlement, (ii	This checklist focuses on environmental issues and concerns. To ensure that social dimensions are adequately considered, refer also to ADB checklists and handbooks on (i) involuntary resettlement, (ii) indigenous peoples planning, (iii) poverty reduction, (iv) participation, and (v) gender and development.				
<b>U</b>	Answer the questions assuming the "without mitigation" case. The purpose is to identify potential				
	impacts. use the "remarks" section to discuss any anticipated mitigation measures.				
	Name of Pourashava : Habiganj				
Name of Sector	Name of Sector : Infrastructure (Road) Improvement.				
	•				
Sub-Project	•••	Improvement of RCC road at Children Park area starting from R&H Road to			
/Scheme		Cinema Hall by RCC (Part-A) Ch.0.00-360m Connecting Road by RCC (Part-			
		B) Ch.0.00-60m and Connecting Road Starting from R&H Road to old khowari			
		Embankment Road by BC (Part-C) Ch.0.00-370m			

SCREENING QUESTIONS	Tick I	<b>N</b> ark	Remarks	
	YES	NO	nemarks	
A. Sub -Project Location : Weather the project area environmentally sensitive area :	a is adj	acent to	o or within any of the following	
1. Cultural heritage site		✓		
2. Protected Area		✓		
3. Wetland		✓		
4. Mangrove		✓		
5. Estuary		✓		
6. Protected Buffer area		✓		
7. Middle of protective areas		✓		
8. Specially protective biodiversity area		✓		
B. Sub -Project Particulars :				
1. Road length < 20 Km.	✓		L= 790m	
2. Road length > 20 Km.		✓		
3. Landslide		✓		
4. Location of Electric poles		✓		
5. Widening of Road Formation.		✓		
6. Repair /Improvement of road.	✓		Improvement of RCC & BC road	
7. Road length within /abutting permanent Wetland.		✓		
8. Road constructed along river or irrigation canal		✓		
9. Road crossing any stream, canal, river.		✓		
10. Increase no. of Road Cross- drainage Structure.	xv)	✓		
<b>11.</b> Occurrence record of flood on either side of the Road.		~		
12. Tree Cutting on the Road alignment		✓		
<b>13.</b> Plantation scope on the Road sides.		✓		

attached to the	This checklist is to be prepared to support the environmental classification of a project. It is to be attached to the environmental categorization form that is to be prepared and submitted to the				
LEGD / MDS Co	ns	ultant			
This checklist is	to	be completed with the assistance of an Environment Specialist in a Regional			
Department.					
are adequately resettlement, (ii	This checklist focuses on environmental issues and concerns. To ensure that social dimensions are adequately considered, refer also to ADB checklists and handbooks on (i) involuntary resettlement, (ii) indigenous peoples planning, (iii) poverty reduction, (iv) participation, and (v) gender and development.				
	Answer the questions assuming the "without mitigation" case. The purpose is to identify potential impacts. use the "remarks" section to discuss any anticipated mitigation measures.				
Name of Pouras	Name of Pourashava : Habiganj				
Name of Sector	:	Infrastructure (Road) Improvement.			
Sub-Project /Scheme	:	Improvement of BC & CC road at Ghatia area starting from infront of Old Krishi Bank to Mr. Bahar Ali house by BC (Part-A) Ch.0.00-555m & by RCC (Part-B) Ch.0.00-270m			

SCREENING QUESTIONS	Tick N	<i>l</i> lark	Remarks
	YES	NO	nemarks
A. Sub -Project Location : Weather the project area environmentally sensitive area :	a is adj	acent to	o or within any of the following
1. Cultural heritage site		~	
2. Protected Area		✓	
3. Wetland		<ul> <li>✓</li> </ul>	
4. Mangrove		✓	
5. Estuary		✓	
6. Protected Buffer area		✓	
7. Middle of protective areas		✓	
8. Specially protective biodiversity area		✓	
B. Sub -Project Particulars :			
1. Road length < 20 Km.	✓		L= 825m
2. Road length > 20 Km.		✓	
3. Landslide			
4. Location of Electric poles		✓	
5. Widening of Road Formation.		✓	
6. Repair /Improvement of road.	✓		Improvement of BC & CC road
7. Road length within /abutting permanent Wetland.		✓	
8. Road constructed along river or irrigation canal (km).		✓	
9. Road crossing any stream, canal, river.		✓	
10. Increase no. of Road Cross- drainage Structure.	kvi)	✓	
<b>11.</b> Occurrence record of flood on either side of the Road.		~	
12. Tree Cutting on the Road alignment		✓	
<b>13.</b> Plantation scope on the Road sides.		✓	

This checklist is to be prepared to support the environmental classification of a project. It is to be				
attached to the environmental categorization form that is to be prepared and submitted to the				
LEGD / MDS Consultant				
> This checklist is to be completed with the assistance of an Environment Specialist in a Regional				
Department.				
> This checklist focuses on environmental issues and concerns. To ensure that social dimensions				
are adequately considered, refer also to ADB checklists and handbooks on (i) involuntary				
resettlement, (ii) indigenous peoples planning, (iii) poverty reduction, (iv) participation, and (v)				
gender and development.				
Answer the questions assuming the "without mitigation" case. The purpose is to identify potential				
impacts. use the "remarks" section to discuss any anticipated mitigation measures.				
Name of Pourashava : Habiganj				
Name of Sector : Infrastructure (Road) Improvement.				
<b>Sub-Project</b> : Improvement of BC road at Umednagar area starting from Nabiganj Road to				
/Scheme Gouranga Shil house. Ch 0.00-525.00m				

SCREENING QUESTIONS	Tick N	<i>l</i> lark	Remarks
	YES	NO	Remarks
A. Sub -Project Location : Weather the project area environmentally sensitive area :	a is adj	acent to	o or within any of the following
1. Cultural heritage site		✓	
2. Protected Area		✓	
3. Wetland		✓	
4. Mangrove		✓	
5. Estuary		✓	
6. Protected Buffer area		✓	
7. Middle of protective areas		✓	
8. Specially protective biodiversity area		✓	
B. Sub -Project Particulars :			
1. Road length < 20 Km.	✓		L= 525m
2. Road length > 20 Km.		✓	
3. Landslide		✓	
4. Location of Electric poles		✓	
5. Widening of Road Formation.	kvii)	✓	
6. Repair /Improvement of road.	✓		Rehabilitation of BC road
7. Road length within /abutting permanent Wetland.		✓	
<b>8</b> . Road constructed along river or irrigation canal (km).		✓	
9. Road crossing any stream, canal, river.		✓	
10. Increase no. of Road Cross- drainage Structure.	kviii)	✓	
<b>11.</b> Occurrence record of flood on either side of the Road.		~	
12. Tree Cutting on the Road alignment		✓	
13. Plantation scope on the Road sides.		✓	

	This checklist is to be prepared to support the environmental classification of a project. It is to be				
attached to the	attached to the environmental categorization form that is to be prepared and submitted to the				
LEGD / MDS Cor	ารน	Itant			
This checklist is	to b	be completed with the assistance of an Environment Specialist in a Regional			
Department.					
This checklist for	cus	es on environmental issues and concerns. To ensure that social dimensions			
are adequately	cor	nsidered, refer also to ADB checklists and handbooks on (i) involuntary			
resettlement, (ii)	inc	ligenous peoples planning, (iii) poverty reduction, (iv) participation, and (v)			
	gender and development.				
Answer the ques	$\rightarrow$ Answer the questions assuming the "without mitigation" case. The purpose is to identify potential				
impacts. use the	impacts. use the "remarks" section to discuss any anticipated mitigation measures.				
Name of Pourasha	Name of Pourashava : Habiganj				
Name of Sector		Infractructure (Dead) Improvement			
Name of Sector	:	Infrastructure (Road) Improvement.			
Sub-Project	:	Improvement of Court Station Road by BC starting from Baby Stand Point to			
/Scheme		Bye Pass Road by RCC Ch 0.00-430.00m			

SCREENING QUESTIONS	Tick N	<b>/</b> lark	Domorko
	YES	NO	Remarks
A. Sub-Project Location : Weather the project area environmentally sensitive area :	is adja	acent to	o or within any of the following
1. Cultural heritage site		✓	
2. Protected Area		✓	
3. Wetland		✓	
4. Mangrove		✓	
5. Estuary		~	
6. Protected Buffer area		✓	
7. Middle of protective areas		✓	
8. Specially protective biodiversity area		✓	
B. Sub -Project Particulars :			
1. Road length < 20 Km.	~		L= 430m
2. Road length > 20 Km.		✓	
3. Landslide		✓	
4. Location of Electric poles		✓	
5. Widening of Road Formation.		✓	
6. Repair /Improvement of road.	✓		Improvement of RCC road
7. Road length within /abutting permanent Wetland.		✓	
8. Road constructed along river or irrigation canal (km).		✓	
9. Road crossing any stream, canal, river.		✓	
10. Increase no. of Road Cross- drainage Structure.		✓	
<b>11.</b> Occurrence record of flood on either side of the Road.		~	
12. Tree Cutting on the Road alignment		✓	
13. Plantation scope on the Road sides.		~	

attached to the e	This checklist is to be prepared to support the environmental classification of a project. It is to be attached to the environmental categorization form that is to be prepared and submitted to the LEGD / MDS Consultant		
This checklist is the Department.	This checklist is to be completed with the assistance of an Environment Specialist in a Regional Department.		
are adequately resettlement, (ii)	This checklist focuses on environmental issues and concerns. To ensure that social dimensions are adequately considered, refer also to ADB checklists and handbooks on (i) involuntary resettlement, (ii) indigenous peoples planning, (iii) poverty reduction, (iv) participation, and (v) gender and development.		
impacts. use the	Answer the questions assuming the "without mitigation" case. The purpose is to identify potential impacts. use the "remarks" section to discuss any anticipated mitigation measures.		
Name of Pourasha	Name of Pourashava : Habiganj		
Name of Sector	:	Infrastructure (Road) Improvement.	
Sub-Project /Scheme	:	Improvement of road Starting from R&H Road to Thana cross road by BC Ch.0.00-550m.	

SCREENING QUESTIONS	Tick N	<i>l</i> lark	Remarks
	YES	NO	Remarks
A. Sub-Project Location : Weather the project area environmentally sensitive area :	is adja	acent to	o or within any of the following
1. Cultural heritage site		✓	
2. Protected Area		√	
3. Wetland		✓	
4. Mangrove		✓	
5. Estuary		✓	
6. Protected Buffer area		~	
7. Middle of protective areas		✓	
8. Specially protective biodiversity area		✓	
B. Sub -Project Particulars :			
1. Road length < 20 Km.	✓		L= 550m
2. Road length > 20 Km.		✓	
3. Landslide		✓	
4. Location of Electric poles		✓	
5. Widening of Road Formation.		✓	
6. Repair /Improvement of road.	✓		Improvement of BC road
7. Road length within /abutting permanent Wetland.		✓	
<b>8</b> . Road constructed along river or irrigation canal (km).		✓	
9. Road crossing any stream, canal, river.		~	
10. Increase no. of Road Cross- drainage Structure.		✓	
<b>11.</b> Occurrence record of flood on either side of the Road.		~	
12. Tree Cutting on the Road alignment		✓	
13. Plantation scope on the Road sides.		✓	

		be prepared to support the environmental classification of a project. It is to be
attached to the	er	nvironmental categorization form that is to be prepared and submitted to the
LEGD / MDS Co	ns	ultant
This checklist is	to	be completed with the assistance of an Environment Specialist in a Regional
Department.		
		ses on environmental issues and concerns. To ensure that social dimensions
. ,		onsidered, refer also to ADB checklists and handbooks on (i) involuntary
		ndigenous peoples planning, (iii) poverty reduction, (iv) participation, and (v)
gender and deve	elo	pment.
		ons assuming the "without mitigation" case. The purpose is to identify potential
impacts. use the	re"re	emarks" section to discuss any anticipated mitigation measures.
Name of Pourash	av	/a : Habiganj
Name of Sector	:	Infrastructure (Road) Improvement.
	-	
Sub-Project	:	Improvement of starting from Back Road and Connecting road by
/Scheme		RCC.Ch.0.00-150m and Byepass road by BC Ch. 0.00-676.00m.

SCREENING QUESTIONS	Tick N	<i>l</i> lark	Remarks
	YES	NO	nemarks
A. Sub-Project Location : Weather the project area	is adja	acent to	o or within any of the following
environmentally sensitive area :			
1. Cultural heritage site		✓	
2. Protected Area		~	
3. Wetland		✓	
4. Mangrove		~	
5. Estuary		✓	
6. Protected Buffer area		~	
7. Middle of protective areas		✓	
8. Specially protective biodiversity area		~	
B. Sub -Project Particulars :			
1. Road length < 20 Km.	✓		L= 826m
2. Road length > 20 Km.		✓	
3. Landslide		✓	
4. Location of Electric poles		✓	
5. Widening of Road Formation.		✓	
6. Repair /Improvement of road.	✓		Improvement of RCC& BC road
7. Road length within /abutting permanent Wetland.		✓	
8. Road constructed along river or irrigation canal		~	
9. Road crossing any stream, canal, river.		~	
10. Increase no. of Road Cross- drainage Structure.	kix)	~	
<b>11.</b> Occurrence record of flood on either side of the Road.		~	
12. Tree Cutting on the Road alignment		✓	
13. Plantation scope on the Road sides.		✓	

		be prepared to support the environmental classification of a project. It is to be
attached to the	en	vironmental categorization form that is to be prepared and submitted to the
LEGD / MDS Co	nsı	ultant
This checklist is	to	be completed with the assistance of an Environment Specialist in a Regional
Department.		
This checklist for	cu	ses on environmental issues and concerns. To ensure that social dimensions
		onsidered, refer also to ADB checklists and handbooks on (i) involuntary
		ndigenous peoples planning, (iii) poverty reduction, (iv) participation, and (v)
gender and deve		
U		ons assuming the "without mitigation" case. The purpose is to identify potential
		emarks" section to discuss any anticipated mitigation measures.
		· · ·
Name of Pourash	nav	a : Habiganj
Name of Sector	:	Infrastructure (Road) Improvement.
Sub-Project	:	Improvement of Mahmudabad road by BC & partially RCC (front of Anantapur
/Scheme		road to MachuliaDiabeticHospital) Ch 0.00-1200.00m

SCREENING QUESTIONS	Tick N	<i>l</i> lark	Remarks
	YES	NO	Remarks
A. Sub-Project Location : Weather the project area environmentally sensitive area :	is adja	acent to	o or within any of the following
1. Cultural heritage site		✓	
2. Protected Area		√	
3. Wetland		✓	
4. Mangrove		✓	
5. Estuary		✓	
6. Protected Buffer area		~	
7. Middle of protective areas		✓	
8. Specially protective biodiversity area		✓	
B. Sub -Project Particulars :			
1. Road length < 20 Km.	✓		L= 1200m
2. Road length > 20 Km.		✓	
3. Landslide		✓	
4. Location of Electric poles		✓	
5. Widening of Road Formation.		✓	
6. Repair /Improvement of road.	✓		Improvement of RCC &BC road
7. Road length within /abutting permanent Wetland.		~	
8. Road constructed along river or irrigation canal		✓	
9. Road crossing any stream, canal, river.		~	
10. Increase no. of Road Cross- drainage Structure.		✓	
<b>11.</b> Occurrence record of flood on either side of the Road.		~	
12. Tree Cutting on the Road alignment		✓	
13. Plantation scope on the Road sides.		✓	

attached to the	This checklist is to be prepared to support the environmental classification of a project. It is to be attached to the environmental categorization form that is to be prepared and submitted to the							
	<ul> <li>LEGD / MDS Consultant</li> <li>This checklist is to be completed with the assistance of an Environment Specialist in a Regional Dopartment</li> </ul>							
This checklist fo are adequately	This checklist focuses on environmental issues and concerns. To ensure that social dimensions are adequately considered, refer also to ADB checklists and handbooks on (i) involuntary resettlement, (ii) indigenous peoples planning, (iii) poverty reduction, (iv) participation, and (v)							
impacts. use the	Answer the questions assuming the "without mitigation" case. The purpose is to identify potenti impacts. use the "remarks" section to discuss any anticipated mitigation measures. Name of Pourashava : Habiganj							
Name of Sector		Infrastructure (Road) Improvement.						
Sub-Project /Scheme	:							

SCREENING QUESTIONS	Tick N	<b>/</b> lark	Demosive
	YES	NO	Remarks
A. Sub-Project Location : Weather the project area	a is adj	acent to	o or within any of the following
environmentally sensitive area :			
1. Cultural heritage site		✓	
2. Protected Area		✓	
3. Wetland		✓	
4. Mangrove		✓	
5. Estuary		✓	
6. Protected Buffer area		✓	
7. Middle of protective areas		✓	
8. Specially protective biodiversity area		✓	
B. Sub - Project Particulars :			
1. Road length < 20 Km.	✓		L= 510m
2. Road length > 20 Km.		~	
3. Landslide		✓	
4. Location of Electric poles		✓	
5. Widening of Road Formation.		✓	
6. Repair /Improvement of road.	✓		Improvement of RCC road
7. Road length within /abutting permanent Wetland.		✓	
8. Road constructed along river or irrigation canal		✓	
9. Road crossing any stream, canal, river.		✓	
<b>10.</b> Increase no. of Road Cross- drainage Structure.		✓	
<b>11.</b> Occurrence record of flood on either side of the Road.		<b>√</b>	
12. Tree Cutting on the Road alignment		✓	
13. Plantation scope on the Road sides.		✓	

	ecklist is to be prepared to support the environmental classification of a project. It is to the environmental categorization form that is to be prepared and submitted to the							
	EGD / MDS Consultant							
♦This check	dist	t is to be completed with the assistance of an Environment Specialist in a						
Regional Departm	ien	t.						
<ul> <li>Answer th</li> </ul>	ie i	questions assuming the "without mitigation" case. The purpose is to identify						
potential impacts.	us	e the "remarks" section to discuss any anticipated mitigation measures.						
Name of Pourash	Name of Pourashava : Habiganj							
Name of Sector	:	Infrastructure of Drain Improvement						
Sub-Project	Ib-Project : Construction of RCC drain at Umednagar area starting from Baniyachong							
/Scheme		Road to Kotu Mia house via Bacchu Mia house Ch 35.00-235.00m.						

SCREENING QUESTIONS	Tick I	Mark	Demerke
	YES	NO	Remarks
A. Project Siting			
Is the Project area adjacent to or within any of the following environmentally sensitive areas?		~	
Cultural Heritage site		✓	
Protected Area		✓	
Wetland		✓	
Mangrove		$\checkmark$	
Estuarine		✓	
Buffer zone of protected area		✓	
Special area for protecting biodiversity		✓	
B. Sub -Project Particulars :			
Drain length and with	~		L= 200m
Type of drain	~		U- type drain
Tree cutting on the drainage alignment		✓	
Outfall of drainage?	√		Outfall of Khowai river
Existences of cross drainage. Is it hampering drainage flow?		~	
C. Potential Environmental Impacts			
Will the Project cause			
Pollution of the receiving water body		~	
pollution or interfere with the irrigation canal / channel		✓	
affect the structures near the out fall		✓	
Affect the community structures at the or near by the out fall		~	
Potential ecological problems due to increased soil erosion and siltation?		~	
Creation of temporary breeding habitats for mosquito vectors of disease due to water stagnancy in the drains?		~	

SCREENING QUESTIONS	Tick I	Mark	<b>_</b>
	YES	NO	Remarks
Access problem for the house dwellers	~		Proper attention during construction period
Impact on commercial and business establishment during construction	~		Temporary problem arisen during construction period
Impact on livelihood of Hawkers during construction	~		Temporary problem during construction period
Impact on land due to disposal of sludge from the desolation of the drains		~	
Pollution of raw water supply from upstream wastewater discharge from communities, industries, agriculture, and soil erosion runoff?		~	
Impairment of historical/cultural monuments/areas and loss/damage to these sites		~	
increased road traffic due to interference of construction activities	~		Sometime problem during construction period
Continuing soil erosion/silt runoff from construction operations?		~	
increased volume of sullage (wastewater from cooking and washing) and sludge		~	
poor sanitation and solid waste disposal in construction camps and work sites, and possible transmission of		~	
Dislocation or involuntary resettlement of people?		✓	
Potential social conflicts arising from land tenure and land use issues?		~	
Soil erosion before compaction and lining of canals?		$\checkmark$	
Labor-related social problems especially if workers from different areas are hired?		~	
Alteration of surface water hydrology of waterways crossed by roads, resulting in increased sediment in streams affected by increased soil erosion at construction site?		~	
Deterioration of surface water quality due to silt runoff and sanitary wastes from worker-based camps and chemicals used in construction?		~	
Downstream water pollution from discharge of Fish pond effluents with drain water?		~	
Soil erosion (furrow, surface)?		$\checkmark$	
Scouring of canals?		✓	
Logging of canals by sediments?		✓	
Clogging of canals by weeds?		✓	
Pollution from oil and fuel spills and bilge flushing?		✓	

Signature of Regional Environmentalist

Signature of Pourosava representative

Signature of National Environmental Specialist

◆This checklist is to be prepared to support the environmental classification of a project. It is to be attached to the environmental categorization form that is to be prepared and submitted to the LEGD / MDS Consultant

◆This checklist is to be completed with the assistance of an Environment Specialist in a Regional Department.

 Answer the questions assuming the "without mitigation" case. The purpose is to identify potential impacts. use the "remarks" section to discuss any anticipated mitigation measures.
 Name of Pourashava : Habiganj

Name of Sector	:	Infrastructur	e o	f Drair	n Impr	ovemen	t					
Sub-Project /Scheme	:	Construction 200.00m	of	RCC	drain	beside	the	Kalibari	Cross	Road	at	Ch0.00-

SCREENING QUESTIONS	Tick I	Mark	Remarks		
	YES	NO	Remarks		
A. Project Siting					
Is the Project area adjacent to or within any of the following environmentally sensitive areas?		√			
Cultural Heritage site		√			
Protected Area		✓			
Wetland		✓			
Mangrove		✓			
Estuarine		✓			
Buffer zone of protected area		✓			
Special area for protecting biodiversity		√			
B. Sub -Project Particulars :					
Drain length and with	✓		L= 200m		
Type of drain	✓		U- type drain		
Tree cutting on the drainage alignment		~			
Outfall of drainage?	✓		Outfall of existing drain		
Existences of cross drainage. Is it hampering drainage flow?		√			
C. Potential Environmental Impacts					
Will the Project cause					
Pollution of the receiving water body	xxvi)	√			
pollution or interfere with the irrigation canal / channel		✓			
affect the structures near the out fall		√			
Affect the community structures at the or near by the out fall		~			
Potential ecological problems due to increased soil erosion and siltation?		√			
Creation of temporary breeding habitats for mosquito vectors of disease due to water stagnancy in the drains?		~			

) This checklist is to be prepared to support the environmental classification of a project. It is to be attached to the environmental categorization form that is to be prepared and submitted to the LEGD / MDS Consultant

i) This checklist is to be completed with the assistance of an Environment Specialist in a Regional Department.

♦ Answer the questions assuming the "without mitigation" case. The purpose is to identify potential impacts. use the "remarks" section to discuss any anticipated mitigation measures.

Name of Pourashava : Habiganj						
Name of Sector	:	Infrastructure of Drain Improvement				
Sub-Project /Scheme	-	Part-A: Construction of RCC drain at Children Park area starting from RHD road to existing cross drain (Ch00-360m). Part-B: Construction of RCC drain at Children Park area starting from RHD road to existing cross drain (main drain) (Ch.00-60m).				

SCREENING QUESTIONS	Tick I	Mark	Domoriko
	YES	NO	Remarks
A. Project Siting	-		
Is the Project area adjacent to or within any of the following environmentally sensitive areas?		~	
Cultural Heritage site		✓	
Protected Area		✓	
Wetland		✓	
Mangrove		✓	
Estuarine		✓	
Buffer zone of protected area		✓	
Special area for protecting biodiversity		√	
B. Sub -Project Particulars :			
Drain length and with	✓		L= 420m
Type of drain	✓		U-type drain
Tree cutting on the drainage alignment		✓	
Outfall of drainage?	~		Outfall of khowai river
Existences of cross drainage. Is it hampering drainage flow?	~		1 nos. Existing cross drainage
C. Potential Environmental Impacts			
Will the Project cause			
Pollution of the receiving water body	xxx)	~	
pollution or interfere with the irrigation canal / channel		✓	
affect the structures near the out fall		$\checkmark$	
Affect the community structures at the or near by the out fall		~	
Potential ecological problems due to increased soil erosion and siltation?		~	
Creation of temporary breeding habitats for mosquito vectors of disease due to water stagnancy in the drains?		~	

AThis sheak!	at i	is to be prepared to support the environmental election of a preject. It is				
	◆This checklist is to be prepared to support the environmental classification of a project. It is					
to be attached to the	to be attached to the environmental categorization form that is to be prepared and submitted to the					
LEGD / MDS Cons	ulta	ant				
i)  This checkl	ist	is to be completed with the assistance of an Environment Specialist in a				
Regional Departme						
ii) <ul> <li>Answer the</li> </ul>	e q	uestions assuming the "without mitigation" case. The purpose is to identify				
potential impacts. u	Jse	the "remarks" section to discuss any anticipated mitigation measures.				
Name of Pourasha	Name of Pourashava : Habiganj					
Name of Sector	Name of Sector : Infrastructure of Drain Improvement					
Sub-Project	:	Construction of RCC Drain Starting from in front of Nozir Market to existing				
/Scheme		Culvert Ch.200-400m				

SCREENING QUESTIONS	Tick I	Mark	Domoriko
	YES	NO	Remarks
A. Project Siting			
Is the Project area adjacent to or within any of the		✓	
following environmentally sensitive areas?			
Cultural Heritage site		✓	
Protected Area		✓	
Wetland		$\checkmark$	
Mangrove		✓	
Estuarine		$\checkmark$	
Buffer zone of protected area		✓	
Special area for protecting biodiversity		√	
B. Sub -Project Particulars :			
Drain length and with	✓		L= 200m
Type of drain	✓		U-type drain
Tree cutting on the drainage alignment		$\checkmark$	
Outfall of drainage?	✓		Outfall of existing drain
Existences of cross drainage. Is it hampering drainage flow?		√	
C. Potential Environmental Impacts			
Will the Project cause			
Pollution of the receiving water body	xxxiv)	√	
pollution or interfere with the irrigation canal / channel		✓	
affect the structures near the out fall		√	
Affect the community structures at the or near by the out fall		~	
Potential ecological problems due to increased soil erosion and siltation?		~	
Creation of temporary breeding habitats for mosquito vectors of disease due to water stagnancy in the drains?		~	

 This checklist is to be prepared to support the environmental classification of a project. It is to be attached to the environmental categorization form that is to be prepared and submitted to the LEGD / MDS Consultant

i) This checklist is to be completed with the assistance of an Environment Specialist in a Regional Department.

 Answer the questions assuming the "without mitigation" case. The purpose is to identify potential impacts. use the "remarks" section to discuss any anticipated mitigation measures.

Name of Pourashava : Habiganj				
Name of Sector	:	Infrastructure of Drain Improvement		
Sub-Project /Scheme	:	Construction of RCC drain starting from existing drain at Queshnagar near old Passport Office to existing Drain Ch. 80-250m, Link-01 drain Ch.300-420m & Link-02, drain Ch.420-510m.		

SCREENING QUESTIONS	Tick I	Mark	Domoriko
	YES	NO	Remarks
A. Project Siting	ſ		
Is the Project area adjacent to or within any of the		✓	
following environmentally sensitive areas?			
Cultural Heritage site		✓	
Protected Area		✓	
Wetland		$\checkmark$	
Mangrove		$\checkmark$	
Estuarine		$\checkmark$	
Buffer zone of protected area		✓	
Special area for protecting biodiversity		√	
B. Sub -Project Particulars :			
Drain length and with	✓		L= 380m
Type of drain	$\checkmark$		U-type drain
Tree cutting on the drainage alignment		$\checkmark$	
Outfall of drainage?	✓		Outfall of Khowai River
Existences of cross drainage. Is it hampering drainage flow?			
C. Potential Environmental Impacts			
Will the Project cause			
Pollution of the receiving water body	xxxviii)	√	
pollution or interfere with the irrigation canal / channel		✓	
affect the structures near the out fall		✓	
Affect the community structures at the or near by the out		√	
fall			
Potential ecological problems due to increased soil erosion and siltation?		$\checkmark$	
Creation of temporary breeding habitats for mosquito		√	
vectors of disease due to water stagnancy in the drains?			

	This checklist is to be prepared to support the environmental classification of a project. It is to be attached to the environmental categorization form that is to be prepared and submitted to the						
	LEGD / MDS Consultant						
	s to	be completed with the assistance of an Environment Specialist in a Regional					
Department.							
		ses on environmental issues and concerns. To ensure that social dimensions					
are adequately	C	onsidered, refer also to ADB checklists and handbooks on (i) involuntary					
resettlement, (ii	ni (	ndigenous peoples planning, (iii) poverty reduction, (iv) participation, and (v)					
gender and dev	elo	pment.					
		ons assuming the "without mitigation" case. The purpose is to identify potential					
impacts. use the	impacts. use the "remarks" section to discuss any anticipated mitigation measures.						
Name of Pouras	hav	va : Habiganj					
Name of Sector	:	Infrastructure (Road) Improvement.					
Sub-Project	:	Improvement of Road at Jungle Bohula area starting from Intabad Jungle					
/Scheme		Bohula Road to Masulia Akhra by RCC Ch. 0.00-525.00m					

SCREENING QUESTIONS	Tick N	<i>l</i> lark	Remarks	
		NO	nemarks	
A. Sub-Project Location : Weather the project area environmentally sensitive area :	a is adja	acent to	o or within any of the following	
1. Cultural heritage site		✓		
2. Protected Area		✓		
3. Wetland		✓		
4. Mangrove		✓		
5. Estuary		✓		
6. Protected Buffer area		~		
7. Middle of protective areas		✓		
8. Specially protective biodiversity area		✓		
B. Sub -Project Particulars :				
1. Road length < 20 Km.	✓		L= 525m	
2. Road length > 20 Km.		✓		
3. Landslide		✓		
4. Location of Electric poles		✓		
<ol><li>Widening of Road Formation.</li></ol>		✓		
6. Repair /Improvement of road.	✓		Improvement of RCC road	
7. Road length within /abutting permanent Wetland.		~		
8. Road constructed along river or irrigation canal (km).		✓		
9. Road crossing any stream, canal, river.		✓		
10. Increase no. of Road Cross- drainage Structure.	xxxix)	✓		
<b>11.</b> Occurrence record of flood on either side of the Road.		~		
12. Tree Cutting on the Road alignment		✓		
13. Plantation scope on the Road sides.		✓		

	This checklist is to be prepared to support the environmental classification of a project. It is to be attached to the environmental categorization form that is to be prepared and submitted to the					
LEGD / MDS Consultar						
This checklist is to be Department.	completed with the assistance of an Environment Specialist in a Regional					
are adequately consid	on environmental issues and concerns. To ensure that social dimensions dered, refer also to ADB checklists and handbooks on (i) involuntary enous peoples planning, (iii) poverty reduction, (iv) participation, and (v) ent.					
	Answer the questions assuming the "without mitigation" case. The purpose is to identify potential impacts. use the "remarks" section to discuss any anticipated mitigation measures.					
Name of Pourashava :	Name of Pourashava : Habiganj					
Name of Sector : Inf	frastructure (Road) Improvement.					
	provement of BC road at Boglabazar area starting from infront of BOC road Khorshed Mia's mill. Ch 200-715.00m					

SCREENING QUESTIONS	Tick I	Mark	Remarks
	YES	NO	Remarks
A. Sub -Project Location : Weather the project are	o or within any of the following		
environmentally sensitive area :		T	
1. Cultural heritage site		✓	
2. Protected Area		✓	
3. Wetland		✓	
4. Mangrove		✓	
5. Estuary		✓	
6. Protected Buffer area		✓	
7. Middle of protective areas		✓	
8. Specially protective biodiversity area		✓	
B. Sub -Project Particulars :			
1. Road length < 20 Km.	✓		L= 515m
2. Road length > 20 Km.		✓	
3. Landslide		✓	
4. Location of Electric poles		✓	
5. Widening of Road Formation.	xI)	✓	
6. Repair /Improvement of road.	✓		Improvement of BC road
7. Road length within /abutting permanent Wetland.		✓	
8. Road constructed along river or irrigation canal (km).		✓	
9. Road crossing any stream, canal, river.		✓	
10. Increase no. of Road Cross- drainage Structure.	kli)	✓	
<b>11.</b> Occurrence record of flood on either side of the Road.		~	
12. Tree Cutting on the Road alignment		✓	
13. Plantation scope on the Road sides.	1	✓	

This checklist is	This checklist is to be prepared to support the environmental classification of a project. It is to be					
attached to the	attached to the environmental categorization form that is to be prepared and submitted to the					
LEGD / MDS Co	ons	ultant				
This checklist is	to	be completed with the assistance of an Environment Specialist in a Regional				
Department.						
are adequately	С	ses on environmental issues and concerns. To ensure that social dimensions onsidered, refer also to ADB checklists and handbooks on (i) involuntary ndigenous peoples planning, (iii) poverty reduction, (iv) participation, and (v)				
gender and dev						
	Answer the questions assuming the "without mitigation" case. The purpose is to identify potential impacts. use the "remarks" section to discuss any anticipated mitigation measures.					
Name of Pouras	Name of Pourashava : Habiganj					
Name of Sector	:	Infrastructure (Road) Improvement.				
Sub-Project /Scheme	:	Improvement of Back road starting from Smashan Ghat road to Chowdhury Bazar Narikel Hata Road by BC Ch. 1735-2560m				
1						

SCREENING QUESTIONS		<i>l</i> lark	Domorizo
		NO	Remarks
A. Sub-Project Location : Weather the project area environmentally sensitive area :	a is adja	acent to	o or within any of the following
1. Cultural heritage site		✓	
2. Protected Area		✓	
3. Wetland		✓	
4. Mangrove		✓	
5. Estuary		~	
6. Protected Buffer area		✓	
7. Middle of protective areas		✓	
8. Specially protective biodiversity area		✓	
B. Sub -Project Particulars :			
1. Road length < 20 Km.	✓		L= 825m
2. Road length > 20 Km.		✓	
3. Landslide		✓	
4. Location of Electric poles		✓	
5. Widening of Road Formation.		✓	
6. Repair /Improvement of road.	✓		Rehabilitation of BC road
7. Road length within /abutting permanent Wetland.		✓	
8. Road constructed along river or irrigation canal (km).		~	
9. Road crossing any stream, canal, river.		~	
10. Increase no. of Road Cross- drainage Structure.	klii)	~	
<b>11.</b> Occurrence record of flood on either side of the Road.		~	
12. Tree Cutting on the Road alignment		~	
13. Plantation scope on the Road sides.		✓	

This checklist is to be prepared to support the environmental classification of a project. It is to be attached to the environmental categorization form that is to be prepared and submitted to the LEGD / MDS Consultant				
<ul> <li>This checklist is Department.</li> </ul>	This checklist is to be completed with the assistance of an Environment Specialist in a Regional Department.			
adequately consi indigenous peopl ➤ Answer the quest impacts. use the	<ul> <li>This checklist focuses on environmental issues and concerns. To ensure that social dimensions are adequately considered, refer also to ADB checklists and handbooks on (i) involuntary resettlement, (ii) indigenous peoples planning, (iii) poverty reduction, (iv) participation, and (v) gender and development.</li> <li>Answer the questions assuming the "without mitigation" case. The purpose is to identify potential impacts. use the "remarks" section to discuss any anticipated mitigation measures.</li> <li>Name of Pourashava : Habiganj</li> </ul>			
Name of Sector	:	Infrastructure (Road) Improvement.		
Sub-Project	:	Improvement of Darihata road by BC & RCC starting from front of Chowdhury		

SCREENING QUESTIONS	Tick N	lark	Remarks		
	YES	NO	nemarks		
A. Sub -Project Location : Weather the project area is adjacent to or within any of the following environmentally sensitive area :					
1. Cultural heritage site		~			
2. Protected Area		✓			
3. Wetland		✓			
4. Mangrove		✓			
5. Estuary		✓			
6. Protected Buffer area		✓			
7. Middle of protective areas		✓			
8. Specially protective biodiversity area		✓			
B. Sub -Project Particulars :					
1. Road length < 20 Km.	✓		L= 1265m		
2. Road length > 20 Km.		~			
3. Landslide		✓			
4. Location of Electric poles		✓			
5. Widening of Road Formation.	kliii)	✓			
6. Repair /Improvement of road.	~		Improvement of BC & RCC road		
7. Road length within /abutting permanent Wetland.		✓			
8. Road constructed along river or irrigation canal		✓			
9. Road crossing any stream, canal, river.		✓			
<b>10.</b> Increase no. of Road Cross- drainage Structure.	kliv)	✓			
<b>11.</b> Occurrence record of flood on either side of the Road.		~			
12. Tree Cutting on the Road alignment		✓			
13. Plantation scope on the Road sides.		~			

This checklist is to be prepared to support the environmental classification of a project. It is to be attached to the environmental categorization form that is to be prepared and submitted to the LEGD / MDS Consultant
This checklist is to be completed with the assistance of an Environment Specialist in a Regional Department.
Answer the questions assuming the "without mitigation" case. The purpose is to identify

Answer the questions assuming the without mitigation case. The purpose is to identify potential impacts. use the "remarks" section to discuss any anticipated mitigation measures.
 Name of Pourashava : Habiganj

Name of Sector	:	Infrastructure of Drain Improvement
Sub-Project /Scheme	:	Construction of RCC drain at Left side of Main Road starting from Chowdhury Bazar Traffic Point to Nursing Institute.Ch.00-1730m.

SCREENING QUESTIONS	Tick N	lark	Demerke
	YES	NO	Remarks
A. Project Siting			
Is the Project area adjacent to or within any of the following environmentally sensitive areas?		~	
Cultural Heritage site		✓	
Protected Area		✓	
Wetland	$\checkmark$		
Mangrove		✓	
Estuarine		✓	
Buffer zone of protected area		~	
Special area for protecting biodiversity		✓	
B. Sub -Project Particulars :			
Drain length and with	✓		L= 1730m
Type of drain	√		U- type drain
Tree cutting on the drainage alignment		√	
Outfall of drainage?	~		Out fall existing drain to Khowai River
Existences of cross drainage. Is it hampering drainage flow?			
C. Potential Environmental Impacts			
Will the Project cause			
Pollution of the receiving water body		~	
pollution or interfere with the irrigation canal / channel		✓	
affect the structures near the out fall		✓	
Affect the community structures at the or near by the out fall		~	
Potential ecological problems due to increased soil erosion and siltation?		~	
Creation of temporary breeding habitats for mosquito		~	

SCREENING QUESTIONS	Tick N	lark	Dementer
	YES	NO	Remarks
vectors of disease due to water stagnancy in the drains?			
Access problem for the house dwellers	$\checkmark$		Proper attention during construction period
Impact on commercial and business establishment during construction	~		Temporary problem during construction period
Impact on livelihood of Hawkers during construction	~		Temporary problem during construction period
Impact on land due to disposal of sludge from the desolation of the drains		~	
Pollution of raw water supply from upstream wastewater discharge from communities, industries, agriculture, and soil erosion runoff?		√	
Impairment of historical/cultural monuments/areas and loss/damage to these sites		~	
increased Drain traffic due to interference of construction activities	~		Sometime problem during construction period
Continuing soil erosion/silt runoff from construction operations?		~	
increased volume of sullage (wastewater from cooking and washing) and sludge		~	
poor sanitation and solid waste disposal in construction camps and work sites, and possible transmission of		~	
Dislocation or involuntary resettlement of people?		✓	
Potential social conflicts arising from land tenure and land use issues?		~	
Soil erosion before compaction and lining of canals?		✓	
Labor-related social problems especially if workers from different areas are hired?		~	
Alteration of surface water hydrology of waterways crossed by Drains, resulting in increased sediment in streams affected by increased soil erosion at construction site?		~	
Deterioration of surface water quality due to silt runoff and sanitary wastes from worker-based camps and chemicals used in construction?		~	
Downstream water pollution from discharge of Fish pond effluents with drain water?		~	
Soil erosion (furrow, surface)?		✓	
Scouring of canals?		✓	
Logging of canals by sediments?		√	
Clogging of canals by weeds?		✓	
Pollution from oil and fuel spills and bilge flushing?		~	

Signature of RES Environmentalist

Signature of Pourashava Representative

Signature of National Environmentalist

	•This checklist is to be prepared to support the environmental classification of a project. It is			
to be attached to the environmental categorization form that is to be prepared and submitted to the				
LEGD / MDS Consultant				
♦This check	dist	is to be completed with the assistance of an Environment Specialist in a		
Regional Departm				
<ul> <li>Answer th</li> </ul>	Answer the questions assuming the "without mitigation" case. The purpose is to identify			
potential impacts.	potential impacts. use the "remarks" section to discuss any anticipated mitigation measures.			
Name of Pouras	Name of Pourashava : Habiganj			
Name of Sector	:	Infrastructure of Drain Improvement		
Sub-Project	:	Construction of RCC drain at Right side of Main Road starting from		
/Scheme		Chowdhury Bazar Traffic Point to Nursing Institute.Ch.00-1730m.		

SCREENING QUESTIONS	Tick I	Mark	Demerike
	YES	NO	Remarks
A. Project Siting			
Is the Project area adjacent to or within any of the		✓	
following environmentally sensitive areas?			
Cultural Heritage site		$\checkmark$	
Protected Area		✓	
Wetland		✓	
Mangrove		✓	
Estuarine		✓	
Buffer zone of protected area		✓	
Special area for protecting biodiversity		✓	
B. Sub -Project Particulars :			
Drain length and with	✓		L= 1730m
Type of drain	✓		U-type drain
Tree cutting on the drainage alignment	✓		
Outfall of drainage?	$\checkmark$		Outfall of existing drain
Existences of cross drainage. Is it hampering drainage			
flow?			
C. Potential Environmental Impacts			
Will the Project cause			
Pollution of the receiving water body	i)	✓	
pollution or interfere with the irrigation canal / channel		✓	
affect the structures near the out fall		✓	
Affect the community structures at the or near by the out		✓	
fall			
Potential ecological problems due to increased soil		✓	
erosion and siltation?			
Creation of temporary breeding habitats for mosquito		~	
vectors of disease due to water stagnancy in the drains?			

•This checklist is to be prepared to support the environmental classification of a project. It is to be attached to the environmental categorization form that is to be prepared and submitted to the				
	LEGD / MDS Consultant			
♦This check	dist	is to be completed with the assistance of an Environment Specialist in a		
Regional Departm				
<ul> <li>Answer th</li> </ul>	Answer the questions assuming the "without mitigation" case. The purpose is to identify			
potential impacts.	use	the "remarks" section to discuss any anticipated mitigation measures.		
Name of Pouras	Name of Pourashava : Habiganj			
Name of Sector		Infrastructure of Drain Improvement		
Name of Sector	:			

SCREENING QUESTIONS	Tick I	Mark	Demerke
	YES	NO	Remarks
A. Project Siting	•		
Is the Project area adjacent to or within any of the following environmentally sensitive areas?		~	
Cultural Heritage site		✓	
Protected Area		$\checkmark$	
Wetland		✓	
Mangrove		✓	
Estuarine		✓	
Buffer zone of protected area		✓	
Special area for protecting biodiversity		✓	
B. Sub -Project Particulars :			
Drain length and with	✓		L= 210m
Type of drain	✓		U-type drain
Tree cutting on the drainage alignment	✓		
Outfall of drainage?	✓		Outfall existing drain
Existences of cross drainage. Is it hampering drainage flow?			
C. Potential Environmental Impacts			
Will the Project cause			
Pollution of the receiving water body	V)	✓	
pollution or interfere with the irrigation canal / channel		✓	
affect the structures near the out fall		✓	
Affect the community structures at the or near by the out fall		~	
Potential ecological problems due to increased soil erosion and siltation?		~	
Creation of temporary breeding habitats for mosquito vectors of disease due to water stagnancy in the drains?		√	

◆This checklist is to be prepared to support the environmental classification of a project. It is to be attached to the environmental categorization form that is to be prepared and submitted to the LEGD / MDS Consultant				
♦ I his check	dist	is to be completed with the assistance of an Environment Specialist in a		
Regional Departm	ent			
<ul> <li>Answer th</li> </ul>	ne c	questions assuming the "without mitigation" case. The purpose is to identify		
potential impacts.	potential impacts. use the "remarks" section to discuss any anticipated mitigation measures.			
Name of Pouras	Name of Pourashava : Habiganj			
Name of Sector	:	Infrastructure of Drain Improvement		
Sub-Project /Scheme	•	Construction of RCC drain at Cenema Hall Area Starting from Sultania Library to Old Khowai River Ch0.00-320.00m		

SCREENING QUESTIONS	Tick	Mark	Demoster
	YES	NO	Remarks
A. Project Siting			
Is the Project area adjacent to or within any of the		✓	
following environmentally sensitive areas?			
Cultural Heritage site		$\checkmark$	
Protected Area		$\checkmark$	
Wetland		✓	
Mangrove		✓	
Estuarine		✓	
Buffer zone of protected area		✓	
Special area for protecting biodiversity		✓	
B. Sub - Project Particulars :			
Drain length and with	<ul> <li>✓</li> </ul>		L= 320m
Type of drain	✓		U-type drain
Tree cutting on the drainage alignment	✓		
Outfall of drainage?	✓		Outfall of existing drain
Existences of cross drainage. Is it hampering drainage		✓	
flow?			
C. Potential Environmental Impacts			
Will the Project cause			
Pollution of the receiving water body	lix)	✓	
pollution or interfere with the irrigation canal / channel		✓	
affect the structures near the out fall		✓	
Affect the community structures at the or near by the out		✓	
fall			
Potential ecological problems due to increased soil		✓	
erosion and siltation?			
Creation of temporary breeding habitats for mosquito		✓	
vectors of disease due to water stagnancy in the drains?			

◆This checklist is to be prepared to support the environmental classification of a project. It is to be attached to the environmental categorization form that is to be prepared and submitted to the LEGD / MDS Consultant

◆This checklist is to be completed with the assistance of an Environment Specialist in a Regional Department.

♦ Answer the questions assuming the "without mitigation" case. The purpose is to identify potential impacts. use the "remarks" section to discuss any anticipated mitigation measures.
Name of Pourashava : Habigani

Name of Fourashava : Habiganj				
Name of Sector	:	Infrastructure of Drain Improvement		
Sub-Project /Scheme	:	Construction of RCC drain starting infront Mr. Ripon house to existing drain at Etimkhna Road Ch.0.00-150m. & Link-Ch.0+200-0+150m.		

SCREENING QUESTIONS	JESTIONS Tick Mark YES NO		Demender
			Remarks
A. Project Siting	ſ		
Is the Project area adjacent to or within any of the		✓	
following environmentally sensitive areas?			
Cultural Heritage site		$\checkmark$	
Protected Area		$\checkmark$	
Wetland		✓	
Mangrove		$\checkmark$	
Estuarine		✓	
Buffer zone of protected area		~	
Special area for protecting biodiversity		√	
B. Sub -Project Particulars :			
Drain length and with	✓		L= 200m
Type of drain	✓		U-type drain
Tree cutting on the drainage alignment	<		
Outfall of drainage?	✓		Outfall of existing drain
Existences of cross drainage. Is it hampering drainage flow?		$\checkmark$	
C. Potential Environmental Impacts			
Will the Project cause			
Pollution of the receiving water body	xiii)	√	
pollution or interfere with the irrigation canal / channel		✓	
affect the structures near the out fall		✓	
Affect the community structures at the or near by the out		√	
fall			
Potential ecological problems due to increased soil		$\checkmark$	
erosion and siltation?			
Creation of temporary breeding habitats for mosquito		$\checkmark$	
vectors of disease due to water stagnancy in the drains?			

◆This checklist is to be prepared to support the environmental classification of a project. It is to be attached to the environmental categorization form that is to be prepared and submitted to the LEGD / MDS Consultant

◆This checklist is to be completed with the assistance of an Environment Specialist in a Regional Department.

♦ Answer the questions assuming the "without mitigation" case. The purpose is to identify potential impacts. use the "remarks" section to discuss any anticipated mitigation measures.

Name of Pourasnava : Habiganj				
Name of Sector	:	Infrastructure of Drain Improvement		
Sub-Project /Scheme	:	Construction of RCC drain at Rajnagar area starting from infront of Councilor Lovely Sultana house to existing drain drain near Rajnagar Grave Yard Road Ch. 0.00-100.m.		

SCREENING QUESTIONS	Tick Mark YES NO		Demerke
			Remarks
A. Project Siting	ľ		
Is the Project area adjacent to or within any of the		✓	
following environmentally sensitive areas?			
Cultural Heritage site		$\checkmark$	
Protected Area		$\checkmark$	
Wetland		✓	
Mangrove		✓	
Estuarine		$\checkmark$	
Buffer zone of protected area		√	
Special area for protecting biodiversity		✓	
B. Sub -Project Particulars :			
Drain length and with	✓		L= 100m
Type of drain	$\checkmark$		U-type drain
Tree cutting on the drainage alignment	✓		
Outfall of drainage?	✓		Outfall of existing drain
Existences of cross drainage. Is it hampering drainage		✓	
flow?			
C. Potential Environmental Impacts			
Will the Project cause			
Pollution of the receiving water body	lxvii)	✓	
pollution or interfere with the irrigation canal / channel		✓	
affect the structures near the out fall		✓	
Affect the community structures at the or near by the out		√	
fall			
Potential ecological problems due to increased soil		$\checkmark$	
erosion and siltation?			
Creation of temporary breeding habitats for mosquito		$\checkmark$	
vectors of disease due to water stagnancy in the drains?			

	•This checklist is to be prepared to support the environmental classification of a project. It is				
to be attached to	the	environmental categorization form that is to be prepared and submitted to the			
LEGD / MDS Cons	sul	tant			
♦This check	dist	is to be completed with the assistance of an Environment Specialist in a			
Regional Departm	en	t.			
	Answer the questions assuming the "without mitigation" case. The purpose is to identify				
potential impacts.	potential impacts. use the "remarks" section to discuss any anticipated mitigation measures.				
Name of Pourashava : Habiganj					
Name of Sector		Infrastructure of Drain Improvement			
Sub-Project	:	Construction of RCC drain at Shaesta Nagar Area from Sardar Bari to Grave			
/Scheme		Yard Ch 0.00-300.00m			

SCREENING QUESTIONS	NS Tick Mark YES NO		Demender
			- Remarks
A. Project Siting	ľ		
Is the Project area adjacent to or within any of the		√	
following environmentally sensitive areas?			
Cultural Heritage site		✓	
Protected Area		✓	
Wetland		$\checkmark$	
Mangrove		$\checkmark$	
Estuarine		$\checkmark$	
Buffer zone of protected area		√	
Special area for protecting biodiversity		√	
B. Sub - Project Particulars :			
Drain length and with	✓		L= 300m
Type of drain	✓		U-type drain
Tree cutting on the drainage alignment	✓		
Outfall of drainage?	✓		Outfall of existing drain
Existences of cross drainage. Is it hampering drainage		✓	
flow?			
C. Potential Environmental Impacts			
Will the Project cause			
Pollution of the receiving water body	xxi)	√	
pollution or interfere with the irrigation canal / channel		✓	
affect the structures near the out fall		√	
Affect the community structures at the or near by the out		✓	
fall			
Potential ecological problems due to increased soil		$\checkmark$	
erosion and siltation?			
Creation of temporary breeding habitats for mosquito		$\checkmark$	
vectors of disease due to water stagnancy in the drains?			

This checklist is to be prepared to support the environmental classification of a project. It is to be attached to the environmental categorization form that is to be prepared and submitted to the LEGD / MDS Consultant
 This checklist is to be completed with the assistance of an Environment Specialist in a Regional Department.
 Answer the questions assuming the "without mitigation" case. The purpose is to identify potential impacts. use the "remarks" section to discuss any anticipated mitigation measures.
 Name of Pourashava : Habiganj
 Name of Sector : Infrastructure of Drain Improvement
 Sub-Project / Scheme : Construction of RCC drain Starting from infront of Eng. Bahadur Alam house to existing Drain near santinagar Poil Road Ch.0.00-100m

SCREENING QUESTIONS	Tick Mark		Dementer
	YES	NO	Remarks
A. Project Siting	ľ		
Is the Project area adjacent to or within any of the		✓	
following environmentally sensitive areas?			
Cultural Heritage site		~	
Protected Area		$\checkmark$	
Wetland		~	
Mangrove		$\checkmark$	
Estuarine		$\checkmark$	
Buffer zone of protected area		$\checkmark$	
Special area for protecting biodiversity		✓	
B. Sub -Project Particulars :			
Drain length and with	✓		L= 100m
Type of drain	✓		U-type drain
Tree cutting on the drainage alignment	✓		
Outfall of drainage?	✓		Outfall of existing drain
Existences of cross drainage. Is it hampering drainage		~	
flow?			
C. Potential Environmental Impacts			
Will the Project cause			
Pollution of the receiving water body	xxv)	√	
pollution or interfere with the irrigation canal / channel		✓	
affect the structures near the out fall		✓	
Affect the community structures at the or near by the out		✓	
fall			
Potential ecological problems due to increased soil		$\checkmark$	
erosion and siltation?			
Creation of temporary breeding habitats for mosquito		$\checkmark$	
vectors of disease due to water stagnancy in the drains?			

YESNOHemarksAccess problem for the house dwellers✓Proper attention during construction periodImpact on commercial and business establishment during construction✓Temporary problem during construction periodImpact on livelihood of Hawkers during construction✓Temporary problem during construction periodImpact on land due to disposal of sludge from the desolation of the drains✓✓Pollution of raw water supply from upstream wastewater discharge from communities, industries, agriculture, and soil erosion runoff?✓Popper attention during construction periodImpairment of historical/cultural monuments/areas and loss/damage to these sites✓Popper attention during construction periodContinuing soil erosion/silt runoff from construction operations?✓Popper attention during construction periodIncreased volume of sullage (wastewater from cooking and washing) and sludge poor sanitation and solid waste disposal in construction camps and work sites, and possible transmission of✓Dislocation or involuntary resettlement of people?✓Potential social conflicts arising from land tenure and land use issues?✓Soil erosion before compaction and lining of canals?✓Soil erosion before compaction and lining of canals?✓Labor-related social problems especially if workers from different areas are hired?✓	SCREENING QUESTIONS			
Access problem for the nouse oweners       construction period         Impact on commercial and business establishment during construction       Impact on livelihood of Hawkers during construction       Temporary problem during construction period         Impact on livelihood of Hawkers during construction       Imporary problem during construction period       Temporary problem during construction period         Impact on land due to disposal of sludge from the desolation of the drains       Impact on the drains       Imporary problem during construction period         Pollution of raw water supply from upstream wastewater discharge from communities, industries, agriculture, and soil erosion runoff?       Impairment of historical/cultural monuments/areas and loss/damage to these sites       Impairment of historical/cultural monuments/areas and loss/damage to these sites         increased Drain traffic due to interference of construction activities       Popper attention during construction period         Continuing soil erosion/silt runoff from construction operations?       Impairment of sullage (wastewater from cooking and washing) and sludge         poor sanitation and solid waste disposal in construction camps and work sites, and possible transmission of       Impairment of people?         Dislocation or involuntary resettlement of people?       Impairment of poor sanitation and solid made tenure and land use issues?       Impairment of poole compaction and lining of canals?         Soil erosion before compaction and lining of canals?       Impairment of poole canal problems especially if workers       Im				Remarks
Impact on commercial and business establishment during construction       ✓       Temporary problem during construction period         Impact on livelihood of Hawkers during construction       ✓       Temporary problem during construction period         Impact on land due to disposal of sludge from the desolation of the drains       ✓       Temporary problem during construction period         Pollution of raw water supply from upstream wastewater discharge from communities, industries, agriculture, and soil erosion runoff?       ✓         Impairment of historical/cultural monuments/areas and loss/damage to these sites       ✓         increased Drain traffic due to interference of construction activities       ✓         Continuing soil erosion/silt runoff from construction operations?       ✓         increased volume of sullage (wastewater from cooking and washing) and sludge       ✓         poor sanitation and solid waste disposal in construction camps and work sites, and possible transmission of       ✓         Dislocation or involuntary resettlement of people?       ✓         Potential social conflicts arising from land tenure and land use issues?       ✓         Soil erosion before compaction and lining of canals?       ✓         Labor-related social problems especially if workers from different areas are hired?       ✓	Access problem for the house dwellers	~		
during construction       during construction period         Impact on livelihood of Hawkers during construction       Impact on livelihood of Hawkers during construction         Impact on land due to disposal of sludge from the desolation of the drains       Impact on land due to disposal of sludge from the desolation of raw water supply from upstream watewater discharge from communities, industries, agriculture, and soil erosion runoff?       Impairment of historical/cultural monuments/areas and loss/damage to these sites         increased Drain traffic due to interference of construction activities       Popper attention during construction period         Continuing soil erosion/silt runoff from construction operations?       Impairment of sullage (wastewater from cooking and washing) and sludge         poor sanitation and solid waste disposal in construction camps and work sites, and possible transmission of       Impairment of people?         Dislocation or involuntary resettlement of people?       Impairment of people?         Soil erosion before compaction and lining of canals?       Impairment of liter areas are hired?				
Impact on livelihood of Hawkers during construction       ✓       Temporary problem during construction period         Impact on land due to disposal of sludge from the desolation of the drains       ✓       ✓         Pollution of raw water supply from upstream wastewater discharge from communities, industries, agriculture, and soil erosion runoff?       ✓         Impairment of historical/cultural monuments/areas and loss/damage to these sites       ✓       Popper attention during construction period         Continuing soil erosion/silt runoff from construction operations?       ✓       Popper attention during construction period         Increased volume of sullage (wastewater from cooking and washing) and sludge       ✓          poor sanitation and solid waste disposal in construction camps and work sites, and possible transmission of       ✓         Dislocation or involuntary resettlement of people?       ✓         Potential social conflicts arising from land tenure and land use issues?       ✓         Soil erosion before compaction and lining of canals?       ✓         Labor-related social problems especially if workers from different areas are hired?       ✓	•	$\checkmark$		
Impact on land due to disposal of sludge from the desolation of the drains       ✓         Pollution of raw water supply from upstream wastewater discharge from communities, industries, agriculture, and soil erosion runoff?       ✓         Impairment of historical/cultural monuments/areas and loss/damage to these sites       ✓         increased Drain traffic due to interference of construction activities       ✓         Continuing soil erosion/silt runoff from construction operations?       ✓         increased volume of sullage (wastewater from cooking and washing) and sludge       ✓         poor sanitation and solid waste disposal in construction camps and work sites, and possible transmission of       ✓         Dislocation or involuntary resettlement of people?       ✓         Potential social conflicts arising from land tenure and land use issues?       ✓         Soil erosion before compaction and lining of canals?       ✓         Labor-related social problems especially if workers from different areas are hired?       ✓				
Impact on land due to disposal of sludge from the desolation of the drains       ✓         Pollution of raw water supply from upstream wastewater discharge from communities, industries, agriculture, and soil erosion runoff?       ✓         Impairment of historical/cultural monuments/areas and loss/damage to these sites       ✓         increased Drain traffic due to interference of construction activities       ✓         Continuing soil erosion/silt runoff from construction operations?       ✓         increased volume of sullage (wastewater from cooking and washing) and sludge       ✓         poor sanitation and solid waste disposal in construction camps and work sites, and possible transmission of       ✓         Dislocation or involuntary resettlement of people?       ✓         Potential social conflicts arising from land tenure and land use issues?       ✓         Soil erosion before compaction and lining of canals?       ✓         Labor-related social problems especially if workers from different areas are hired?       ✓	Impact on livelihood of Hawkers during construction	v		
desolation of the drains       Impairment of historical/cultural monuments/areas and loss/damage to these sites       Impairment of historical/cultural monuments/areas and loss/damage to these sites         increased Drain traffic due to interference of construction activities       Impairment of historical/cultural monuments/areas and loss/damage to these sites       Impairment of historical/cultural monuments/areas and loss/damage to these sites         increased Drain traffic due to interference of construction activities       Impairment of sullage (wastewater from construction operations?       Impairment of sullage (wastewater from cooking and washing) and sludge         poor sanitation and solid waste disposal in construction of transmission of       Impairment of people?       Impairment of people?         Dislocation or involuntary resettlement of people?       Impairment of people?       Impairment of people?         Soil erosion before compaction and lining of canals?       Impairment of people       Impairment of people         Soil erosion before compaction and lining of canals?       Impairment of people       Impairment of people         Soil erosion before compaction and lining of canals?       Impairment of people       Impairment of people         Soil erosion before compaction and lining of canals?       Impairment of people       Impairment of people         Soil erosion before areas are hired?       Impairment areas are hired?       Impairment of people	Impact on land due to disposal of sludge from the		✓	during construction period
wastewater discharge from communities, industries, agriculture, and soil erosion runoff?       Impairment of historical/cultural monuments/areas and loss/damage to these sites         increased Drain traffic due to interference of construction activities       ✓         Continuing soil erosion/silt runoff from construction operations?       ✓         increased volume of sullage (wastewater from cooking and washing) and sludge       ✓         poor sanitation and solid waste disposal in construction camps and work sites, and possible transmission of       ✓         Dislocation or involuntary resettlement of people?       ✓         Potential social conflicts arising from land tenure and land use issues?       ✓         Soil erosion before compaction and lining of canals?       ✓         Labor-related social problems especially if workers from different areas are hired?       ✓	desolation of the drains			
agriculture, and soil erosion runoff?         Impairment of historical/cultural monuments/areas and loss/damage to these sites       ✓         increased Drain traffic due to interference of construction activities       ✓         Continuing soil erosion/silt runoff from construction operations?       ✓         increased volume of sullage (wastewater from cooking and washing) and sludge       ✓         poor sanitation and solid waste disposal in construction camps and work sites, and possible transmission of       ✓         Dislocation or involuntary resettlement of people?       ✓         Potential social conflicts arising from land tenure and land use issues?       ✓         Soil erosion before compaction and lining of canals?       ✓         Labor-related social problems especially if workers from different areas are hired?       ✓	Pollution of raw water supply from upstream		✓	
Impairment of historical/cultural monuments/areas and loss/damage to these sites       ✓         increased Drain traffic due to interference of construction activities       ✓       Popper attention during construction period         Continuing soil erosion/silt runoff from construction operations?       ✓       Popper attention during construction period         increased volume of sullage (wastewater from cooking and washing) and sludge       ✓       ✓         poor sanitation and solid waste disposal in construction camps and work sites, and possible transmission of       ✓       ✓         Dislocation or involuntary resettlement of people?       ✓       ✓         Potential social conflicts arising from land tenure and land use issues?       ✓       ✓         Soil erosion before compaction and lining of canals?       ✓       ✓         Labor-related social problems especially if workers from different areas are hired?       ✓       ✓				
loss/damage to these sites       Increased Drain traffic due to interference of construction activities       ✓       Popper attention during construction period         Continuing soil erosion/silt runoff from construction operations?       ✓       ✓         increased volume of sullage (wastewater from cooking and washing) and sludge       ✓       ✓         poor sanitation and solid waste disposal in construction camps and work sites, and possible transmission of       ✓       ✓         Dislocation or involuntary resettlement of people?       ✓       ✓         Potential social conflicts arising from land tenure and land use issues?       ✓       ✓         Soil erosion before compaction and lining of canals?       ✓       ✓         Labor-related social problems especially if workers from different areas are hired?       ✓       ✓				
increased       Drain       traffic       due       to       interference       ✓       Popper attention during construction period         Continuing soil       erosion/silt       runoff       from construction       ✓       ✓         increased volume of sullage (wastewater from cooking and washing) and sludge       ✓       ✓       ✓         poor       sanitation       and solid       waste       disposal       ✓         construction camps and work sites, and possible transmission of       ✓       ✓       ✓         Dislocation or involuntary resettlement of people?       ✓       ✓         Potential social conflicts arising from land tenure and land use issues?       ✓       ✓         Soil erosion before compaction and lining of canals?       ✓       ✓         Labor-related social problems especially if workers from different areas are hired?       ✓			~	
construction activities       construction period         Continuing soil erosion/silt runoff from construction operations?       ✓         increased volume of sullage (wastewater from cooking and washing) and sludge       ✓         poor sanitation and solid waste disposal in construction camps and work sites, and possible transmission of       ✓         Dislocation or involuntary resettlement of people?       ✓         Potential social conflicts arising from land tenure and land use issues?       ✓         Soil erosion before compaction and lining of canals?       ✓         Labor-related social problems especially if workers from different areas are hired?       ✓				Depart attention during
Continuing soil erosion/silt runoff from construction operations?       ✓         increased volume of sullage (wastewater from cooking and washing) and sludge       ✓         poor sanitation and solid waste disposal in construction camps and work sites, and possible transmission of       ✓         Dislocation or involuntary resettlement of people?       ✓         Potential social conflicts arising from land tenure and land use issues?       ✓         Soil erosion before compaction and lining of canals?       ✓         Labor-related social problems especially if workers from different areas are hired?       ✓		v		
operations?       increased volume of sullage (wastewater from cooking and washing) and sludge         poor sanitation and solid waste disposal in construction camps and work sites, and possible transmission of       ✓         Dislocation or involuntary resettlement of people?       ✓         Potential social conflicts arising from land tenure and land use issues?       ✓         Soil erosion before compaction and lining of canals?       ✓         Labor-related social problems especially if workers from different areas are hired?       ✓			✓	
and washing) and sludge				
poor sanitation and solid waste disposal in construction camps and work sites, and possible transmission of       ✓         Dislocation or involuntary resettlement of people?       ✓         Potential social conflicts arising from land tenure and land use issues?       ✓         Soil erosion before compaction and lining of canals?       ✓         Labor-related social problems especially if workers from different areas are hired?       ✓	increased volume of sullage (wastewater from cooking		✓	
construction camps and work sites, and possible transmission of          Dislocation or involuntary resettlement of people?       ✓         Potential social conflicts arising from land tenure and land use issues?       ✓         Soil erosion before compaction and lining of canals?       ✓         Labor-related social problems especially if workers from different areas are hired?       ✓				
transmission of       ✓         Dislocation or involuntary resettlement of people?       ✓         Potential social conflicts arising from land tenure and land use issues?       ✓         Soil erosion before compaction and lining of canals?       ✓         Labor-related social problems especially if workers from different areas are hired?       ✓			$\checkmark$	
Dislocation or involuntary resettlement of people?       ✓         Potential social conflicts arising from land tenure and land use issues?       ✓         Soil erosion before compaction and lining of canals?       ✓         Labor-related social problems especially if workers from different areas are hired?       ✓				
Potential social conflicts arising from land tenure and land use issues?       ✓         Soil erosion before compaction and lining of canals?       ✓         Labor-related social problems especially if workers from different areas are hired?       ✓				
land use issues?       ✓         Soil erosion before compaction and lining of canals?       ✓         Labor-related social problems especially if workers from different areas are hired?       ✓				
Soil erosion before compaction and lining of canals?✓Labor-related social problems especially if workers from different areas are hired?✓			•	
Labor-related social problems especially if workers			✓	
from different areas are hired?			✓	
Alteration of surface water hydrology of waterways				
	Alteration of surface water hydrology of waterways		✓	
crossed by Drains, resulting in increased sediment in				
streams affected by increased soil erosion at				
construction site?         Deterioration of surface water quality due to silt runoff         ✓				
and sanitary wastes from worker-based camps and	· ·		•	
chemicals used in construction?				
Downstream water pollution from discharge of Fish			✓	
pond effluents with drain water?	pond effluents with drain water?			
Soil erosion (furrow, surface)?				
Scouring of canals?	<u>_</u>		✓	
Logging of canals by sediments?	Logging of canals by sediments?		✓	
Clogging of canals by weeds?	Clogging of canals by weeds?		$\checkmark$	
Pollution from oil and fuel spills and bilge flushing?	Pollution from oil and fuel spills and bilge flushing?		$\checkmark$	

Signature of Regional Environmentalist

# Signature of PS representative

Signature of NES

# XIV. Appendix-4 Levels of Service for Proposed Interventions- Roads and Drains

Road part	Existing Standard	Proposed Standard	Additional Climate Change for UGIIP-III
Design Life	20 years	20 years	20 years with consideration for 50 years flood frequency for rights of way (RoW)
Minimum width	Minor roads 1.0- 3.0m Town roads 3.0-5.0m	3.0m for minor access roads With 1.0m shoulder only if RoW permits.	As par drawing
Crest Level	600 mm above normal flood level	600 mm above normal flood level	200 mm above A1B <sup>15</sup> scenario sea levels in 2034
Surface material	BT, CC, WBM, HBB & BFS	DBC or RCC roads	DBC road 40mm thickness RCC road 150mm thickness
Earthworks	Compacted where necessary either by hand or machine.	Machine compacted in layers and tested	As par drawing
Embankments	Slope 1:1.5	Embankments strengthened with edge protection. Where possible, trees or bushes should be planted on earth embankments	Additional strengthening on roads in flood areas, either CC road
Road/Drain	Overall condition of the roads and drains is not good	Rehabilitation/Re- construction/Construction	Orange –B

#### A. Principles

- 1. One of the prime objectives of this TMP is to ensure the safety of all the road users along the work zone, and to address the following issues:
  - (i) the safety of pedestrians, bicyclists, and motorists travelling through the Construction zone;
  - (ii) Protection of work crews from hazards associated with moving traffic;
  - (ii) mitigation of the adverse impact on road capacity and delays to the road users;
  - (iv) Maintenance of access to adjoining properties; and
  - (v) Addressing issues that may delay the project.


#### B. Operating Policies for TMP

- 2. The following principles will help promote safe and efficient movement for all road users (motorists, bicyclists, and pedestrians, including persons with disabilities) through and around work zones while reasonably protecting workers and equipment.
  - (i) Make traffic safety and temporary traffic control an integral and high-priority element of every project from planning through design, construction, and maintenance.
  - (ii) Inhibit traffic movement as little as possible.
  - (ii) Provide clear and positive guidance to drivers, bicyclists, and pedestrians as they approach and travel through the temporary traffic control zone.
  - (iii) Inspect traffic control elements routinely, both day and night, and make modifications when necessary.
  - (iv) Pay increased attention to roadside safety in the vicinity of temporary traffic control zones.
  - (v) Train all persons that select, place, and maintain temporary traffic control devices.
  - (vii) Keep the public well informed.
  - (viii) Make appropriate accommodation for abutting property owners, residents, businesses, emergency services, railroads, commercial vehicles, and transit operations.
- 3. Figure A2 to Figure A3 illustrates the operating policy for TMP for the construction of water pipes and the sewers along various types of roads.

#### C. Analyse the impact due to street closure

- 4. Apart from the capacity analysis, a final decision to close a particular street and divert the traffic should involve the following steps:
  - (i) approval from the ULB/CMC/Public Works Department (PWD) to use the local streets as detours;
  - (ii) consultation with businesses, community members, traffic police, PWD, etc, regarding the mitigation measures necessary at the detours where the road is diverted during the construction;
  - (iii) determining of the maximum number of days allowed for road closure, and 3 incorporation of such provisions into the contract documents;
  - (iv) determining if additional traffic control or temporary improvements are needed along the detour route;
  - (v) considering how access will be provided to the worksite;
  - (vi) contacting emergency service, school officials, and transit authorities to determine if there are impacts to their operations; and

- (vi) developing a notification program to the public so that the closure is not a surprise. As part of this program, the public should be advised of alternate routes that commuters can take or will have to take as result of the traffic diversion.
- 5. If full road-closure of certain streets within the area is not feasible due to inadequate capacity of the detour Street or public opposition, the full closure can be restricted to weekends with the construction commencing on Saturday night and ending on Monday morning prior to the morning peak period.

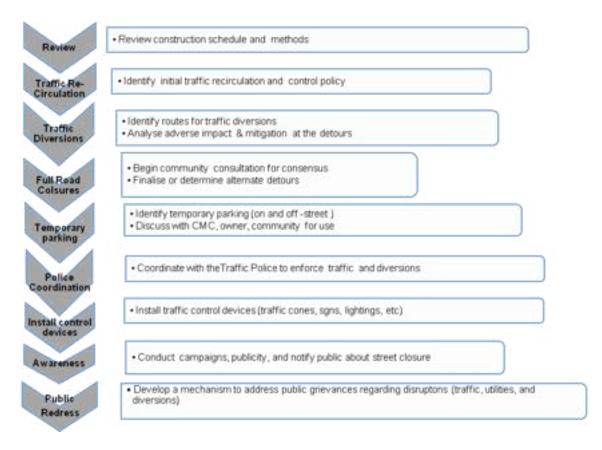

## Figure A1: Policy Steps for the TMP

#### D. Public awareness and notifications

- 6. As per discussions in the previous sections, there will be travel delays during the constructions, as is the case with most construction projects, albeit on a reduced scale if utilities and traffic management are properly coordinated. There are additional grounds for travel delays in the area, as most of the streets lack sufficient capacity to accommodate additional traffic from diverted traffic as a result of street closures to accommodate the works.
- 7. The awareness campaign and the prior notification for the public will be a continuous activity which the project will carry out to compensate for the above delays and minimize public claims as result of these problems. These activities will take place sufficiently in advance of the time when the roadblocks or traffic diversions take place at the particular streets. The reason for this is to allow sufficient time for the public and residents to understand the changes to their travel plans. The project will notify the public about the

roadblocks and traffic diversion through public notices ward level meetings and city level meeting with the elected representatives.

- 8. The PIU will also conduct an awareness campaign to educate the public about the following issues:
  - (i) traffic control devices in place at the work zones (signs, traffic cones, barriers, etc.);
  - (ii) defensive driving behaviour along the work zones; and
  - (iii) reduced speeds enforced at the work zones and traffic diversions.
- 9. It may be necessary to conduct the awareness programs/campaigns on road safety during construction.
- 10. The campaign will cater to all types of target groups i.e. children, adults, and drivers. Therefore, these campaigns will be conducted in schools and community centres. In addition, the project will publish a brochure for public information. These brochures will be widely circulated around the area and will also be available at the PIU, and the contractor's site office. The text of the brochure should be concise to be effective, with a lot of graphics. It will serve the following purpose:
  - (i) explain why the brochure was prepared, along with a brief description of the project;
  - (ii) advise the public to expect the unexpected;
  - (ii) educate the public about the various traffic control devices and safety measures adopted at the work zones;
  - (iii) educate the public about the safe road user behaviour to emulate at the work zones;
  - (iv) tell the public how to stay informed or where to inquire about road safety issues at the work zones (name, telephone, mobile number of the contact person; and
  - (vi) indicate the office hours of relevant offices.

#### E. Install traffic control devices at the work zones and traffic diversion routes

- 11. The purpose of installing traffic control devices at the work zones is to delineate these areas to warn, inform, and direct the road users about a hazard ahead, and to protect them as well as the workers. As proper delineation is a key to achieve the above objective, it is important to install good traffic signs at the work zones. The following traffic control devices are used in work zones:
  - Signs
  - Pavement Markings
  - Channelizing Devices
  - Arrow Panels
  - Warning Lights
- 12. Procedures for installing traffic control devices at any work zone vary, depending on road configuration, location of the work, construction activity, duration, traffic speed and volume, and pedestrian traffic. Work will take place along major roads, and the minor internal roads. As such, the traffic volume and road geometry vary. The main roads carry considerable traffic; internal roads in the new city areas are wide but in old city roads very narrow and carry considerable traffic. However, regardless of where the construction takes place, all the work zones should be cordoned off, and traffic shifted away at least with traffic cones, barricades, and temporary signs (temporary "STOP" and "GO").

- 13. Figure A4 to Figure A5 illustrates a typical set-up for installing traffic control devices at the work zone of the area, depending on the location of work on the road way, and road geometrics:
  - Work on shoulder or parking lane
  - Shoulder or parking lane closed on divided road
  - Work in Travel lane
  - Lane closure on road with low volume
  - Lane closure on a two-line road with low volume (with yield sign)
  - Lane closure on a two-line road with low volume (one flagger operation)
  - Lane closure on a two lane road (two flagger operation)
  - Lane closure on a four lane undivided Road
  - Lane closure on divided roadway
  - Half road closure on multi-lane roadway
  - Street closure with detour
- 14. The work zone should take into consideration the space required for a buffer zone between the workers and the traffic (lateral and longitudinal) and the transition space required for delineation, as applicable. For the works, a 30 cm clearance between the traffic and the temporary STOP and GO signs should be provided. In addition, at least 60 cm is necessary to install the temporary traffic signs and cones.
- 15. Traffic police should regulate traffic away from the work zone and enforce the traffic diversion result from full street closure in certain areas during construction. Flaggers/ personnel should be equipped with reflective jackets at all times and have traffic control batons (preferably the LGED type) for regulating the traffic during night time.
- 16. In addition to the delineation devices, all the construction workers should wear fluorescent safety vests and helmets in order to be visible to the motorists at all times. There should be provision for lighting beacons and illumination for night constructions.

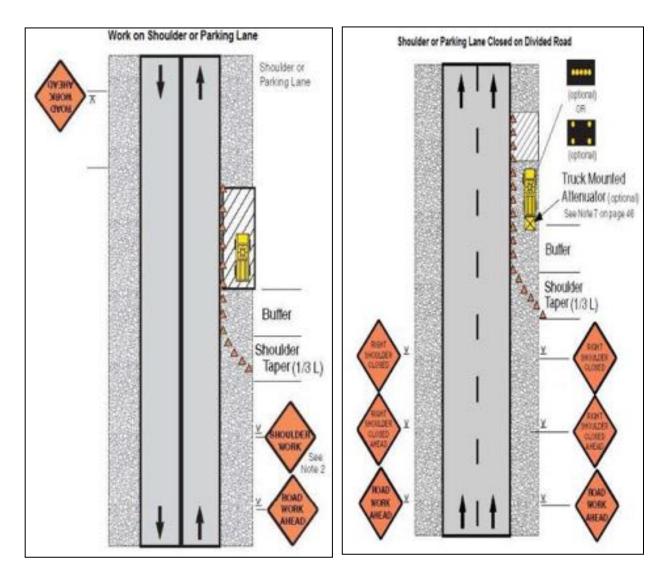


Figure A2 & A3: Work on shoulder or parking lane and shoulder or parking lane closed on divided road

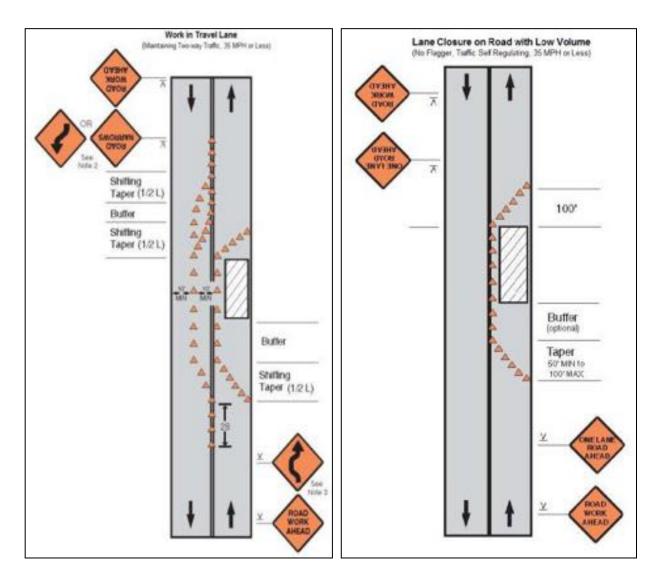


Figure A4 & A5: Work in Travel lane & Lane closure on road with low volume

PUBLIC CONSULTATION- ENVIRONMENTAL (FOR ROAD/DRAINAGE SUB-PROJECT) Focus Group Discussions (FGDs)

	re of Location : Improvement of	Back Doo	destanting
	Sonoshan about de	a to chard	Purch Beller
Cha	inage ( oto log : infront of cer	iomahal	1 627-2
Date	of visit : 12.09. 2015		me: 4.00
	of Participants :		
SI No.	Participants Name & Address	Occupation	Signature
1	aut Suns solad	-sheeter	Trom
2	(Sare 22 - Caller Sin 200 - 12	game.	140-
3	NEW 200 CONCO ANI	28232	Hoez
4	stides nover 4	রন্ত্রি সে	Val Ala
5	Reus resist - Lever "	* <del>35</del> 394	apal
6	allan ange	3222-14	prost.
7	la sur surà sus "	<b>রা</b> বঙ্গ	april
8	inter anylin in the	39=70	icto
9	(ar: 1200 00-161- 6210 21-4	2012241	all -
10	all was	ะกฎก-	-ENGERT
11	GRAS RENA RUDAN .	CONV.	ANO.
12	Sour chiado ghin.		
13	247127278 A	/2334TH	4



Consultation on open road space September 2015

Name of Pourashava	: ttabigany -	
Name of Location	+ improvement of Rec +	esterna black by Ree ( Dont-
Chainage ( 010904		wantibi Loure
Date of visit	: 12.09.2015	- Time: 12.30 Pm
List of Participants	1	
SI Partic No.	ipants Name & Address	Occupation Signature
1 and Ener	(Ors Aram)	all and a set of the
	Nº CATH'-1" Chert an	Row and
, two: road	istoms -	30050) - ab
4 1061.2.30	-14-11-	2000- 22/2/20
and the second second second second	- M	

5	Cert: OIL: 2020-	23234	state
6	Congue signes conford	azam	astrono
7	Carrent Carana "	त्र दा रहता	Carros
8	Corrent and on ,	ans April	any-
9	Col. confor for or "	Span	Eshor
10	an: bont Brin h	15 12 1973	Panalo
11	GANGANDA GRAD ARG	1	
12	Carls and Lines Sher	<u>पुंहित</u> ात	anaro
13	1001: F31 47 4	प्राहेगव	731977



Consultation on in front of Gulam kibria House September, 2015

	Table: Issues of the Public Consultation- Design Phase					
SI No	Key Issues/Demands	Perception of Community	Action to be Taken			
01	Awareness of the project including coverage area	Yes, they are aware of the project that will be improved	No need to take action.			
02	In what way they may associate with the project	They will give all types of cooperation for implementation of the project	More consultation before start of the project.			
03	Presence of any forest, wildlife or any sensitive/ unique environmental components nearby the project area	No such information available.	No need to take action.			
04	Presence of historical/cultural/ religious sites nearby	No such information available.	No need to take action.			
05	Unfavourable climatic condition	No such information available.	No need to take action.			
06	Occurrence of flood	Road not flooded	No need to take action.			
07	Drainage and sewerage problem facing	Not facing drainage problem.	No need to take action.			
08	Present drinking water problem- quantity and quality	Drinking water collected by individual deep/shallow tube well	Paura Authority should take more attention to supply drinking water to paura people			
09	Present solid waste collection and distribution problem	Yes, Has solid waste collection and disposal problem	Need improved solid waste collection and disposal system. CBO & Paurashava can solve this problem			
10	Availability of labour during construction time	Yes, Local labour is available.	No need to take action.			
11	Access road to project site	Yes, it is road project. It will provide access.	No need to take action.			
12	Perception of villagers on tree felling and a forestation	Yes, no tree felling in this project.	No need to take action.			
13	Dust and noise pollution disturbances during construction work	Yes, they know the impact will be short-term & negligible.	EMP will be prepared to minimize the impact.			
14	Setting up construction camp site within the villages/project locality	Yes, no construction camp is required for this sub-project.	No camp or storage site within locality			
15	Safety of residents during construction phase and plying of vehicle for construction activities	Yes, they are aware of the safety issues./	Awareness programs will be taken before start of the construction work.			
16	Conflicts among beneficiaries downstream users-water supply project using of river water	No use of community water in this project.	No need to take action.			
17	Requirements of enhancement of other facilities	Road improvement will enhance the facilities.	No need to take action.			
18	Whether local people agreed to sacrifice their lands (cultivable or not) for beneficial project after getting proper compensation	No land is required.	No need to take action.			

**Summary of Outcome**: If any important road of any area in development everything of that area will develop very soon. It's helpful to all classes of people who live at that area. All the student of that area wills able to go their school and college within shortest time. It is helpful for extension of business which may help to earn so many foreign currency. By earning lot of foreign currency our economic problem eradicate very soon. Pregnant woman and any ill person can go to any hospital within a small time. The employers of any government or non-government institution and the workers of that institution can go their work place very soon.

#### XVII. Appendix-7 Special Condition for Environment Code of Practice (ECOP)

SI.			Action By
No	Issues	Management Measures	
1	Excavation/ Cutting, filling and clearing of road and drain	During excavating / cleaning work the safety measures need to be taken by the construction crew such as wearing protective clothing, shoes, gloves and face masks. Collected earth and sand need to be cover during transportation.	Contractor
2	Dust & Cleaning	Regular sprinkling of water in the vicinity of the construction site is necessary so that dust is not re-suspended. Frequency of the sprinkling to be three times a day or more based on the extent of activity and dryness of the season; Cleaning to be done in a manner that does not generate or re-suspend dust.	Contractor
3	Cutting of Road	Proper notification should be provided to the public surrounding the construction site. A notice board informing the proposed work should be erected two weeks prior to actual work. An alternative road/detour route need to be constructed for temporary passing the people, rickshaw, van, car private etc.	Contractor/PIU
4	Public awareness campaign	A public awareness need to be done before start to the work. This awareness campaign may be done through making posters and sign board near the construction areas.	PIU
5	Noise	Use of ear plugs / muffs is necessary by all construction workers during operation of heavy equipment/ machinery; Wherever feasible, noise absorption padding / enclosures should be used surrounding the noise-generating machinery.	Contractor
6.	Pedestrian & traffic safety	Extensive barricading of the construction zone should be provided so that pedestrians do not come into direct contact with the machines, tools, material and other accessories;	Contractor
		Provision of barricading to be done so that these do not create traffic safety problems; Supplementary aids / tools such as signboards, reflectors and night lighting to be used to avoid possible accidents.	
7	Tree-cutting &	Compensatory tree plantation in the ratio of 2 trees planted for	PIU

# Special Condition for Environment Code of Practice (ECOP) of Road and Drain Sub-project of Habiganj Pourashava

SI.	Issues	Management Measures	Action By
No			
	safeguarding	every tree that had to be cut due to construction activities; Any tree saved from cutting should be barricaded and protected by the Contractor.	
8	Debris management	Well-defined onsite area for storing of any debris generated; Transporting debris with proper coverage; Disposal in an approved dump yard / landfill.	Contractor
9	Worker safety	Provision of personal protection equipment (PPE) such as helmets, boots and face masks for the workers; Provision of first aid box with basic items.	Contractor
10	Transporting construction material	Transporting with adequate safety precautions, e.g. not to use undersized trucks. Adequate covering of trucks that are used to transport material to and from the construction site.	Contractor
11	Storing construction material	Well-defined area for storage with suitable containment as required. Proper labelling of different items	Contractor
12	Worker camps	Adequate disposal of sanitary waste need to be considered in order to follow best waste management practices. Basic hygiene and cleanliness in the worker camps, if any. In particular, toilet facilities should be well-maintained with basic provision of soak pits & septic tanks. Drinking water should also be provided to the workers.	Contractor
13	Monitoring	Ensuring compliance to the ECR rules in terms of ambient air and noise monitoring data.	PIU
14	ECOP for LGED	Need to campaign among the mass about the awareness of the importance of the road, not to create any obstacle on the road side drain, abstain disposal of solid waste to the road side drain etc.	PIU
		Ensuring compliance to the ECR rules in terms of solid waste disposal, ambient air and noise monitoring data during operational period.	