

## Initial Environment Examination

Project Number: 40648-034

July 2015

# IND: Infrastructure Development Investment Program for Tourism - Tranche 3

Submitted by

Program Management Unit, Government of Uttarakhand, Dehrdaun

This report has been submitted to ADB by the Program Management Unit, Government of Uttarakhand, Dehradun and is made publicly available in accordance with ADB's public communications policy (2011). It does not necessarily reflect the views of ADB.

This Initial Environment Examination report is a document of the borrower. The views expressed herein do not necessarily represent those of ADB's Board of Directors, Management, or staff, and may be preliminary in nature. In preparing any country program or strategy, financing any project, or by making any designation of or reference to a particular territory or geographic area in this document, the Asian Development Bank does not intend to make any judgments as to the legal or other status of any territory or area.

## Asian Development Bank



### **Program Management Unit**

## Infrastructure Development Investment Program for Tourism (ADB Assisted – Loan No. 2833, India)

### Government of Uttarakhand



Uttarakhand Simply Heaven!

Date: 06.06.2015

Ref: 2602/2-10-ADB IDIPT/249/2014-15

To

Country Director, Indian Resident Mission (INRM), Plot no -4, San Martin Marg, Chanakyapuri, New Delhi 110021, PB No-53311 (HPO)

Sub: IDIPT UK Tranche III: Submission of IEE document for "Restoration, Adaptive Reuse & Revitalization of Almora Fort"sub project

Ref: IEE (based on SAR) submitted vide letter no. 1687/2-10-ADB IDIPT/249/2014-15 dt. 30.09.14 and updated IEE submission (based on DPR) vide letter no. 2021/2-10-ADB IDIPT/249/2014-15 dt. 20.01.15

Respected Madam,

Kindly refer to the IEE document for "Restoration, Adaptive Reuse & Revitalization of Almora Fort "sub project, contract Package No. UK/IDIPT-III/BHT/03 and UK/IDIPT-III/BHT/05(based on DPR) submitted vide this office letter dt. 20.01.15 and ADB's observations on the same communicated vide mail dt. 29.01.15 and mail dt. 05.02.15.

IEE document along with comments compliance matrix is enclosed for your kind perusal and approval.

Encl.:- As above

Yours Sincerely

(R.K. Joshi)

Additional Program Director

## **Comments Compliance Matrix**

| ADB Comments                              | Response  |
|---|---|
| ADB observation dt. 29.01.15              | Submitted vide mail dt. 05.02.15  |
| Thank you for the revised IEE for T3.     | In response to your observations on the   |
| Please clarify how the IEE was revised    | revised IEE and RP documents of Tranche 3,  |
| to facilitate ADB review and approval. If | we wish to inform that the draft documents  |
| the IEE was revised in response to ADB    | based on SARs were submitted during   |
| comments, please submit a comments        | finalization of loan for tranche 3, which are   |
| response matrix. If revised for another   | being updated/ revised based on the project   |
| reason, please clarify.                   | specific DPRs.  |
|   | While developing the DPR the issues related to land availability, duplicity of projects in proposed area, Operation & Maintenance issues, future sustainability considerations and NOCs for land etc were dealt in depth, resulting in some deviation from the earlier submitted documents. |
| ADB observation dt. 05.02.15              | Submitted herewith  |
| "Thank you for your email. However        |   |
| please submit a comments response         |   |
| matrix to ADB's observations for each of  |   |
| the IEEs and RPs. Revision to             | Comments response matrix prepared and   |
| documents should be clearly highlighted   | enclosed herewith.  |
| or made in track changes to facilitate    |   |
| ADB review and approval. The point is to  |   |
| understand the changes to what was        |   |
| earlier reviewed. Thank you for your      |   |
| understanding."                           |   |
|   |   |

## Changes in IEE Reports between SAR and DPR Stage

| S.  | Details in IEE         | Corresponding Details in | Remarks                           |  |  |
|-----|------------------------|--------------------------|-----------------------------------|--|--|
| No. | (SAR Stage)            | IEE (DPR Stage)          |                                   |  |  |
| 1   | Page no. 1:            | Page no. 6:              | There have been some              |  |  |
|     | Sub Project Scope      | Sub Project Scope        | changes in sub project scope.     |  |  |
|     |                        |                          | due to more consultation with     |  |  |
|     |                        |                          | stakeholders including District   |  |  |
|     |                        |                          | Authorities, Line agencies.       |  |  |
|     |                        |                          | In the SAR stage, the scope       |  |  |
|     |                        |                          | involved only Restoration of      |  |  |
|     |                        |                          | the Forts (Malla Mahal, Rani      |  |  |
|     |                        |                          | Mahal and Ram Shila temple).      |  |  |
|     |                        |                          | However, pursuant to              |  |  |
|     |                        |                          | discussions with District         |  |  |
|     |                        |                          | Administration, it was decided    |  |  |
|     |                        |                          | to shift the Collectorate office  |  |  |
|     |                        |                          | from its existing location in the |  |  |
|     |                        |                          | Fort to somewhere else. Later     |  |  |
|     |                        |                          | the construction of               |  |  |
|     |                        |                          | Collectorate building in new      |  |  |
|     |                        |                          | site (Govt. land) was included    |  |  |
|     |                        |                          | in the subproject DPR.            |  |  |
| 2   | Page no. 3 and 11      | Page no. 7 and 15        | Though the, project               |  |  |
|     | Project Implementation | Project Implementation   | implementation period in the      |  |  |
|     | Schedule               | Schedule                 | SAR and DPR stage has been        |  |  |
|     |                        |                          | kept as 24 months only, the       |  |  |
|     |                        |                          | construction will begin in the    |  |  |
|     |                        |                          | fourth quarter of 2015 as per     |  |  |
|     |                        |                          | DPR, since the Construction of    |  |  |
|     |                        |                          | Collectorate building is to be    |  |  |
|     |                        |                          | taken up prior to Fort            |  |  |
|     |                        |                          | restoration works, so that        |  |  |

|    |   |  | administration works are not  |
|----|---|--|---|
|    |   |  |   |
|    |   |  | hampered due to restoration   |
|    |   |  | works in the Fort.  |
| 2  | Page no. 10 Project Components  | Page no. 14 Project Components   | Due to Changes in the scope as in 1 of this table   |
| 3  | Page no. 31<br>Location Impact:   | Page no. 33 Location Impact:   | Due to addition of site for proposed Collectorate building. However, the site is  |
|    | Land Acquisition and Resettlement   | Land Acquisition and Resettlement  | also Govt. land and does not entail any land acquisition/ resettlement. Only interdepartmental land transfer is needed, which is under process.             |
| 4  | Page no. 32  Design Impacts and Pre- Construction Impacts                             | Page no. 34, para 84 Measures to Mitigate Design Impacts                               | Due to change in scope as in 1 of this table.   |
| 5  | Page no. 33 para 82 Environmental Impacts- Pre construction, Construction & Operation | Page no. 35, para 89 Environmental Impacts- Pre construction, Construction & Operation | Due to change in scope as in 1 of this table.   |
| 6  | Page no. 45 Operation and Maintenance Impacts   | Page no. 48, para 118 Operation of Collectorate Office                                 | Due to change in scope as in 1 of this table.   |
| 7  | Table 14 page 64: Environmental Management Plan for Operation Phase                   | Table 17 page 68: Environmental Management Plan for Operation Phase                    | Due to change in scope as in 1 of this table.   |
| 8  | Table 16 page 66-67:<br>Environmental<br>Monitoring Plan                              | Table 19 page 71-72:<br>Environmental Monitoring<br>Plan                               | Due to change in scope as in 1 of this table.   |
| 9  | Table 18 page 72:<br>Environmental Budget   | Table 18 page 77: Environmental Budget   | Project was decided to be bid out in 02 packages, to avoid any delay on account of Collectorate shifting works. Hence budget has been separately earmarked. |
| 10 | Table 19 page 73-74: Consultation with Stakeholders                                   | Table 22 page 78-79: Consultation with Stakeholders                                    | Consultation documents have been updated.   |

|        | Due to addition in scope.  | Project Selection Criteria   | ANNEXURE-2 page 83 Compliance With Sub Project Selection Criteria (As Per EARF Table 6) | 11 |
|--------|--|--|---|----|
|        | Updated photographs of   | ANNEXURE -3b page 101  | ANNEXURE -3 page 92)  | 12 |
| ge     | Collectorate building page   | Site photographs and   | Site Photographs  |    |
|        | 98, 101 attached   | Correspondence   |   |    |
|        |  | documents  |   |    |
| tation | Due to continued consultat   | ANNEXURE-5 page 110-   | ANNEXURE-5  | 13 |
|        | and meetings regarding   | 112 Correspondence   | Correspondence  |    |
|        | shifting of Collectorate   | documents  | documents   |    |
|        | building   |  |   |    |
| ge     | Collectorate building page 98, 101 attached  Due to continued consultate and meetings regarding shifting of Collectorate | ANNEXURE -3b page 101 Site photographs and Correspondence documents  ANNEXURE-5 page 110- 112 Correspondence | ANNEXURE -3 page 92) Site Photographs  ANNEXURE-5 Correspondence                        |    |

#### **Environmental Assessment Document**

| Initial Environmental Examination (IEE)                 |
|---|
| Loan Number: 3223 IND                                   |
| Package No: UK/IDIPT-III/BHT/03 and UK/IDIPT-III/BHT/06 |

**Updated JUNE 2015** 

Infrastructure Development Investment Program for Tourism, Uttarakhand

Subproject – Restoration, Adaptive Reuse & Revitalization of Almora Fort

TRANCHE III

Prepared by the Government of Uttarakhand for the Asian Development Bank

This Initial Environmental Examination is a document of the borrower. The views expressed here in do not necessarily represent those of ADB's Board of Directors, Management, or staff, and may be preliminary in nature.

#### **ABBREVIATIONS**

ADB - Asian Development Bank BOD - Biological Oxygen Demand

BoQ - Bill of Quantities CO - Carbon monoxide

CPCB - Central Pollution Control Board
DSC - Design and Supervision Consultant

EA - Executing Agency

EAC - Expert Appraisal Committee

EARF - Environment Assessment and Review Framework

EIA - Environmental Impact Assessment EMP - Environment Management Plan

ES - Environmental Specialist

GC - General Conditions

KMVN - Kumaon Mandal VikasNigam

Gol - Government of India

GoUK - Government of Uttarakhand

IDIPT - Infrastructure Development Investment Program for Tourism

IEE - Initial environmental examination

INR - Indian Rupee

PUC - Pollution Under Control Certificate

MLD - Million Liters per day

MoEF - Ministry of Environment and Forests
MFF - Multi- Tranche Financing Facility
NGO - Non-Governmental Organization

NOx - Nitrogen oxide PD - Project Director

PIU - Project Implementation Unit

PM - Particulate Matter

PMU - Project Management Unit RPM - Respirable Particulate Matter

SC - Scheduled Castes SO2 - Sulphur dioxide

SPM - Suspended Particulate MatterSPS - Safeguards Policy Statement

ST - Scheduled Tribe

#### **Table of Contents**

| EXE        | ECUTIVE SUMMARYINTRODUCTION  |                 |
|------------|--|-----------------|
|            |  |                 |
|            | BACKGROUND   |                 |
|            | PURPOSE OF IEE   |                 |
| C.         | EXTENT OF IEE  | 9               |
| D.         | ENVIRONMENTAL REGULATORY COMPLIANCE                                  | 9               |
| E.<br>II.  | REPORT STRUCTURE DESCRIPTION OF PROJECT COMPONENTS                   | <b>12</b><br>13 |
| A.         | PROJECT OVERVIEW   | 13              |
| В.         | PRESENT STATUS   | 13              |
| C.         | PROJECT COMPONENTS   | 13              |
| D.<br>III. | PROJECT IMPLEMENTATION SCHEDULE  DESCRIPTION OF EXISTING ENVIRONMENT |                 |
| A.         | PHYSICAL ENVIRONMENT   | 16              |
| В.         | ECOLOGICAL RESOURCES   | 24              |
| C.         | SOCIAL AND CULTURAL RESOURCES  | 26              |
| D.<br>IV.  | ECONOMIC RESOURCES ENVIRONMENTAL IMPACTS AND MITIGATION MEASURES     |                 |
| A.         | LOCATION IMPACT - LAND ACQUISITION AND RESETTLEMENT                  | 33              |
|            | ENVIRONMENTAL IMPACTS- PRE CONSTRUCTION, CONSTRUCTION & ERATION      | 34              |
| V.         |  |                 |
| A.         | INSTITUTIONAL ARRANGEMENTS   | 50              |
| В.         | ENVIRONMENTAL MONITORING PLAN  | 71              |
| C.         | ENVIRONMENTAL MONITORING AND REPORTING                               | 72              |
| D.         | CAPACITY BUILDING  | 73              |
| E.         | ENVIRONMENTAL BUDGET   | 76              |
| VI.        | PUBLIC CONSULTATION AND INFORMATION DISCLOSURE                       | 78              |

| A. PROCESS FOR CONSULTATION FOLLOWED   | 78     |
|--|--------|
| B. FUTURE CONSULTATION AND INFORMATION DISCLOSURE                            | 79     |
| C. GRIEVANCE REDRESS MECHANISM   | 82     |
| <u>LIST OF TABLES</u>  |        |
| TABLE1: ENVIRONMENTAL REGULATORY COMPLIANCE FOR "RESTORATION OF ALMORA FORT" |        |
| TABLE 2: WATER QUALITY DATA OF KOSI RIVER ALMORA                             | 22     |
| TABLE 3: DISTRICT-WISE FOREST COVER, UTTARAKHAND                             | 24     |
| TABLE 4: NATIONAL PARKS IN UTTARAKHAND                                       | 25     |
| TABLE 5: WILDLIFE SANCTUARIES IN UTTARAKHAND                                 | 26     |
| TABLE 6: WILDLIFE / BIRDS IN ALMORA REGION                                   | 26     |
| TABLE 7: DISTRICT COMPARATIVE DEMOGRAPHIC SCENARIO 2001 AND 2                | 011 27 |
| TABLE 8: LAND USE PATTERN  | 28     |
| TABLE 9: INDUSTRIAL SCENARIO IN DISTRICT ALMORA                              | 29     |
| TABLE 10: AGRICULTURE SCENARIO IN ALMORA DISTRICT                            | 30     |
| TABLE 11: STATUS OF ANIMAL HUSBANDRY IN ALMORA                               | 30     |
| TABLE 12: SCOR ANALYSIS OF ALMORA  |        |
| TABLE 13: SUMMARY OF PRE-CONSTRUCTION MITIGATION MEASURES                    |        |
| TABLE 14: SUMMARY OF MITIGATION MEASURES DURING CONSTRUCTION                 |        |
| TABLE: 15 ENVIRONMENT MANAGEMENT PLAN FOR PRE-CONSTRUCTION                   | _      |
| TABLE16:ENVIRONMENT MANAGEMENT PLAN FOR CONSTRUCTION PHAS                    | SF 59  |

| TABLE 17: ENVIRONMENTAL MANAGEMENT PLAN FOR OPERATION PHASE 68                     |
|--|
| TABLE 18: SITE AND ACTIVITY-SPECIFIC PLANS/PROGRAMS AS PER EMP 69                  |
| TABLE 19: ENVIRONMENTAL MONITORING PLAN  |
| TABLE20: TRAININGMODULES FOR ENVIRONMENTALMANAGEMENT74                             |
| TABLE21: ENVIRONMENTAL BUDGET  |
| TABLE 22:CONSULTATIONS WITH STAKEHOLDERS78   |
| <u>LIST OF ANNEXURES</u>   |
|  |
| ANNEXURE-1: RAPIDENVIRONMENTALASSESSMENT(REA)CHECKLIST83                           |
| ANNEXURE-2: COMPLIANCE WITH SUB PROJECT SELECTION CRITERIA (AS PER EARF TABLE 6)88 |
| ANNEXURE-3-A: PROJECT LOCATION MAP96   |
| ANNEXURE- 3-B : SITE PHOTOGRAPHS99   |
| ANNEXURE 4-A: NOC FROM DISTRICT ADMINISTRATION102                                  |
| ANNEXURE 4-B: CORRESPONDENCE WITH DISTRICT ADMINISTRATION                          |
| ANNEXURE-5: MINUTES OF MEETING   |

#### **CURRENCY EQUIVALENTS**

(as of 13<sup>th</sup> November 2013) Currency unit – Indian rupee (Rs) Rs1.00 = \$0.015738 \$1.00 = Rs 63.5400

#### **WEIGHTS AND MEASURES**

dB (A) A-weighted decibel
ha - hectare
km- kilometer
km²- square kilometer
μg- microgram
m - meter
m²- square meter
MW (megawatt) - megawatt

In preparing any country program or strategy, financing any project, or by making any designation of or reference to a particular territory or geographic area in this document, the Asian Development Bank does not intend to make any judgments as to the legal or other status of any territory or area.

#### **EXECUTIVE SUMMARY**

- 1. **Project Background**: The Infrastructure Development Investment Program for Tourism (IDIPT) envisages an environmentally and culturally sustainable and socially inclusive tourism development, in the project states of Himachal Pradesh, Punjab, Tamil Nadu and Uttarakhand, delivered through a multi-tranche financing facility (MFF)modality. Project 3 includes the states of Uttarakhand and Tamil Nadu.
- 2. This Initial Environmental Examination (IEE) has been prepared for "Restoration, Adaptive Reuse & Revitalization of Almora Fort", Uttarakhand under **Tranche 3.** This IEE has been prepared based on the primary, secondary data, field visits, project design, reconnaissance survey and public and stake holder's consultations
- 3. **Executing and Implementing agencies**. A Project Management Unit (PMU) is established in Dehradun for the overall project management and Project Implementation Unit (PIU) is established at Bhimtal. Safeguards Specialists within the PMU is responsible for implementation of the resettlement and environmental safeguard provisions. Project Management Consultants (PMC) and Design and Supervision Consultants (DSC) provide assistance to the PMU/PIUs in project implementation. Within the PMC team Safeguards Specialists provide overall management of environmental and social issues, and will provide technical support to the PMU including implementation of the environmental and resettlement issues according to ADB's requirements, and assist in monitoring impacts and mitigation measures associated with sub- projects. The Safeguards Specialist of the DSC team is responsible for preparation of the Environmental Assessment documents in line with the EARF and supervises the implementation of the EMP provisions in the various sub-projects.
- 4. The DSC Safeguards Specialist will support environmental management functions including updating sub-project IEEs in respect to environmental management plans, assisting in preparing IEEs, and assist in monitoring impacts and mitigation measures associated with sub- projects. He/she will be required to include mitigation measures in designs where appropriate, and to specify other measures in construction contracts. Contractors will be required by their contracts to implement all specified mitigation, monitoring, and reporting assigned to contractors as presented in sub-project IEE.
- 5. **Categorization.**The subproject has been categorized as B as per the ADB's Safeguard Policy Statement (2009). The subproject is not covered in the ambit of the EIA notification 2006 and EIA Act 2009. As a result, the categorization, and the subsequent environmental assessment and clearance requirements, either from the state or the Government is not triggered. Clearance requirements in the "Construction Phase" will be taken by the project contractor.
- 6. **Subproject Scope.** This sub-project envisages the historic precincts' preservation; re-use strategy and revitalization of the Almora Fort or Malla Mahal for a substantial enhancement of the visitor experience. The project aims at restoring a heritage site to its ancient grandeur, revitalizing it in order to give the visitor a glimpse into the region's history and this significant site. The sub-project firmly believes that Almora, with its unique Himalayan locales and cultural heritage has the potential of emerging as the CULTURAL CAPITAL of the state, giving a boost to the experiential tourism aspect of not just the

Himalayas but the entire country. At present District Collectorate office is located within the Fort, therefore before starting of work within the Fort, shifting of the Collectorate office is required. It was decided that construction of new Collectorate building is also taken up under the sub project and accordingly the deviation in scope from SAR to DPR stage.

#### 7. The proposed sub-project seeks to:

- Provide opportunities for the international visitor to develop an understanding ofKumaoni culture and ways of living in a historic setting.
- Enhance substantially the visitor experience through an interpretation of history.
- Allow the visitor to experience the Himalayas through participation in folk ways ofliving, viz. making craft objects, singing, dancing, and sampling local cuisines.
- Substantially improve basic infrastructure and services on site.
- Build capacities among frequently marginalized stakeholders: women entrepreneurs and practitioners of dying art forms, especially folk music, dance and crafts.
- Create opportunities for marketing of local organic produce and art objects.
- Improve last mile connectivity between natural and cultural edifices; and strengthen capacity of sector agencies and local communities for planning, development, management, and marketing of tourist/pilgrims destinations and attractions.
- 8. **Description of the Environment.** Subproject components are located in the Almora town area, amidst settlements and there is no natural habitat at these sites. The components proposed for restoration, is not Central or State Protected Monument'. There are no protected areas, wetlands, mangroves, or estuaries in or near the subproject locations.
- 9. Almora is located at 29.62°N, 79.67°E. It has an average elevation of 1,651 m (5,417 feet). It is located on a ridge at the southern edge of the Kumaon Hills of the Himalayan Ranges, in the shape of a horse saddle shaped hillock, thick forests of pine and fir trees surround it. Flowing alongside the city are rivers Kosi (Kaushiki) and Suyal (Salmale). Snowcapped Himalayas can be seen in the background. Almora got its name from Kilmora, a short plant found in the region, which was used for washing the utensils of the Katarmal Temple. The people bringing Kilmora were called Kilmori and later Almori, and the place came to be known as Almora after them.
- 10. **Environmental Management.** An Environmental Management plan (EMP) outlining the specific environmental measures to be adhered to during various phases of implementation of the subproject has been prepared. The subproject will conform to all Government regulations, policies, and standards, as well as Asian Development Bank's Safeguard Policy Statement (2009). It includes (i) mitigation measures for environmental impacts during construction (ii) an environmental monitoring program, and the responsible entities for mitigating, monitoring, and reporting; (iii) public consultation and information disclosure; and (iv)grievance redress mechanism. A number of impacts and their significance will be reduced by amending the designs. The EMP will be included in civil work bidding and contract documents.
- 11. **Consultation, Disclosure and Grievance Redress.** Stakeholder discussion has been conducted during the SAR& DPR stage. The project concept incorporates the views of

primary and secondary stakeholders including local communities and local officials who were all meaningfully consulted during IEE and project preparation. The consultations are an ongoing process, addressing public concerns in every stage of the project. The IEE will be made available at public locations in the town and will be disclosed to a wider audience via the ADB and Uttarakhand Tourism Development Board websites. The consultation process will be continued and expanded during DPR preparation and project implementation to ensure that stakeholders are fully engaged in the project and have the opportunity to participate in its development and implementation.

- 12. The citizens of Almora will be the major beneficiaries of the project. The most noticeable net environmental benefits to the population of the town will be positive and large as the proposed subproject will restore the architectural significance of the deteriorating Forts and temples and encourage the adaptive reuse.
- 13. **Monitoring and Reporting:** The PMU, PIU, PMC and DSC will be responsible for environmental monitoring. The PIU with support from the DSC will submit quarterly monitoring reports to the PMU. The PMU will consolidate the quarterly reports and will send it to ADB. ADB will post the environmental monitoring reports on its website.
- 14. **Implementation Schedule**: Construction of all elements will begin in the fourth quarter of the year 2015, and work will be completed in the end of 2017. Total implementation period is 24 months.
- 15. **Conclusions and Recommendations.** The initial environmental examination ascertains that the sub-project is unlikely to cause any significant environmental impacts. No additional studies or need of undertaking detailed EIA is envisaged at this stage. The proposed subproject is not expected to have any impact on the Forests and does not involve any tree cutting as the scope of the work is restricted to restoring a heritage site to its ancient grandeur, revitalizing it in order to give the visitor a glimpse into the history of this significant site. As a part of restoration of the Fort, the Collectorate building presently housed in the Fort, is to be shifted prior to Fort works. The site for the proposed building has been selected and accordingly the Construction of Collectorate building forms part of the DPR of this sub project. There are no rare, threatened, and endangered species (flora and fauna) within the subproject corridor of impact. The Executing Agency shall ensure that Environment Management Plan and Monitoring Program are included in Bill of Quantity (BOQ) and forms part of bid document and civil works contract. The same shall be revised (if necessary) during project implementation and with approval of ADB.
- 16. The environmental impacts of the project are therefore not significant and at Category B level, as per ADB's Safeguards Policy Statement. The specific measures stated in the EMP will address the adverse environmental impacts due to the subproject. Impacts are readily mitigated through careful siting, specific selection criteria for procuring contractors with demonstrated experience in heritage restoration projects; execution of proven mitigation measures during the design; and adoption of good engineering practices during construction and implementation. A detailed monitoring plan prepared as part of this IEE will further mitigate negative environmental impacts during implementation.

#### I. INTRODUCTION

#### A. Background

- 1. The India Inclusive Tourism Infrastructure Development Project (IITIDP) envisages an environmentally and culturally sustainable and socially inclusive tourism development, in the project states of Himachal Pradesh, Punjab, Tamil Nadu and Uttarakhand. The expected Impact of the Project in the four states is sustainable and inclusive tourism development in priority State tourism sub circuits divided into marketable cluster destinations that exhibit enhanced protection and management of key natural and cultural heritage tourism sites, improved market connectivity, enhanced destination and site environment and tourist support infrastructure, and enhanced capacities for sustainable destination and site development with extensive participation by the private sector and local communities.
- 2. As per the Asian Development Bank's (ADB) Environmental Assessment Guidelines, and in line with the Environment Assessment and Review Framework (EARF) for the project, all the sub-project components for the proposed works are categorized as 'B' and an Initial Environmental Examination (IEE) prepared. This Initial Environmental Examination (IEE) assesses the "Restoration, Adaptive Reuse & Revitalization of Almora Fort" and specifies measures towards addressing the impacts. The IEE is based on a review of sub-project site plans and reports; field visits, collection of secondary data to characterize the environment and identify potential impacts; and interviews and discussions with stakeholders.
- 3. Based on the findings of the IEE, an Environmental Management Plan (EMP) has been prepared, outlining the specific environmental measures to be adhered to during various phases implementation of the sub project. This EMP forms part of the contract document, and shall enable integration of environmental provisions / management measures in the Contract Document.

#### B. Purpose of IEE

- 4. The present proposal is aimed at "Restoration, Adaptive Reuse & Revitalization of Almora Fort". The environmental impacts due to this subproject are mostly related to the location of the site, construction impacts and Operation & Maintenance as well. Therefore, as per the Asian Development Bank's (ADB) Environmental Assessment Guidelines, the sub-project components are categorized as 'B' and this IEE has been carried out. This IEE provides mitigation measures for impacts related to location and design, construction, operation, and maintenance.
- 5. The purpose of the study is to identify the environmental issues to be considered at project planning and design stage, assess environmental consequences due to project intervention and suggest mitigation measures to minimize the adverse environmental impacts, if any, associated with construction and operation.
- 6. Initial environmental examination (IEE) has four basic objectives; (i) asses relevant potential impacts and risks associated with the proposed sub project (ii) assess the

compliance with ADB environmental safeguard requirements and applicable environmental laws, (iii) incorporate mitigation measures in the project design and preparation of Environmental Management & Monitoring Plan (EMMP).

#### C. Extent of IEE

7. The IEE covers all activities proposed under the project and described in the DPR. The immediate project impact is considered as 500 meters from the site. However, the study area is considered up to 50 km for larger analysis of land use and other environmental features.

#### D. Environmental Regulatory Compliance

8. The realm of environmental regulations and mandatory requirements for the proposed subprojectisshownin**Table1**. The Environmental Impact Assessment (EIA) notification, 2006 by the Ministry of Environment and Forests (MoEF, GoI) specifies the mandatory environmental clearance requirements. Accordingly, all projects and activities are broadly categorized into two categories<sup>1</sup> - Category A and Category B, based on the spatial extent of potential impacts and potential impacts on human health and natural and man-made resources. Given that the sub-project is not covered in the ambit of the EIA notification, Environment clearance requirements from the GoI. are not triggered.

Table1: Environmental Regulatory Compliance for "Restoration, Adaptive Reuse & Revitalization of Almora Fort"

| Applicability of Acts/Guidelines               | ComplianceCriteria                            |  |  |
|--|---|--|--|
| The EIA notification, 2006 (and its            | These sub-projects are not covered in the     |  |  |
| subsequent amendments in 2009) provides        | ambit of the EIA notification as they are not |  |  |
| for categorization of projects into category A | covered either under Category A or Category   |  |  |
| and B, based on extent of impacts.             | B of the notification. As a result, the       |  |  |
|  | categorization, and the subsequent            |  |  |
|  | environmental assessment and clearance        |  |  |
|  | requirements, either from the state or the    |  |  |
|  | Gol is not triggered.                         |  |  |
| The Water (Prevention and Control of           | The Act and Rules outlines the activities     |  |  |
| Pollution) Act 1974 and The Water              | which are prohibited on account of their      |  |  |

<sup>&</sup>lt;sup>1</sup>All projects or activities included as Category 'A' in the Schedule, including expansion and modernization of existing projects or activities and change in product mix, will require prior environmental clearance from the Central Government in the Ministry of Environment and Forests (MoEF) on the recommendations of an Expert Appraisal Committee (EAC) to be constituted by the Central Government for the purposes of this notification; All projects or activities included as Category 'B' in the Schedule, including expansion and modernization of existing projects or activities as specified in sub paragraph (ii) of paragraph 2, or change in product mix as specified in sub paragraph (iii) of paragraph 2, but excluding those which fulfil the General Conditions (GC) stipulated in the Schedule, will require prior environmental clearance from the State/Union territory Environment Impact Assessment Authority (SEIAA). The SEIAA shall base its decision on the recommendations of a State or Union territory level Expert Appraisal Committee (SEAC) as to be constituted for in this notification. In addition, General Condition (GC) of the notification specifies that any project or activity specified in Category 'B' will be treated as Category A, if located in whole or in part within 10 km from the boundary of: (i) Protected Areas notified under the Wild Life Protection) Act, 1972, (ii) Critically Polluted areas as notified by the Central Pollution Control Board from time to time, (iii) Notified Eco-sensitive areas, (iv) inter-State boundaries and international boundaries.

<sup>\*</sup>Considering the historical significance of the site, guidelines as per the Act have been considered in the design components

| (Prevention and Control of Pollution) Rules 1975                                     | potential to cause water pollution. Pollution from various sources in this sub project |
|--|--|
|  | needs to be controlled as per this Act and Rules                                       |
| The Ancient Monuments and Archaeological   | Project site is not an ASI protected monument  |
| Sites and Remains Act, 1958, and the rules,  | •  |
| 1959 provide guidance for carrying out   |  |
|  | Therefore, the provisions of the act does  |
| construction and reuse in and around the   | not apply  |
| protected monuments. * Forest (Conservation) Act, 1980                               | This act provides guidelines for   |
| Torest (Conservation) Act, 1900  | conservation of forests and diversion of   |
|  | forest land for non-forest use. The law also   |
|  | states guidelines on de-reservation of   |
|  | various categories of forests for diversion of   |
|  | forest land. This law describes the penalty  |
|  | for contravention of the provisions of the   |
|  | Act. Restriction on the de-reservation of  |
|  | forests or use of forest land for non-forest   |
|  | purpose.   |
|  | For felling of the tree if any permission  |
| The Indian Wildlife (Distortion) Act 1070  | will be required from local forest office.   |
| The Indian Wildlife (Protection) Act, 1972, amended 1993, The Wild Life (Protection) |  |
| Amendment Act, 2002  | matters connected therewith or ancillary or  |
|  | incidental thereto. It also states the norms   |
|  | for hunting of wild animals, prohibition of  |
|  | picking, uprooting, etc., of specified plants.   |
|  | The Act deals with the declaration of area   |
|  | as Sanctuary, National Park, and closed  |
|  | area and also states the restriction of  |
|  | entries in the sanctuary. There is no  |
|  | protected area in the vicinity.  |
| Biodiversity Act 2002 and Biodiversity   | Not Applicable for the subproject  The Act essentially controls access to              |
| Rules 2004   | indigenous biodiversity resources. No  |
| 1.0.00   | agency/person referred to in sub-section (2)   |
|  | shall, without previous approval of the  |
|  | National Bio-diversity Authority, obtain any   |
|  | biological resource occurring in India or  |
|  | knowledge associated thereto for research  |
|  | or for commercial utilization or for bio-  |
|  | survey and bio-utilization.  Not Applicable for the subproject                         |
| ADB Safeguard Policy Statement, (2009)   | Categorization of subproject components  |
|  | into A, B or C and developing required level   |
|  | of environmental assessment for each   |

| com  | mponent.     |      |              |      |    |    |
|------|--------------|------|--------------|------|----|----|
| Sub  | b-project    | is   | Category     | В    | as | no |
| sign | ınificant im | pact | s are envisa | aged | l. |    |

- 9. It can be observed from **Table 1**, that the proposed sub-project does not need to go through a full-scale environmental assessment process; as the scale of impacts and categorization of the sub-project components will not require clearances from Competent Authorities. The environmental screening (REA Checklist annexed- **Annexure 1**) reveals that the most significant environmental impacts are anticipated during construction phase and are generic to construction activities. However since it is a conservation project aimed at adaptive reuse of the building, not much impacts are anticipated even in the operation phase. Only for additional project component like construction of new Collectorate building, which involves straightforward construction, impacts generic to the construction activities have been considered during the construction phase and the maintenance of water supply, sanitation conditions, solid waste managementare consideredat operation phase. All impacts are site specific, reversible and can be readily mitigated supporting a Category B classification.
- 10. The sub-project selection criteria specify that all project activities pertaining to "Restoration, Adaptive reuse & Revitalization of Almora Fort" are in accordance with the provisions of the prevalent local norms and guidelines. Compliance with sub project clearance criteria is attached as **Annexure 2**.
- 11. It can be observed from **Table1**, that the proposed sub-project does not need to go through a full-scale environmental assessment process; as the scale of impacts and categorization of the sub-project components will not require clearances from Competent Authorities. The sub-project selection criteria specify that all project activities pertaining to "Restoration, Adaptive reuse & Revitalization of Almora Fort" are in accordance with the provisions of Conservation and Adaptive Reuse of buildings with cultural and architectural significance.
- 12. The ADB guidelines, stipulate addressing environmental concerns, if any, of a proposed activity in the initial stages of Project preparation. For this, the ADB Guidelines categorizes the proposed components into categories (A, B or C) to determine the level of environmental assessment required to address the potential impacts <sup>2</sup> .The Rapid Environmental Assessment (REA) checklist method was followed as per ADB requirement to assess the potential impacts of the project in planning phase. The REA checklist is attached as **Annexure 1** with this report. The subproject has been categorized as B as per the ADB's Safeguard Policy Statement (2009). Accordingly this IEE has been prepared to address the

<sup>&</sup>lt;sup>2</sup>AsperSPS 2009projectsare assignedto one ofthefollowingfour categories:(i)CategoryA.Aproposed projectis classifiedascategoryAifitislikelytohavesignificantadverseenvironmentalimpactsthatareirreversible,diverse, orunprecedented.Theseimpactsmayaffect an arealarger thanthe sitesorfacilitiessubjecttophysicalworks.An environmentalimpact assessment isrequired.(ii)CategoryB.Aproposedprojectis classifiedascategoryBif its potential adverseenvironmentalimpacts are lessadverse thanthose ofcategory Aprojects.These impacts aresite-specific,fewifanyofthemareirreversible,andinmostcasesmitigationmeasurescanbedesignedmorereadily thanfor categoryAprojects.Aninitialenvironmentalexaminationisrequired.(iii)CategoryC.Aproposed project is classifiedas categoryCif it is likelytohaveminimal or no adverse environmentalimpacts.No environmental assessmentisrequiredalthoughenvironmentalimplicationsneedtobereviewed(iv)CategoryFl.Aproposed projectisclassified ascategoryFl if itinvolvesinvestmentofADB fundstoor througha Fl(paras. 65-67).

potential impacts, in line with the recommended IEE content and structure for Category B project. The IEE has been conducted based on Primary and secondary sources of information and field reconnaissance surveys and stakeholder consultations. Evaluation has been conducted for impacts likely to accrue due to due to location, design & preconstruction, construction, operation & maintenance. An EMP outlining the specific environmental measures to be adhered to during implementation of the subproject has been prepared.

#### E. Report Structure

13. This Report contains eight (8) sections including this introductory section: (i) Introduction; (ii) Description of Project Components; (iii) Description of the Existing Environment; (iv) Environmental Impacts and Mitigation Measures; (v) Environmental Management Plan; (vi) Public consultation & Information Disclosure; (vii) Findings and Recommendations; and (viii) Conclusions

#### II. DESCRIPTION OF PROJECT COMPONENTS

#### A. Project Overview

- 14. The project "Restoration, Adaptive-Reuse and Revitalization of Almora Fort" is located in Almora town which is the district headquarters of the same name. Almora, a picturesque district in the Kumaun region, East of Uttarakhand in India, with a breathtaking panoramic view of Himalayas, summons tourists worldwide to its alluring grandeur of natural beauty. Famous for its rich cultural heritage, unique handicrafts, sumptuous cuisine and magnificent wildlife, coupled with an easy accessibility, Almora promises its tourists a visit full of fun and unforgettable moments.
- 15. The district of Almora is located in the province of Uttarakhand in India. In east lies the district of Pithoragarh bordering Tibet and its west lies the district of Garhwal and its North lies the newly created district of Bageshwar and in the South there is the district Nainital.
- 16. Almora is a unique destination that has the capacity of emerging as the CULTURAL CAPITAL of Uttarakhand State. The natural, cultural and mythical environments coalesce here to create a unique experience. The objective of the project is to highlight these aspects in order to project Almora town as a hub of cultural activities, the arts and sustainable tourism promotion.

#### B. Present status

17. The Fort's historical importance and its image as an important part of the town's historic evolution is practically unknown to visitors. This loss of historical and cultural association to the fort by the local community is largely due to absence of appropriate usage of this historical edifice. The current usage of the fort as the DM office is not conducive to create and sustain any form of cultural or historical association with the Fort.

#### **Identified Problem areas:**

- Unregulated Development
- Lack of re-use strategy
- Insensitive Additions and Repairs to the Site
- Complete Absence of Solid Waste Management and Disposal Systems
- Absence of Sanitation
- Lack of Accessibility
- Uncertainty in Terms of Long Term Site Management
- Lack of Balance between Natural Surroundings and Historic Elements
- Inadequate Parking Facilities and Walkways
- Lack of Tourism Infrastructure
- Potential of the Site is Under-utilized.

#### C. Project components

18. The scope of this sub-project includes:

- ✓ Restoration of the historic sites: Ram Shila Temple dating back to 1588 AD and the MallaMahal or Fort Nanda Devi Complex built in 1815 AD as a precinct.
- ✓ Revitalization of the entire precinct as a public space for experiencing regional history and culture, through creation of facilities such as:
  - Develop cobblestone-paved courtyard as a performance arena.
  - Create a Museum on Kumaon culture in the main building of the MallaMahal or Fort Nanda Devi Complex.
  - Create a Himalayan Art Gallery and nature interpretation centre in the Rani Mahal, adjacent to the main palace.
  - Restoration of the historic site of Ram Shila Temple with proper access and signage, retaining the sanctity of this significant edifice.
  - · Creation of craft demonstration areas.
  - Removal or concealment some buildings through strategic landscaping and foliage coverage of structures that create visual discord.
  - Create facilities in Almora town to enable it to emerge as a complete destination with secular spaces for experiencing the true flavor of Kumaon.
  - Improve all three access routes that lead up to the fort and temple leading to enhanced experience quality through interpretation and upgraded visitor amenities and facilities inand around the historic/archaeological site.
  - Improve accessibility, especially for the differently-abled through the setting up of elevators leading from bazaar to the site.
  - Improve basic tourist and pilgrim facilities and amenities in this significant area of cultural/ historical/ archaeological significance, as well as satellite sites.
  - Improve vehicular parking facilities for about 100 vehicles in the town.
  - Improve basic environmental services like solid waste and wastewater management.
  - Enforcing strict standards for cleanliness and upkeep. Improving tourist/visitor
    wayside amenities along approximately 10 km of vehicular access.Improving
    access to places of tourist/pilgrim attractions by way of 15 km of connectivity
    improvement inclusive of roadside infrastructure and improved signage.
  - Improving about 4 km of pedestrian environment connecting the heritage site with different parts of the town.
  - Assisting in building capacities among rural communities and their organizations engaged in the practice of local art forms, craft and village based organic produce.
  - Training around 50 individuals, giving equal opportunities to women and marginalized communities in heritage management and tourism-related skills in Almora town.
  - Developing a range of master plans and management plans for environmental protection, restoration and development guidelines, cultural preservation, and pilgrim management.

- Assisting in building the institutional/organizational capacities of various sector agencies in management, reuse and revitalization of the historic site.
- Printing and publishing of literature on the site and its nearby attractions, for instance books, brochures, guide maps etc.
- Effective social media management.
- Creating a dedicated website leading to more effective web presence for the region.
- ✓ Construction of District Collectorate office at Porth Free Estate near Vikas Bhavan. Construction of G + 4 building with office, parking within Govt. land of 2500 sq m
  - For Almora District Collectorate office, Water supply is planned from municipal water supply and water line will be extended to proposed building. Water consumption for office use is for approx. 500 persons – 22500 Liter. Consumption is estimated as per NBCC norms of 45 liter/ capita
  - For waste water discharge 4 nos. of soak pit and 4 nos. of septic tank will be utilized. In total 64 nos. of toilet, 32 nos. urinal will be constructed
  - Solid waste will be stored in bins of adequate capacity from where collection will be done by Almora Nagar Palika
- 19. Location map of project site is shown in **Annexure 3A.** Site photographs and proposed Collectorate building architectural view is attached as **Annexure 3B.**

#### D. Project Implementation Schedule

20. Construction of all elements will begin in the fourth quarter of the year 2015, and work will be completed in the end of 2017. Total implementation period is 24 months. It was decided before starting of work within the Fort, Collectorate office will be shifted to new building. Accordingly sub package for construction of Collectorate building will be taken up prior to Fort restoration works. **Figure 1** shows the Almora Fort Adaptive Reuse & Restoration Plan.



Figure 1: Almora Fort: Adaptive Reuse & Restoration Plan

#### III. DESCRIPTION OF EXISTING ENVIRONMENT

#### A. PHYSICAL ENVIRONMENT

21. This section presents a brief description of the existing environment, including its physical, ecological resources, and socio-economic condition. Broad aspects on various environmental parameters such as geography, climate and meteorology, physiography, geology, seismology, ecology, socio-cultural and economic development parameters is listed. Secondary information has been compiled from IEE prepared for Restoration/reconstruction work of Almora under Uttarakhand Emergency Assistance Project, prepared by the State Disaster Management Authority, Uttarakhand for ADB.

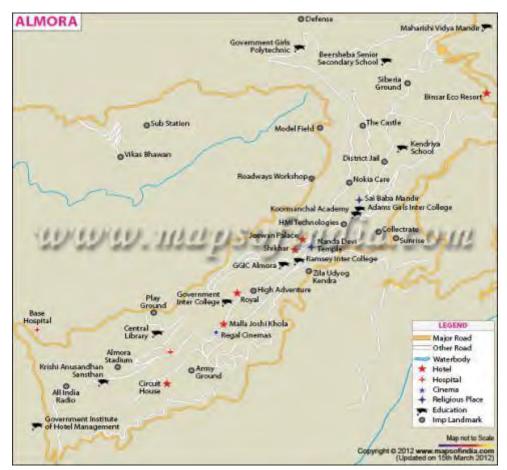


Figure 2: Map of Almora

#### Geography

22. Uttarakhand lies in the northern part of India amidst the magnificent Himalayas and dense forests. The State is bordering Himachal Pradesh in the north-west and Uttar Pradesh in the South and shares international borders with Nepal and China. The State is comprised of 13 districts, these are; Pithoragarh, Almora, Nainital, Bageshwar, Champawat, Uttarkashi, Udham Singh Nagar, Chamoli, Dehradun, Pauri, TehriGarhwal, Rudraprayag, and Haridwar. Geographically, the state lies in the northern Himalayas between 28°53'24" to 31°27'50"

North latitude and 77°34'27" to 81°02'22" East longitude. The State has an area of 53,483 sq. km. and a population of about 10.08 million as per census 2011.

23. Uttarakhand is divided into two regions and also called administrative divisions, basically following terrain: the Kumaon and Garhwal. The Kumaon division located southeast of the state and composed of Almora, Bageshwar, Champawat, Nainital, Pithoragarh, and Udham Singh Nagar. The Kumaon region is part of the vast Himalayan track and and the sub-mountains of Terai and Bhabhar. The region is drained by Gori, Dhauli, and Kali from the Tibetan mountains, and Pindari and Kaliganga which ultimately joins Alaknanda River. The Garwhal division is composed of Chamoli, Uttarkashi, Rudraprayag, TehriGarhwal, Pauri, Dehradun, and Haridwardistricts.and is entirely on rugged mountain ranges dissected by valley, and deep gorges. The Alaknanda River, the main source of the Ganges, traces its headwaters in this region. **Figure 3** shows districts of Almora.



Figure 3: Districts of Uttarakhand

24. Almora is located at 29.62°N 79.67°E. It has an average elevation of 1,651 metres (5,417 feet). It is located on a ridge at the southern edge of the Kumaon Hills of the Himalaya range. In the shape of a horse saddle shaped hillock, it is surrounded by thick forests of pine and fir trees. Flowing alongside the city are rivers of Koshi, (Kaushiki), and Suyal (Salmale). The snow-capped Himalayas can be seen in the background. Almora got its name from "Kilmora" a short plant found nearby region, which was used for washing the utensils of Katarmal Temple. The people bringing Kilmora were called Kilmori and later "Almori"and the place came to be known as "Almora".

- 25. District of Almora is divided into nine tehsils namely: Almora, Bhikiyasain, Chaukhutiya, Dwarahat, Jainti, Ranikhet, Someshwar, and Sult. District Pauri, Nainital, Champawat, Pithoragarh, Bageshwar and Chamoli share its boundary with district Almora.
- 26. The eastern portion of the horse saddle shaped ridge is known as Talifat and the western one is known as Selifat. The market is at the top of the ridge where these two, Talifat and Selifat jointly terminate. The market is 1.25 miles (2.01 km) long and is covered with stone slabs. The place of the present cantonment was formerly known as Lalmandi. Presently where the collectorate exists, the 'Malla Mahal' (Upper Court) of Chanda kings was located. The site of present District Hospital used to be 'TallaMahal' (Lower Court) of Chand rulers.
- 27. The Almora district lies in the lesser Himalayas which are the youngest mountains in the world and the land mass now covered by them was occupied by the great geosynclinal Tethys sea during the Mesozoic period. The rocks of the area belong to Crystalline zone. The area is broadly divided in two distinct lithologic units (a) Sarju Formation of valdiya of lohaghat, represented by the porphyries , migmatites, schists and micaceousquartzites (b) Duram Formation represented by Quartites

Physiography

28. The district is naturally landscaped with high Himalayan Mountains, snow capped peaks, passes, valleys, alpine meadows, forests, waterfalls, perennial rivers, glaciers and springs. Topographically the district is having rugged terrain with high cliffs and intersected by deep gorges. The district Almora is located at 29.62°N 79.67°E. It has an average elevation of 1,651 metres (5,417 feet). It can be observed that the district acquires a shape of a horse saddle shaped hillock. Surrounded by the thick forests of pine and fir trees, the city is neighbored rivers of Kochi and Suyal. The total area of district is 3082 Square Kilometer (1190 square mile) and it is surrounded by other districts of Uttaranchal including Bageshwar and Chamoli on Northern side, Pauri on western side, Nainital on southern and Champawat on the eastern side.

Soil

29. The soils of Almora district can be broadly classified into two types, viz. Soils of Lesser Himalaya and Soils of Greater or Central Himalaya. Majority of the area is covered by the first type.

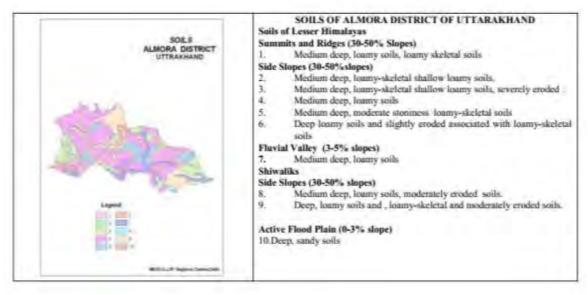


Figure- 4:Soil Map of Almora

#### Climate and Meteorology

- 30. The State of Uttarakhand, with its highly varying topographical features, has shown an equally variegating climatic condition, ranging from hot and sub-humid tropical in the southern tract of Bhabhar to temperate, cold alpine, and glacial climates in the northern part of the high mountains.
- 31. Factors such as elevation, slope, and proximity of glaciers, forests, mountain peaks and ridges and direction of mountain ranges together give rise to the great variations in climatic conditions, even at the micro and local levels. These attributes determine the temperature range as well as the distribution of rainfall.
- 32. However, the overall climatic condition in the State is governed by the southwest monsoon. It has a sub-tropical to temperate climate, with three pronounced seasons; summer, winter, and monsoon. The hilly terrain of the Himalayan region has snow cover and is severely cold during winter with snowfall normally occurring during the months of December to March. The climatic conditions of Almora, Nainital, Pithoragarh, Chamoli, Uttarkashi, Pauri and Dehradun are humid and cold.
- 33. As for the project areas within the Kumaon region, such districts come under the Intermediate Zone, a zone with moderate temperature and moderate rainfall. The climate is cool, dry and delightfully healthy. The weather normally follows the seasonal rhythm during the year. The temperature ranges from 0°C to 10°C in winter and from 8°C to 33°C in summer season. The average rainfall ranges in between 55 to 212 cm. The winter season beginning from November to the end of February is cold and the summer period from March to June is hot. The rainy season from July to September is warm and moist.
- 34. The entire district can be grouped into the following climatic zones:

| Climatic Zone       | Elevation (in meters) |
|---------------------|-----------------------|
| 1. Cool Temperature |                       |
| a. Moist            | 600 - 1200            |

## Infrastructure Development Investment Program for Tourism, Uttarakhand (IDIPT: Tranche 3) Initial Environmental Examination Restoration, Adaptive Reuse & Revitalization of Almora Fort

| b. Dry  | 1000 - 2500  |
|---|--------------|
| c. Sub Tropical Valley  | 600 - 1200   |
| 2. Cold Temperature   |              |
| a. Cold Temperature in higher location (snow bound) (5 - 6 month) | 3000 - 3500  |
| b. Cold Temperature (lower valley)                                | 2000 - 3000  |
| 3. Alpine Zone  |              |
| Perpetually snow covered area                                     | 3500 - above |
| 4. Dry Climate  |              |
| Trans Himalayan Alpine Valley of rain shadow location             | 2500 - 3500  |

- 35. **Seasons:-** The entire district exhibits four broad seasons in the year
  - a. Winter or Cold weather (mid Dec. mid March)
  - b. Summer or hot weather (mid March mid June)
  - c. Season of general rains (South West monsoon season)
  - d. Season of retreating monsoon (mid September to mid November)
- 36. Temperature:-There is no meteorological observatory in the district. The following account of the climate is based mainly on the records of the observations in the neighboring districts where similar meteorological conditions prevail. Variations in temperature are considerable from place to place and depend upon elevation as well as aspect. As the insolation is intense at high altitudes, in summer temperatures are considerably higher in the open than in the shade. Pools of cold stagnant air in the valleys cause the diurnal range of temperature to be considerable. January is the coldest month with a mean maximum temperature of 10°C at heights of 2,000 m. above sea-level, the mean minimum temperature being at the freezing point (0°C.). Cold waves in the wake of western disturbances often make winter conditions rigorous. With the onset of the monsoon towards the end of June, day temperatures fall by about 3° to 5°C and with its withdrawal towards the third or fourth week of September, day and night temperatures begin to decrease, slowly in the beginning but more rapidly after October till January, which is the coldest month. Temperatures are much lower at higher altitudes towards the north. In association with western disturbances, precipitation at higher altitudes occurs mostly in the form of snow which accumulates considerably in the valleys. After January, both day and night temperatures begin to rise, rapidly from March to May or June, the last two being the warmest months. The mean daily maximum temperature is about 25°C. at stations 2,000 m. above sea-level, 15° to 18°Cat 3,000m above sea-level and still lower at higher elevations. With the incursion of the monsoon current, temperatures fall slightly by about 3° to 5°C. The annual temperature of the district vary between 28 °C to -2 °C. In summer it varies between 28-12 °C and in winter 15 to -2°C.
- 37. **Rainfall:** As per Agriculture Contingency Plan of district Almora, the annual rainfall in district is 1054 mm. The district observes 905.5 mm of rain in SW monsoon period from June to September, 46.4 mm during North East monsoon during October December. In winter (January February) the precipitation is recorded 67.9 mm and in summer (March May) the precipitation is 34.7 mm.

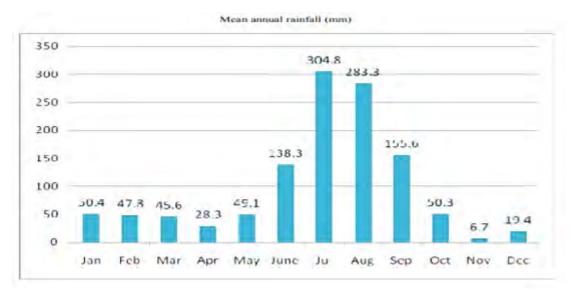


Figure- 5: Mean Annual Rainfall

- 38. **Humidity:** The humidity is highest during the monsoon months and particularly so during the rainiest months of July and August. During the winter months, it increases towards the afternoon at high altitudes.
- 39. **Cloudiness:** Skies are heavily clouded during the monsoon months and for short spells when the region is affected by western disturbances. During the rest of the year, the skies are generally clear to lightly cloud.
- 40. **Winds:**Owing to the nature of the terrain, local effects are pronounced and when the general prevailing winds are not too strong to mask these effects, there is a tendency for diurnal reversal of winds which blow up the slopes during the day (anabatic flow) and down the slopes at night (katabatic flow). Katabatic wind can blow with considerable force.

  Ambient Air Quality and Noise Level
- 41. The pristine environment and sparse population suggest that most part of Almora have a very good air quality. Any point or non-point sources of air pollution (except vehicular emission) are not observed. It was observed that the traffic on the roads is too low to cause significant air pollution due to vehicular exhaust. There are no industries in the vicinity and hence any other source of atmospheric air pollution is not expected. The air pollution level expected to be well within the permissible limits because there are no major sources of pollution in the region.
- 42. Since there is no official/published air quality data available for this district, the baseline data on ambient air quality will be generated by the contractor before commencement of construction works.
- 43. Generally, noise pollution is not a problem in project district. Traffic, and festival/cultural noises, along with noise generated from construction activities, DG sets etc., are the most prominent sources of noise in the urban areas. There are no industrial enterprises in the project area. As the traffic is very low, the noise pollution either at point or non-point sources is unlikely in the project area. Moreover, there will be not much rise in the noise levels to be brought about by the proposed activities as project proposes adaptive reuse of the building, anticipating not much noise generation during operation phase also.

During the construction period, a temporary increase in the noise levels are expected due to movement of construction machineries and construction activities.

44. It was observed that ambient noise scenario in residential, commercial, and sensitive locations in the sub project area are quite low in general. The baseline data on Noise levels will be generated by the contractor before commencement of civil works.

Hydrology

Water drainage

45. Rivers and drainage in project district- The district abounds in rivers some of which originate within the fold of the district and, assuming a peripheral course along the borderline, enter the Garhwal region and eventually merges into the Ganga and have thus been geographically grouped under the rivers of the Ganga system. These are Koshi (Kaushiki), Suyal (Salmale) Gori, Ram Ganga Sarju etc.

Water Quality

46. Based on the reconnaissance survey/site visit and visual observations, water seems to be unpolluted. The secondary data is generally not available/ accessible for surface water as well as ground water. There is very little documentation on the pollution status of rivers of the area. The secondary data of Kosi River is being represented here for the purpose of reference.

Table 2: Water Quality Data of Kosi River Almora

| S/<br>No. | Parameters                        | IS: 10500 | Analysis of Results for sampling date |          |          | Remarks       |
|-----------|-----------------------------------|-----------|---------------------------------------|----------|----------|---------------|
|           |                                   |           | 18/05/07                              | 23/05/07 | 12/06/07 |               |
| 1         | Total coliform organism MNP/100ml |           | 300                                   | 400      |          | Objectionable |
| 2         | PH                                | 6.5-8.5   | 7.4                                   | 7.2      | 7.6      | O.K           |
| 3         | Dissolved oxygen, mg/l            |           | 6.03                                  | 6.5      | 5.4      | O.K           |
| 4         | Total hardness (as CaCO3), mg/l   | 600       | 64                                    | 70       | 84       | O.K           |
| 5         | Calcium (as Ca), mg/l             | 200       | 25                                    | 28       | 34       | O.K           |
| 6         | BOD, mg/l                         | < 3ª      | 16                                    | 8        | 2.1      | Objectionable |
| 7         | Alkalinity                        | 600       | 92                                    | 102      | 108      | O.K           |
| 8         | Iron (as Fe), mg/l                | 1.0       | 1.79                                  | 1.84     | 1.96     | Objectionable |
| 9         | Arsenic (as As), mg/l             | 0.01      |                                       |          | -        |               |
| 10        | Chromium (as Cr), mg/l            | 0.05      | 0.054®                                | 0.038    | 0.028    | Excess        |
| 11        | Mercury (as Hg), mg/l             | 0.001     | BDL                                   | BDL      |          | 0.K           |
| 12        | Lead (as Pb), mg/l                | 0.05      | BDL                                   | BDL      | BDL      | O.K.          |
| 13        | Copper (as Cu), mg/l              | 1.5       | BDL                                   | BDL      | BDL      | O.K           |
| 14        | Zinc (as Zn), mg/l                | 15-       | BDL                                   | BDL      | BDL      | O.K.          |
| 15        | Manganese (as Mn), mg/l           | 0.3       | 0.018                                 | 0.021    | 0.031    | O.K           |

Acceptable limits in absence of alternate source. Not available in IS: 10500, have taken from CPCB website:http://www.cpcb.nic.in @ Within MCLG (0.1 mg/l) as per USEPA. BDL = below desirable limit

- 47. Based on limited records, the water quality of Uttarakhand's rivers, rivulets, and other natural water sources is generally good and no major source of water pollution was found. The hand pumps, natural water seeping out from mountains locally called as "Naula", and natural water springs locally called as "Gadhera" represent the ground water sources in the hills. There are no major sources of water pollution in terms of point or non-point sources aside from natural landslides leading to deposition of debris in streams.
- 48. Proposed subproject is not expected to have any impact on the surface/ ground water quality as there is no surface water body nearby and ground water shall not be utilized during construction/ operation phase. Water from municipal supply shall be used in the Collectorate building.

#### Seismology

49. Uttarakhand Himalayas are one of the seismically active regions of the world and have experienced earthquakes since times immemorial. The region has also experienced tectonic movements. This is evident from several thrusts and faults present in and around the state. Two regional tectonic features in Uttarakhand, which have earthquake potential, are the main central thrust (MCT) and the main Boundary Thrust (MBT). In fact, these tectonic feature are present all along the entire Himalayan tectonic belt.

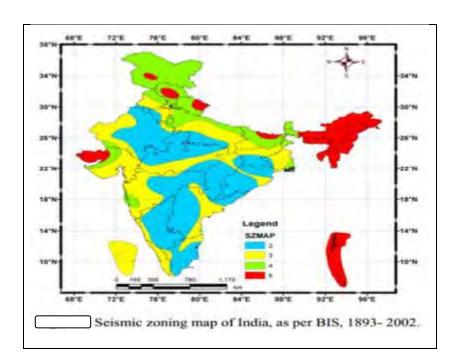


Figure- 6 Seismic Zone of India

50. As per the seismic zoning map of India, as incorporated in Indian Standard Criteria for earthquake Resistant Design of Structure IS:1893-(Part I) 2002: General Provisions and Buildings; the entire state of Uttarakhand has been assigned to seismic zone IV and V, which are the two most seismo-tectonically active zones on the map. Most part of Alaknanda valley are in seismic zone V whereas the Bhagirathi valley is in seismic zone IV.

#### B. ECOLOGICAL RESOURCES

51. The hilly State of Uttarakhand has a forest cover of 65% of its total geographical areas (slightly lower than the stipulated 66.6% forest cover for hilly states).

#### Forestry

- 52. According to the India State of Forest report 2011, the recorded forest area of the Uttarakhand state is 34,651 km<sup>2</sup> which constitutes 64.79% of its geographical area. Reserve forests constitute 71.11%. Protected Forests 28.52% and Unclassed Forests constitutes 0.35% of the total forest area.
- 53. The distribution of forest cover by district is presented in the succeeding Figure and Table. The Garhwal region has more forest cover with 14,626 km compared to the Kumaon region with 9,869 km². However, they are almost equal in terms of distribution over its territory with 45% and 47% of covered with forest. The district of PauriGarhwal, Uttarkashi, Nainital, and Chamoli have the largest forest cover accounting for 50% of all the state's total. **Figure 7** shows Uttarakhand Forest cover map. **Table 3** indicates district wise forest cover.

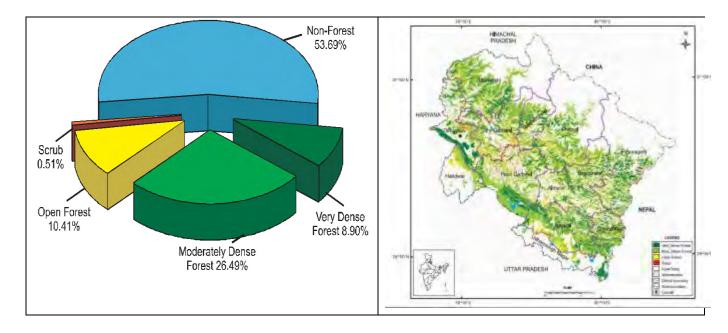


Figure- 7 Uttarakhand Forest Cover Map

Table 3: District-wise Forest Cover, Uttarakhand

|         | egion District Geograph<br>Area | Geographic | Forest Cover |          |        | Total  | % of  |
|---------|---------------------------------|------------|--------------|----------|--------|--------|-------|
| Region  |                                 |            | Very         | Moderate | Open   | Forest | Total |
|         |                                 | Alea       | Dense        | Dense    | Forest | 2007   | 2007  |
|         | Uttarkashi                      | 8,016      | 567          | 1959     | 619    | 3145   | 39.23 |
|         | Rudraprayag                     | 1,984      | 246          | 581      | 298    | 1125   | 56.70 |
| Garhwal | Chamoli                         | 8,030      | 427          | 1,586    | 682    | 2695   | 33.56 |
|         | PauriGarhwal                    | 5,329      | 523          | 2,094    | 672    | 3289   | 61.72 |
|         | TehriGarhwal                    | 3,642      | 298          | 1,232    | 617    | 2147   | 58.95 |

|           | Dehradun   | 3,088  | 584   | 695    | 328   | 1,607  | 52.04 |
|-----------|--|--------|-------|--------|-------|--------|-------|
|           | Haridwar   | 2,360  | 26    | 354    | 238   | 618    | 26.19 |
| Sub-Total |  | 32,449 | 2,671 | 8,501  | 3,454 | 14,626 | 46.91 |
| Kumaon    | Pithoragarh  | 7,090  | 567   | 1,115  | 412   | 2,094  | 29.53 |
|           | Bageshwar  | 2,246  | 194   | 883    | 304   | 1,381  | 61.49 |
|           | Almora   | 3,139  | 222   | 928    | 427   | 1,577  | 52.04 |
|           | Nainital   | 4,251  | 601   | 1,919  | 573   | 3,093  | 72.76 |
|           | Champawat  | 1,766  | 336   | 571    | 274   | 1,181  | 66.87 |
|           | Udham Singh<br>Nagar   | 2,542  | 171   | 248    | 124   | 543    | 21.36 |
| Sub-Tota  | İ  | 21,034 | 2,091 | 5,664  | 2,114 | 9,869  | 50.38 |
| Grand To  | otal   | 5,3483 | 4,762 | 14,165 | 5,567 | 24,496 | 48.65 |
| Note      | Very Dense Forest – All lands with tree cover of canopy density of 70% and above  Moderately Dense Forest – Canopy density between 40%-70%  Open Forest – Canopy density between 10%-40% |        |       |        | nd    |        |       |

54. The proposed subproject is not expected to have any impact on the Forests and does not involve any tree cutting as the scope of the work is restricted to reconstruction and adaptive reuse of the Fort, where no tree felling is foreseen. At proposed location for new collectorate building also, no trees need to be cut.

#### **Biodiversity**

- 55. The State of Uttarakhand is endowed with rich bio-diversity as manifested by its approximately 64 percent forest cover. The State has established six national parks and six wildlife sanctuaries for the conservation of flora and fauna. Such areas include the Nanda Devi National Park, Valley of Flowers, Gangotri National Park, GovindPashuVihar National Park, Rajaji National Park, Jim Corbett National Park, Kedarnath Wildlife Sanctuary, Askot Musk Deer Sanctuary, Mussoorie Sanctuary, Binsar Wildlife Sanctuary, Sanadi Sanctuary, and Govind Wildlife Sanctuary—all of which are being looked after by the Uttarakhand government. A positive remark on the State is that it maintains rich wildlife outside their protected areas.
- 56. The State of Uttarakhand is represented by Biogeographic Zones 2B Western Himalaya and 7B Siwaliks<sup>3</sup> in this region. About 18.7 % of the total area under the Forest Department has been clearly earmarked for biodiversity conservation by the creation and management of 12 Protected Areas (PA) and a biosphere reserve in the State.
- 57. The proposed site has no protected area in vicinity. Binsar Wildlife Sanctuary is about 33 km north of the Almora town. The sanctuary was established to conserve and protect the shrinking broad leaf oak. List of Natural parks and wildlife sanctuaries are given in **Table 4 & 5** respectively. **Table 6** indicates type of wildlife and birds.

**Table 4: National Parks in Uttarakhand** 

<sup>&</sup>lt;sup>3</sup>Negi, A.S., Status, Distribution and Management of Mountain Ungulates in Uttaranchal, EnvisBulletine, 2002

| SI. | National Park       | Year of       | Area    | District     |
|-----|---------------------|---------------|---------|--------------|
| No. |                     | Establishment | (sq.km) |              |
| 1.  | Corbett NP          | 1936          | 521     | Garhwal      |
| 2.  | Nanda Devi NP       | 1982          | 630     | Chamoli      |
| 3.  | Valley of Flower NP | 1982          | 87      | Chamoli      |
| 4.  | Rajaji NP           | 1983          | 820     | Dehradun and |
|     |                     |               |         | Haridwar     |
| 5.  | Gangotri NP         | 1989          | 2390    | Uttarkashi   |
| 6.  | Govind NP           | 1990          | 472     | Uttarkashi   |

Source: Wildlife and Protected Areas, ENVIS, 2002

Table 5: Wildlife Sanctuaries in Uttarakhand

| SI.<br>No. | Sanctuary     | Year of<br>Establishment | Area<br>(sq.km.) | District    |
|------------|---------------|--------------------------|------------------|-------------|
| 1.         | Govind WLS    | 1955                     | 521              | Uttarkashi  |
| 2.         | Kedarnath WLS | 1972                     | 957              | Chamoli     |
| 3.         | Askot WLS     | 1986                     | 600              | Pithoragarh |
| 4.         | Sonanadi WLS  | 1987                     | 301              | Garhwal     |
| 5.         | Binsar WLS    | 1988                     | 46               | Almora      |
| 6.         | Musoorie WLS  | 1993                     | 11               | Dehradun    |

Source: Wildlife and Protected Areas, ENVIS, 2002

Table 6: Wildlife / Birds in Almora region

| Forest Type          | Wild Life / Birds in Almora region                                    |  |  |  |
|----------------------|---|--|--|--|
| Sub-trophical        | Tiger, Chital (Axis axis) Leopard (PantheraPardus), Fox               |  |  |  |
|                      | (Vulpesvulpesmontanus), Boar (Susscrofa)                              |  |  |  |
| Tropical rain Forest | Goral (Nemoahaedus goral), Kalij Pheasant (Lophuraleucomelana),       |  |  |  |
|                      | PeoraPatridge (hill Patridge, Chir Pheasant)                          |  |  |  |
| Mixed Cane Forest    | Himalayan Thar, Monal, Koklas   |  |  |  |
| Khusoo Forest        | Musk Deer (Moschusmoschiiferus), Himalayan Thar, Black Bear           |  |  |  |
| Sub Alpine           | Blue Sheep / 'Bharal' (Pseudoisnahoor) Monal                          |  |  |  |
| Alpine               | Snow Leopard (PantheraUncia), Monal, Black Beer, Marmot, Bharal,      |  |  |  |
|                      | Snow Cock (Tetraogallushimalayensis), Snow Patridge (Lerwalerwa) etc. |  |  |  |

#### **Fishery**

58. Fish abound in almost all streams of the district and riparian villages find in it an important supplement to their ordinary food. The common species found here are asela or saul, mahasher, kalabans or karaunch and fucta or phar kata. Other species found in the district include gadara, gadiyal or guluwa, tarra, symplu and nama, nawoo or japa.No interference with fishery activities is envisaged by execution of the proposed subprojects.

#### C. SOCIAL AND CULTURAL RESOURCES

59. The State of occupies a total land area of 53,483 sq. km. which is 1.73 percent of India's total land area. The native people of Uttarakhand are generally called either Garhwali or Kumaoni depending on their place of origin in either the Kumaon or Garhwal region. According to the 2011 census of India, Uttarakhand has a population of 10,116,752 comprising 5,154,178 males and 4,962,574 females, with 69.45% of the population living in rural areas. The state is the 20th most populous state of the country having 0.84% of the population on 1.69% of the land. The population density of the state is 189 people per

square kilometer having a 2001–2011 decadal growth rate of 19.17%. The gender ratio is 963 females per 1000 males. The crude birth rate in the state is 18.6 with the total fertility rate being 2.3. The state has an infant mortality rate of 43, a maternal mortality rate of 188 and a crude death rate of 6.6. The schedule caste and schedule tribe population in the State is significant, averaging 18 percent and three percent respectively. The population density is 189persons per sq.km.—considerably lower than the national average of 364.9persons per sq.km. Rural population constitutes about 69.77% while urban population composes the remaining 30.23% of State's total populations. About 70% of the State population lives below the poverty line which is way above the national average of 46%. Literacy rate in the State is 78.82%.



Figure- 8 Major Urban Centers of Uttarakhand

- 60. The State is divided into Garhwal and Kumaon divisions. Administratively, the State is divided into 13 districts, 79 tehsils and 97 blocks. Garhwal division has seven hill districts with one located in the foothills (Haridwar). Kumaon division, on the other hand, has six districts—one in the foothills (Udham Singh Nagar).
- 61. **Population Density** In 2001 census, Almora had a population of 630,567 of which males were 293,848 and remaining 336,719 were females. In 2011, Almora had population of 622,506 of which male and female were 291,081 and 331,425 respectively. The density of Almora district as per census 2011 is 198 people per sq. km against 201 people per sq. km in 2001. Almora district administers 3,090 square kilometers of areas.

Table 7: District comparative demographic scenario 2001 and 2011

| Description                          | Year 2011 | Year 2001 |
|--------------------------------------|-----------|-----------|
| Actual Population                    | 621,927   | 630,567   |
| Male                                 | 290,414   | 293,848   |
| Female                               | 331,513   | 336,719   |
| Population Growth                    | -1.73%    | 3.67%     |
| Area Sq. Km                          | 3,090     | 3,090     |
| Density/km2                          | 198       | 201       |
| Proportion to Uttarakhand Population | 6.15%     | 7.43%     |
| Sex Ratio (Per 1000)                 | 1142      | 1145      |
| Child Sex Ratio (0-6 Age)            | 921       | 933       |
| Average Literacy                     | 81.06     | 73.64     |
| Male Literacy                        | 93.57     | 89.20     |
| Female Literacy                      | 70.44     | 60.56     |
| Total Child Population (0-6 Age)     | 77,991    | 97,368    |

| Male Population (0-6 Age)   | 40,601  | 50,376  |
|-----------------------------|---------|---------|
| Female Population (0-6 Age) | 37,390  | 46,992  |
| Literates                   | 440,918 | 392,640 |
| Male Literates              | 233,748 | 217,169 |
| Female Literates            | 207,170 | 175,471 |
| Child Proportion (0-6 Age)  | 12.54%  | 15.44%  |
| Boys Proportion (0-6 Age)   | 13.98%  | 17.14%  |
| Girls Proportion (0-6 Age)  | 11.28%  | 13.96%  |

#### Land use pattern

- 62. The land use pattern of Uttarakhand is strongly governed by the following: elevation, climate, mountainous terrain, lithological type, topography, surface hydrology, sunlight in the fields of forestry and agriculture, alpine meadows, sparse vegetation (scrub), grazing land, barren land, and human settlement. The human settlements are mainly located in the shallow water zones or around the localities nearer to springs.
- 63. Forest is the main land use in the State and nearly 64 % of the geographical area is under the varying forest densities (cover). Tree line is clearly demarcated above 2900 m elevation. Agriculture is confined to areas of low reliefs which are underlined by weak rock formation (i.e. schists, phyllites, weathered gneisses, and crushed quartzite). The cultivated land, approximately 11.5 % of the total geographical area, is either terraced/semi-terraced or plain. Other land use categories such as meadows, grazing lands, and scrubs do not exhibit definite relationship with lithology. It is also observed that the south-facing hill slopes are covered by lush green forests.
- 64. The project district is located in hilly forest area and predominant land use is forest. Below is described area wise land use in district.

Table 8: Land use pattern

| S.No | Particulars                            | Area (in 000 hac) |
|------|--|-------------------|
| 1.   | Geographical/reported area             | 464               |
| 2.   | Forest Area                            | 236               |
| 3.   | Land under Non Agricultural Use        | 12.5              |
| 4.   | Permanent Pasture                      | 28.3              |
| 5.   | Cultivable Wasteland                   | 37.8              |
| 6.   | Land Under Misc. Tree Crops and Groves | 33.9              |
| 7.   | Barren Land Uncultivable Land          | 25.2              |
| 8.   | Current Fallows                        | 14                |
| 9.   | Other Fallows                          | 64.5              |

Source- http://agricoop.nic.in/Agriculture%20Contingency%20Plan/Uttarakhand/almora.pdf Cultural and Archeological resources

65. The State of Uttarakhand has a great range of cultural practices. Festivals and cultural activities are being celebrated throughout the year in the State. The major fairs and festivals of the Garhwal region include the Hatkalika Fair, Tapkeshwar Fair, Surkhanda Devi Mela, Kunjapuri Fair, Lakhawar Village Fair, and Mata Murti Ka Mela. On the other hand, major fairs and festivals in the Kumaon region consist of Uttarayani Mela, Shravan Mela (Jageshwar), Kartik Poornima at Dwarahat, Kasar Devi fair, and Nanda Devi mela.

66. There are no heritage/Archaeological sites listed by Archaeological Survey of India (ASI) within the study area hence, the proposed project activities do not have any adverse impact on these sites. There are few small temples located along the project corridors, but none of them will be affected as the restoration work is restricted to the Fort site only. Nearby the proposed site for Collectorate office building, no heritage/Archaeological sites listed by Archaeological Survey of India (ASI) exist.

#### D. ECONOMIC RESOURCES

Transportation and communication

67. Transportation system is a key factor in the socio-economic development of any area. Roads are logically the critical inputs to the growth of all the sectors. Aside from road systems, the State of Uttarakhand is connected to other states via rail and air transportation systems. In project district Almora the total length of Pucca road is 1964 km in which 115 km is under Forest Department and 13 Km is under Nagar Panchyat/ Cantonment while rest of the road is under PWD.

**Industrial Development** 

68. Almora is a hilly district of Uttarakhand. Large industries are not present here.

S. No. Unit Head 1 Khadiudhyog Run by Industrial co-operative Society 2 Transformed Khadi Gram 2 unit is run by Industrial co-operative 2+3+603 Society, 3 unit is run by Registered udyog organization and rest 603 is run by private owners. 3 Small industrial units Nil 4 **Engineering works** 219 All are run by private owners 5 Chemical industrial units 44 All are run by private owners 6. Vidhyan 625 All are run by private owners 7. Handicraft power looms 41 All are run by private owners Handicraft 119 All are run by private owners 422 Others 7. Total person Employed in 1323 these industries

**Table 9: Industrial Scenario in District Almora** 

Source - http://almora.nic.in/files/ZSP%202009/tab36.pdf

#### Agriculture

- 69. Agriculture is the main economic activity in the State as per latest land-use statistics. The total reported area for agricultural activity is 55.66 lakh hectares. In the hills, the major crops grown include wheat, paddy, mandua, ramdana and potato whereas in the plains the major crops are wheat, paddy, pulses, and sugarcane.
- 70. The pattern of land ownership is unlike that found in the rest of India. Most of the Uttarakhand farmers are owner-cultivators. Tenant farming and sharecropping are rare while

landholdings are generally small and limited to family farms—approximately 50 percent of all landholdings are less than 0.5 hectares in size and 50 percent under one hectare. As such, the zamindari system of big landholders is limited to the plains. Both the geography and the Pahari cultural heritage have played roles in maintaining a traditionally more equitable, if impoverished, land distribution in Uttarakhand.

71. The agriculture related statistics of project district Almora has been mentioned in below **Table 10** for reference. Status of Animal husbandry in Almora is shown in **Table 11**.

Table 10: Agriculture Scenario in Almora district

| SL         | Particular               | Unit (000 ha) | Cropping intensity % |  |  |  |
|------------|--------------------------|---------------|----------------------|--|--|--|
| 1          | Net sown area            | 83.5          | 158.9                |  |  |  |
| 2.         | Area Sown more than once | 49.5          |                      |  |  |  |
| 3.         | Gross cropped area       | 132.7         |                      |  |  |  |
| Irrigation | Irrigation               |               |                      |  |  |  |
| 1          | Net Irrigated Area       | 5.5           | 6.6                  |  |  |  |
| 2          | Gross Irrigated Area     | 9.8           | 11.7                 |  |  |  |
| 3          | Rainfed Area             | 73.7          | 88.7                 |  |  |  |

Predominant agricultural produce are:-

Main Agricultural products are – Wheat (Triticumaestivum), Paddy (Oryza sativa), Wheat , Jaue , Maize (Zea mays), Barley (Hordeumvulgare), Madua(Eleusinecoracana), Finger millet (Eleusinecoracana), Pulse – Urad (Phaseolusradiatus), Mung , Masur(Ervum lens), Gram , Pea, Arhar

Oilseed- Mustard (Brassica compestris), Aalse, Til, Groundnut (Arechis hypogea), Sunflower, Soyabeen, Others- Potato, Tobaco and Turmeric

Table 11: Status of Animal husbandry in Almora

| SI | Livestock                   | Numbers (000) |
|----|-----------------------------|---------------|
| 1  | Cattle                      | 237.7         |
| 2  | Buffaloes                   | 109.7         |
| 3  | Total Commercial dairy Farm | 347.4         |
| 4  | Goat                        | 171.7         |
| 5  | Sheep                       | 4.8           |
| 6  | Others (Pig, Yak etc)       | 0.6           |

#### **Aesthetics and Tourism**

72. Tourism is one of the strong pillars of the State economy. The State has high growth potential for tourism, be in nature, wildlife, adventure or pilgrimage tourism. Tourist arrivals in the state have been increasing over time. Expenditure on schemes for tourism development and promotion in the State has progressively increased over the years. Some of the major destinations with tourism potential include Haridwar (called 'The Gateway of God'),

Rishikesh (the birth place of Yoga), Dehradun, Mussoorie, Almora, Kedarnath, Badrinath, Yamunotri, Gangotri, Jim Corbett National Park, Nainital, Ranikhet, and Pithoragarh.

- 73. Almora is a naturally picturesque district. Its pine and deodar covered slopes and magnificent mountain vistas have attracted seekers for centuries. From Swami Vivekananda to poet Sumitra Nandan Pant, Nobel Laureate Sir Ronald Ross to Academy award winning actress Uma Thurman, lyricist and ad-guru Prasoon Joshi to Apple founder Steve Jobs, creative individuals were either born in these hills or visited them to derive inspiration from the quiet environs of this salubrious retreat.
- 74. With the establishment of the Uday Shankar India Cultural Centre in 1938 in Simtola near the town, Almora acquired exalted status as a cultural hub of North India. Great artistes like UstadAllauddin Khan, Pandit Ravi Shankar, Guru Dutt, Zohra Segal, Lakshmi Shankar, Ananda Shankar, to name just a few, came to this town that evolved gradually into a renowned centre for the arts.
- 75. This sub-project envisages the "Restoration, Adaptive Reuse & Revitalization of Almora Fort" or Malla Mahal and Rani Mahal for a substantial enhancement of the visitor experience. The sub-project firmly believes that Almora, with its unique Himalayan locales and cultural heritage has the potential of emerging as the "Cultural Capital" of the state, giving a boost to the experiential tourism aspect of not just the Himalayas but the entire country.
- 76. The rationale is to create a secular cultural space (at present the town is dotted with temples and ashrams) and make a concerted effort to engage all five senses of the visitor, attracting people to the site and places around it, telling the story of the place called ALMORA.
- 77. The sub-project envisages a substantial rise in tourism interest in Almora as a destination, leading to sustainable and equitable economic growth in the region. The site will lead to a 10% growth in direct employment generation through tourism activity, also contributing an increase of about 15% in the real income levels in the district of Almora. The sub-project, once implemented, would enhance the duration of stay for the average visitor by at-least twenty-four hours.
- 78. More significantly, since the sub-project is located in the heart of the town, it can be an equal-opportunities employer and benefits to the economy will trickle down to the local populace that derives sustenance from direct employment in the main bazaar. The sub-project will substantially increase footfalls in the local eateries, guesthouses and hotels, located within Almora Town. This will lead to the building of capacities for stakeholders already engaged in tourism as a sector of employment.
- 79. The Strengths, Challenges, Opportunities & Risks (SCOR) Analysis of Almora Fort Restoration Sub-project is presented in the following **Table 12.**

**Table 12: SCOR Analysis of Almora** 

| STRENGTHS   | CHALLENGES |  |  |
|---|------------|--|--|
| <ul> <li>Almora Town is the hub of tourism activity<br/>in the region, both in the south-north and<br/>the east-west corridors. Hence,</li> </ul> |            |  |  |

- geographical location is appropriate
- Almora town has a historical connect with arts and culture and hence the centre has an appropriate context.
- The connection with spirituality and situation of sacred sites such as Jageshwar and Binsar in proximity, renders the site an appropriate place for developing an experience based tourism product.
- The site has unique historic value, unparalleled by any other in the region.
- The site represents a unique amalgam of architectural styles, representing a true picture of Almora.
- The site's location, at the pinnacle in the heart of the town can easily make the project viable through appropriate footfalls.

- The region has developed an identity as a spiritual destination. To add the experiential input through an arts and culture centre would require a longer gestation period.
- Setting up the institutional framework to ensure the quality of services and software offered to the visitor over a long period of time.
- Putting in place, mechanisms that will ensure striking a balance between imperatives of conservation and handling of visitor influx.
- The project has to walk the tightrope between close coordination with government agencies and yet retain an independent character to ensure the quality of experience offered.

#### **OPPORTUNITIES**

- Absence of a destination offering experiential tourism in the area of arts and culture could be a unique selling proposition.
- There is no Himalayan Art Gallery in the state and this could be unique meeting point for artistes and art lovers and even buyers.
- Almora's associational significance to culture could be fully utilized.
- Would be unique example of heritage preservation with viable re-use.
- Would be a first for social media promotion of a destination in Uttarakhand.
- The unique elevation of the site providing visibility shall lend character to the town, once the ramparts are illuminated.
- The imperative of conservation is already on the government as the site is under serious stress. A reuse mechanism will make the conservation effort more meaningful.

#### **RISKS**

- Spiritual or religious tourists may choose to ignore the site.
- A social media push has not been tried for any site.
- There would be a need to constantly innovate and attract visitors if the site is to become a vibrant arts' centre. The right human and cultural resources need to be identified and supported and implementing agency may not be equipped to make those choices.
- Political interference and influence may be exerted to influence work once the reputation of the centre is established.
- Just having a centre as an island with environmental degradation around will not help. The town, if it does not rise to the occasion the centre will promise, the centre in itself may not be able to give the desired push to tourism footfall.
- The possibility of lack of ability to address issues comprehensively and rather focusing on unilateral perspective of tourism development without addressing the planning, protection, management aspects can adversely affect the perception of quality of services.

#### IV. ENVIRONMENTAL IMPACTS AND MITIGATION MEASURES

- 80. The assessment for environmental impacts due to the implementation of this project has been carried out for potential impacts during the following stages of the project planning and implementation:
  - Location impacts: Impacts associated with site selection, including impacts onenvironmentandresettlementorlivelihoodrelatedimpactsoncommunities and wildlife
  - ii. Design impacts: Impacts arising from project design, including the technology used, scale of operations, discharge standards etc
  - iii. Construction impacts: Impacts resulting from construction activities including site clearance, earthworks, civil works, etc.
  - iv. O&M impacts: Impacts associated with the operation and maintenance of the infrastructure built in the project.

## A. Location Impact - Land Acquisition and Resettlement

81. The location considered for the subproject is within the area designated for ecotourism as part of developing Uttarakhand's conservation, heritage, natural and cultural attractions, and are outside areas demarcated for habitat protection and conservation. The proposed sub-project envisages upgrading the infrastructure and adaptive reuse of existing Almora Fort Complex. No additional land is to be acquired. For construction of Collectorate office possession of government land is required. The Rani Mahal presently acts as the DM's Conference Hall and the record room. The Malla Mahal is presently the DM's Office and Court. The ADM's office is also housed in the Fort site. For shifting of the DM (Collectorate) Office, consultations have been carried out and finally shifting was decided. Letter to the Secretary Tourism is enclosed as **Annexure 4B.**No objection certificate from District Administration, for restoration of the Fort is enclosed as **Annexure 4 A.** Meeting minutes of Consultation with Higher Authorities regarding shifting of Collectorate Office has been placed at **Annexure 5.** 

#### 1 Measures to Mitigate Location Impacts

- (i) In accordance with the provisions in the subproject selection criteria, the subproject design will include adequate provisions for ensuring effective maintenance and protection of the assets created so as to ensure the long terms sustainability of the sites.
- (ii) Designs will be worked out and implemented in accordance with the provisions. Further, the design guidelines for the project components will conform to Archaeological Survey of India Guidelines. The other reference codes/Standards/ Guidelines consulted include US Secretary of Interior's Standards, Great Britain's National Trust for Places of Historic Interest and Beauty Guidelines and INTACH Architectural Heritage Division benchmarks.
- 82. **Design considerations to avoid environmental impacts:** Since it is a heritage restoration project, impacts arising from the inappropriate designs of proposed facilities are

not likely. All component designs will be worked out to minimize any impacts on the adjoining properties, and the drainage and sewerage connections on the road. Given that there is a need for disposal of construction wastes, the contractors will be required to consult with the Project Implementation Unit (PIU) and Almora Nagar Palika Parishad for safe disposal sites.

### 2 Measures to Mitigate Design Impacts

- (i) Design of proposed components will enable efficient drainage at the project site and maintain natural drainage patterns.
- (ii) Designs will be worked out in such a manner that exposed steel and concrete structures are avoided. The obsolete and inappropriate additions will be removed. The design brief for all components proposed will strictly conform to the Uttarakhand architecture. Any new landscaping elements will only utilize native species to protect local biodiversity.
- 83. **Technical Suitability:** The intervention proposed would be of non-destructive nature. Most alterations to the site, currently made to it, are in blatant contravention of heritage conservation norms. Removing the same shall not lead to any danger or defacement of the site, but will in fact add to its appearance.
- 84. Except construction of new Collectorate / DM office (which is govt. Land) no additional land is required for the sub-project. The entire work components will be carried out within the available government land. Thus, telephone lines, electric poles and wires, water and sewer lines will not be affected. The storm water runoff from alterations of the site's natural drainage patterns due to landscaping, excavation works in the Almora Fort Complex and landscaping near the surroundings will be taken care in the designs. Selection of materials and construction technologies shall be carefully chosen as per the heritage restoration guidelines. Designs will ensure:
  - Incorporation of adequate drainage provisions
  - Natural tree species in the proposed landscape.
  - Use of materials such that architectural character of the site is maintained.

#### B. Environmental Impacts- Pre construction, Construction & Operation

- 85. **Determination of Area of Influence.** The primary impact areas are (i) sites for subproject components; (ii) main routes/intersections which will be traversed by construction vehicles. The secondary impact areas are: (i) entire town area outside of the delineated primary impact area; and (ii) entire Almora district in terms of over-all environmental improvement.
- 86. In the case of this subproject the components will involve straight forward construction and operation, and impacts will be mainly localized, short in duration and expected only during construction period.

#### 1. Design Impacts and Pre-Construction Impacts

87. Impacts arising from the inappropriate designs of proposed facilities would in general include the contemporary designs for the traditional and cultural environment, etc. Selection

of materials, if not carefully chosen, will adversely impact the aesthetic appeal of the surroundings. The results of interventions are unobtrusive and will be integral part of the overall ambience so as to avoid impacts on the aesthetics of the site. Structural designs to be worked out in such a manner that over ground structures do not affect the aesthetics of the area. All component designs will be worked out to minimize any impacts on the adjoining properties, and the drainage and sewerage connections on the road. Given that there is a need for disposal of construction wastes, the contractors will be required to consult with the Project Implementation Unit(PIU) and Almora Nagar Palika Parishad for safe disposal sites.

- 88. **Technical Suitability:** The intervention proposed would be of non-destructive nature. Most alterations to the site, currently made to it, are in blatant contravention of heritage conservation norms. Removing the same shall not lead to any danger or defacement of the site, but will in fact add to its appearance.
- 89. No additional land is required for the sub-project (except new collectorate building). The entire work components will be carried out within the available government land. Thus, telephone lines, electric poles and wires, water and sewer lines will not be affected. The storm water run off from alterations of the site's natural drainage patterns due to landscaping, excavation works in the Almora Fort Complex and landscaping near the surroundings will be taken care in the designs. Selection of materials and construction technologies shall be carefully chosen, so that it does not adversely impact the aesthetic appeal of the destinations. Designs will ensure energy conservation as briefed below.
- 90. **Energy Efficiency Measures.** Energy efficiency measures shall be observed wherever possible:
  - Use of LED lighting to reduce energy cost, maintenance cost.
  - All electric equipment including fans, lights and switches would be as per BEE star rating.
  - Designing of structures to be done for maximum utilization of natural light and ventilation in the day time
  - Use of Vernacular architecture and maximum usage of locally available materials in construction thereby cutting the processing and transportation cost of material procurement
  - Preserving natural landscape features and use of native plant species will minimize irrigation cost
  - Use of regionally appropriate, low water-using and native plants in landscaping to save water as once established, these plants require little water beyond normal rainfall. And also, because native plants are better adapted to local soils and climatic conditions, they rarely require the addition of fertilizer and are more resistant to pests and diseases thereby cutting irrigation and maintenance costs.
  - Use of water efficient fixtures
    - 2. Pre-construction Impacts and Mitigation Measures
  - ✓ Consents, permits, clearances, no objection certificate (NOC), etc. Failure to obtain necessary consents, permits, NOCs, etc. can result to design revisions

and/or stoppage of works.

- ✓ Mitigation measures. The following will be conducted during detailed design phase:
  - Obtain all necessary consents, permits, clearance, NOCs, etc. prior to start of civil works.
  - Acknowledge in writing and provide report on compliance all obtained consents, permits, clearance, NOCs, etc.
  - Include in detailed design drawings and documents all conditions and provisions if necessary
- 91. **Erosion control.** Most of the impacts will occur due to earth works during construction phase. Prior to commencement of civil works, the contractor will be required to:
  - Develop an erosion control and re-vegetation plan to minimize soil loss and reduce sedimentation to protect water quality.
  - Minimize the potential for erosion by balancing cuts and fills to the extent feasible.
  - Identify and avoid areas with unstable slopes and local factors that can cause slope instability (groundwater conditions, precipitation, seismic activity, slope angles, and geologic structure).
  - Minimize the amount of land disturbed as much as possible. Use existing roads, disturbed areas, and borrow pits and quarries. Minimize vegetation removal.
     Stage construction to limit the exposed area at any one time.
- 92. Sites for construction work camps and areas for stockpile, storage and disposal. The priority is to locate these near the subproject sites. The contractor will be required to meet the following criteria for the sites:
  - Will not promote instability and result in destruction of property, vegetation, irrigation, and drinking water supply systems, etc.
  - Residential areas will not be considered so as to protect the human environment (i.e., to curb accident risks, health risks due to air and water pollution and dust, and noise, and to prevent social conflicts, shortages of amenities, and crime).
  - Disposal will not be allowed near sensitive areas which will cause inconvenience to the community.
  - Any construction camp site will be finalized in consultation with DSC and PIU.
- 93. **Sources of construction materials.** For the construction material required for this sub project, considering that the extraction of materials can disrupt natural land contours and vegetation resulting in accelerated erosion, disturbance in natural drainage patterns, ponding and water logging, and water pollution, the contractor will be required to:
  - Use guarry sites and sources permitted by government.
  - Verify suitability of all material sources and obtain approval from PIU/DSC.
  - Submit to DSC on a monthly basis documentation of sources of materials.

- 94. The contractor will identify and seek prior approval of the DSC engineer for quarrying and borrowing operations. Quarry and borrowing will be carried only from approved locations and no new quarries will be opened for the purposes of the project. Any deviation from the provisions will be immediately notified and approval of the engineer is to be sought.
- 95. **Access:** Hauling of construction materials and operation of equipment on-site can cause traffic problems and conflicts in ROWs. However, potential impacts will be of short-duration, localized and can be mitigated. The contractor will need to adopt the following mitigation measures:
  - Plan transportation routes so that heavy vehicles do not use narrow local roads, except in the immediate vicinity of delivery sites.
  - Schedule transport and hauling activities during non-peak hours.
  - Locate entry and exit points in areas where there is low potential for traffic congestion.
  - Keep the site free from all unnecessary obstructions.
  - Drive vehicles in a considerate manner.
  - Notify affected sensitive receptors by providing sign boards with information about the nature and duration of construction works and contact numbers for concerns/complaints.
  - Provide free access to households and businesses/shops along the ROWs during the construction phase.
- 96. Summary of pre-construction activities is presented in **Table 13.** The responsibilities, monitoring program and costs are provided in detail in the EMP. The contractor is required to update the information during detailed design phase.

**Table 13: Summary of Pre-Construction Mitigation Measures** 

| Parameters  | Mitigation Measures  |
|---|--|
| Consents, permits, clearances, no objection certificate (NOC), etc. | <ul> <li>Obtain all necessary consents, permits, clearance, NOCs, etc. prior to start of civil works.</li> <li>Acknowledge in writing and provide report on compliance of all obtained consents, permits, clearance, NOCs, etc.</li> <li>Include in detailed design drawings and documents all conditions and provisions if necessary</li> </ul>   |
| Erosion control   | <ul> <li>Develop an erosion control and re-vegetation plan to minimize soil loss and reduce sedimentation to protect water quality.</li> <li>Minimize the potential for erosion by balancing cuts and fills to the extent feasible.</li> <li>Identify and avoid areas with unstable slopes and local factors that can cause slope instability (groundwater conditions, precipitation, seismic activity, slope angles, and geologic structure).</li> <li>Minimize the amount of land disturbed as much as possible. Use existing roads, disturbed areas, and borrow pits and quarries when</li> </ul> |

| Parameters  | Mitigation Measures   |
|---|---|
|   | possible. Minimize vegetation removal. Stage construction to limit the exposed area at any one time.  |
| Utilities   | Identify and include locations and operators of these utilities in the detailed design documents to prevent unnecessary disruption of services during the construction phase.   |
|   | Require contractors to prepare a contingency plan to include actions to be done in case of unintentional interruption of services.  Obtain from the BUL and/on BOO the list of affected utilities and the bull a |
|   | <ul> <li>Obtain from the PIU and/or DSC the list of affected utilities and<br/>operators;</li> </ul>  |
|   | <ul> <li>Prepare a contingency plan to include actions to be done in case of<br/>unintentional interruption of services.</li> </ul>   |
|   | If relocations are necessary, contractor will coordinate with the providers to relocate the utility.  |
| Social and Cultural Resources                         | <ul> <li>Develop a protocol for use by the construction contractors in<br/>conducting any excavation work, to ensure that any chance finds<br/>are recognized and measures are taken to ensure they are<br/>protected and conserved.</li> </ul>   |
| Sites for construction                                | Will not promote instability and result in destruction of property, vegetationand drinking water supply systems, etc.   |
| work camps,<br>areas for<br>stockpile,<br>storage and | <ul> <li>Residential areas will not be considered so as to protect the human<br/>environment (i.e., to curb accident risks, health risks due to air and<br/>water pollution and dust, and noise, and to prevent social conflicts,<br/>shortages of amenities, and crime).</li> </ul>  |
| disposal  | Disposal will not be allowed near sensitive areas which will cause inconvenience to the community.  |
| Sources of construction materials                     | <ul> <li>Use quarry sites and sources permitted by government.</li> <li>Verify suitability of all material sources and obtain approval from PIU/DSC.</li> </ul>   |
|   | If additional quarries are required after construction has started, obtain written approval from PIU/DSC.   |
|   | Submit to DSC on a monthly basis documentation of sources of materials.   |
| Access  | <ul> <li>Schedule transport and hauling activities during non-peak hours.</li> <li>Locate entry and exit points in areas where there is low potential for traffic congestion.</li> </ul>  |
|   | <ul><li>Keep the site free from all unnecessary obstructions.</li><li>Drive vehicles in a considerate manner.</li></ul>   |
|   | <ul> <li>Notify affected sensitive receptors by providing sign boards with<br/>information about the nature and duration of construction works and<br/>contact numbers for concerns/complaints.</li> </ul>  |
|   | <ul> <li>Provide free access to households and businesses/shops along<br/>ROWs during the construction phase.</li> </ul>  |

# 3. Construction Impacts

# **Anticipated Construction Impacts and Mitigation Measures**

- 97. **Construction Schedule and Method.** Proposed construction activities will cover 24 months for each package. The infrastructures will be constructed according to design specifications and Guidelines of Archaeological Survey of India, US Secretary of Interior's Standards, Great Britain's National Trust for Places of Historic Interest and Beauty Guidelines and INTACH Architectural Heritage Division benchmarks.
- 98. Demolished materials will be reused to the maximum extent possible. Materials will be brought to the storage site (selected in consultation with DSC Expert) by trucks and will be transported and stored on unused areas within the fort complex. The working hours will be 8 hours daily, the total duration of each stage depends on the soil condition and other local features.
- 99. Suitable and sufficient space for construction equipment and stockpiling of materials will be marked prior to work start and the contractor will need to remove all construction and demolition wastes on a daily basis.
- 100. This is both restoration work (Almora Fort)and new construction work (Collectorate building)and construction of these project components involves simple techniques of civil work, the nature of works and the location of subproject sites in built-up areas where there are a variety of human activities, will result to impacts to the environment and sensitive receptors such as residents, businesses, and the community in general. These anticipated impacts are short-term, site-specific and within relatively small areas.
- 101. **Erosion Hazards**: The sites are in the built up area of the town (except new collectorate building)therefore risk of erosion is low, limited during construction activities and not expected to have any negative impact on the drainage and hydrology of the area. Runoff will produce a highly variable discharge in terms of volume and quality, and in most instances will have no discernible environmental impact. The contractor will be required to:
  - Save topsoil removed during excavation and use to reclaim disturbed areas, as soon as it is possible to do so.
  - Use dust abatement such as water spraying to minimize windblown erosion.
  - Provide temporary stabilization of disturbed/excavated areas that are not actively under construction.
  - Conduct routine site inspections to assess the effectiveness of and the maintenance requirements for erosion and sediment control systems.
- 102. **Impacts on Water Quality:** Excavated materials may end up in drainages adjacent to the subproject sites, particularly during monsoon season. Other risks of water pollution may be caused by: (i) poorly managed construction sediments, wastes and hazardous substances; and (ii) poor sanitation practices of construction workers. The contractor will be required to:
  - Schedule civil works during non-monsoon season, to the maximum extent possible.
  - Ensure drainages within the construction zones are kept free of obstructions.
  - Keep loose soil material and stockpiles out of drains, flow-lines and watercourses.

- Avoid stockpiling of excavated and construction materials (sand, gravel, cement, etc.) unless covered by tarpaulins or plastic sheets.
- Re-use/utilize, to maximum extent possible, excavated materials.
- Dispose any residuals at identified disposal site. DSC in consultation with the PIU will identify approved sites.
- Dispose waste oil and lubricants generated as per provisions of Hazardous Waste (Management and Handling) Rules, 1989.
- 103. **Impacts on Air Quality.** There is potential for increased dust particularly during summer/dry season due to stockpiling of excavated materials. Emissions from vehicles carrying construction materials and debris/materials to be disposed may cause increased in air pollutants within the construction zone. These are inherent impacts which are site-specific but have low magnitude and short in duration due to being a restoration project and can be easily mitigated. The contractor will be required to:
  - Conduct regular water spraying on earth piles, trenches and sand piles.
  - Conduct regular visual inspection along alignments and construction zones to ensure no excessive dust emissions.
  - Maintain construction vehicles/ equipment and obtain "pollution under control" certificate from UEPPCB.
  - Obtain CFE and CFO for crushers, diesel generators, etc., if to be used in the project.
- 104. **Noise and Vibration Impacts.** Noise and vibration emitting construction activities include earthworks, rock crushing, concrete mixing, movement and operation of construction vehicles and equipment, and loading and unloading of coarse aggregates. The significance of noise and vibration impacts will be high in areas where noise-sensitive institutions such as health care and educational facilities are situated. These impacts will be temporary, short-term, intermittent, and expected to be in the range of 80 to 100 dB(A)

#### 105. The contractor will be required to:

- Limit construction activities in fort complexes and other important sites to daytime only.
- Plan activities in consultation with the PIU/DSC so that activities with the greatest potential to generate noise are conducted during periods of the day which will result in least disturbance.
- Minimize noise from construction equipment by using vehicle silencers and noisereducing mufflers.
- Avoid loud random noise from sirens, horns etc.
- Instruct drivers that horns not be used unless it is necessary to warn other road users or animals of the vehicle's approach.

- If specific noise complaints are received during construction, the contractor may be required to implement one or more of the following noise mitigation measures, as directed by the project manager
- Locate stationary construction equipment as far as possible from nearby noisesensitive properties as possible.
- Shut off idling equipment.
- Reschedule construction operations to avoid periods of noise annoyance identified in the complaint.
- Notify nearby residents whenever extremely noisy work will be occurring.
- Follow Noise Pollution (Regulation and Control) Rules, day time ambient noise levels should not exceed 65 dB(A) in commercial areas, 55 dB(A) in residential areas, and 50 dB(A) in silence zone.
- Ensure vehicles comply with Government of India noise limits for vehicles.
- 106. **Impacts on Flora and Fauna.** As per preliminary design, tree-cutting is not required. There are no protected areas in the direct and indirect impact zones and no diverse ecological biodiversity as vegetation and animals found in the construction zones are common in built up/urban areas. The contractor will be required to:
  - Conduct site induction and environmental awareness with the help of Environment Expert DSC.
  - Limit activities within the work area.
  - Replant trees in the area using minimum ratio of 2 new trees for every 1 tree cut, if any. Replacement species must be approved by DSC and PMU Forest Conservation Specialist and should be a native species.
- 107. **Impacts on Physical Cultural Resources.** There may be inconvenience to tourists, residents, businesses, and other road users due to construction activities in the fort complexes and slower flow of traffic in areas with narrow roads. This potential impact is site-specific, short-term and can be mitigated. The contractor will be required to:
  - Ensure no damage to structures/properties near construction zone.
  - Provide walkways and metal sheets where required to maintain access of people and vehicles.
  - Provide sign boards to inform nature and duration of construction works and contact numbers for concerns/complaints.
  - Implement good housekeeping. Remove wastes immediately. Prohibit stockpiling of materials that may obstruct/slow down pedestrians and/or vehicle movement.
  - Ensure workers will not use nearby/adjacent areas as toilet facility.
  - Coordinate with DSC for transportation routes and schedule. Schedule transport and hauling activities during non-peak hours. Communicate road detours via visible boards, advertising, pamphlets, etc.

- Ensure heavy vehicles do not use narrow local roads, except in the immediate vicinity of delivery sites.
- Provide instructions on event of chance finds for archaeological and/or ethnobotanical resources. Works must be stopped immediately until such time chance finds are cleared by experts.
- 108. **Impact due to Waste Generation.** Demolished structures will be reused to the maximum extent possible. Construction activitieswill produce excess excavated soils, excess construction materials, and solid wastes (such as removed concrete, wood, trees and plants, packaging materials, empty containers, oils, lubricants, and other similar items). These impacts are negative but short-term and reversible by mitigation measures. The contractor will need to adopt the following mitigation measures:
  - Prepare and implement a waste management plan. Manage solid waste according to the following hierarchy: reuse, recycling and disposal.
  - Include in waste management plan designated/approved disposal areas.
  - Coordinate with DSC Environment Expert for beneficial uses of excavated soils/silts/sediments or immediately dispose to designated areas.
  - Recover used oil and lubricants and reuse; or remove from the sites.
  - Avoid stockpiling and remove immediately all excavated soils, excess construction materials, and solid waste (removed concrete, wood, trees and plants, packaging materials, empty containers, oils, lubricants, and other similar items).
  - Prohibit disposal of any material or wastes (including human waste) into drainage, nallah, or watercourse.
- 109. **Impacts on Occupational Health and Safety.** Residential accommodation for workers is not proposed. Exposure to work-related hazards is typically intermittent and of short duration, but is likely to occur. Potential impacts are negative and long-term but reversible by mitigation measures. Overall, the contractor should comply with IFC EHS Guidelines on Occupational Health and Safety.

#### 110. The contractor will be required to:

- Disallow worker exposure to noise level greater than 85 dBA for a duration of more than 8 hours per day without hearing protection. The use of hearing protection shall be enforced actively.
- Develop comprehensive site-specific health and safety (H&S) plan. The overall objective is to provide guidance to contractors on establishing a management strategy and applying practices that are intended to eliminate, or reduce, fatalities, injuries and illnesses for workers performing activities and tasks associated with the project.
- Include in H&S plan measures such as: (i) type of hazards during excavation works; (ii) corresponding personal protective equipment for each identified hazard; (iii) H&S training for all site personnel; (iv) procedures to be followed for all site activities; and (v) documentation of work-related accidents.

- Provide H&S orientation training to all new workers to ensure that they are apprised of the rules of work at the site, personal protective protection, and preventing injury to fellow workers.
- Ensure that qualified first-aid can be provided at all times. Equipped first-aid stations shall be easily accessible throughout the site.
- Provide medical insurance coverage for workers.
- Secure construction zone from unauthorized intrusion and accident risks.
- Provide supplies of potable drinking water.
- Provide clean eating areas where workers are not exposed to hazardous or noxious substances.
- Mark and provide sign boards in the construction zone, and areas for storage and disposal. Signage shall be in accordance with international standards and be well known to, and easily understood by workers, visitors, and the general public as appropriate.
- 111. **Impacts on Socio-Economic Activities.** Manpower will be required during the 24 months construction phase. This can help generate contractual employment and increase in local revenue. Thus potential impact is positive and long-term. During the operation of the project, anticipated impacts are positive owing to increase in revenue from tourism in the area. As per design closure of roads are not required. However, construction activities may disturb the traffic in the market area and cause public discomfort. The potential impacts are negative and moderate but short-term and temporary. The contractor will need to adopt the following mitigation measures:
  - Leave space for access between mounds of soil.
  - Provide walkways and metal sheets where required to maintain access to shops/businesses along trenches.
  - Consult businesses and institutions regarding operating hours and factoring this in to work schedules.
  - Provide sign boards for pedestrians to inform nature and duration of construction works and contact numbers for concerns/complaints.
  - Employ at least 50% of the labor force, or to the maximum extent, local persons within the 2-km immediate area if manpower is available.
- 112. Summary of Mitigation Measures during Construction. Table 14 provides summary of mitigation measures to be considered by the contractor during construction phase. The detailed mitigation measures, environmental monitoring and reporting requirements, emergency response procedures, related implementation arrangements, capacity development and training measures, implementation schedule, cost estimates, and performance indicators are provided in the EMP.

**Table 14: Summary of Mitigation Measures during Construction Phase** 

| Potential | Mitigation Measures |
|-----------|---------------------|
| Impact    |                     |

| Potential Impact         | Mitigation Measures  |
|--------------------------|--|
| Erosion                  | Save topsoil removed during excavation and use to reclaim disturbed  |
| hazards                  | areas, as soon as it is possible to do so.   |
|                          | <ul> <li>Use dust abatement such as water spraying to minimize windblown erosion.</li> </ul>   |
|                          | <ul> <li>Provide temporary stabilization of disturbed/excavated areas that are not<br/>actively under construction.</li> </ul>   |
|                          | <ul> <li>Apply erosion controls (e.g., silt traps) along the drainage leading to the<br/>water bodies.</li> </ul>  |
|                          | <ul> <li>Maintain vegetative cover within road ROWs to prevent erosion and<br/>periodically monitor ROWs to assess erosion.</li> </ul>   |
|                          | <ul> <li>Clean and maintain catch basins, drainage ditches, and culverts regularly.</li> </ul>   |
|                          | <ul> <li>Conduct routine site inspections to assess the effectiveness of and the maintenance requirements for erosion and sediment control systems.</li> </ul>   |
| Impacts on water quality | Schedule civil works during non-monsoon season, to the maximum extent possible.  |
|                          | <ul> <li>Ensure drainages and water bodies within the construction zones are<br/>kept free of obstructions.</li> </ul>   |
|                          | Keep loose soil material and stockpiles out of drains, flow-lines and watercourses.  |
|                          | <ul> <li>Avoid stockpiling of excavated and construction materials (sand, gravel, cement, etc.) unless covered by tarpaulins or plastic sheets.</li> </ul>   |
|                          | Re-use/utilize, to maximum extent possible, excavated materials.   |
|                          | <ul> <li>Dispose any residuals at identified disposal site (PIU/DSC will identify approved sites).</li> </ul>  |
|                          | <ul> <li>Dispose waste oil and lubricants generated as per provisions of<br/>Hazardous Waste (Management and Handling) Rules, 1989.</li> </ul>   |
|                          | <ul> <li>Refuel equipment within the designated refueling containment area away from drainages, nallahs, or any water body.</li> </ul>   |
|                          | <ul> <li>Inspect all vehicles daily for fluid leaks before leaving the vehicle staging area, and repair any leaks before the vehicle resumes operation.</li> </ul>   |
| Impacts on               | Conduct regular water spraying on earth piles, trenches and sand piles.  |
| air quality              | <ul> <li>Conduct regular visual inspection along alignments and construction<br/>zones to ensure no excessive dust emissions.</li> </ul>   |
|                          | <ul> <li>Spreading crushed gravel over backfilled surfaces if re-surfacing of<br/>disturbed ROWs cannot be done immediately.</li> </ul>  |
|                          | <ul> <li>Maintain construction vehicles and obtain "pollution under control"<br/>certificate from UEPPCB</li> </ul>  |
|                          | <ul> <li>Obtain CFE and CFO for hot mix plants, crushers, diesel generators, etc., if to be used in the project.</li> </ul>  |
| Noise and                | Limit construction activities to daytime only.   |
| vibrations               | <ul> <li>Plan activities in consultation with the PIU/DSC so that activities with the</li> </ul>   |
| impacts                  | greatest potential to generate noise are conducted during periods of the day which will result in least disturbance.   |
|                          | Minimize noise from construction equipment by using vehicle silencers and fitting jackhammers with noise-reducing mufflers.  |
|                          | Avoid loud random noise from sirens, air compression, etc.   |
|                          | • Instruct drivers that horns not be used unless it is necessary to warn other   |
|                          | road users or animals of the vehicle's approach.   |
|                          | <ul> <li>If specific noise complaints are received during construction, the contractor<br/>may be required to implement one or more of the following noise mitigation<br/>measures, as directed by the project manager: (i) locate stationary</li> </ul> |

| Potential                     | otential Mitigation Measures  |  |  |  |  |  |  |
|-------------------------------|---|--|--|--|--|--|--|
| Impact                        | initigation incastres   |  |  |  |  |  |  |
| Impacts on                    | <ul> <li>construction equipment as far from nearby noise-sensitive properties as possible; (ii) shut off idling equipment; (iii) reschedule construction operations to avoid periods of noise annoyance identified in the complaint; and/or (iv) notify nearby residents whenever extremely noisy work will be occurring.</li> <li>Follow Noise Pollution (Regulation and Control) Rules, day time ambient noise levels should not exceed 65 dB(A) in commercial areas, 55 dB(A) in residential areas, and 50 dB(A) in silence zone.4</li> <li>Ensure vehicles comply with Government of India noise limits for vehicles. The test method to be followed shall be IS:3028-1998.</li> <li>Conduct site induction and environmental awareness.</li> </ul>   |  |  |  |  |  |  |
| flora and fauna               | <ul> <li>Limit activities within the work area.</li> <li>Replant trees in the area using minimum ratio of 2 new trees for every 1 tree cut, if any. Replacement species must be approved by Forest Conservation Specialist of DSC/PMU</li> </ul>  |  |  |  |  |  |  |
| Impacts on physical resources | <ul> <li>Ensure no damage to structures/properties near construction zone.</li> <li>Provide walkways and metal sheets where required to maintain access of people and vehicles.</li> <li>Provide sign boards to inform nature and duration of construction works and contact numbers for concerns/complaints.</li> <li>Increase the workforce in front of critical areas such as institutions, place of worship, business establishment, hospitals, and schools;</li> <li>Implement good housekeeping. Remove wastes immediately. Prohibit stockpiling of materials that may obstruct/slow down pedestrians and/or vehicle movement.</li> <li>Ensure workers will not use nearby/adjacent areas as toilet facility.</li> <li>Coordinate with DSC for transportation routes and schedule. Schedule transport and hauling activities during non-peak hours. Communicate road detours via visible boards, advertising, pamphlets, etc.</li> <li>Ensure heavy vehicles do not use narrow local roads, except in the immediate vicinity of delivery sites.</li> <li>Provide instructions on event of chance finds for archaeological and/or ethno-botanical resources. Works must be stopped immediately until such time chance finds are cleared by experts.</li> </ul> |  |  |  |  |  |  |
| Impacts on waste generation   | <ul> <li>Prepare and implement a waste management plan. Manage solid waste according to the following hierarchy: reuse, recycling and disposal. Include in waste management plan designated/approved disposal areas.</li> <li>Coordinate with DSC Environment Expert for beneficial uses of excavated soils/silts/sediments or immediately dispose to designated areas.</li> <li>Recover used oil and lubricants and reuse; or remove from the sites.</li> <li>Avoid stockpiling and remove immediately all excavated soils, excess construction materials, and solid waste (removed concrete, wood, trees and plants, packaging materials, empty containers, oils, lubricants, and other similar items).</li> <li>Prohibit disposal of any material or wastes (including human waste) into drainage, nallah, or watercourse.</li> </ul>  |  |  |  |  |  |  |
| Impacts on                    | Comply with IFC EHS Guidelines on Occupational Health and Safety  |  |  |  |  |  |  |

\_

<sup>&</sup>lt;sup>4</sup> Day time shall mean from 6.00 am to 10.00 pm. Silence zone is an area comprising not less than 100 meters around hospitals, educational institutions, courts, religious places or any other area which is declared as such by BSPCB. Mixed categories of areas may be declared as one of the above mentioned categories by UEPPCB.

| Potential Impact               | Mitigation Measures  |
|--------------------------------|--|
| occupational health and safety | <ul> <li>Disallow worker exposure to noise level greater than 85 dBA for a duration of more than 8 hours per day without hearing protection. The use of hearing protection shall be enforced actively.</li> <li>Develop comprehensive site-specific health and safety (H&amp;S) plan. The overall objective is to provide guidance to contractors on establishing a management strategy and applying practices that are intended to eliminate, or reduce, fatalities, injuries and illnesses for workers performing activities and tasks associated with the project.</li> <li>Include in H&amp;S plan measures such as: (i) type of hazards during excavation works; (ii) corresponding personal protective equipment for each identified hazard; (iii) H&amp;S training for all site personnel; (iv) procedures to be followed for all site activities; and (v) documentation of work-related accidents.</li> <li>Provide H&amp;S orientation training to all new workers to ensure that they are apprised of the rules of work at the site, personal protective protection, and preventing injury to fellow workers.</li> <li>Ensure that qualified first-aid can be provided at all times. Equipped first-aid stations shall be easily accessible throughout the site as well as at construction camps.</li> <li>Provide medical insurance coverage for workers.</li> <li>Secure construction zone from unauthorized intrusion and accident risks.</li> <li>Provide supplies of potable drinking water.</li> <li>Provide clean eating areas where workers are not exposed to hazardous or noxious substances.</li> <li>Provide visitor orientation if visitors to the site can gain access to areas where hazardous conditions or substances may be present. Ensure also that visitor/s do not enter hazard areas unescorted.</li> <li>Ensure the visibility of workers through their use of high visibility vests when working in or walking through heavy equipment operating areas.</li> <li>Ensure moving equipment is outfitted with audible back-up alarms.</li> <li>Mark and provide sign boards in the construction zone, and area</li></ul> |
| Impacts on socio-              | <ul> <li>Provide walkways and metal sheets where required to maintain access to<br/>shops/businesses along trenches.</li> </ul>  |
| economic<br>activities         | <ul> <li>Consult businesses and institutions regarding operating hours and factoring this in to work schedules.</li> <li>Provide sign boards for pedestrians to inform nature and duration of construction works and contact numbers for concerns/complaints.</li> <li>Employ at least 50% of the labor force, or to the maximum extent, local persons within the 2-km immediate area if manpower is available.</li> <li>"Mobility Plan" has to be chalked out in consultation with the District Administration prior to start of work.</li> </ul>   |

113. The construction related impacts due to proposed subproject components are generic to construction and are relatively less significant being an architectural heritage restoration projects. The potential impacts that are associated with construction activities can be mitigated to standard levels without difficulty through incorporation or application of the recommended mitigation measures and procedures.

## 4. Post-Construction Impacts and Mitigation Measures

- 114. Site clean-up is necessary after construction activities. The contractor will be required to:
  - Backfill any excavation and trenches, preferably with excess excavation material generated during the construction phase.
  - Use removed topsoil to reclaim disturbed areas.
  - Reestablish the original grade and drainage pattern to the extent practicable.
  - Stabilize all areas of disturbed vegetation using weed-free native shrubs, grasses, and trees.
  - Restore access roads, staging areas, and temporary work areas.
  - Restore roadside vegetation.
  - Remove all tools, equipment, barricades, signs, surplus materials, debris, and rubbish. Demolish buildings/structures not required for O&M. Dispose in designated disposal sites.
  - Reguest in writing from PIU/DSC that construction zones have been restored.

## **Anticipated Operations and Maintenance (O&M) Impacts and Mitigation Measures**

- 115. Impacts on environmental conditions associated with the O&M of the subproject components pertain to impacts related to increased tourists in the areas resulting to increased vehicular movement along the roads, increased demands for services, and increased solid waste generation. These impacts can be mitigated by:
  - Increased vehicular movement along the roads speed restrictions, provision of appropriate road signage and well located rest points for pedestrians shall minimize impacts on safety of the people
  - Increase demands for services addressed through the subproject design
  - Increase solid waste generation Municipal Corporation to put in place solid waste management programs.

## 116. **OperationandMaintenanceImpacts**

- o The project initiatives will encourage tourist populations to these destinations.
- The project will also build the capacity of primary and secondary stakeholders by training on environmental and livelihood aspect. The project will have a cumulative positive impact on the tourism sector through a series of steps that target the:

#### 117. Socio-Economic

The Almora Fort Restoration Plan will bring in much needed investment to develop a range of tourism products, which will not only improve connectivity and infrastructure but also provide a range of employment opportunities linked to pilgrimage, culture and nature tourism. The sub-project would lead to improvement in basic tourism infrastructure which helps improve the quality of life for the residents and improve the level of urban services in the town thereby leading to a coordinated decision-making between different concerned stakeholders. The existing local craft based activities can be further diversified to cater to an increasing number of tourists and also create new opportunities for local entrepreneurship (SHG) not only among men but also women force.

 This sub-project is envisaged to encourage gender equality by increasing women's participation in tourism related activities especially those related to craft and cuisine.

### 118. Operation of Collectorate office

- For Almora District Collectorate office, Water supply is planned from municipal water supply and water line will be extended to proposed building. Water consumption for office use is for approx 500 persons 22500 Liter. (Consumption is estimated as per NBCC norms of 45 liter/ capita)
- For waste water discharge 4 nos. of soak pit and 4 nos. of septic tank are proposed. In total 64 nos. of toilet, 32 nos. urinal will be constructed
- Solid waste will be stored in bin adjacent to Collectorate office. Collection will be done by Almora Nagar Palika
- 119. This sub-project will benefit the region as a whole and several institutions like Uday Shankar Institute of Dance, Almora, Gobind Ballabh Pant Institute of Folk Arts, Almora, Mayawati Ashram, Champawat, Vivekananda Ashram, University of Kumaon, Faculty of Fine Arts, YugManch, Nainital, Folk Crafts Museum, Bhimtal etc. shall be included as key stakeholders.

#### **Nature and Environment**

- 120. Better infrastructure and tourism facilities will help increase the benefits to natural areas of Almora by enabling visitors to make informed choices to avoid conflicting uses between the built and natural environment through the various identified projects activities and will enable finding solutions to make them compatible.
- 121. The project will increase public appreciation of the environment and will spread awareness of environmental problems by creating an enabling environment for a better understanding, cooperation and sensitivity towards the depleting environmental resources of the area and issues of tourism development not just by the implementation agency UTDB but also all concerned stakeholders such as the Forest Department, Van Panchayat and District Administration.
- 122. Carbon footprint generation envisaged by this sub-project will be relatively low by ensuring the implementation of principles such as the 3R (Reuse, Reduce, Recycle) through the use of eco-friendly building materials and techniques.

## V. ENVIRONMENTAL MANAGEMENT PLAN(EMP)

- 123. An environmental management plan (EMP) translates recommended mitigation and monitoring measures into specific actions that will be carried out by the contractor and proponent. Environmental Management Plan deals with the management measures and implementation procedure of the guidelines along with enhancement measures recommended to avoid, minimize and mitigate foreseen environmental impacts of the project.
- 124. The EMP will guide the environmentally sound construction of the subproject and ensure efficient lines of communication between the DSC (Engineer), contractors, and PIU/PMU.
- 125. The EMP identifies the three phases of development as: (i) Site Establishment and Preliminary Activities; (ii) Construction Phase; and (iii) Post Construction/Operational Phase.
- 126. The purpose of the EMP is to ensure that the activities are undertaken in a responsible non detrimental manner to: (i) provide a pro-active, feasible and practical working tool to enable the measurement and monitoring of environmental performance on site; (ii) guide and control the implementation of findings and recommendations of the environmental assessment conducted for the subproject; (iii) suggest detail specific actions deemed necessary to assist in mitigating the environmental impact of the subproject; and (iv) ensure that safety recommendations are complied with.
- 127. A copy of the EMP must be kept on site during the construction period at all times. The EMP will be made binding on all contractors operating on the site and will be included within the Contractual Clauses. Non-compliance with, or any deviation from, the conditions set out in this document constitutes a failure in compliance. It shall be noted that the Supreme Court of India mandates those responsible for environmental damage must pay the repair costs both to the environment and human health and the preventative measures to reduce or prevent further pollution and/or environmental damage. (The polluter pays principle).
- 128. The Contractor is deemed not to have complied with the EMP if:
  - Within the boundaries of the site, site extensions and haul/ access roads there is evidence of contravention of clauses.
  - If environmental damage ensues due to negligence.
  - The contractor fails to comply with corrective or other instructions issued by the Engineer/PMU/PIU within a specified time.
  - The Contractor fails to respond adequately to complaints from the public.
- 129. All works undertaken towards protection of environmental resources as part of the EMP and as part of good engineering practices while adhering to relevant specifications will be deemed to be incidental to works being carried out and no separate payment will be made unless otherwise specified explicitly. The costs towards environmental management as per EMP unless otherwise provided as a separate head, will be deemed to be part of the

BoQ of the project. The scope of works of the contractor towards the implementation of the environmental provisions shall be as follows:

- Abide by all existing Environmental regulations and requirements of the local level,
   Government of Uttarakhand and Government of India, during implementation.
- Compliance with all mitigation measures and monitoring requirements set out in the Environmental Management and Monitoring Plan (EMMP).
- Submission of a method statement detailing how the subproject EMMP will be complied with. This shall include methods and schedules of monitoring.
- Monitoring of project environmental performance including performance indicators defined therein, and periodic submission of monitoring reports.
- Compliance with all measures required for construction activities in sensitive areas, in line with the regulatory requirements of these protected areas, and the guidelines set forth in the management plans for these areas.
- Compliance of all safety rules and regulations applicable at work, and provision of adequate health and safety measures such as water, food, sanitation, personal protective equipment, workers insurance, and medical facilities.

#### **Responsibilities for EMP Implementation**

## A. Institutional Arrangements

130. The institutional arrangements specify the arrangements for the implementation of environmental provisions of the entire project, and include the proposed subproject also.

## Project Management Unit (PMU) and Project Implementation Unit (PIU)

131. The Department of Tourism, Government of Uttarakhand is the Executing Agency (EA). Project Management Unit (PMU) is established in Dehradun for the overall project management and Project Implementation Units (PIU) have been established for each of the three circuits. The proposed sub-project shall be implemented by the PIU, Bhimtal. A Safeguards Specialist (SS) is within the PMU, and SS is responsible for overall management implementation of the resettlement and environmental safeguard provisions.

# Project Management Consultant (PMC) and Design and Supervision Consultants (DSC)

132. Project Management Consultants (PMC) and Design and Supervision Consultants (DSC) have been recruited to provide assistance to the PMU and PIUs respectively in project implementation. Within the PMC team an Environment Safeguards Specialist will provide overall direction for management of environmental issues, and will provide technical support to the PMU including implementation of the environmental requirements according to ADB requirements, and assist in monitoring impacts and mitigation measures associated with sub-projects. The Safeguards Specialist of the DSC team will be responsible for preparation of the Environmental Assessment documents in line with the EARF and supervise the implementation of the EMP provisions in the various sub-projects. The PMU, will oversee the implementation of the environmental provisions related to subproject

implementation, its responsibilities include preparation and updating of IEEs consistent with the ADBs Environmental Assessment Guidelines and the environmental compliance requirements of theGovernment of Uttarakhand and the Government of India.

- 133. The DSC Safeguards Specialist will support environmental management functions including updating sub-project IEEs in respect to environmental management plans, assisting in preparing IEEs, and assist in monitoring impacts and mitigation measures associated with sub-projects. He/she will be required to include mitigation measures in designs where appropriate, and to specify other measures in construction contracts. Contractors will be required by their contracts to implement all specified mitigation, monitoring, and reporting assigned to contractors as presented in sub-project IEE. Environmental monitoring will be undertaken by the PMU/PMC supported by the DSC-Safeguards Specialist.
- 134. Towards addressing the forest related issues in the project components during design and implementation, the PMU/DSC includes provisions of Forest Conservation Specialist.

## 135. The following agencies will be responsible for EMP Implementation:

- Dept. of Tourism is the Executing Agency (EA) responsible for overall management, coordination, and execution of all activities funded under the loan;
- UTDB is the Implementing Agency (IA) responsible for coordinating procurement and construction of the project through its Project Management Unit (PMU) at Dehradun.
- The Project Management Consultant (PMC) assists PMU in managing the project including procurement and assures technical quality of design and construction;
- The Design and Supervision Consultant (DSC) will prepare the DPR of the project and will carry out construction supervision during project implementation. Their responsibility will also include EMP implementation supervision;
- A Project Implementation Unit (PIU) has been established in Bhimtal. This PIU will look into progress and coordination of day to day construction works with the assistance of DSC; and
- The contractor will be responsible for execution of all construction works. The contractor will work under the guidance of the PIU Bhimtal and the DSC. The environmental related mitigation measures will also be implemented by the contractor.
- 136. The contractor's conformity with contract procedures and specifications during construction will be carefully monitored by the DSC and PIU.
- 137. Responsibility for monitoring: During construction, DSC's Environmental Specialist and the designated representative engineer of the PIU will monitor the contractor's environmental performance. During the operation phase, monitoring will be the responsibility of the UTDB.

138. Responsibility for Reporting. PMU will submit to ADB semi-annual reports on implementation of the EMP and will permit ADB to field environmental review missions which will review in detail the environmental aspects of the project. Any major accidents having serious environmental consequences will be reported immediately. PMC environmental expert will help in preparing monthly, quarterly, semi-annual and annual progress reports.

#### **EMP Tables**

139. **Tables 15 to 17** show the potential adverse environmental impacts, proposed mitigation measures, responsible parties, for implementation. This EMP will be included in the bid documents and will be further reviewed and updated during implementation, if required.

**Table: 15 Environment Management Plan for Pre-Construction Phase** 

| Sr.<br>No. | Parameters   | Mitigation Measures   | Parameter/<br>Indicator of<br>Compliance          | Responsible for<br>Implementation   | Responsible for<br>Supervision                                 | Frequency of monitoring   | Source of Funds<br>to Implement<br>Mitigation<br>Measures |
|------------|--|---|---|---|--|---|---|
| 1          | Consents, permits, clearances, no objection certificate (NOC), etc.              | Obtain all necessary consents, permits, clearance, NOCs, etc. prior to start of civil works.  Acknowledge in writing and provide report on compliance all obtained consents, permits, clearance, NOCs, etc. |   | PIU   | to be reported to ADB in environmental monitoring report (EMR) | Check CFEs, permits, clearance from State Culture Dept. prior to start of civil works | Project cost /PMU   |
| 2          | Establishment of baseline environmental conditions prior to start of civil works | Conduct documentation of location of components, areas for construction zone (camps, staging, storage, stockpiling, etc.) and surroundings (within direct impact zones). Include photos and GPS coordinates | Records   | Contractor  | PMU and PMC<br>PIU and DSC                                     | Once prior to construction  | Contractor  |
| 3          | Utilities  | 1-Identify and include locations and operators of these utilities in the detailed design documents to prevent unnecessary disruption of services during the construction phase.  2-Require contractors to   | showing utilities to be shifted  Contingency plan | - DSC will prepare preliminary list and maps of utilities to be shifted - During detailed design phase, contractor to (i) | PIU/DSC  | Pre-Construction<br>Phase   | Contractor  |

| Sr.<br>No. | Parameters                          | Mitigation Measures   | Parameter/<br>Indicator of<br>Compliance | Responsible for<br>Implementation   | Responsible for<br>Supervision | Frequency of monitoring                   | Source of Funds<br>to Implement<br>Mitigation<br>Measures |
|------------|-------------------------------------|---|--|---|--------------------------------|---|---|
|            |                                     | prepare a contingency plan to include actions to be done in case of unintentional interruption of services.  3-Obtain from the PIU and/or DSC the list of affected utilities and operators;  4-If relocations are necessary; contractor will coordinate with the providers to relocate the utility.   |  | prepare list and operators of utilities to be shifted; (ii) contingency plan                                |                                |   |   |
| 4          | Social and<br>Cultural<br>Resources | 1-Consult Archaeological Survey of India (ASI) or Uttarakhand State Archaeology Department to obtain an expert assessment of the archaeological potential of Pedestrian route. 2-Consider alternatives if the site is found to be of medium or high risk. Include state and local archaeological, cultural and historical authorities, and interest | Chance find protocol                     | - PMC to consult ASI or Uttarakhand State Archaeology Department - PMC to develop protocol for chance finds | PMU                            | Prior to start of construction activities | DSC/PMC   |

| Sr.<br>No. | Parameters   | Mitigation Measures   | Parameter/<br>Indicator of<br>Compliance | Responsible for<br>Implementation | Responsible for<br>Supervision | Frequency of monitoring  | Source of Funds<br>to Implement<br>Mitigation<br>Measures |
|------------|--|---|--|-----------------------------------|--------------------------------|--|---|
| 5          | Sites for construction work camps, areas for stockpile, storage and disposal | groups in consultation forums as project stakeholders so that their expertise can be made available.  3-Develop a protocol for use by the construction contractors in conducting any excavation work, to ensure that any chance finds are recognized and measures are taken to ensure they are protected and conserved.  Siting of the construction camps shall be as per the guidelines below and details of layout to be approved by DSC.  The potential sites will be selected for labour camp and these shall be visited by the DSC environmental expert and one having least impacts on environment will be approved by the DSC. As far as possible construction camp will | camps site, and                          | Contractor                        | DSC/ PIU                       | At the time of construction camp establishment and finalization of storage areas | Contractor  |

| Sr.<br>No. | Parameters                        | Mitigation Measures   | Parameter/<br>Indicator of<br>Compliance        | Responsible for<br>Implementation         | Responsible for<br>Supervision | Frequency of monitoring       | Source of Funds<br>to Implement<br>Mitigation<br>Measures |
|------------|-----------------------------------|---|---|---|--------------------------------|-------------------------------|---|
|            |                                   | be established at in vacant land near alignment of Pedestrian route and planned locations of amenities to avoid impact on other land.                                       |   |   |                                |                               |   |
|            |                                   | Location for stockyards for construction materials shall be identified either at Locations of amenities/facilities or at sites at a minimum distance of 300 m from streams. |   |   |                                |                               |   |
|            |                                   | Construction sanitation facilities shall be adequately planned,   |   |   |                                |                               |   |
|            |                                   | The Sewage collection and treatment and disposal and solid waste collection and disposal at camp site shall be designed, built and operated.                                |   |   |                                |                               |   |
| 6          | Sources of construction materials | Use quarry sites and sources licensed by the Uttarakhand Government.  | Permits issued to quarries/sources of materials | Contractor  PMC and DSC to verify sources | PMU                            | Upon submission by contractor | PMC and DSC as part of consultancy fee                    |

| Sr.<br>No. | Parameters | Mitigation Measures   | Parameter/<br>Indicator of<br>Compliance | Responsible for<br>Implementation                            | Responsible for<br>Supervision | Frequency of monitoring                 | Source of Funds<br>to Implement<br>Mitigation<br>Measures |
|------------|------------|---|--|--|--------------------------------|---|---|
|            |            | Verify suitability of all material sources and obtain approval from PIU.  |  | (including permits) if additional is requested by contractor |                                |   |   |
|            |            | If additional quarries are required after construction has started, obtain written approval from PIU. Submit to DSC on a monthly basis documentation of sources of materials.   |  |  |                                |   |   |
| 7          | Access     | 1. Plan transportation routes so that heavy vehicles do not use narrow local roads, except in the immediate vicinity of delivery sites.  2. Schedule transport and hauling activities during non-peak hours.  3. Locate entry and exit points in areas where there is low potential for traffic congestion.  4. Keep the site free from all unnecessary obstructions. | Traffic management plan                  | Contractor   | PIU and DSC                    | to be included in site environment plan | Contractor  |

| Sr.<br>No. | Parameters                     | Mitigation Measures  | Parameter/<br>Indicator of<br>Compliance | Responsible for<br>Implementation        | Responsible for<br>Supervision | Frequency of monitoring  | Source of Funds<br>to Implement<br>Mitigation<br>Measures |
|------------|--------------------------------|--|--|--|--------------------------------|--|---|
|            |                                | 5. Drive vehicles in a considerate manner. 6. Coordinate with the Traffic Police Department for temporary road diversions and for provision of traffic aids if transportation activities cannot be avoided during peak hours. Notify affected sensitive receptors by providing sign boards with information about the nature and duration of construction works and contact numbers for concerns/complaints. |  |  |                                |  |   |
| 8          | Occupational health and safety | Comply with IFC EHS Guidelines on Occupational Health and Safety   | Health and safety<br>(H&S) plan          | Contractor                               | PMU and PMC PIU and DSC        |  | Contractor  |
| 9          | Public consultations           | Continue information dissemination, consultations, and involvement/participation of stakeholders during project implementation.  | Disclosure<br>records<br>Consultations   | PMU and PMC<br>PIU and DSC<br>Contractor | PMU and PMC                    | During updating of IEE Report During preparation of site- and activity-specific plans as per EMP Prior to start of | PMU   |

| Sr.<br>No. | Parameters | Mitigation Measures | Parameter/<br>Indicator of<br>Compliance | Responsible for<br>Implementation | Responsible for<br>Supervision | Frequency of monitoring          | Source of Funds<br>to Implement<br>Mitigation<br>Measures |
|------------|------------|---------------------|--|-----------------------------------|--------------------------------|----------------------------------|---|
|            |            |                     |  |                                   |                                | construction During construction |   |

# **Table16:Environment Management Plan for Construction Phase**

| S.<br>No. | Parameters   | Mitigation Measures  | Parameter/<br>Indicator of<br>Compliance                  | Responsible<br>for<br>Implementation | Responsible<br>for<br>Supervision | Frequency of monitoring        | Source of Funds to<br>Implement<br>Mitigation Measures |
|-----------|--|--|---|--------------------------------------|-----------------------------------|--------------------------------|--|
| 1         | Site clearance activities, including delineation of construction areas | Shrubs and grass (no trees) shall be removed from construction sites prior to commencement of construction. All works shall be carried out such that the damage or disruption of flora other than those identified for cutting is minimum.  Only ground cover/shrubs that impinge directly on the permanent works or necessary temporary works shall be removed with prior approval from the Environmental Expert of DSC  All areas used for temporary | Site clearance plan and demarcation of construction areas | Contractor                           | DSC / PIU                         | Construction sites delineation | Contractor   |

|   | S.<br>Io. | Parameters                        | Mitigation Measures   | Parameter/<br>Indicator of<br>Compliance                                    | Responsible for Implementation | Responsible<br>for<br>Supervision | Frequency of monitoring                      | Source of Funds to<br>Implement<br>Mitigation Measures |
|---|-----------|-----------------------------------|---|---|--------------------------------|-----------------------------------|--|--|
|   |           |                                   | construction operations will<br>be subject to complete<br>restoration to their former<br>condition with appropriate<br>rehabilitation procedures.   |   |                                |                                   |  |  |
| 2 |           | Drinking<br>water<br>availability | Sufficient supply of cold potable water to be provided and maintained. If the drinking water is obtained from an intermittent public water supply then storage tanks will be provided. At construction camp site water will be arranged as per available source followed by storage                 | Availability of water at identified sources, drinking water quality results | Contractor                     | DSC/ PIU                          | Regularly<br>during<br>construction<br>phase | Contractor   |
| 3 |           | Waste<br>disposal                 | The pre-identified disposal location shall be part of Comprehensive Waste Disposal Plan. Solid Waste Management Plan to be prepared by the Contractor in consultation and with approval of Environmental Specialist of DSC.  The Environmental Specialist of DSC shall approve these disposal sites | Waste<br>Disposal<br>sites, waste<br>management<br>plan                     | Contractor                     | DSC / PIU                         | Regularly<br>during<br>construction<br>phase | Contractor   |

| S.<br>No. | Parameters                                     | Mitigation Measures  | Parameter/<br>Indicator of<br>Compliance  | Responsible<br>for<br>Implementation | Responsible<br>for<br>Supervision | Frequency of monitoring                      | Source of Funds to<br>Implement<br>Mitigation Measures |
|-----------|--|--|---|--------------------------------------|-----------------------------------|--|--|
|           |  | after conducting a joint inspection on the site with the Contractor.   |   |                                      |                                   |  |  |
|           |  | Contractor shall ensure that waste shall not be disposed off near any water course or close to Pedestrian Route or agricultural land, Orchards and Natural Habitats like Grasslands.   |   |                                      |                                   |  |  |
| 4         | Stockpiling<br>of<br>construction<br>materials | Stockpiling of construction materials does not impact, obstruct the drainage and Stockpiles will be covered to protect from dust and erosion. If these are exposed than regular water spray shall be carried out.                                    | Identified<br>locations of<br>stockpiling   | Contractor                           | DSC/ PIU                          | Regularly<br>during<br>construction<br>phase | Contractor   |
| 5         | Arrangement<br>for<br>Construction<br>Water    | The contractor shall use ground/surface water as a source of water for the construction with the written consent from the concerned Department.  To avoid disruption/disturbance to other water users, the Contractor shall extract water from fixed | Identified<br>sources of<br>construction<br>water ,<br>availability of<br>construction<br>water | Contractor                           | DSC / PIU                         | Regularly<br>during<br>construction<br>phase | Contractor   |

| S.<br>No. | Parameters   | Mitigation Measures  | Parameter/<br>Indicator of<br>Compliance                                 | Responsible<br>for<br>Implementation | Responsible<br>for<br>Supervision | Frequency of monitoring                      | Source of Funds to<br>Implement<br>Mitigation Measures |
|-----------|--|--|--|--------------------------------------|-----------------------------------|--|--|
|           |  | locations and consult DSC before finalizing the locations.   |  |                                      |                                   |  |  |
|           |  | The Contractor shall provide a list of locations and type of sources from where water for construction shall be extracted.   |  |                                      |                                   |  |  |
|           |  | The Contractor shall need to comply with the requirements of the State Ground Water Department for the extraction and seek their approval for doing so and submit copies of the permission to DSC. |  |                                      |                                   |  |  |
| 6         | Soil Erosion   | Slope protection measures will be undertaken as per design to control soil erosion   | Protection locations as per design                                       | Contractor                           | DSC/ PIU                          | Regularly<br>during<br>construction<br>phase | Contractor   |
| 7         | Water<br>Pollution<br>from<br>Construction<br>Wastes | The Contractor shall take all precautionary measures to prevent entering of wastewater into local streams, water bodies Contractor shall not wash his vehicles in surface water                    | Waste water discharge at construction camps, Vehicle parking and washing | Contractor                           | DSC/ PIU                          | Regularly<br>during<br>construction<br>phase | Contractor   |

| S.<br>No. | Parameters   | Mitigation Measures   | Parameter/<br>Indicator of<br>Compliance                                  | Responsible<br>for<br>Implementation | Responsible<br>for<br>Supervision | Frequency of monitoring                      | Source of Funds to<br>Implement<br>Mitigation Measures |
|-----------|--|---|---|--------------------------------------|-----------------------------------|--|--|
|           |  | body  | areas   |                                      |                                   |  |  |
| 8         | Water Pollution from Fuel and Lubricants                                     | The Contractor shall ensure that all construction vehicle parking locations, fuel/lubricants storage sites, vehicle, machinery and equipment maintenance and refueling sites shall be located at least 500 m away from habitation and other local streams | Vehicle<br>parking,<br>refueling and<br>washing<br>areas                  | Contractor                           | DSC/ PIU                          | Regularly<br>during<br>construction<br>phase | Contractor   |
| 9         | Soil Pollution<br>due to fuel<br>and<br>lubricants,<br>construction<br>waste | The fuel storage and vehicle cleaning area will be stationed such that spillage of fuels and lubricants does not contaminate the ground. Soil and pollution parameters will be monitored as per monitoring plan.  | Fuel and<br>Lubricant<br>storage<br>areas, soil<br>quality<br>parameters  | Contractor                           | DSC / PIU                         | Regularly<br>during<br>construction<br>phase | Contractor   |
| 10        | Generation of dust   | The contractor will take every precaution to reduce the levels of dust at construction site.  All earthworks to be protected/ covered in a manner to minimize dust  | Air quality<br>monitoring<br>results,<br>water<br>sprinkling<br>frequency | Contractor                           | DSC /PIU                          | Regularly<br>during<br>construction<br>phase | Contractor   |

| S.<br>No. | Parameters   | Mitigation Measures   | Parameter/<br>Indicator of<br>Compliance                                       | Responsible<br>for<br>Implementation | Responsible<br>for<br>Supervision | Frequency of monitoring                      | Source of Funds to<br>Implement<br>Mitigation Measures |
|-----------|--|---|--|--------------------------------------|-----------------------------------|--|--|
|           |  | generation.   |  |                                      |                                   |  |  |
| 11        | Emission<br>from<br>Construction<br>Vehicles,<br>Equipment<br>and<br>Machinery | All vehicles, equipment and machinery used for construction shall conform to the relevant Bureau of India Standard (BIS) norms. The discharge standards promulgated under the Environment Protection Act, 1986 shall be strictly adhered to. The silent/quiet equipment available in the market shall be used in the sub Project.  The Contractor shall maintain a record of PUC for all vehicles and machinery used during the contract period which shall be produced for verification whenever required. | Pollution<br>under control<br>certificates<br>for vehicles<br>and<br>machinery | Contractor                           | DSC/ PIU                          | Regularly<br>during<br>construction<br>phase | Contractor   |
| 12        | Noise<br>Pollution   | The Contractor shall confirm that all Construction equipment used in construction shall strictly conform to the MoEF/CPCB noise standards and all Vehicles and equipment  | Noise under control certificates, noise monitoring results                     | Contractor                           | DSC/ PIU                          | Regularly<br>during<br>construction<br>phase | Contractor   |

| S.<br>No. | Parameters                      | Mitigation Measures  | Parameter/<br>Indicator of<br>Compliance   | Responsible for Implementation | Responsible<br>for<br>Supervision | Frequency of monitoring                      | Source of Funds to<br>Implement<br>Mitigation Measures |
|-----------|---------------------------------|--|--|--------------------------------|-----------------------------------|--|--|
|           |                                 | used in construction shall be fitted with exhaust silencers.   |  |                                |                                   |  |  |
|           |                                 | At the construction sites noisy construction work such as crushing, operation of DG sets, use of high noise generation equipment shall be stopped during the night time between 10.00 pm to 6.00 am.   |  |                                |                                   |  |  |
|           |                                 | In any case Noise limits for construction equipment will not exceed 75 dB (A).   |  |                                |                                   |  |  |
| 13        | Material<br>Handling at<br>Site | Workers employed on mixing cement, lime mortars, concrete etc., will be provided with protective footwear and protective goggles.  Workers, who are engaged in welding works, will be provided with welder's protective eye-shields.  The use of any toxic | Records of availability of personal protective equipment (PPE), training records for the of PPEs | Contractor                     | DSC/ PIU                          | Regularly<br>during<br>construction<br>phase | Contractor   |
|           |                                 | chemical will be strictly in accordance with the manufacturer's instructions.  The Engineer will be given  | use of PPEs  |                                |                                   |  |  |

| S.<br>No. | Parameters   | Mitigation Measures   | Parameter/<br>Indicator of<br>Compliance   | Responsible<br>for<br>Implementation | Responsible<br>for<br>Supervision | Frequency of monitoring                      | Source of Funds to<br>Implement<br>Mitigation Measures |
|-----------|--|---|--|--------------------------------------|-----------------------------------|--|--|
|           |  | at least 6 working days' notice of the proposed use of any chemical. A register of all toxic chemicals delivered to the site will be kept and maintained up to date by the Contractor.  |  |                                      |                                   |  |  |
| 14        | Disposal of<br>Construction<br>Waste /<br>Debris / Cut<br>Material | The Contractor shall confirm that Safe disposal of the construction waste will be ensured in the pre-identified disposal locations. In no case, any construction waste will be disposed off around the project site indiscriminately. The waste will be disposed off as per spoil Management Plan to be prepared during construction phase. | Disposal<br>sites, waste<br>utilization<br>records   | Contractor                           | DSC/ PIU                          | Regularly<br>during<br>construction<br>phase | Contractor   |
| 15        | Safety<br>Measures<br>During<br>Construction                       | Adequate safety measures for workers during handling of materials at site will be taken up.  The contractor has to comply with all regulations for the safety of workers. Precaution will be taken to   | Safety<br>training<br>program<br>records,<br>availability of<br>first aid kits<br>and trained<br>personnel | Contractor                           | DSC/ PIU                          | Regularly<br>during<br>construction<br>phase | Contractor   |

| S.<br>No. | Parameters  | Mitigation Measures  | Parameter/<br>Indicator of<br>Compliance                               | Responsible<br>for<br>Implementation | Responsible<br>for<br>Supervision | Frequency of monitoring                      | Source of Funds to<br>Implement<br>Mitigation Measures |
|-----------|---|--|--|--------------------------------------|-----------------------------------|--|--|
|           |   | prevent danger of the workers from fire, etc. First aid treatment will be made available for all injuries likely to be sustained during the course of work.  |  |                                      |                                   |  |  |
|           |   | The Contractor will conform to all anti-malaria instructions given to him by the Engineer.   |  |                                      |                                   |  |  |
| 16        | Clearing of<br>Construction<br>Camps and<br>Restoration | Contractor to prepare site restoration plans for approval by the Engineer. The plan is to be implemented by the contractor prior to demobilization.  On completion of the works, all temporary structures will be cleared away, all rubbish burnt, excreta or other disposal pits or trenches filled in and effectively sealed off and the site left clean and tidy, at the Contractor's expense, to the entire satisfaction of the Engineer | Pre construction records and photographs, disposal site rehabilitation | Contractor                           | DSC/ PIU                          | Regularly<br>during<br>construction<br>phase | Contractor   |

**Table 17: Environmental Management Plan for Operation Phase** 

| S. No. | Parameters   | Mitigation Measures   | Parameter/ Indicator of Compliance                  | Responsible for Implementation | Responsible for<br>Supervision | Frequency<br>of<br>monitoring | Source of Funds<br>to Implement<br>Mitigation<br>Measures                                       |
|--------|--|---|---|--------------------------------|--------------------------------|-------------------------------|---|
| 1      | Uncontrolled tourism flow to the Fort site   | Environmental Monitoring Plan and the Tourism Master Plan will be implemented strictly to avoid uncontrolled tourism flow.  | Tourism Master Plan                                 | Tourism<br>department          | District<br>Administration     | Atleast<br>weekly             | Government of<br>Uttarakhand and<br>Tourism<br>Department                                       |
| 2      | Unhygienic condition due to poor maintenance of sanitation facilities and irregular solid waste collection | Tourism department will carry out maintenance of the toilets, and carry out the regular collection and disposal of wastes to a designated waste treatment site.   | Maintenance<br>schedule of<br>sanitation facilities | PIU                            | PMU                            | Atleast<br>weekly             | Tourism Department for Almora Fort and District Administration Almora for Collectorate building |
| 3      | Irregular supply of water at Collectorate office creating environment nuisance and health effect           | For Almora District Collectorate office, Water supply is planned from municipal water supply and water line will be extended to proposed building. Water consumption for office use is for approx 500 persons – 22500 Liter. Consumption is estimated as per NBCC norms of 45 liter/ capita | Maintenance<br>schedule of water<br>supply system   | PIU                            | PMU                            | Atleast<br>weekly             | District<br>Administration<br>Almora  |
| 4      | Unhygienic   | For waste water discharge 4   | Maintenance   | PIU                            | PMU                            | Atleast                       | District  |

| S. No. | Parameters   | Mitigation Measures              | Parameter/ Indicator of Compliance | Responsible for Implementation | Responsible for<br>Supervision | Frequency<br>of<br>monitoring | Source of Funds<br>to Implement<br>Mitigation |
|--------|--|----------------------------------|------------------------------------|--------------------------------|--------------------------------|-------------------------------|---|
| 3. NO. |  |                                  | Compilation                        | Implementation                 |                                | monitoring                    | Measures                                      |
|        | environmental condition due to poor solid waste management and sanitation facility | total 64 nos. of toilet, 32 nos. | sanitation facilities              |                                |                                | weekly                        | Administration<br>Almora                      |

# Summary of Site- and Activity-Specific Plans as per EMP

140. **Table18** summarizes site- and activity-specific plans to be prepared as per EMP tables.

Table 18: Site and Activity-Specific Plans/Programs as per EMP

| To be Prepared  | Specific Plan/Program                         | Purpose  | Responsible for Preparation                                       | Responsible for<br>Implementation |
|---|---|--|---|-----------------------------------|
| During preparation of site environment plan, before start of the construction |   | , ,  |   | Contractor                        |
| work  | Erosion control and revegetation plan         | Mitigate impacts due to erosion  | Contractor  | Contractor                        |
|   | List and maps showing utilities to be shifted | Utilities shifting   | DSC during preliminary stage<br>Contractor as per detailed design | Contractor                        |
|   | Contingency plan                              | Mitigate impacts due to interruption of services during utilities shifting | Contractor  | Contractor                        |
|   | Chance find protocol                          | Address archaeological or historical finds                                 | PMU and PMC   | Contractor                        |

| To be Prepared | Specific Plan/Program      | Purpose  | Responsible for Preparation | Responsible for<br>Implementation |
|----------------|----------------------------|--|-----------------------------|-----------------------------------|
|                | List of pre-approved sites | Location/s for work camps, areas for stockpile, storage and disposal | PIU and DSC                 | Contractor                        |
|                | Waste management plan      | Mitigate impacts due to waste generation                             | Contractor                  | Contractor                        |
|                | Traffic management plan    | Mitigate impacts due to transport of materials and pipe laying works |                             | Contractor                        |
|                | H&S plan                   | Occupational health and safety                                       | Contractor                  | Contractor                        |

## **B.** Environmental Monitoring Plan

- 141. Through integration of mitigation measures in project design, impacts are mostly insignificant, temporary in nature and can be properly avoided or mitigated by following proposed mitigation measures given in the EMP of this IEE report.
- 142. **Table 19** provides the indicative environmental monitoring program which includes relevant environmental parameters, with a description of the sampling stations, frequency of monitoring, applicable standards, and responsibility. This will be updated during detailed design to ensure EMP and monitoring program is commensurate to the impacts of the subproject.
- 143. Environmental monitoring will be done during construction in three levels; namely monitoring development of project performance indicators done by the DSC Environmental Specialist, monitoring implementation of mitigation measures done by the Contractor; and overall regulatory monitoring of the environmental issues done by the PMC/PMU Environmental Specialist. The monitoring carried out by the contractor through the approved agency will be supervised by the Safeguard Specialist of the Design & Supervision Consultant. The Environmental Monitoring Plan for the project is presented in Table 19. The proposed monitoring of all relevant environmental parameters, with a description of the sampling stations, frequency of monitoring, applicable standards and responsible agencies are presented.

**Table 19: Environmental Monitoring Plan** 

| S.  | Attributes   | Stage         | Parametersto                           | Location     | Frequency    | Responsibility    |
|-----|--------------|---------------|--|--------------|--------------|-------------------|
| No. |              |               | be                                     |              |              |                   |
|     |              |               | Monitored                              |              |              |                   |
| 1   | Debris       | Construction  | Safe disposal of                       | Major        | Random       | Contractor        |
|     | /Constructio | Stage         | construction                           | construction | checks       |                   |
|     | n materials  |               | wastes                                 | sites        |              |                   |
|     | disposal     |               |  |              |              |                   |
| 2   | Dust         | Construction  | No. of tankers                         | Major        | Random       | Contractor        |
|     | suppression  | Stage         | for water                              | construction | checks       |                   |
|     |              |               | sprinkling,                            | sites        |              |                   |
|     |              |               | Timing of                              |              |              |                   |
|     |              |               | sprinkling,                            |              |              |                   |
|     |              |               | Location of                            |              |              |                   |
|     |              |               | sprinkling, Log                        |              |              |                   |
|     |              |               | Book                                   |              |              |                   |
| 2   | Ambient Air  | Construction  | RPM, (PM10                             | Major        | Twice in a   | Contractor,to be  |
|     | Quality      | Stage         | and PM 2.5)                            | construction | yearfor the  | monitored through |
|     |              |               | SO <sub>2</sub> , NO <sub>x</sub> , CO | sites        | entire       | engagement of     |
|     |              |               |  |              | construction | agency approved   |
|     |              |               |  |              | period       | under NABL        |
|     |              |               |  |              |              | Accreditation     |
|     |              |               |  |              |              | norm              |
| 3   | NoiseLevels  | Construction  | Equivalent Day&                        | All          | Twice in a   | Contractor,to     |
|     |              | and Operation | Night Time                             | Construction | yearfor the  | monitorthrough on |

| S.  | Attributes                            | Stage                 | Parametersto  | Location                      | Frequency                        | Responsibility                |
|-----|---------------------------------------|-----------------------|---|-------------------------------|----------------------------------|-------------------------------|
| No. |                                       |                       | be<br>Monitored   |                               |                                  |                               |
|     |                                       | Stage                 | Noise Levels  | sites                         | entire<br>construction<br>period | approvedMonitorin<br>g Agency |
| 4   | Supply of PPE                         | Construction<br>Stage | Provision of PPE on site, adequacy of equipment   | All<br>Construction<br>sites  | Continuous                       | Contractor                    |
| 5   | Establishing<br>Medical<br>facilities | Construction<br>Stage | Access to health facilities for the construction workers  | All<br>Construction<br>sites  | Continuous                       | Contractor                    |
| 6   | Accident record                       | Construction<br>Stage | No. of fatal accidents, No. of injuries, No. of disabilities  | All construction sites        | Continuous                       | Contractor                    |
| 7   | Post construction clearance of site   | Post<br>construction  | Whether temporary locations for workers camp, site office, and other construction locations are restored to pre- project conditions | All<br>Constructio<br>n sites | Post construction                | Contractor                    |

#### C. Environmental Monitoring and Reporting

- 144. The PMU will monitor and measure the progress of EMP implementation. The monitoring activities will be corresponding with the project's risks and impacts and will be identified in the EIAs/IEEs for the subprojects. In addition to recording information of the work, deviation of work components from original scope, the PMU and PIU will undertake site inspections and document review to verify compliance with the EMP and progress toward the final outcome.
- 145. DSC will submit monthly monitoring and implementation reports to PIU, who will take follow-up actions, if necessary. PIU will submit the quarterly monitoring and implementation reports to PMU who will then submit to the ADB. The PMU will submit semi-annual monitoring reports to ADB. Project budgets will reflect the costs of monitoring and reporting requirements. Monitoring reports will be posted in a location accessible to the public.
- 146. For projects likely to have significant adverse environmental impacts, the EA will retain qualified and experienced external experts to verify its monitoring information. The EA will document monitoring results, identify the necessary corrective actions, and reflect them

in a corrective action plan. The EA, in each quarter, will study the compliance with the action plan developed in the previous quarter. Compliance with loan covenants will be screened by the EA.

- 147. ADB will review project performance against the EA's commitments as agreed in the legal documents. The extent of ADB's monitoring and supervision activities will be commensurate with the Project's risks and impacts. Monitoring and supervising of social and environmental safeguards will be integrated into the project performance management system. ADB will monitor projects on an ongoing basis until a project completion report is issued. ADB will carry out the following monitoring actions to supervise project implementation:
  - conduct periodic site visits for projects with adverse environmental or social impacts;
  - conduct supervision missions with detailed review by ADB's safeguard specialists/ officers or consultants for projects with significant adverse social or environmental impacts;
  - o review the periodic monitoring reports submitted by EA to ensure that adverse impacts and risks are mitigated as planned and as agreed with ADB;
  - work with EA to rectify to the extent possible any failures to comply with their safeguard commitments, as covenanted in the legal agreements, and exercise remedies to re-establish compliance as appropriate; and
  - Prepare a project completion report that assesses whether the objective and desired outcomes of the safeguard plans have been achieved, taking into account the baseline conditions and the results of monitoring.

#### D. Capacity Building

#### 148. Institutional Strengthening

 The Department of Tourism, Government of Uttarakhand is the Executing Agency (EA). Project Management Unit (PMU) is established in Dehradun for the overall project management. This sub-project will be implemented by the PIU, Bhimtal. A Safeguards Specialist in the PMU is responsible for implementation of the environmental safeguard provisions. Project Management Consultants (PMC) and Design and Supervision Consultants (DSC) are recruited to provide assistance to the PMU/PIUs in project implementation. Within the PMC team a Safeguards Specialist will provide overall direction for management of environmental and social issues, and will provide technical support to the PMU including implementation of the environmental and resettlement requirements according to ADB requirements, and assist in monitoring impacts and mitigation measures associated with sub-projects. The Safeguards specialist of the DSC team will be responsible to assist in preparation of IEE and EMP report and supervise the implementation of the EMP provisions in the sub-projects. The PMU will oversee the implementation of the environmental provisions related to subproject implementation, consistent with the ADBs Environmental Assessment Guidelines and the environmental compliance requirements of the Government of Uttarakhand and the Government of India.

#### 149. Training and Capacity Building

The Environmental Specialist of the PMC and DSC will provide the basic training required for environmental awareness followed by specific aspects of infrastructure improvement projects along with environmental implications for projects located within / in the vicinity of natural and cultural heritage sites. Specific modules customized for the available skill set will be devised after assessing the capabilities of the members of the Training Programme and the requirements of the project. The entire training would cover basic principles of environmental assessment and management; mitigation plans and programmes, implementation techniques, monitoring methods and tools. The proposed training program along with the frequency of sessions is presented in **Table 20**.

Table20: TrainingModules for EnvironmentalManagement

| Program<br>me                               | Description   | Participants  | Formof<br>Training | Duration/<br>Location | Training<br>Conducting<br>Agency              |
|---|---|---|--------------------|-----------------------|---|
| A.Pre-Cons<br>Sensitizati<br>on<br>Workshop | Introduction to Environment: Basic Concept of environment Environmental Regulations and Statutory requirements as per Government of India and ADB   | Tourism/ Forest/Roads /Culture Department Officials, Project Director(PD) and Environmental Specialist(ES) of the PMU/PIU | Workshop           | 1<br>Working<br>Day   | Environment<br>al<br>Specialist of<br>the PMC |
| Session I<br>Modulel                        | Introduction to Environment: Basic Concept of environment Safeguards Regulations and Statutory requirements as per Govt. of India and ADB Guidelines on cultural resources, Environmental considerations in planning, design and implementingprojects | PMU/PIU<br>(including the ES)<br>and Engineering<br>staff of the<br>implementing<br>agencies                              | Lecture            | 1Working<br>Day       | Safeguards<br>Specialist of<br>the PMC        |

| components impacted in construction and operation stages Activities causing pollution during construction and operation stages Environmental Management Environmental Management Environmental Provisions Implementation Arrangements Methodology of Assessment Good engineering practices to be integrated into contract documents  ModuleIII Improved Co-ordination with Other Departments: Statutory Permissions-Procedural Requirements Co-operation & Coordination with other Departments.  Module IV Environmental considerations in planning, designing and implementing heritage buildings and conservation projects  Module V Environmental principles Of ecc-tourism(as per Uttarakhand eco- tourism policies) and raining and awareness building on Conservation and management aspects of the area.  Including the ES) and Engineering staff of Tourism dept  Module IV Environmental considerations in planning, designing and implementing heritage buildings and conservation and awareness building on Conservation and conservation an | Program<br>me            | Description  | Participants   | Formof<br>Training                 | Duration/<br>Location | Training<br>Conducting<br>Agency                                      |
|--|--------------------------|--|--|------------------------------------|-----------------------|---|
| Other Departments: Statutory Permissions- Procedural Requirements Co-operation & Coordination with other Departments.  Module IV Environmental considerations in planning, designing and interestion peritage buildings and conservation projects  Module V Environmental principles Of eco-tourism (as per Uttarakhand eco- tourism policies) and raining and awareness building on Conservation and management aspects of the area.  Module V Environmental principles Of eco-tourism policies) and raining and awareness building on Conservation and management aspects of the area.  (including The ES) and Engineering staff of Tourism dept  PMU/PIU (includingthe ES) and Engineering staffor Tourism dept  Lecture/ Interactive Sessions and site visits  Environmental principles Of eco-tourism policies) and raining and awareness building on Conservation and management aspects of the area.  | ModuleII                 | components impacted in construction and operation stages Activities causing pollution during construction and operation stages Environmental Management Environmental Provisions Implementation Arrangements Methodology of Assessment Good engineering practices to be integrated into contract | (including theES) and Engineering                      | Workshop                           | Working               | Specialist  |
| considerations in planning, designing and implementing heritage buildings and conservation projects  Module V  Environmental principles Of eco-tourism policies) and raining and awareness building on Conservation and management aspects of the area.  Local Community Groups, NGOs  Local Community Groups, NGOs  Local Community Groups, NGOs  Local Community Groups, NGOs  B.Construction Stage  | ModuleIII                | Other Departments: Statutory Permissions— Procedural Requirements Co-operation & Coordination  | (including<br>The ES) and<br>Engineering staff         | Interactive                        | _                     | Specialist of the   |
| eco-tourism(as per Uttarakhand eco- tourism policies) and raining and awareness building on Conservation and management aspects of the area.  Community Groups, NGOs  Sessions  Unteractive Sessions  Day  from DSC and PIU  B.Construction Stage  | Module IV                | considerations in planning, designing and implementing heritage buildings and  | (includingthe ES)<br>and Engineering<br>staffofTourism | Interactive<br>Sessions<br>andsite | _                     | specialist of<br>thePMCwith<br>supportfrom<br>the<br>Conservatio<br>n |
|  | Module V                 | eco-tourism(as per Uttarakhand eco- tourism policies) and raining and awareness building on Conservation and management aspects of the   | Community  | Interactive                        | Working               | Specialist from DSC   |
| Specian II   | B.Construc<br>Session II | tion Stage   |  | ı                                  | l                     | 1   |

| Program<br>me  | Description   | Participants  | Formof<br>Training                     | Duration/<br>Location | Training<br>Conducting<br>Agency         |
|----------------|---|---|--|-----------------------|--|
| Module VI      | Roleduring Construction-<br>Roles and Responsibilities<br>of officials/contractors/<br>consultantstowards<br>protectionof environment<br>Implementation<br>Arrangements<br>Monitoringmechanisms | Engineers and Staff of line departments of the Governmentof Uttarakhand, andPMU/PIU (includingthe ES) | Lecture/<br>Interactive<br>Sessions    | 1<br>Working<br>Day   | Safeguards<br>Specialistof<br>the<br>DSC |
| Module VII     | Monitoringand<br>Reporting<br>System  | Engineersand<br>staffof<br>implementing<br>agenciesand<br>PMU/PIU<br>(includingthe ES)                | Lecture/<br>Interactive<br>Sessions    | 1<br>Working<br>Day   | Safeguards<br>Specialistof<br>the<br>DSC |
| SessionIII     |   |   |  |                       |  |
| Module<br>VIII | Skill upgrade on Hospitality,<br>Interpretational skills, micro-<br>planning,   | Youth in the villages in the periphery, and other NGOs in the district                                | Sitevisits,<br>interactive<br>sessions | 2 working<br>days     | Tourism<br>department                    |

Notes: PMU= Project Management Unit; PIU=Project Implementation Unit; PMC= Project Management Consultant; DSC=Design and Supervision Consultant; ES= Environment Specialist; NGO=Non-government organization

#### E. Environmental Budget

- 150. As part of good engineering practices in the project, there have been several measures as erosion prevention, rehabilitation of borrow areas, safety, signage, provision of temporary drains, etc., the costs for which are included in the design costs of specific subprojects. Therefore, these items of costs have not been included in the IEE budget. Only those items not covered under budgets for construction are considered in the IEE budget.
- 151. This is a small reconstruction-restoration project and there are no major structures to be constructed therefore it is not expected to cause much significant air, water and noise pollution. The main EMP cost will arise from monitoring of environmental parameters (air, water and noise).
- 152. The costs of personal protective equipment to construction workers shall be borne by contractor as part of conditions of contract. In addition the sources of funds for Mitigation measures during construction stage including monitoring during construction stage are also to be borne by the contractor. These are deemed to be included as part of the contract price amount quoted by the contractor for the works. The costs of components for monitoring in operation stage and the capacity building costs are to be funded by the PMU. The EMP cost is given in the **Table 21**.

**Table21: Environmental Budget** 

| Item   | Rate per sample | Number           | Total Cost<br>(INR) | Source of funds    |
|--|-----------------|------------------|---------------------|--------------------|
|  |                 | Environme        | ntal Monitorino     | 9                  |
|  | C               | onstruction Phas | se                  |                    |
| Air quality monitoring — Within existing Fort and proposed Collectorate/ DM building site-Total 4 sample sites twice in a year for 2 years = 16 samples  | 9000            | 16 samples       | 1,44,000            | Contractor's costs |
| Noise Level monitoring – Within existing Fort and proposed Collectorate/ DM building site- Total 6 sample sites twice in a year for 2 years = 24 samples | 2500            | 24 samples       | 60,000              | Contractor's costs |
| Total Monitoring Cost For C Phase  | onstruction     |                  | 2,04,000            |                    |
| Capacity Building Expenses (3 Sessions in project life)  | 50000           |                  | 1,50,000            | PMU/ DSC           |
| Total Cost   |                 |                  | 3,54,000            |                    |
| Contingencies @ 5 %  |                 |                  | 17,700              |                    |
| Total Budgeted Cost  |                 |                  | ;                   | 3,71,700           |

#### VI. PUBLIC CONSULTATION AND INFORMATION DISCLOSURE

#### A. Process for Consultation followed

153. During Project preparation, consultations have been held with the District Administration, Municipal Authority, Members of Bar Association, Department of Tourism, public representatives of project area villages, Hotel Owners, and tourists on project orientation, issues pertaining to conservation and management Almora Fort, land acquisition problems and addressing the current gaps in provision of basic services and improvement of tourist infrastructure. These consultations (**Table-22**) provided inputs in identification of the felt needs of the communities, and the relevant stakeholders.

**Table 22:Consultations with Stakeholders** 

| Date                          | Members Consulted                  | Issues                | Suggestions                                   |
|-------------------------------|------------------------------------|-----------------------|---|
| 25 <sup>th</sup>              | Groups of traders from the         | Need                  | Site needs repair and                         |
| June,                         | market, litigants at the DM Office | Assessment,           | reconstruction in sync with                   |
| 2014                          | and the office bearers of the Bar  | know public           | its architectural fabric and                  |
|                               | Association                        | perception            | can highlight Almora's                        |
|                               |                                    | about                 | image as a tourist                            |
|                               |                                    | restoration and       | destination                                   |
|                               |                                    | reuse of              |   |
| Eth Luba                      | District administration officials  | building Presentation | Destaration was appreciated                   |
| 5 <sup>th</sup> July,<br>2014 | District administration officials  | was shown on          | Restoration was appreciated but wider public  |
| 2014                          |                                    | the proposed          | consultations were                            |
|                               |                                    | reuse and             | suggested before any move                     |
|                               |                                    | restoration           | to shift the administrative                   |
|                               |                                    | plan for the          | offices                                       |
|                               |                                    | Almora Fort           |   |
|                               |                                    | Complex.              |   |
| 11 <sup>th</sup>              | District Administration, PWD,      | Briefing about        | Minutes enclosed.                             |
| August,                       | Municipal Authority, Hotel         | the sub project       | (Annexure 5)                                  |
| 2014                          | Association, Culture Dept.,        | components            |   |
|                               | District tourism Dev Officer       |                       |   |
| 20th                          | Members from Almora Municipal      | As a follow up        | • Stakeholders expressed                      |
| August,                       | Authorities, Bar Association, The  | of earlier            | concern over the                              |
| 2014                          | Hotel and Restaurant               | meeting, for a        | increasing breakdown of                       |
|                               | Association, The Department of     | wider                 | civic amenities in the town                   |
|                               | Culture, Government of             | disclosure            | and the overcrowding.                         |
|                               | Uttarakhand, The Traders'          |                       | • Concerns were also                          |
|                               | Association of Almora, Public      |                       | expressed that the other                      |
|                               | Representatives and Members of     |                       | heritage sites in the town                    |
|                               | the Media                          |                       | were immense stress and in advanced stages of |
|                               | The Media                          |                       | in advanced stages of deterioration.          |
|                               |                                    |                       | • A general consensus                         |
|                               |                                    |                       | emerged on relocation of                      |
|                               |                                    |                       | the administrative offices                    |
|                               |                                    |                       | with the provision of                         |
|                               |                                    |                       | efficient and inexpensive                     |
|                               |                                    |                       | transport facility to the new                 |

|                      |   |  | complexes.  The administration, however, insisted upon even wider consultations with public before any decision to issue NOC could be arrived at. Another meeting was called on the 25 <sup>th</sup> August'14. |
|----------------------|---|--|---|
| August,<br>2014      | PWD, District Administration, Municipal Authorities, Bar Association, The Hotel and Restaurant Association, The Department of Culture, Government of Uttarakhand, The Traders' Association of Almora        | To obtain general consensus on the sub project | The general consensus favoredand welcomed the adaptive reuse project and relocation of the administrative buildings   |
| 19th<br>Nov,<br>2014 | Meeting organized under the chairmanship of Chief Secretary Utttarakhand, in presence of Secretary Revenue, Commissioner Kumaon, Addl. Secretary Tourism, Dist. Magistrate, Champawat and IDIPT Consultants | For discussion<br>on Shifting of<br>DM Office  | The general consensus favoredthe relocation of the administrative buildings. Minutes attached Annex 5   |

#### B. Future Consultation and Information Disclosure

- 154. To ensure continued public participation, provisions to ensure regular and continued stakeholder participation, at all stages during the project design and implementation is proposed. A grievance redress cell will be setup within the PIU and PMU to register grievances of the people regarding technical, social and environmental aspects. This participatory process will ensure that all views of the people are adequately reviewed and suitably incorporated in the design and implementation process. Further, to ensure an effective disclosure of the project proposals to the stakeholders, an extensive project awareness campaign will be carried out.
- 155. For the information and benefit of the community the summary of IEE will be translated in the local language (Hindi) and made available at: (i) Office of the PIU/PMU; and, (ii) Office of the District Magistrate, Almora and other relevant line departments in the District. These copies will be made available free of cost to any person seeking information on the same. Hard copies of the IEE will be available in the PMU/PIU as well as the district library at Almora, and accessible to citizens as a means to disclose the document and at the same time creating wider public awareness. On demand, the person seeking information can obtain a hard copy of the complete IEE document at the cost of photocopy from the office of the PMU/PIU, on a written request and payment for the same to the Project Director. Electronic version of the IEE will be placed in the official website of the Tourism Department and the website of ADB after approval of the documents by Government and ADB. This will create awareness of the project implementation among the public.

#### C. Grievance Redress Mechanism

- 156. The affected person/aggrieved party can give their grievance verbally or in written to the local grievances committee. Grievances of affected person will first be brought to the attention of the implementing NGO who can resolve the issue at site level. If the matter is not solved within 7 days period by the NGO or PIU, it will be brought to the Grievance Redress Committee constituted for the purpose in PIU. This GRC shall discuss the issue in its monthly meeting and resolve the issues within one month of time after receiving the grievance. If the matter is not resolved by GRC at PIU level within stipulated time, it shall be referred to GRC at PMU level by Executive Engineer of PIU.
- 157. GRC at PMU shall discuss the issue and try to resolve it and inform the PIU accordingly. If the matter is not resolved by the GRC at PMU level within one month of time, the aggrieved person/party can bring the matter to The Court of Law. The PIU shall keep records of all grievances received including contact details of complainant, date of receiving the complaint, nature of grievance, agreed corrective actions and the date these were affected and final outcome. The grievance redress process is shown below.

#### **Composition and functions of GRC**

- 158. **Local Grievance Committee.(LGC) –** In this LGC has worked with NGO, SHG, Line Agency, representative of Gram Panchayat ,Special invitee.
- 159. **Grievance Redress Committee (GRC) at PIU-** In each PIU there shall be one GRC, which will include Project Manager (PIU), District Tourist Officer of Department of Tourism of Govt. Of Uttarakhand, Community Development Officer of PIU, nominated representative of District Magistrate and nominated representative committee shall be headed by Project Manager (PIU). The committee will meet at least once in every month. Agenda of meeting shall be circulated to all the members and affected persons/aggrieved party along with venue, date and time; informed in written at least 7 days in advance of meeting. The matters shall remain with GRC at PIU level for one month and if grievance is not resolved within this time period, the matter shall be referred to GRC at PMU.
- 160. GRC within Environmental and Social Management Cell (ESMC) at PMU- There shall be one GRC in PMU. The matters not resolved by the GRC at PIU level within one month shall come under GRC at PMU. GRC at PMU will include Community Development Expert of PMU, Safeguard Specialist of PMU and Additional Project Director (APD) of PMU. The Committee shall be headed by APD of PMU. This committee shall look the matters, which are referred to and not resolved by GRC at PIU level. If the matter is not resolved by the GRC at PMU level within one month of time, the aggrieved person/party can bring the matter to The Executive Committee/State Level Empowered Committee (SLEC).

## Approach to GRC

- 161. Affected person/aggrieved party can approach to GRC for redress of his/their grievances through any of the following modes-
  - (a) Web based: A separate corner will be developed at the program website so that public / community/ affected person can register their complaint in the online column.
  - (b) Telecom based: A toll free no. Will be issued by the PMU/ PIU so that general public can register their complaint through telephone / mobile phone to the PIU/PMU office.
  - (c) Through implementing NGO: The local representative of the NGO appointed for the purpose will collect the problems & issues of the community or affected person and pass on the same to PIU / PMU.

# GRIEVANCE REDRESS MECHANISM (IDIPT-Uttarakhand)

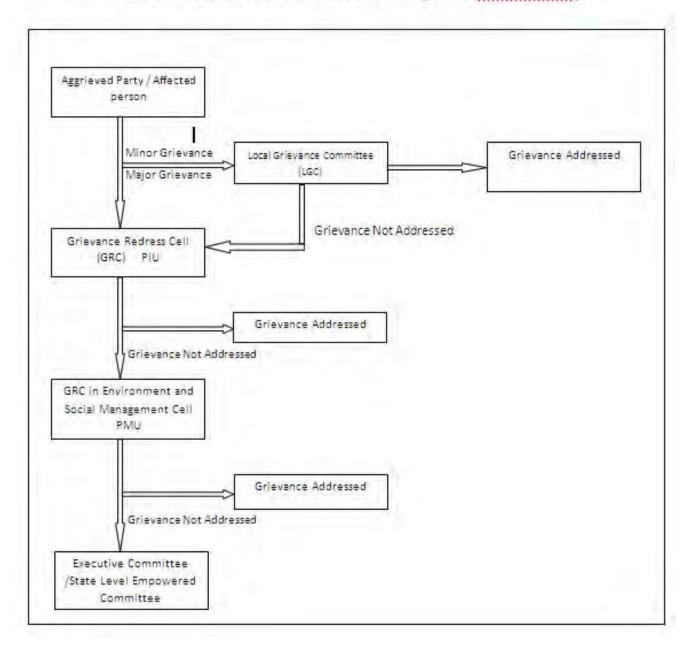


Figure 9: Grievance Redress Mechanism in IDIPT, Uttarakhand

#### Note:

- 1. LGC NGO, SHG, Line Agency, Representative of Gram Panchayat, Special invitee
- 2. GRC PM, CDO, Engineer, DFO, DTO, SDM
- 3. GRC in Environment and Social Management Cell (ESMC) PMU (APD, SS, CDS, FS), PMC (EE, CDE)

#### VII. FINDINGS & RECOMMENDATIONS

- 162. The proposed components of the project are in line with the sub-project selection criteria for the IDIPT (Annexure 2). The subproject conforms to all GoI, GoUK and ADB regulations, policies, and standards including all necessary government permits and clearances.
- 163. The significance of the environmental impacts will be more due to the construction related impacts. It is to be noted that the resultant potential impacts from these proposals can be offset through provision of proven mitigation measures during the design and adoption of good engineering practices during construction and implementation. Further, the provision of environmental infrastructure will better the environmental conditions and minimize the pollution related and aesthetic quality near the sub project site.
- 164. The specific management measures laid down in the IEE will effectively address any adverse environmental impacts due to the sub-project. The effective implementation of the measures proposed will be ensured through the building up of capacity towards environmental management within the PMU supplemented with the technical expertise of a Safeguards Specialist as part of the DSC Consultants. Further, the environmental monitoring plans provide adequate opportunities towards course correction to address any residual impacts during construction or operation stages.

#### VIII. CONCLUSIONS

165. The IEE carried out for the sub-project show that the proposed sub-components will result in net environmental benefits in terms of enhanced tourism facilities and revenue generation, and that any adverse environmental impact can be addressed through proper location, planning, and design of the proposed sub-project; control of construction activity and mitigation measures. The EMP provided for mitigation of all identified short term impacts and the contract clauses for the environmental provisions will be part of the civil works contracts. Further, the proposed designs have been consulted with the stakeholders and no significant issues requiring redress in terms of environmental safeguards exist.

ANNEXURE-1: RAPIDENVIRONMENTALASSESSMENT(REA)CHECKLIST

### RAPIDENVIRONMENTALASSESSMENT(REA)CHECKLIST

#### Instructions:

- i. The project team completes this checklist to support the environmental classification of a project. It is to be attached to the environmental categorization form and submitted to the Environment and Safeguards Division (RSES) for endorsement by the Director, RSES and for approval by the Chief Compliance Officer.
- ii. This checklist focuses on environmental issues and concerns. To ensure that social dimensions are adequately considered, referral so to ADB's (a) checklists on involuntary resettlement and Indigenous Peoples; (b) poverty reduction handbook; (c) staff guide to consultation and participation; and(d)gender checklists.
- iii. Answer the questions assuming the "without mitigation" case. The purpose is to identify potential impacts. Use the "remarks" section to discuss any anticipated mitigation measures.

**Country/Project Title: IDIPT-Uttarakhand**-Restoration, Adaptive Re-use and Revitalization of Almora Fort

Sector Division: SAUW (South Asia Urban Development and Water Division)

| SCREENING QUESTIONS  | Yes        | No       | REMARKS  |  |  |  |
|--|------------|----------|--|--|--|--|
| A. Project Siting:   |            |          |  |  |  |  |
| Isthe project area adjacent to or with                       | nin any of | the fol  | lowing areas?  |  |  |  |
| Densely populated?   | <b>✓</b>   |          | The fort lies in the centre of the Almora town with dense population.  |  |  |  |
| Heavy with development activities?                           | <b>√</b>   |          | The fort lies in the centre of the town with dense population. Therefore heavy with development activities. It is surrounded with residential, official and commercial buildings.  |  |  |  |
| Adjacent to / or within any environmentally sensitive areas? |            | ✓        |  |  |  |  |
| Culturalheritagesite   | <b>✓</b>   |          | Sub-project is on a heritage site that dates back to 15 <sup>th</sup> to 18 <sup>th</sup> century.  Even though not declared to be of national importance/ State importance as recognized bythe Archaeological Survey of India (ASI), the provisions of Ancient Monuments and Archaeological Sites and Remains(Amendment and Validation) Act, 2010) shall be considered in view of the architectural significance. |  |  |  |
| ProtectedArea  |            | <b>✓</b> |  |  |  |  |
| Wetland  |            | ✓        |  |  |  |  |

|   | SCREENING QUESTIONS  | Yes      | No       | REMARKS   |
|---|--|----------|----------|---|
| • | Mangrove   |          | ✓        |   |
| • | Estuarine  |          | ✓        |   |
| • | Buffer zoneof protectedarea  |          | <b>√</b> |   |
| • | Special areafor protectingbiodiversity   |          | <b>✓</b> |   |
| • | Bay  |          | ✓        |   |
|   | Potential Environmental Impaci<br>ill the Project cause  | cts      |          |   |
| • | Impacts on the sustainability of associated sanitation and solid waste disposal systems and their interactions with other urban services.  | <b>✓</b> |          | These impacts shall result in the event of the sanitation and solid waste management systems not being developed in the proposed sites. It will also dependent on the efficiency/capability of community institutions and inaction of environmental laws developed by community. Proper mitigation measures are provisioned in the project. |
| • | Deterioration of surrounding environmental conditions due to rapid urban population growth, commercial and industrial activity, and increased waste generation to the point that both manmade and natural systems are overloaded and the capacities to manage these systems are overwhelmed? | 1        |          | It is envisaged that due to increase in tourism related infrastructure development, more entrepreneurs like hotel, lodge, home-stay, shops etc will be developed resulting to rapid urban population growth, commercial and industrial activity, and increased waste generation   |
| • | Degradation of land and ecosystems (e.g. loss of wetlands and wild lands, coastal zones, watersheds and forests)?  |          | <b>√</b> |   |
| • | Dislocation or involuntary resettlement of people  |          | <b>√</b> |   |
| • | Degradation of cultural property, and loss of cultural heritage and tourism revenues?  |          | <b>√</b> |   |
| • | Occupation of low-lying lands, floodplains and steep hillsides by squatters and low- income  |          | <b>✓</b> |   |

|   | SCREENING QUESTIONS   | Yes      | No       | REMARKS   |
|---|---|----------|----------|---|
|   | groups, and their exposure to increased health hazards and risks due to polluting industries?   |          |          |   |
| • | Water resource problems (e.g. depletion/degradation of available water supply, deterioration for surface and ground water quality, and pollution of receiving waters? |          | ✓        |   |
| • | Air pollution due to urban emissions?   |          | <b>✓</b> |   |
| • | Risks and vulnerabilities related to occupational health and safety due to physical, chemical and biological hazards during project construction and operation?       | <b>√</b> |          | Only physical hazards to workers due to accidents may come across during construction for which safety of workers should be taken in priority.  |
| • | Social conflicts between construction workers from other areas and local workers?   |          | ✓        |   |
| • | Road blocking and temporary flooding due to land excavation during rainy season?  |          | <b>✓</b> |   |
| • | Noise and dust from construction activities?  | <b>✓</b> |          | Impacts envisaged during construction phase. Due care will be taken as per mitigation measures listed in the EMP  |
| • | Traffic disturbances due to construction material transport and wastes?   | <b>✓</b> |          | Impacts envisaged during construction phase. Due care will be taken during construction to avoid traffic disturbances. Circulation plan will be prepared in consultation with the stakeholders and properly disseminated. Timings and frequency of movement of construction vehicles shall be kept to minimize impact on public movement. |
| • | Temporary silt runoff due to construction?  | <b>✓</b> |          | Due to construction activities in the fort premises, there is a potential of temporary silt runoff to the downstream. Adoption of mitigation measures shall effectively address such impact during construction.  |
| • | Hazards to public health due to ambient, household and occupational pollution, thermal  |          | <b>√</b> |   |

|   | SCREENING QUESTIONS  | Yes      | No       | REMARKS   |
|---|--|----------|----------|---|
|   | inversion, and smog formation?   |          |          |   |
| • | Water depletion and/or degradation?  |          | <b>√</b> |   |
| • | Overpaying of ground water, leading to land subsidence, lowered ground water table, and salinization?  |          | <b>√</b> |   |
| • | Contamination of surface and ground waters due to improper waste disposal?   | <b>✓</b> |          | Due to increase in tourist inflow, it is envisaged that garbage and other solid waste may increase which may result to contamination of surface and ground waters. Adoption of mitigation measures like formulation of environmental laws, developing solid waste management systems like composting etc.shall effectively address such impact during construction and post construction. |
| • | Pollution of receiving waters resulting in amenity losses, fisheries and marine resource depletion, and health problems?   |          | ✓        |   |
| • | Large population influx during project construction and operation that causes increased burden on social infrastructure and services (such as water supply and sanitation systems)?      |          | <b>√</b> |   |
| • | Social conflicts if workers from other regions or countries are hired?   |          | ✓        | Not envisaged. Preference will be given to local laborers and migratory labour shall be employed in unavoidable circumstances only.   |
| • | Risks to community health and safety due to the transport, storage, and use and/or disposal of materials such as explosives, fuel and other chemicals during operation and construction? |          | <b>√</b> |   |
| • | Community safety risks due to<br>both accidental and natural<br>hazards, especially where the<br>structural elements or  |          | <b>√</b> |   |

|          | SCREENING QUESTIONS  | Yes      | No       | REMARKS  |
|----------|--|----------|----------|--|
|          | components of the project are accessible to members of the affected community or where their failure could result in injury to the community throughout project construction, operation and decommissioning?                             |          |          |  |
| C.       | Climate Change and Disaster F  | Risk Que | stions   |  |
| Th<br>ch | e following questions are recklist to help identify potential cli  |          |          | ental categorization. They are included in this er risks.  |
| •        | Is the Project area subject to hazards such as earthquakes, floods, landslides, tropical cyclone winds, storm surges, tsunami or volcanic eruptions and climate changes  | <b>~</b> |          | The project area is located in an area prone to landslides, cloud bursts, earthquakes etc. as it is located in the seismic Zone V as per IS 1893:2002.   |
| •        | Could changes in precipitation, temperature, salinity, or extreme events over the Project lifespan affect its sustainability or cost?  | <b>√</b> |          | The project area lies in the hilly region having landslides a major environmental problem during monsoons. In case of such events, the road blockage may hamper project progress.  |
| •        | Are there any demographic or socio- economic aspects of the Project area that are already vulnerable (e.g. high incidence of marginalized populations, rural-urban migrants, illegal settlements, ethnic minorities, women or children)? |          | <b>✓</b> |  |
| •        | Could the Project potentially increase the climate or disaster vulnerability of the surrounding area (e.g., increasing traffic or housing in areas that will be more prone to flooding, by encouraging settlement in earthquake zones)?  | <b>V</b> |          | Due to development of tourism infrastructure, it is envisaged that tourist inflow in the area will increase resulting to increase traffic and noise pollution in the area. Also more enterprises like guest houses, lodges, home-stays and shops are likely to come. Proper systems need to be developed to address such problems in future. |

# ANNEXURE-2 : COMPLIANCE WITH SUB PROJECT SELECTION CRITERIA (AS PER EARF TABLE 6)

| Component                        |    | Criteria  | Remarks   |
|----------------------------------|----|---|---|
| Overall<br>selection<br>criteria | 1. | Will be fully consistent with management plans or master plans for the area   | Sub project selected based on the Uttarakhand Tourism Development master plan for Uttarakhand. Sub project area comes in zone 5 of the said master plan and is part of the Almora, Bageshwar, Champawat, Pithoragarh, Munisiari regional circuit.   |
|                                  | 2. | Will avoid resettlement/relocation. If unavoidable the extent of resettlement will be minimized.  | No such impact anticipated. Series of discussions have been held regarding shifting of DM Office at the Govt. level.Present DM office located within the Fort will be shifted to proposed DM/Collectorate office at Poth Free Estate near Bikash Bhavan   |
|                                  | 3. | Will not result in destruction of or<br>encroachment onto protected areas,<br>including National Parks. Sanctuaries,<br>Conservation Reserves and Community<br>Reserves, environmentally sensitive<br>zones and Biosphere reserves. | No environmentally sensitive zones in the vicinity  |
|                                  | 4. | Will be in line with the Conservation Plan/management plan for the conservation and management of the Protected areas   | NA  |
|                                  | 5. | Will promote tourism related activities in protected areas, in the zones earmarked for tourism development, the scale and extent of which shall be in line with the provisions in the Management Plan                               | Not a Protected area  |
|                                  | 6. | Will not result in destruction of or encroachment onto archaeological monuments/heritage sites and will be in line with the master plan proposals for the conservation and preservation of the site/monuments                       | Not an ASI Site, yet guidelines/reference codes of following shall be used as design guidelines/ reference codes:  1. Archaeological Survey of India Guidelines.  2. US Secretary of Interior's Standards.  3. Great Britain's National Trust for Places of Historic Interest and Beauty Guidelines.  4. INTACH Architectural Heritage Division benchmarks. |
|                                  | 7. | Will not involve major civil works within the prohibited and regulated areas, as  | Proposed works entail repair and renovation, using a palette of local materials for repair and renovation   |

| Component  | Criteria  | Remarks   |
|--|---|---|
|  | defined in the ASI refutations, to<br>minimize any potential impacts on safety<br>to the structures/ monuments  | works, which are non-detrimental to heritage character. Incremental additions within the complex will be carefully planned, with material and construction conforming to or respecting the heritage structure. New Collectorate office location is not within regulated area  |
|  | 8. Will reflect inputs from public consultation and disclosure for site selection   | Meaningful public consultations are being done from planning phase and inputs have been considered in the project design  |
|  | 9. Will not introduce any elements or components that are invasive upon the sanctity and significance of the cultural heritage site, including large scale commercial activities or creation of new land uses with potential to trigger induced development and land use changes around the sites | Proposed interventions aim at enhancement of the quality of Fort's natural and historic built environment which has been transformed and adversely affected by recent constructions in the fort precinct. The fort walls, ramparts & historic buildings inside are in a state of disrepair and in need of conservation. |
|  | 10. Will introduce landscaping and other tourist infrastructure in line with the environmental quality of the tourist destinations, such as landscaping in harmony with the natural vegetation and diversity and not encourage introduction of species that are invasive                          | No new/alien species shall be introduced. Landscaping plan shall enhance the natural and scenic beauty of the place. Only native and drought tolerant species will be planted.  |
|  | 11. Will not result in development of physical infrastructure/ tourism amenities that would impair the environmental conditions due to lack of management capacities or high O&M costs  | O&M has been linked with the local stakeholders to ensure project sustainability and enhanced environment management.   |
| Conservation measures and excavation measures-in and around Cultural properties and protected Monuments/ Structures. | 12. Will observe the principle of not altering the historic condition and shall involve treatment of damage caused by natural processes and human actions and prevention of further deterioration, using both technical and management measures.  | The current usage of the fort as<br>the DM office is not conducive to   |

| Component | Criteria   | Remarks  |
|-----------|--|--|
|           | 13. Will promote in situ conservation and only in the face of uncontrollable natural threats and relocation is the sole means of saving elements of a site may they be moved in their historic condition.  | Proposed interventions promote in situ conservation of the buildings and if in future, need of relocation arises due to some uncontrollable natural threat, efforts will be made to retain its historic character.   |
|           | <b>14.</b> Will ensure that intervention be minimal. Every intervention proposed shall have clear objectives and use tried and proven methods and materials.   | Proposed designs are in sync with the historic and architectural character of the surroundings   |
|           | 15. Will ensure that physical remains are conserved in their historic condition without loss of evidence. Respect for the significance of the physical emails must guide any restoration. Technical interventions should not compromise subsequent treatment of the original fabric. The results of intervention should be unobtrusive when compared to the original fabric or to previous treatments, but still should be distinguishable | The major objective of the sub project is preservation of historic setting of the fort and the quality of its historic and natural environment, which has been adversely affected by the recent constructions and additions.   |
|           | Will ensure that the adaptive reuse of any particular building of monuments/structures does not intrude or induce impacts on other areas of the monument   | The proposed Almora Fort Restoration, Adaptive Reuse and Revitalization project offers to protect, sustainably develop and reconnect people to the rich historic, cultural resources of Almora town with the Historic Fort acting as the catalyst to enhance its image as a Cultural Heritage Destination and emerging Eastern Tourism gateway to Uttarakhand. |
|           | 17. Will ensure preservation of traditional technology and craftsmanship. New materials and techniques may only be used after they have been tried and proven, and should in no way cause damage to site.  | Project designs are based on guidelines conforming to Uttarakhand architecture, other reference codes including Archaeological Survey of India Guidelines, US Secretary of Interior's Standards, Great Britain's National Trust for Places of Historic Interest and Beauty Guidelines and INTACH Architectural Heritage Division benchmarks.                   |
|           | 18. Will ensure that the setting of a heritage site be conserved. Natural and cultural landscapes that form part of a sites setting contribute to its significance and   | Despite being strategically located<br>in the middle of the town, new<br>interventions in the areas<br>surrounding the fort precinct have  |

| Component  | Criteria   | Remarks   |
|--|--|---|
| Component  | should be integrated with its conservation   | gradually led to creating a visible disconnect between the site and additions obstructing the visibility of the fort in the surroundings area and hills. There is a also a complete lack of clarity and grandness in the access to the Fort.  • The goal of the project is to undertake holistic revitalization and cultural revival of the fort and surrounding precinct and enhance the standard of the built and natural environment of the Fort and its precinct. |
|  | 19. Will ensure that during archaeological excavation care be taken to conserve the physical remains. A practical plan for the conservation of a site-both during and after excavation-should be submitted for all site programmed for excavation  | NA  |
|  | 20. Will ensure that treatment of the cultural heritage site and its environs is a comprehensive measure to prevent damage from natural processes and human actions, to reveal the historic condition of a site, and to allow its rational use.  Service building should be as far aspossible from the principal area of the site.  Landscaping should aim to restore the site to its historic state and should not adversely affect the site: contemporary gardening and landscape concepts and designs should not be introduced. | Incidental landscaping of appreciation foregrounds with minimal interventions will help enhance and appreciate the historic built environment of the place.  Also the landscaping elements will only utilize native species to protect local biodiversity. Landscaping will be aimed to store the site to its historic state and indigenous ornamental species like osmanthusfragrans, champa, padam, nyctanthes etc. will be planted.                                |
| Conservation and habitat protection measures- in and around the natural heritage assets and protected areas. | 21. Will observe the principle of not adversely impacting the habitat quality of the protected area and shall involve treatment of damage caused by natural processes and human actions and prevention of further deterioration, using both technical and management measures.   | The Sub project site is not a protected area as per ASI norms yet ASI provisions form the basis of design guidelines Project is an integrated conservation project aimed at restoring the historic character of the Fort precinct. In addition new construction for Collectorate office. No impact on habitat quality is  |


| Component    |     | Criteria   | Remarks   |
|--------------|-----|--|---|
|              |     |  | envisaged.  |
|              |     |  |   |
|              | 22. | Will ensure that intervention, in form of additional civil works within the protected areas, be minimal. Every intervention proposed shall have clear objectives and use tried and proven methods and materials. | The project strategy is to give recognition to the fort and it's surrounding as realms of historical, socio-cultural, socio-economic, intra-cultural activities for visitors and locals which can harnesses |
|              |     |  | opportunities for employment, livelihood generation, and recreational styles for people and enhance the standard of the built and natural environment of the Fort and its precinct.                         |
|              |     |  | An Integrated Conservation, Environmental up-gradation and tourism development of Almora fort and its precinct approach will be adopted.  For the need of restoration of Fort                               |
|              |     |  | DM office will be shifted to new Collectorate/DM building   |
|              | 23. | Will not open up new areas of tourist  | Not a wetland or sensitive or   |
|              |     | movement, including opening up of new routes for boating in wetlands etc,  | protected area.  Not envisaged the proposed   |
|              |     | especially in areas identified as core or  | interventions shall retain the historic   |
|              |     | zone identified for conservation in the  | character and significance of the   |
|              | 24  | management plan for the protected area.  | Fort.   |
|              | 24. | Will ensure that the areas of significant habitat diversity habitats are conserved in their natural condition.   | NA  |
|              | 25. | The results of intervention should be unobtrusive when compared to the original fabric or to previous treatments, but still should be distinguishable  | Proposed interventions are as per original fabric and architectural character of the surroundings   |
|              | 26. | New materials and techniques may only<br>be used after they have been tried and<br>proven, and should in no way cause<br>damage to the site.   | No new materials and techniques are used  |
|              | 27. | Service buildings should be as far as possible from the principal area of the site.  | NA  |
| Water supply | 28. | Will be taken up from existing potable treatment systems nearby, unless on such systems are available in the vicinity  | Existing potable system is used. Project only contains provision of water storage system.   |
|              |     |  | For Almora District   |
|              |     |  |   |

| Component                              | Criteria   | Remarks  |
|--|--|--|
|  |  | Collectrate office, Water supply is planned from municipal water supply and water line will be extended to proposed building. Water consumption for office use is for approx 500 persons – 22500 Liter. Consumption is estimated as per NBCC norms of 45 liter/ capita |
|  | 29. Will not result in excessive abstraction of ground water or result in excessive groundwater pumping impairing ground water quality                             | Not envisaged  |
|  | 30. Will ensure adequate protection form pollution of intake points  | Since water supply is from existing potable supply scheme of JalSansthan, only internal distribution system is provided in the project, the chances of pollution from intake points is already minimized by the JalSansthan.   |
|  | 31. Will not result in unsatisfactory raw water supply (e.g. supply with excessive pathogens or mineral constituents)  | Potable water supply is through existing water supply scheme of JalSansthan. Internal distribution system will be provided in the project.   |
|  | 32. Will ensure proper and adequate treatment and disposal facilitates for increased volumes of wastewater generation  | Not much waste water generation envisaged. There will be upgradation of existing system of sewage management -septic tanks/sock pits.  |
| Sanitation<br>and toilet<br>facilities | 33. Will ensure that the site selection for the septic tank/ or any/ or any other treatment method proposed is not close to water intake or water usage points, or | Upgradation/ new construction of septic tanks/ sock pits will be done at the existing locationand as well as new location  |
|  | areas prone to flooding or water logging   | For waste water – discharge 4 nos. of soak pit and 4 nos. of septic tank will be utilized. In total 128 nos. of toilet, 32 nos. urinal will be constructed   |
|  |  | Solid waste will be stored in bin adjacent to Collectorate office. Collection will be done by Almora Nagar Palika  |
|  | <b>34.</b> Willensure that sanitation improvements proposed do not result in pollution of groundwater.   | Ensured and forms part of EMMP   |


| Component   | Criteria  | Remarks   |
|-------------|---|---|
|             | 35. Will not interfere with other utilities and                     | The proposed sanitation   |
|             | block access to buildings, cause                                    | arrangements have been made in  |
|             | nuisance to neighboring areas due to                                | view of population load and hence interference with other utilities and |
|             | noise, smell, and influx of insects, rodents, etc.                  | nuisance to neighboring areas not                                       |
|             | Todenis, etc.   | envisaged.  |
|             | <b>36.</b> Will not impair downstream water quality                 | Project entails provision of new  |
|             | due to inadequate sewage treatment or                               | septic tanks/sock pits or   |
|             | release of untreated sewage,  | upgradation of the existing system.                                     |
|             |   | Hence impairment of downstream  |
|             | 07 1459   | water quality not envisaged.  |
|             | 37. Will not cause overflows and flooding of                        | Adequate sewage treatment   |
|             | surroundings, especially around the heritage sites with raw sewage. | arrangements  |
| Solid waste | <b>38.</b> Will ensure that the disposal of solid                   | There is provision of waste   |
| management  | wastes will not result in degradation of                            | segregation at source through   |
|             | aesthetics in the vicinity of the proposed                          | separate Bio-degradable and Non-  |
|             | tourist areas   | Biodegradable Waste bins and  |
|             |   | suitable disposal arrangements.   |
|             | <b>39.</b> Will ensure buffer of greenbelt and earth                | During construction phase suitable                                      |
|             | works around the site to avoid nuisance                             | buffer will be provided as per  |
|             | to neighboring areas due to foul odor                               | EMMP. Project has provisions for  |
|             | and influx of insects, rodents, etc.                                | incidental landscaping with native                                      |
|             |   | species   |
|             | <b>40.</b> Will ensure that for composting pits for                 | NA  |
|             | protected areas, the locations are devoid                           |   |
|             | of any wildlife population, especially wild boars, porcupines       |   |
|             | 41. Will ensure any on site waste                                   | On site waste management has  |
|             | management done in compliance with                                  | been planned in due compliance  |
|             | government regulations and in                                       | with govt. regulations and  |
|             | coordination with municipal authorities.                            | consultation with the Almora Nagar                                      |
|             |   | PalikaParishad and forms part of  |
|             |   | the DPR.  |
|             |   | Mitigation measures relating to waste management during                 |
|             |   | construction phase forms part of the                                    |
|             |   | EMP.  |
| Roads       | 42. Will ensure minimal clearing of                                 | Clearing of vegetation will be done                                     |
|             | vegetation  | only if necessary, after consultation                                   |
|             |   | with Environment Specialist of the                                      |
|             |   | DSC. This forms part of contractor's                                    |
|             |   | This forms part of contractor's responsibility listed in the EMMP.      |
|             | 43. Will ensure no dislocation and                                  | No dislocation and involuntary  |
|             | involuntary resettlement of people living                           | resettlement envisaged.   |
| L           |   | <u> </u>  |

| Component   | Criteria   | Remarks  |
|---|--|--|
|   | in right of way.   | Shifting of the DM Office would be done in consultation with stakeholders. Site already selected for new construction  |
|   | <b>44.</b> Will not lead to alteration of surface water hydrology of streams/waterways that may result in increased sediment load due to erosion form construction sites.  | No surface water body in the vicinity. Erosion from construction sites will be controlled as per EMMP provisions.  |
| Drainage<br>and flood<br>protection                                 | <b>45.</b> Will ensure improvements are identified to cater to the watershed or drainage zones and not individual drains.  | No alterations to the existing drainage patterns are expected due to project interventions   |
|   | <b>46.</b> Will ensure adequacy of outfall of proposed drainage works, to avoid any impacts associated with flooding in downstream areas, or areas not covered   | NA   |
|   | 47. Will ensure effective drainage of the monument area, and provide for improved structural stability of the monuments  | The buildings, pavements and new additions to the fort have led to ill planned drainage system.  Drainage improvement works are proposed for sanitation and rainwater disposal without causing damage to the foundation and wall of the buildings.  These interventions shall rather improve the structural stability of the Fort. |
| Development<br>of parking<br>and other<br>tourist<br>infrastructure | 48. Will ensure no deterioration of surrounding environmental conditions due to uncontrolled growth around these facilities, increased traffic and increased waste generation resulting from   | The sub project shall lead to improved environmental conditions by supplementing the inadequate sanitation system.   |
| amenities   | improved infrastructure facilities  49. Will not create structures or buildings that are physically or visually intrusive, in terms of size, scale, location that shall have an adverse impact on the aesthetic quality or the site, through careful designs in terms of built form, construction materials etc. | Not envisaged. The proposed developments will provide a context- and use-appropriate solution to the project looking at the environmental sensitivity of the Fort property. Project shall add to the aesthetic beauty of the site and enhance the visitor experience.  |

## ANNEXURE-3-A: PROJECT LOCATION MAP

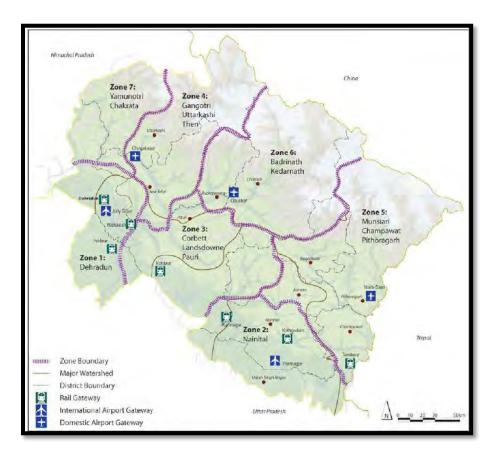

**Tourism Zones in Uttarakhand** 

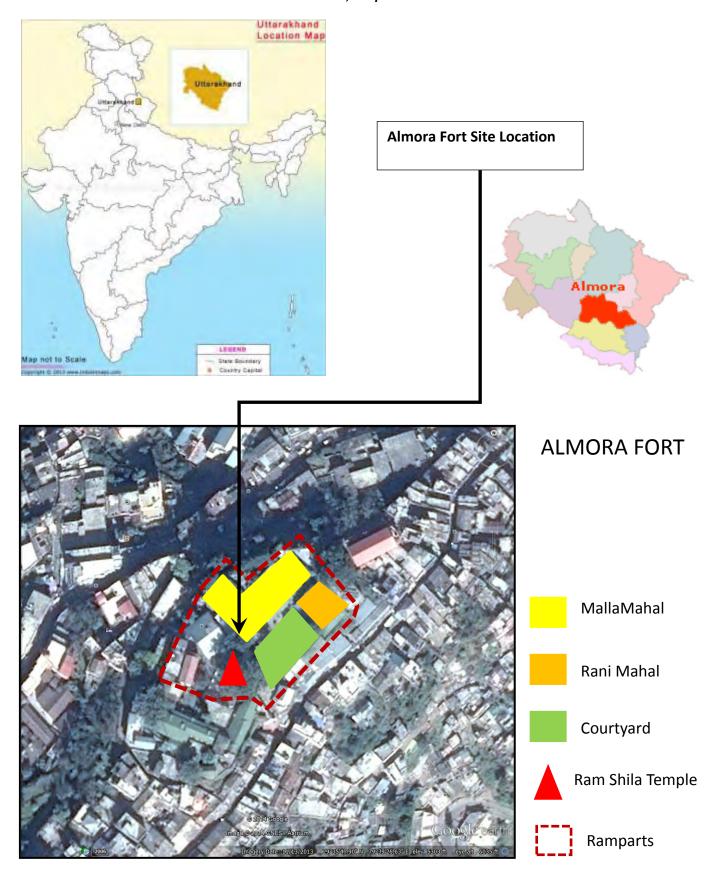





ANNEXURE- 3-B: Site Photographs

# Ram Shila Temple

# Rani Mahal& Courtyard





# Ramparts


Court Hall of MallaMahal





# Access Point 1 to the fort

# Access Point 2 to the fort

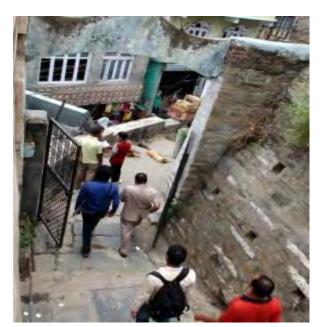



Almora Bazar has its own character

On-site image of tree invading the monument









**Proposed Location of Almora Collectorate office** 





Approach road to Collectorate office – Nearby construction of Medical college - construction going on (for other offices going on and institutions in vicinity)

#### ANNEXURE 4-A: NOC FROM DISTRICT ADMINISTRATION

No Objection Certificate from the DM, Almora for proposed reconstruction/ conservation works in the Almora Fort

को शासनादेश रां० 99/ पर्यटन विभाग रत्तराखण्ड / नि०स० / स०पर्यं० / २०१४ देहरादूनः दिनॉकः २३ जुलाई, २०१४ तथा परियोजना प्रबन्धक पी०आई०यू०, भीमताल के पत्रांक 338Gen corp./PIU-Bhimtal/346/1-B/2014-15 दिनॉकः 26-07-2014 एवं कार्यक्रम निदेशक के पत्र सं0 1550 / 2-10-ADB(IDIPT)/208/2013-14 दिनॉकः 26, अगस्त, 2014 के कम में कलैक्ट्रेट परिसर (मल्ला महल), अल्मोड़ा के जीर्णोद्धार/संरक्षण हेतु इस कार्यालय को कोई आपत्ति नही है।

दिनॉक:- 2 6 अगस्त, 2014

(विनोद कुमार सुमन), जिला अधिकारी, अल्मोडा।

कार्यालय जिलाधिकारी, अल्मोडा। संख्या ६६६% / नौ-२० / 2013-14, दिनॉक: 26 अगस्त, 2014

प्रतिलिपि निम्नांकितों को सूचनार्थ एवं आवश्यक कार्यवाही हेतु पेषित:-

- 1- आयुक्त एवं सचिव, राजस्य परिषद्, उत्तराखण्ड, देहरादून।
- 2- सचिव पर्यटन, उत्तराखण्ड शासन, पर्यटन विभाग, देहरादून।
- 3- आयुक्त, कुमाऊँ मण्डल, नैनीताल।
- 4- अपर सचिव, राजस्य अनुभाग-न, उत्तराखण्ड शासन, देहरादून।
- 5- परियोजना प्रबन्धक, पी०आई०यू०, भीमताल / डी०एस०सी०, भीमताल जिला नैनीताल।

### ANNEXURE 4-B: Correspondence with District Administration

Correspondence from Project side for NOC for proposed works under the sub project

- 1. Letter from Program Director to DM, Almora
- 2. Letter from Program Director to Secretary Tourism for facilitating the shifting of DM Office, in the project interest
- 3. Letter from Secretary Tourismto DM, Almora & Champawat

### **Program Management Unit**

Infrastructure Development Investment Program for Tourism
(ADB Assisted – Loan No. 2833,India)
Government of Uttarakhand

Pandit Deendyal Upadhaya Paryatan Bhawan, Near ONGC Helipad Garhi Catt, Dehradun -248003

Govt. of Uttarakhand Garhi Catt, Dehra Tel: 91-135-2559987, Fax: 91-135-2559988

E-mail: utdb.pmu@gmail.com

Uttarakhand

पत्रांकः | 550/ 2-10-ADB (IDIPT)/208/2013-2014

दिनांकः 26 अगस्त 2014

प्रेषक.

कार्यकम निदेशक ए०डी०बी० परियोजना पर्यटन, उत्तराखण्ड।

सेवा में,

ज़िलाधिकारी अल्मोड़ा।

विषयः ए०डी०बी० सहायतित, उत्तराखण्ड पर्यटन अवस्थापना विकास निवेश कार्यक्रम अन्तर्गत अल्मोड़ा के मल्लामहल (कलैक्ट्रेट परिसर) फोर्ट में किये जाने वाले जीर्णोद्धार कार्यों हेतु अनापत्ती प्रमाण पत्र के सम्बन्ध में।

महोदय.

जैसा कि आप अवगत है कि उत्तराखण्ड राज्य में पर्यटन विकास को बेहतर बनाने हेतु एशियाई विकास बैंक सहायतित "उत्तराखण्ड पर्यटन अवस्थापना विकास निवेश कार्यक्रम" चलाया जा रहा है। कार्यक्रम के अन्तर्गत आगामी तृतीय ट्रांच में अल्मोड़ा नगर स्थित मल्लामहल (कलैक्ट्रेट परिसर) फोर्ट में जीर्णोद्धार के कार्य प्रस्तावित हैं।

अतः आपसे अनुरोध है कि आप अपने स्तर से उक्त के सम्बन्ध में जीर्णोद्धार कार्यों हेतु अनापत्ती प्रमाण पत्र देने का कष्ट करें।


1. Letter from Program Director IDIPT to DM, Almora requesting for NOC for proposed restoration works in the Almora Fort (Collectorate office)

He

(शैलेश बगोली, आई0ए0एस0) कार्यक्रम निदेशक

ोय.

### **Program Management Unit**





vt. of Uttarakhand Garhi Catt, Dehradun -248003

Tel: 91-135-2559987, Fax: 91-135-2559988

E-mail: utdb.pmu@gmail.com

पत्रांकः 15नन/2-10-ADB (IDIPT)/236/2013-2014

दिनांकः 🔰 / ०९ 2014

प्रेषक,

कार्यक्रम निदेशक ए०डी०बी० परियोजना पर्यटन, उत्तराखण्ड।

सेवा में.

सचिव, पर्यटन उत्तराखण्ड शासन।

विषयः ए०डी०बी० सहायतित, कार्यक्रम अन्तर्गत "अल्मोड़ा के मल्लामहल तथा चम्पावत के राजभुंगा किले को पर्यटन विभाग को हस्तान्तरित किये जाने के सम्बन्ध में।"

महोदय,

जैसा कि आप अवगत है कि ए०डी०बी० सहायितत "उत्तराखण्ड पर्यटन अवस्थापना विकास निवेश कार्यक्रम" के अन्तर्गत आगामी तृतीय ट्रांच में मा० मुख्यमंत्री, उत्तराखण्ड राज्य के निर्देशानुसार जनपद अल्मोड़ा के मल्लामहल तथा जनपद चम्पावत के राजभुंगा किले का जीर्णोद्धार कार्य सम्मिलित किया गया है। उक्त के क्रम में दोनों किलों के जीर्णोद्धार व पुर्नउपयोग हेतु निम्नानुसार दो उप—परियोजनाएं विकसित कर ए०डी०बी० को प्रेषित की जा चुकी हैं।

- 1- Almora Fort (Malla Mahal) Historic Precincts' Preservation, Re-use Strategy & Revitalization for Enhancement of Visitor Experience. (attached)
- 2- Champawat Fort (Rajbhunga Fort) Preservation, Re-use Strategy & Revitalization for Enhancement of Visitor Experience. (attached)

इस सम्बन्ध में ए०डी०बी० का सुझाव है कि यह राज्य की सांस्कृतिक धरोहरें हैं तथा भविष्य में उक्त उप—परियोजनाओं पर किये जा रहे निवेश का समुचित लाभ प्रदेश को तभी प्राप्त हो सकता है जब इन किलों का इनकी महत्ता के दृष्टिगत पर्यटन स्थल की तरह पूर्ण सदुपयोग किया जाय।

इस सम्बन्ध में अवगत कराना है कि उक्त किलों के भीतर वर्तमान में सरकारी कार्यालयों का संचालन होने के कारण इन सांस्कृतिक धरोहरों का उचित रख—रखाव नहीं हो पा रहा है तथा पर्यटकों की आमद न के बराबर है। यदि ये सरकारी कार्यालय किले के भीतर ही अवस्थित रहे तो भविष्य में उक्त को एक पर्यटक स्थल के रूप में विकसित किए जाने में कठिनाई होगी। अतः इन कार्यालयों को किला परिसर से किसी दूसरे स्थान पर

स्थानान्तरित करने की आवश्यकता प्रतीत हो रही है जिससे उक्त क्षेत्रों में पर्यटकों की आवाजाही बढ़ेगी तथा राज्य र्क. आर्थिकी में भी योगदान रहेगा।

अतः आपसे अनुरोध है आप अपने स्तर से सरकारी कार्यालयों को दूसरे स्थानों पर स्थानान्तरित करने तथा उक्त परिसम्पत्तियों को पर्यटन विभाग को हस्तान्तरित करवाने हेतु राजस्व विभाग से अनुरोध करना चाहें।

संलग्नकः उपरोक्तानुसार।

(शैलेश बगोली, आई०ए०एस०) कार्यक्रम निदेशक

भवदीय.

2. Letter from Program Director IDIPT to Secretary Tourism Uttarakhand Govt. intimating about Almora and Champawat Fort restorations works in tranche 3 of IDIPT and requesting for shifting of DM/Collectorate office from the Forts so that their tourism potential is achieved.

## उत्तराखण्ड शासन

पर्यटन विभाग

संख्याः 99 / /नि०स० /स०पर्य० / 2014 देहरादून : दिनांकः 23 जुलाई, 2014

प्रेषक.

डा० उमाकान्त पंवार सचिव पर्यटन

सेवा मे.

जिलाधिकारी

जिलाधिकारी

अल्मोडाः

चम्पावत

विषय : चम्पावत के राजबुंगा व बाणासुर किले और अल्मोडा के मल्ला महल के जीर्णीद्धार /

महोदय,

अवगत कराना है कि दिनांक 24 मई 2014 को मां0 मुख्यमंत्री जी, उत्तराखण्ड की अध्यक्षता में पर्यटन विभाग की समीक्षा बैठक आहूत की गयी। बैठक में समीक्षा के उपरान्त मां0 मुख्यमंत्री जी ने अन्य कार्यों के साथ चम्पावत के राजबुंगा व बाणासुर किले और अल्मोडा के मल्ला महल के जीर्णोद्धार व संरक्षण के भी निर्देश दिये गये जिसका उदेश्य पर्यटन क्षेत्र को बढावा देना और समग्र विकास करना है। बैठक मे उक्त कार्यों को पर्यटन विभाग के माध्यम से ए०डी०बी० (आई०डी०आई०पी०टी०) के द्वारा सम्पन्न करने का भी निर्णय लिया गया।

उपरोक्त के संर्दभ में यह भी अवगत कराना है कि ए०डी०बी० (आई०डी०आई०पी०टी०) के अधीनस्थ पी०आई०यू० भीमताल और डी०एस०सी० भीमताल इस संबंध में आवश्यक कार्यवाही कर रहे हैं ।

अतः आपसे अनुरोध है कि उपरोक्त कार्यों के सुचारू रूप से सम्पादन हेतु पी०आई०यू० भीमताल/डी०एस०सी० भीमताल को अनापत्ति पत्र व अन्य यथासंभव सहायता प्रदान करने के लिए संबन्धित को आवश्यक दिशा निर्देश जारी करने का कष्ट करें।

> (डा० उमाकान्त पंवार) सचिव पर्यटन

## तिलिपि :

1. आयुक्त कुमाऊ मण्डल

2. ए०डी०बी० (आई०डी०आई०पी०टी०)

कृपया सूचनार्थ हेतु प्रेषित ।

कृपया सूचनार्थ एवं अग्रिम् आवश्यक कार्यवाही

सचिव पर्यटन

3. Letter from Secretary Tourism, UK Govt. to DM, Almora requesting for NOC for proposed restoration works in the Almora Fort sub project.

ANNEXURE-5: Minutes of Meeting

दिनांक 11.08.2014 को सॉय 5 बजे जिलाधिकारी अल्मोड़ा की अध्यक्षता में ए०डी०बी० द्वारा सहायतित योजनाओं के अर्न्तगत नन्दा देवी फोर्ट (कलैक्ट्रेट कार्यालय) अल्मोड़ा को पर्यटन की दृष्टि से जीर्णोद्धार एवं विकसित करने के संबंध में आहूत बैठक का कार्यवृत्त :--

स्थान – कलैक्ट्रेट कार्यालय अल्मोड़ा का समागार। अध्यक्ष– जिलाधिकारी महोदय, अल्मोड़ा। उपाध्यक्ष– अपर जिलाधिकारी,एस०डी०एम० अल्मोड़ा।

#### उपस्थिति:-

- 1. श्री प्रकाश चन्द्र जोशी, अध्यक्ष, नगर पालिका परिषद, अल्मोडा।
- 2. श्री बलवन्त सिंह, परियोजना प्रबन्धक।
- 3. श्री लोकेश ओहरी, हैरिटेज कन्जरवेट विशेषज्ञ।
- 4. श्री राजेश विष्ट, अध्यक्ष होटल एसोसिएशन अल्मोडा।
- 5. श्री हरीश चन्द्र जोशी, सचिव होटल एसोसिएशन अल्मोड़ा।
- श्री अरूण वर्मा, उपसचिव होटल एसोसिएशन अल्मोडा।
- 7. श्री अजय अग्रवाल, सदस्य होटल एसोसिएशन अल्मोडा।
- डा० ज्ञान प्रकाश तिवाड़ी, संस्कृति विभाग अल्मोड़ा।
- 9. श्री चन्दन सिंह विष्ट, प्रशासनिक अधिकारी, क्षेत्रीय पर्यटक कार्यालय, अल्मोडा।
- 10. श्री पी०सी० तिवाडी, पत्रकार।
- 11. श्री वी०डी० पालीवाल, ए०इ०आर०आई०ई०एस०।
- 12. श्री आशुतोष, अधिशासी अभियन्ता, ग्रामीण अभियन्त्रण सेवा, अल्मोडा।

#### कार्यवृत्त

बैंठक का शुभारम्भ करते हुये अपर जिलाधिकारी महोदय द्वारा आई०डी०आई०पी०टी० के प्रतिनिधियों को प्रस्तावित योजना के बारे में जानकारी देने के लिये निर्देशित किया गया। तदोपरान्त हैरिटेज कन्जरवेटिव विशेषज्ञ द्वारा पी०पी०टी० प्रेसन्टेशन प्रस्तुत किया गया।

अल्मोड़ा एक सांस्कृतिक शहर है इसके सांस्कृतिक विरासत को आज बचाना अत्यन्त आवश्यक है। नन्दा देवी फोर्ट (कलैक्ट्रेट कार्यालय) अल्मोड़ा उन प्राचीन विरासतों में से एक हैं जिसकी वर्तमान दशा जीर्ण—क्षीर्ण है। इसको बचाने के सुझाव दिये गये। विश्वभर में आज प्रत्येक देश आर्थिक, सांस्कृतिक, वैज्ञानिक एवं सैन्य क्षेत्र में विकास कर आगे बढ़न की होड़ में है, भारत भी इन क्षेत्रों में विकास कर विश्व के अन्य देशों के साथ आगे बढ़ने हेतु महत्तपूर्ण कार्य कर रहा है। जिसके फलस्वरूप आगामी कुछ वर्षों में प्रत्येक राज्य के एक शहर को सांस्कृतिक राजधानी के रूप में विकसित किया जाना होगा। वर्तमान में कलैक्ट्रेट भवन का कार्यालय नन्दा देवी फोर्ट में शहर के मध्य में तथा कुछ ऊँचाई पर बसा है, मुख्य मार्ग से वाहन द्वारा इस कार्यालय होने के कारण Disaster Managemant Plan जैसे एम्बुलैंस, पुलिस एवं अग्निशमन आदी वाहन का अतिशीघ उपलब्ध हो पाना कठिन है। इसलिए इस कार्यालय को अन्यत्र स्थानान्तरित कर इस भवन को सांस्कृतिक केन्द्र के साथ—साथ पर्यटन को बढ़ावा देने हेतु यथासंभव प्रयास किये जाने चाहिए।

जिलाधिकारी महोदय, जनपद अल्मोड़ा के निर्देशानुसार इस भवन में कलैक्ट्रेट कार्यालय काफी लबें समय से रहा है, अतः नन्दा देवी फोर्ट के साथ कोस्टक में कलैक्ट्रेट भवन का उल्लेख किया जाना सुनिश्चित किया जाए। पूर्व में कलैक्ट्रेट कार्यालय को स्थानान्तरण करने के प्रस्ताव पारित हुए थे, शहर की जनता द्वारा विरोध होने पर यह कार्य सम्पापदित न हो सका, अन्यथा कलैक्ट्रेट भवन के लिये चिन्हित जमीन विकास भवन में उपलब्ध है। जिलाधिकारी महोदय के अनुसार

उपरोक्त विरोध के मध्यनजर सम्पूर्ण नन्दा देवी फोर्ट (कलैक्ट्रेट कार्यालय) दो भागों में बॉटकर एक भाग को सांस्कृतिक केन्द्र के रूप में विकसित किया जाए तथा दूसरे भाग में कलैक्ट्रेट कार्यालय को स्थानान्तरित किया जाए।

आई०डी०आई०पी०टी० के प्रतिनिधियों द्वारा जानकारी एवं सुझाव दिया कि सम्पूर्ण नन्दा देवी फोर्ट (कलैक्ट्रेट कार्यालय) परिसर को दो भागों में बॉट जाने पर पर्यटकों तथा कार्यालय में कार्यरत कर्मचारी, जनसमूह एवं जुलूस आदि में प्रतिमागियों का आने व जाने का एक ही मार्ग प्रयोग में लायी जायेगी इसके अतिरिक्त एक ही परिसर में एक महत्तपूर्ण कार्यालय कलैक्ट्रेट कार्यालय का होना तथा पर्यटन की दृष्टि से सांस्कृतिक केन्द्र को होना उपरोक्त दोनों के लिये उचित व्यवहारिक नहीं लगता है। अतः कलैक्ट्रेट कार्यालय का अन्यत्र स्थानान्तरित कर विरासत में मिली इस धरोहर को संरक्षित करते हुये सांस्कृतिक केन्द्र (पर्यटन की दृष्टि) विकसित किया जाना उचित होगा। अल्मोड़ा शहर मानसरोवर यात्रियों का एक महत्तपूर्ण पड़ाव है, इस जनपद के अन्दर स्थित जागेश्वर मंदिर समूह एवं जनसुविधाओं जैसे शौंचालय एवं पैदल मार्ग आदि का इस योजना द्वारा प्रस्तावित है, जिसको उत्तराखण्ड सरकार द्वारा संस्तुति प्राप्त हो चुकी है, इस योजना को अग्रिम चरण में कियान्वित किया जाना है। मंदिर समिति जागेश्वर की तरफ से समिति के अध्यक्ष , जिलाधिकारी अल्मोड़ा द्वारा अनापत्ति प्रमाण पत्र दिये जाने की बारे में आश्वासन दिया गया है, जो कि अतिशीघ्र प्राप्त कर लिया जायेगा।

पर्यटको एवं यात्रियो को अल्मोड़ा में रूकने की अवधि बढ़ाने हेतु अल्मोड़ा स्थित नन्दा देवी फोर्ट (कलैक्ट्रेट कार्यालय) का जीर्णेद्धार करते हुये पर्यटन एवं सांस्कृतिक केन्द्र के रूप में विकसित किया जाना उचित होगा। ए०डी०बी०, विताय देय संस्था के प्रतिनिधि तथ्य की जानकारी हेतु माह सितम्बर 2014 में अल्मोड़ा जागेश्वर में निरीक्षण के लिये आने का कार्यकम प्रस्तावित है। उससे पूर्व जनप्रतिनिधि, स्टेक होल्डर द्वारा अनापत्ति प्रमाण पत्र व सहमित दिया जाना अति आवश्यक है, जिसके बिना कार्यदायी संस्था द्वारा कार्य किया जाना संभव नहीं हो पायेगा।

उप जिलाधिकारी अल्मोड़ा द्वारा दये गये सुझाव अतयन्त महत्तपूर्ण एवं सराहनीय थे उनके अनुसार हर बदलाव के पीछे प्रारम्भ में विरोध होना स्वामाविक है, भले ही बदलाव कितनी ही अच्छाईयों के लिये क्यों न हो रहा हो। मानसरोवर यात्रियों का महत्तपूर्ण पड़ाव होने के कारण इस प्रकार के प्रस्ताव प्रशंसनीय है, यात्रियों एवं पर्यटको को अल्मोड़ा में रूकने की अविध को बढ़ाने के लिये लाईट एवं साउड़ शो भी इस योजना में सम्मिलत किया जाए। जिसके द्वारा उत्तराखण्ड़ के इतिहास, सांस्कृतिक विरासत, एवं मुख्य तीर्थ स्थलों का उल्लेख किया जा सके। गुजरात का उदाहरण देते हुये उप जिलाधिकारी महोदय, अल्मोड़ा ने जानकारी दी कि भारत के अन्य राज्यों में इस तरह की परियोजनाओं को प्रोत्साहित किया जा रहा है।

होटल एसोसिएशन अल्मोड़ा, द्वारा दिये गये सुझाव श्री राकेश विष्ट, अध्यक्ष होटल एसोसिएशन अल्मोड़ा द्वारा अवगत कराया गया कि विकास भवन अल्मोड़ा में स्थानीय जनता को अपने महत्तपूर्ण कार्यो हेतु जाना पड़ता है, तथा तदोपरान्त उन्हें कलैक्ट्रेट अल्मोड़ा भी अपने कार्यो को निपटाने हेतु जाना पड़ता है, जिससे उन्हें अनायास काफी किटनाईयों का सामना करना पड़ता है। इससे उचित होगा कि कलैक्ट्रेट परिसर अल्मोड़ा को विकास भवन में स्थानान्तरित किया जाए। जिससे आने वाले स्थानीय गरीब एवं बाहरी व्यक्तियों को आने —जाने की कोई परेशानी न हो तथा उनके समय एवं धन की बचत भी की जा सके। तथा नन्दा देवी फोर्ट (कलैक्ट्रेट कार्यालय) अल्मोड़ा को सांस्कृतिक केन्द्र के रूप में पर्यटन की दृष्टि से विकसित किया जाए।

अंत में जिलाधिकारी महोदय, द्वारा अपनी व्यक्तिगत राय देते हुए सुझावित किया गया कि अल्मोड़ा शहर के बढते हुये विस्तार को मध्यनजर रखते हुये कलैक्ट्रेट अल्मोड़ा को अन्यत्र स्थानान्तरित होना अतिआवश्यक है। लेकिन व्यापार मंडल, जनप्रतिनिधियों एवं अल्मोड़ा के वरिष्ठ सम्भ्राग्त व्यक्तियों का सुझाव के बाद ही कलैक्ट्रेट परिसर अल्मोड़ा को अन्यत्र स्थापित किये जाने हेतु तथा एन०ओ०सी० दी जानी संमव हो पायेगी । जिसे हेतु जिलाधिकारी महोदय, द्वारा अपर जिलाधिकारी महोदय, अल्मोड़ा को एक आवश्कीय बैठक दिनांक 20.08.2014 समय 3.00 बजे आहूत किये जाने हेतु निर्देश दिये गये है।

दिनांक 20.08.2014 को साँय 3.00 बजे जिलाधिकारी अल्मोड़ा की अध्यक्षता में ए०डी०बी० द्वारा सहायतित योजनाओं के अर्न्तगत नन्दा देवी फोर्ट (कलैक्ट्रेट कार्यालय) अल्मोड़ा को पर्यटन की दृष्टि से जीर्णोद्धार एवं विकसित करने के संबंध में आहूत बैठक का कार्यवृत्त :--

सभी सदस्यों का समय पर सुचना न पहुंचने के कारण आहुत बैठक को स्थगित करना पड़ा। तथा अगली बैठक 22.08.2014 को सुनिश्चित किये जाना तय हुआ।

दिनांक 22.08.2014 को समय 4:30 बजे जिलाधिकारी अल्मोड़ा की अध्यक्षता में ए०डी०बी० द्वारा सहायतित योजनाओं के अर्न्तगत नन्दा देवी फोर्ट (कलैक्ट्रेट कार्यालय) अल्मोड़ा को पर्यटन की दृष्टि से जीर्णोद्धार एवं विकसित करने के संबंध में आहूत बैठक का कार्यवृत्तः :

उपरोक्त 22.08.2014 के आहुत बैठक में समय का आभाव होने के कारण पी0आई0यू0, भीमताल बैठक में प्रतिभाग नहीं कर सका अध्यक्ष महोदय को इस सन्दर्भ में सूचित कर दिया गया था। दिनांक 26.08.2014 को कार्यक्रम निदेशक के द्वारा प्रेषित पत्र का संज्ञान लेते हुये जिलाधिकारी महोदय द्वारा अनापत्ति प्रमाण पत्र जारी किया गया तथा मौखिक वार्ता में अद्योहस्ताक्षरित को अवगत कराया कि 80% उपस्थिति सदस्यों द्वारा कलैक्ट्रेट कार्यालय को अन्यत्र स्थानान्त्रित कर परियोजना को सहमति दी गयी।

Main: 374 Gen Coop /PEU-Bhimtal/ivipT/382/03/2014-15

9-119n:03-09-14

धन्यवाद.

भवदीय

परियोजना प्रबंधक पी0आई0यू०, भीमताल

प्रतिलिपि:— सेवा में सूचनार्थ हेतु प्रेषित— सचिव, पर्यटन उत्तराखण्ड़। कार्यकम निदेशक, (आई.डी.आई.पी.टी.) देहरादून। अपर कार्यकम निदेशक, (आई.डी.आई.पी.टी.) देहरादून।

> परियोजना प्रबंधक पी0आई0यू0, भीमताल



## परियोजना प्रबन्धन इकाई पर्यटन संरचना विकास निवेश कार्यक्रम (१०डी०वी० सहायतित- लोन न० 2833, इंडिया) उत्तराखण्ड शासन



पं0 दीनदयाल सपाध्याय पर्यटन भवन, नियर ओ०एन०जी०सी० हैलिपैड गढ़ी केन्ट, देहरादून– 248003

फोन : 91-135-2559985, फैंक्स : 91-135-2559985

ई–गेल : utdb.pmu@gmail.com

पत्रांकः 1.837.12-10 / ए०डी०बी० / (आई०डी०आई०पी०टी०) / 236 / 2014-15

दिनांक: 28.11.2014

सेवा में,

प्राचित्र के अल्ला 1 कामार्टी , के महाम्ह पी

विषयः अल्मोड़ा के मल्लामहल तथा चम्पावत के राजभुंगा व बांणासुर किलों के जीर्णोद्धार के सम्बन्ध में बैठक।

महोदय,

दिनांक 19 नवम्बर 2014 को मुख्य सचिव महोदय की अध्यक्षता में आहूत बैठक का कार्यवृत्त सूचनार्थ संलग्न किया जा रहा है।

संलग्नः- उपरोक्तानुसार।

भवदीय,

(शैलिशं बगौली) कार्यक्रम निदेशक

प्रतिलिपि:-

- 1. निजी सचिव, मुख्य सचिव, उत्तराखण्ड शासन के सूचनार्थ।
- 2. निजी सचिव, अपर मुख्य सचिव, उत्तराखण्ड शासन के सूचनार्थ।

कार्यक्रम निदेशक

## अल्मोड़ा के मल्लामहल तथा चम्पावत के राजभुंगा व बांणासुर किलों के जीर्णोद्धार के सम्बन्ध में बैठक

दिनांक - 19 नवम्बर 2014

समय - पूर्वाहन 11:00 बजे

स्थान - मुख्य सचिव कार्यालय कक्ष सचिवालय परिसर।

अध्यक्षता – श्री एन० रविशंकर, मुख्य सचिव, उत्तराखण्ड शासन।

प्रतिभागी - श्री राकेश शर्मा, अपर मुख्य सचिव, उत्तराखण्ड शासन।

श्री भास्करानन्द जोशी, सचिव राजस्व विभाग, उत्तराखण्ड शासन।

श्री ए०एस० नयाल, आयुक्त कुमांऊ मण्डल, नैनीताल।

श्री शैलेश बगौली, अपर सचिव पर्यटन।

श्री दीपेन्द्र चौधरी, ज़िलाधिकारी चम्पावत।

श्री आर० के० जोशी, अपर कार्यक्रम निदेशक आई०डी०आई०पी०टी०।

श्री लोकेश ओहरी, सलाहकार आई०डी०आई०पी०टी०।

## बैठक का कार्यवृत्त -

सर्वप्रथम अपर सचिव, पर्यटन द्वारा अध्यक्ष महोदय को ए०डी०बी० सहायतित आई०डी०आई०पी०टी० कार्यकम के तहत आने वाली ट्रांच में किये जा रहे अल्मोड़ा व चम्पावत किलों के जीर्णोद्धार सम्बन्धी कार्यों तथा उसको पर्यटन हेत उपयोग में लाये जाने सम्बन्धी उप परियोजनाओं की जानकारी दी गई। अपर सचिव, पर्यटन द्वारा दोनों किलों में वर्तमान में चलाये जा रहे कलैक्ट्रेट व तहसील कार्यालयों को स्थानान्तरित करने हेतु अब तक विभाग द्वारा की गई कार्यवाही से अवगत कराया गया।

## बैठक में अध्यक्ष महोदय की सहमति से निम्नवत निर्णय लिये गये -

## चम्पावत किले के सम्बन्ध में -

- 1. बैठक में यह निर्णित किया गया कि चम्पावत के राजभुंगा व बांणासुर किले के विकास हेतु कार्ययोजना इस प्रकार से बनाई जाए कि तहसील कार्यालय का कार्य प्रभावित न हो। सर्वप्रथम तहसील कार्यालय का नई जगह पर निर्माण शुरू किया जाए।
- 2. सिचव राजस्व द्वारा बताया गया कि यदि पर्यटन विभाग नई तहसील बनवा कर देता है तो राजस्व विभाग को उक्त योजना पर कोई आपत्ति नहीं है।
- 3. जिलाधिकारी चम्पावत द्वारा अवगत कराया गया कि तहसील कार्यालय हेतु के०एम०वी०एन० की सीसा डीपो की भूमि सर्वदा उपयुक्त है तथा वह बाजार के पास भी है तथा साथ में लगते हुए अन्य सरकारी कार्यालय यथा स्वास्थय विभाग का कार्यालय भी वहाँ अवस्थित है।

यह निर्णित किया गया कि तत्काल पर्यटन विभाग की उक्त भूमि को राजस्व विभाग को हस्तान्तरित किया जाए तथा दोनो किलों की भूमि पर्यटन विभाग को दी जाए।

4. अध्यक्ष महोदय द्वारा ज़िलाधिकारी चम्पावत को यह निर्देश दिये गये कि वह इन किलों के जीर्णोद्धार व तहसील कार्यालय को स्थानान्तरित करने के सम्बन्ध में स्थानीय नागरिकों का विश्वास बनाए रखने हेतु लगातार संवाद बनाए रखे जिससे कि भविष्य में जनसहयोग में किसी भी प्रकार की कठिनाई का सामना न करना पड़े।

5. ए०डी०बी० कार्यकम के अधिकारियों व सलाहकारों को तहसील कार्यालय की डिज़ाइन को सचिव राजस्व, आयुक्त कुमांऊ मण्डल एवं ज़िलाधिकारी चम्पावत को दर्शाते हुए उनकी सहमित एवं सुझावों के अनुसार तैयार किये जाने के निर्देश दिये गये।

### अल्मोडा किले के सम्बन्ध में -

6. बैठक में यह अवगत कराया गया कि अल्मोड़ा किले हेतु प्रथम चरण में कलेक्ट्रेट कार्यालय तथा किले परिसर में अन्य कार्यालयों को विकास भवन स्थित कलेक्ट्रेट हेतु 8 एकड भूमि पर निर्माण किया जाना है।

सचिव राजस्व द्वारा नए कलेक्ट्रेट व अन्य कार्यालयों के नए स्थान पर निर्माण कर दिए जाने की दशा में परियोजना पर अनापत्ति व्यक्त की गई।

7. अल्मोड़ा ज़िलाधिकारी कार्यालय के नव—निमार्ण हेतु सलाहकारों द्वारा रूद्रपयाग जनपद कार्यालय भवन की डिज़ाइन प्रोटोटाइप तैयार की गई थी जिस पर अध्यक्ष महोदय द्वारा निर्देशित किया गया कि अल्मोड़ा जनपद रूद्रपयाग की अपेक्षा काफी बड़ा जनपद होने के कारण उसकी आवश्यकताएं भी रूद्रप्रयाग की अपेक्षा अधिक हैं। अतः भवन की डिज़ाइन उपलब्ध भूमि, जनपद की आपश्यकताओं तथा अल्मोड़ा की सांस्कृतिक व ऐतिहासिक पृष्ठभूमि के अनुरूप तैयार की जानी चाहिए। तैयार डिज़ाइन को सचिव राजस्व, आयुक्त कुमांऊ मण्डल तथा ज़िलाधिकारी अल्मोड़ा को दर्शाते हुए उनकी सहमति व सुझावों के अनुसार तैयार किये जाने के निर्देश दिये गये।

#### अन्य -

- 8. उक्त किलों के जीर्णोद्धार कार्यों का नियोजन CPM/PERT method से किया जाय जिससे कि कार्यों के कियान्वयन का मूल्यांकन कर निर्धारित समयावधि में पूर्ण किया जाना सुनिश्चित किया जा सके।
- 9. नैनीताल उप—परियोजना हेतु मुख्य सचिव एवं अपर मुख्य सचिव द्वारा आयुक्त कुमांऊ को निर्देशित किया गया कि, विस्तृत परियोजना आख्या (डी०पी०आर०) में दिये गये घटकों जिन पर किसी कारणवश अभी कार्यवाही नहीं की जा रही है, इन पर जनसहयोग हेतु नैनीताल के प्रभावी नागरिकों को अवगत कराते हुए उनके विचार व सहमित प्राप्त करने की कार्यवाही प्रारम्भ करें जिससे कि भविष्य में उन घटकों पर कार्य करने हेतु एक वातावरण तैयार किया जा सके।

### **Transcript:**

### Minutes of Meeting held on19th Nov, 2014: Regarding Almora Fort: (pt. 6-8)

In the meeting it was informed that in the first phase construction of Collectorate Office and other Offices is to be done in the 8 acres available land at Vikas Bhawan.

Secretary revenue expressed consent for the project subject to shifting of above offices to Vikas Bhawan site. It was directed that the DM Office design should be prepared according to land availability and cultural and historical background of Almora and should not be a replica of Rudraprayag DM Office as the Rudraprayag district is smaller in area than Almora and hence has more requirements.

The planning of the restoration works should be by CPM/PERT method so that the project is executed as per timelines.