

Initial Environmental Examination

May 2016

Azerbaijan: Water Supply and Sanitation Investment Program –Tranches 2 and 4 Beylagan Town Water Supply and Sewerage Subproject

Prepared by AzerSu Joint Stock Company for the Asian Development Bank. This is a revised version of the draft originally posted in October 2011 available on <http://www.adb.org/projects/documents/water-supply-and-sanitation-investment-program-tranche-2-beylagan-town-water-supply>.

CURRENCY EQUIVALENTS

(as of 30 June 2016)

Currency Unit	=	Azeri Manat (AZN)
AZN1.00	=	US \$ 0.6625
US \$1.00	=	AZN 1.5094

ABBREVIATIONS

ADB	-	Asian Development Bank
WSS	-	Water Supply & Sanitation
MFF	-	Mult-tranche Financing Facility
AzerSu	-	AZERSU Joint Stock Company
SAWMA	-	State Amelioration and Water Management Agency
EA	-	Executing Agency
EAC	-	Expert Appraisal Committee
EARF	-	Environmental Assessment & Review Framework
EIA	-	Environmental Impact Assessment
EMP	-	Environmental Management Plan
PMF	-	Program Management Facility
RA	-	The Republic of Azerbaijan
MENR	-	Ministry of Environment and Natural Resources
MSL	-	Mean Sea Level
WWTP	-	Wastewater Treatment Plant
IA	-	Implementing Agency
IEE	-	Initial Environmental Examination
SAIC	-	State Amelioration and Irrigation Committee
RF	-	Resettlement Framework
PVC	-	Polyvinyl Chloride
HDPE	-	High Density Poly Ethylene
EMP	-	Environmental Management Plan
JSC	-	Joint Stock Company
M&E	-	Monitoring and Evaluation
SES	-	Sanitary Epidemiology Service, Ministry of Health

NOTES

- (i) The fiscal year (FY) of the Government of Azerbaijan ends on 31 December. FY before a calendar year denotes the year in which the fiscal year ends, e.g., FY2008 ends on 31 December 2008.
- (ii) In this report, "\$" refers to US dollars

This initial environmental examination is a document of the borrower. The views expressed herein do not necessarily represent those of ADB's Board of Directors, Management, or staff, and may be preliminary in nature. Your attention is directed to the ["terms of use"](#) section on ADB's website.

In preparing any country program or strategy, financing any project, or by making any designation of or reference to a particular territory or geographic area in this document, the Asian Development Bank does not intend to make any judgments as to the legal or other status of any territory or area

CONTENTS

I.	EXECUTIVE SUMMARY	1
II.	POLICY, LEGAL AND ADMINISTRATIVE FRAMEWORK	4
A.	Azerbaijan Environmental Regulatory Framework.....	4
B.	Environmental Assessment Procedure in Azerbaijan	8
C.	ADB Policy	10
D.	Applicability of Environmental Legislations to the Subproject.....	11
E.	Extent of this IEE Study	12
III.	DESCRIPTION OF THE PROJECT	12
A.	Azerbaijan Water Supply and Sanitation Investment Program.....	12
B.	Beylagan Town Water Supply & Sanitation Subproject.....	13
IV.	DESCRIPTION OF THE ENVIRONMENT	32
A.	Physical Resources.....	32
B.	Ecological Resources and Items of Archaeological Significance	34
C.	Social and Economic Development	35
V.	ANTICIPATED ENVIRONMENTAL IMPACTS AND MITIGATION MEASURES.....	36
A.	Pre-Construction (Design & Location) Impacts and Mitigation Measures	36
B.	Construction Impacts and Mitigation Measures	38
C.	Operation Impacts and Mitigation Measures	39
VI.	PUBLIC CONSULTATION AND INFORMATION DISCLOSURE.....	40
VII.	GRIEVANCE REDRESS MECHANISM.....	41
VIII.	ENVIRONMENTAL MANAGEMENT PLAN	42
A.	Environmental Impact Mitigation and Monitoring	42
B.	Implementation Arrangements	54
C.	Environmental Management Budget and Resources	57
IX.	CONCLUSION AND RECOMMENDATION.....	57
A.	Findings and Recommendation	57
B.	Conclusion.....	58

Appendices

- Appendix 1: Photographs
- Appendix 2: Maximum Allowable Concentrations (MAC) In Drinking Water
- Appendix 3: Wastewater Disposal Limits
- Appendix 4: National Ambient Air Quality Standards
- Appendix 5: Maximum Allowable Noise Levels
- Appendix 6: Photographs of Public Consultation, September 2011, Beylagan
- Appendix 7: Photographs of Tranche-4 components
- Appendix 8 : Public consultation, Photographs and MOM, 6 May 2016
- Appendix 9: Letter about treated water discharge permission

I. EXECUTIVE SUMMARY

1. The Asian Development Bank (ADB) funded Azerbaijan Water Supply and Sanitation Investment Program is intended to optimize social and economic development in selected secondary towns through improved water and sanitation (WSS) services. This Investment Program is in continuation to the ongoing ADB assistance in WSS Sector (Loan 2119 - Azerbaijan Water and Sanitation Improvement Project). and will cover: (i) WSS infrastructure development in the towns of Agdash, Goychay, Nakhchivan, Aghjabedi, Beylagan, Balakan and other developing urban centers, and the peripheral areas of Baku; (ii) Management Improvement and Capacity Development of WSS agencies; and (iii) a Program Management Facility (PMF) that will oversee the Program development, implementation and management. This will be implemented through multi-tranche financing facility of ADB over a period of 8 years (2010-2018). The Azersu Joint Stock Company (AZERSU) is the Executing Agency. PMF, created at AZERSU, is responsible for project implementation, and is supported by international and national consultants. At the field level, a Project Implementation Review Committee will review progress and ensure timely resolution of operational issues.

2. ADB requires the consideration of environmental issues in all aspects of the Bank's operations, and the requirements for Environmental Assessment are described in ADB's Safeguard Policy Statement (2009). This states that ADB requires environmental assessment of all project loans, program loans, sector loans, sector development program loans, loans involving financial intermediaries, and private sector loans. Accordingly, the Initial Environmental Examination (IEE) Report has been prepared for Beylagan Town subproject, to be implemented in Tranche 2. Components of this sub-project are: (i) water supply infrastructure - five artesian wells, water collection point, pumping systems, pumping water main, internal roads in facilities, chlorination facility water testing lab, storage reservoirs, water distribution network, fire fighting hydrants and house connections, (ii) wastewater treatment plant sewerage infrastructure - sewer network with manholes and house connections, and (iii) administrative building and workshop. Subproject is currently in bid preparation stage. Subproject is currently in detailed design stage. Construction is likely to start in July 2012 and will be completed in 18 months.

3. This IEE is updated for Beylagan subproject to be included in Tranche 4. Components of the sub-project of Tranche 4 are: (i) sewerage collector and (ii) wastewater treatment plant sewerage infrastructure which is moved from Tranche 2 to Tranche 4. Tranche 4 subprojects is currently detailed design stage. The entire system is scheduled for completion by middle of 2018.

4. Collector route will be through the identified in the northern wastewater treatment side of the town. The project will affect 45 households. Out of them 44 will lose part of agricultural land, However, there are no protected areas, wetlands, mangroves, or estuaries. Trees, vegetation (mostly shrubs and grasses), and animals in the subproject site are those commonly found in built-up areas. The proposed development of groundwater source is not likely to have any adverse impacts on groundwater regime. A review of groundwater resource availability and detailed investigations concluded that there are adequate resources to meet the design demand of Beylagan. The geological structure of the area is stable and no potential land subsidence is foreseen. Groundwater quality is good and meets the national standards.

5. Wastewater Treatment Plant will be constructed on an identified plot of land in the northern side of the town. This site is located ideally away from the town. Part of the WWTP site is presently occupied by a sheep farm, is government-owned lands, and are clear of human habitation, which needs to be removed for development of WWTP. Resettlement plan, prepared parallel to the IEE, addresses this issue in-line with ADB safeguard policy statement 2009. WWTP is designed to treat and dispose the wastewater meeting the disposal standards. Necessary provisions for green buffer zone within WWTP premises are considered in design. Proper selection of treatment process as well as regular O & M of STP mean that the odour will not be a problem. The treated water will be discharged into a channel flowing adjacent to the site. The channel water is used for irrigation. WWTP is designed to meet the disposal standards, so no impact on receiving water body envisaged. Aerobically stabilized sludge will be dewatered directly by using centrifuges (Decanter). Before transported to sludge drying beds, sludge will be conditioned by chemicals (Lime) to prevent odor problem and expressly improve its dewatering characteristics. Dewatered sludge from sludge drying beds will be transported to sludge disposal site adjacent to the WWTP.

6. Regardless of these various actions in locating and designing infrastructure during the IEE process, there will still be impacts on the environment when the infrastructure is built and when it is operating. This is mainly because of the invasive nature of trenching; and because the pipe/sewer network is located in an inhabited town where there are densely populated areas. Because of these factors the considerable impacts are on the physical and human environment.

7. During the construction phase, impacts mainly arise from the need to dispose of large quantities of waste soil and import a similar amount of sand to support the pipes in the trenches; and from the nuisance to/disturbance of residents, businesses and traffic by the construction work. There is no residents to be affected during the construction phase and no traffic at the construction of the collector route and WWTP site. These are common impacts of construction in urban areas, and there are well developed methods for their mitigation. These include: (i) finding beneficial uses for waste material; (ii) covering soil and sand during transportation and when stored on site; (iii) planning work to minimize disruption of traffic and communities; (iv) Providing temporary structures to maintain access across trenches where required.

8. Once the system is operating, most facilities will operate with routine maintenance, which should not affect the environment. Leaks in the network will need to be repaired from time to time, but environmental impacts will be much less than those of the construction period as the work will be infrequent, affecting small areas only. Regular monitoring will be conducted at WWTP to ensure that the treated water meets standards. Sludge will be dewatered using decanter, and further dried in sludge drying beds and finally disposed in the identified sludge disposal site, near the WWTP. There is occupational health and safety risk involved while working in WWTP; all the necessary precautionary measures are included. Adequate manpower, operation and maintenance equipment will be provided. Necessary training will also be provided to the personnel.

9. The major impacts of the implementation of water supply subproject will be beneficial to the citizens of Beylagan as it will provide constant supply of water and safe sewage disposal, which will serve a greater proportion of the population. This will improve the quality of life of people as well as benefiting both individual and public health as the improvements in hygiene should reduce the incidence of disease associated with poor sanitation. This should lead to economic gains as people will be away from work less and will spend less on healthcare, so their incomes should increase.

10. An Environmental Management Plan (EMP) is proposed as part of this IEE which includes (i) mitigation measures for significant environmental impacts during implementation, (ii) environmental monitoring program, and the responsible entities for mitigation, monitoring, and reporting; (iii) public consultation and information disclosure; and (iv) grievance redress mechanism. Mitigation measures have been developed to reduce all negative impacts to acceptable levels. A number of impacts and their significance have already been reduced by amending the designs. Mitigation will be assured by a program of environmental monitoring to be conducted during construction stages. The environmental monitoring program will ensure that all measures are implemented, and will determine whether the environment is protected as intended. It will include observations on- and off-site, document checks, and interviews with workers and beneficiaries. Any requirements for remedial action will be reported to the ADB.

11. The stakeholders were involved in developing the IEE through discussions on site and public consultation after which views expressed were incorporated into the IEE and the planning and development of the project. The IEE is made available at public locations and will be disclosed to a wider audience via the ADB website. The consultation process will be continued and expanded during project implementation to ensure that stakeholders are fully engaged in the project and have the opportunity to participate in its development and implementation.

12. Therefore, the components proposed under this water and sewerage subproject in Beylagan are unlikely to cause significant adverse impacts. The potential impacts that are associated with design, construction, and operation can be mitigated to standard levels without much difficulty through proper engineering design and the incorporation/application of recommended mitigation measures and procedures. Based on the findings of the IEE, the classification of the Project as Category "B" is confirmed, and no further study or detailed EIA is required to comply with ADB SPS (2009). As per the Law of Environmental Protection 1999, an EIA study and approval from MNER is necessary for this subproject. Similarly, permission from MNER is required for groundwater abstraction. AzerSu is in the process of obtaining these mandatory approvals/permissions from MNER.

II. POLICY, LEGAL AND ADMINISTRATIVE FRAMEWORK

A. Azerbaijan Environmental Regulatory Framework

13. Constitutional Provisions. The constitution of the Republic of Azerbaijan embodies precepts and principles for environmental protection, ownership of natural resources and preservation of cultural heritage. Article 14 of Chapter III (Basic rights and liberties of a person and citizen) entails the state ownership of natural resources, without prejudice to rights and interests of any persons and legal entities. Article 39 constitutes the right to live in a healthy environment, to gain information about true ecological situation and to get compensation for damage done to his/her health and property because of violation of ecological requirements. Article 40 states the rights to practice and participate in culture and protection of historical, cultural, and spiritual inheritance and memorials. In Chapter IV (Main responsibilities of citizens), Article 77 states the responsibilities for protection of historical and cultural memorials; while Article 78 stipulates the citizen's responsibility for protection of environment.

14. Drawing from the constitutional provisions, the Government of Azerbaijan enacted various legal instruments – Parliamentary legislations that defines and establishes the State regulation of protected natural areas, and the protection and use of the environment and biodiversity; Presidential Decrees and orders, the Cabinet of Ministers resolutions, and By-laws of the executive authorities (Ministries and Committees).

15. Laws. The Laws/Regulations currently in force in Azerbaijan that deal with environmental protection are listed below:

- (i) Environmental Protection and Utilization of Natural Resources (1992)
- (ii) Environmental Protection (1999)
- (iii) State Ecological Expertise (1996)
- (iv) Environmental Safety (1999)
- (v) Water Code of the Azerbaijan Republic (1998)
- (vi) Water Supply and Wastewater (2000)
- (vii) Health Protection (1999)
- (viii) Sanitary-Hygienic State (1992), part of GOST
- (ix) Water quality, air and noise standards: GOST (various years)
- (x) Program on Strengthening Financial Discipline in the Water Sector (2002)
- (xi) Improvement of Water Supply Management (2004)
- (xii) Construction Norms and Regulations: SNiP
- (xiii) Rule for Use, Protection and Preservation of Trees and Bushes (No 173; September, 2005)
- (xiv) The Land Code (25 June 1999)
- (xv) European Economic Community Directive on Wastewater 91/271/EEC (1991)

16. The fundamental legislation concerning environmental protection and conservation in Azerbaijan is the Law on Environmental Protection of 1999 (EP Law, 1999), which lays down the basis for the legal, economic, and social aspects of environment protection. The objective of this Law is to protect environmental balance thus ensuring environmental safety, prevent the hazardous impact of industry and other activities to natural ecological systems, preservation of biological

diversity and proper use of natural resources. Detailed information on the most pertinent laws to be applied for this subproject are explained in Table 1:

Table 1: Laws & Regulations on Environmental Protection in Azerbaijan

Legislation	Description
Law on Environment Protection, 1999	<p>This Law establishes the main environmental protection principles, and the rights and obligations of the State, public associations and citizens regarding environmental protection. According to Article 54.2 of the Law, EIA is subject to SEE. This also explains that the MENR is responsible for the review and approval of EIA reports submitted by developers. Furthermore, in Articles 81 and 82 of the Law on Environmental Protection (1999), the Law specifically provides for the application of international agreements in case an international institute or body has provisions that are different from those of the Azerbaijani legislation.</p> <p>Articles 35, 36, 37, and 38: Ecological Demands during Project Design and Implementation. During the feasibility study, it should be confirmed that the project will comply with:</p> <ul style="list-style-type: none"> the maximum permitted discharges and emissions of pollutants in the natural environment the maximum permitted noise and vibration levels, and other harmful physical influences as well as health norms and standards of hygiene <p>Article 50: Ecological Expertise requires identification of impact on environment caused by any activities, examine the results of such impacts and predict possible impacts in accordance with the environmental requirements and qualitative parameters of environment.</p> <p>Article 54: Objects of the State Ecological Expertise defines the types of project which require compulsory "State Ecological Expertise (SEE)", i.e. to undergo the systematic EIA process.</p>
State Ecological Expertise (SEE)	SEE mandates an EIA for infrastructure development projects. The objective of the SEE is to identify impacts on the environment caused by construction projects, examine the results of such impacts and propose mitigation measures to prevent adverse effects on the natural environment and people's health. It is essentially a stand-alone check of compliance of the proposed activity with the relevant environmental standards (e.g. for pollution levels, discharges, and noise).
Law on Ecological Safety, 1999	This law defines legal bases of ecological safety as component safety of the state, society and population, the purpose of which is establishment of legal bases for protection of life and health of the person, society, its material and moral values, environment, including atmospheric air, space, water objects, resources of the ground, natural landscape, plants and animals from danger, arising as a result influence natural and anthropogenic action

Law on Sanitary-Hygienic State (GOST 17.1.3.07-82)	<p>This law serves as a basis for drinking water quality standards and mandatory implementation of sanitary-hygienic expertise regarding chemical and biological standards for water quality. Similarly, noise standards are described in GOST 12.1.003-83. However, the GOST does not specify regulations on permitted effluent discharge levels post wastewater treatment. As such, Azerbaijan has adopted Directive No 91/271 from the European Environmental Commission (EEC) in GOST. This regulation identifies the allowable biological and chemical levels for sewage effluent.</p> <p>Standards/maximum allowable values notified/adopted by Government of Azerbaijan are in appendices – Drinking Water Quality (Appendix 2); Wastewater Disposal Standards (Appendix 3); ambient air quality (Appendix 4) and noise levels (Appendix 5).</p>
Water Code (1998)	The Water Code (1998) regulates legal relations concerning the protection and use of water bodies (surface, subsoil, and boundary water bodies) in Azerbaijan. The Law details the obligations of the State with respect to the use and protection of water bodies in terms of monitoring and protection schemes as well as the supervision over the use and protection of water bodies. The items most relevant to the Investment Program include the outlining of (i) the use of water bodies as potable and service water; (ii) the use of specially protected water bodies; and (iii) the use of water bodies for the discharge of wastewaters.
Permission for groundwater use - Decision no 133 dated June 6, 1998 of the Cabinet of Ministers	Prior approval/clearance of the Ministry of Ecology and Natural Resources is necessary for the utilization of ground waters
Construction Norms and Regulations	The Construction Norms and Regulations are identified in SNiP which details how to carry out noise reduction measures to assure compliance with the relevant sanitary norms (section 3.9) and it details regulations on the dumping of excess materials (section 3.12). SNiP III-4-80 also details regulations on construction worker's health and safety. Chapters 2 and 5 provide organizational procedures of construction work sites and material transport. Annex 9 contains standards on maximum concentrations of toxic substances in the air of working zones. Annex 11 specifically claims that workers need to be informed and trained about sanitation and health care issues and the specific hazards of their work.
Rule for Use, Protection and Preservation of Trees and Bushes (2005)	The Rule for Use, Protection and Preservation of Trees and Bushes (2005) is a regulation that details the way to protect trees and shrubs in case of necessary cutting or replanting. These trees are excluded from the Forestry Fund of the Azerbaijan Republic.
Land Code (1999)	Article 22 of the Land Code (1999) stipulates that the state is required to establish protection zones with a special (restrictive) regime for the purpose of construction and operation of industrial facilities
The European Economic Community Directive on Wastewater (1991)	The European Economic Community Directive on Wastewater (1991) regulates the collection, treatment and discharge of domestic wastewater and wastewater from industrial sectors. The directive includes requirements for monitoring the performance of treatment plants and receiving waters. Also, it mandates measures for sludge disposal and re-use as well as means to re-use treated wastewater.

17. **International Treaties/Conventions.** Azerbaijan is signatory/party to most of the environmental-related international Treaties, Agreements and Conventions (see Table below). As stated in Article 151 (Legal value of international acts) of the Azerbaijan Constitution, agreements in International Conventions supersede national laws in case of conflict. This principle is embodied in Articles 81 and 82, Chapter 14 (International Co-Operation on Environment Protection Issues) of the Law on Environmental Protection, 1999.

Table 2: International Conventions/Treaties Ratified by Azerbaijan

S. No	International Convention	Year Ratified
1	UNESCO Convention on Protection of World Cultural and Natural Heritage	1994
2	UN Convention for the Protection of the Ozone Layer (Vienna Convention)	1996
3	Agreement on Mutual Cooperation of the Commonwealth of Independent States in the area of Hydrometeorology	1998
4	Convention on International Trade in Endangered Species of Wild Fauna and Flora (CITES), and Agreement on Protection of Sturgeons	1998
5	UN Convention to Combat Desertification	1998
6	UN Convention on Environmental Impact Assessment in the Trans-boundary Context (Espoo Convention)	1999
7	Convention on the Conservation of European Wildlife and Natural Habitats (Bern Convention)	1999
8	UNECE Convention on Access to Information, Public Participation in Decision-Making and Access to Justice in Environmental Matters (Aarhus Convention)	1999
9	UNESCO Convention on Wetlands of International Importance especially as Waterfowl Habitat (Ramsar Convention)	2001
10	UNECE Convention on the Protection and Use of Trans-boundary Watercourses and International Lakes (Helsinki Convention)	2000
11	UN Convention on Biological Diversity	2000
12	FAO Convention on Plant Protection	2000
13	Protocol on UN Framework Convention on Climate (Kyoto Protocol)	2000
14	Protocol on Substances that Deplete the Ozone Layer (Montreal Protocol)	2000
15	European Agreement about Transportation of Dangerous Goods on International Routes	2000
16	UN Convention on the Control of Transboundary Movements of Hazardous Wastes and their Disposal (Basel Convention)	2001
17	UNECE Convention on Long-Range Trans-boundary Air Pollution	2002

18. **Institutions.** There are four principal environmental institutions (or Ministries in Azerbaijan and the NAR) who handle water resources protection, management and operation. These include (i) MENR, (ii) the Ministry of Health, (iii) the Ministry of Emergency Situations (which implements construction safety supervision and standards and regulates safe sewage discharges and WSS operations), and (iv) AzerSu / State Amelioration and Water Management Agency (SAWMA) who will manage the WSS in their respective areas under the Investment Program:

- (i) **Ministry of Ecology and Natural Resources.** Ministry of Ecology and Natural Resources¹ (MENR) is the primary institution entrusted with the responsibility of environmental protection and implementation of environmental related laws. The

¹ A Presidential Decree in 2001 transformed the former State Committee for Ecology and Natural Resources 134Utilization (SCENRU) into the MENR. Thereon, along with its inherent mandate from SCENRU, the MENR assumed over the functions of several other state bodies such as the departments of Hydrometeorology, Geology, Forestry, and Fishery.

functions and activities of the MENR are sub-divided into the following areas: (i) Environmental policy development; (ii) Environmental protection; (iii) Water monitoring and management; (iv) Protection of marine (Caspian Sea) bio-resources; (v) Forest management; and (vi) Bio-resources and protected areas management. This ministry upholds all natural resource protection laws. The State Ecological Expertise (SEE) acts within this agency on the Program level in reviewing Environmental Impact Assessments (EIAs).

- (ii) **Ministry of Health: (Sanitary and Epidemiology Service sub-body within Azerbaijan only).** Sanitary and hygienic safety is the responsibility of the Ministry of Health. Its main function is the implementation of control over meeting the sanitary and epidemiological rules and standards as well as hygienic standards. This entity implements anti-epidemiological measures throughout Azerbaijan and NAR by legal and physical persons through application of laboratory and sampling controls.
- (iii) **Ministry of Emergency Situations (Commission of Emergency Situations in the NAR).** This agency implements construction safety supervision and standards. Their main involvement in this Program will be to regulate leakage from sewer lines, safe discharges from the sewage treatment system, and safe operation of the wastewater treatment plant and water treatment units.
- (iv) **AzerSu, Beylagan JSC.** Beylagan Joint Stock Company (JSC) manages and operates the water and wastewater infrastructure such as the delivery of potable water and the collection of wastewater in Beylagan. It also manages and operates the water and wastewater treatment plants in the town.

B. Environmental Assessment Procedure in Azerbaijan

19. **Legislation.** State Ecological Expertise (SEE) under the Law on Environmental Protection, 1999, sets out the requirement for environmental assessment in Azerbaijan. Procedures for Environmental Assessment are stipulated therein. The objective of the SEE is to identify impacts on environment caused by development activities/industrial units, examine the results of such impacts and predicting possible ones, in accordance with the environmental requirements and qualitative parameters of environment (Article 50 of EP Law). Article 52 of EP Law stipulates the Objectives and Responsibilities of the State Ecological Expertise:

20. The activities, fields and sectors to which SEE would apply are specified in Article 54 (The units controlled by the SEE) of the EP Law as:

- The State and local programs related to development and placement of productive capacities in governmental and economical institutions;
- The documentation of technical and economical substantiation, construction (reconstruction, enlargement, and renovation technology) and destruction of economical capacities, as well as assessment of the project influence on environment;
- Documentation concerning creation of new techniques, technologies, materials, and substances, as well as import of the same from abroad;
- Draft of scientific-methodical and normative-technical documentation concerning environment protection;

- Certain ecological conditions caused by improper work of industry and extraordinary situations;
- Ecological conditions of the regions and individual (separate) natural objects and systems;
- Provisions of draft contracts stipulating use of natural resources, as specified by the relevant decrees of the concerned executive bodies

21. **Institutions.** State Ecological Expertise (SEE) Department, under the Department of Environmental Policy and Environmental Protection of MENR is responsible for the review and approval of environmental impact assessment (EIA) reports submitted by project proponents.

22. **EA Process, Review & Approval.** The SEE adopts a 2-stage approach. The first stage takes about a month and entails an initial examination of the application of the proposed activity and the expected impacts. This stage may also include preliminary consultations with other agencies, NGOs, experts and initial public inquiries on the various aspects of the project. When determined that the project or activity will likely cause only minor impacts on the environment, the application may be approved with some conditions. On the other hand, if the activity is assessed to cause in significant impacts, a full EIA is required. Subsequently in such situation, a scoping meeting of representatives of the developer/applicant, invited experts and invited members of the public will be organized and to be chaired by the MENR. Based on the outcome of this scoping meeting, the MENR will notify the developer on the required scope and depth of the investigation and public consultation during the EIA study.

23. The second stage, which takes around three months, entails a review and investigation by the MENR of the documents submitted by the developer/proponent. A group of 5-11 expert reviewers and experienced members (e.g. members of the Academy of Science, university staff, or officials from other ministries) will be convened to perform the EIA document review and which will be chaired by MENR. The composition of the review group shall be on the discretion of the MENR but will be taken from a roster of experts who can deal adequately with project-specific environmental issues. The expert group will undertake public submissions, investigations, and consultations relevant to the project impacts as deemed necessary in the review process. Consequently, at the end of this stage, a written review of documentation together with recommendations is submitted by the environmental review expert group to the MENR.

24. The MENR then decides on whether to deny the application or to approve it, with or without conditions. In the case of infrastructure construction projects specified, these conditions include construction phase measures such as site management; noise; dust, discharges to the air land, subsurface or water, solid waste management, emergency contingency plans, etc. These conditions are set to assist the proponent/developer control the environmental impacts such that they are maintained at the acceptable limits. Should the application be approved with conditions, either the activity starts with due consideration on the conditions or the proponent/developer may opt to appeal against the conditions and resolutions may be subjected to judicial proceedings.

25. **Post Approval Monitoring.** During construction of the project, the applicant/developer should ensure adherence to conditions attached to the approval and be responsible in monitoring the developments of the projects along with regular reporting to MENR. The monitoring programme of the proponent/developer should be designed to give clear indications prior to conditions being breach. Practical corrective measures should be undertaken by the proponent/developer in order to avoid breach of any conditions stipulated in the approval.

26. The MENR is authorized to issue warning to proponent/developer should it observe that conditions are being breached. In the event, the proponent/developer is obliged to stop the activity which is causing the breach. In such cases, the MENR may reconsider the approval, possibly with the participation of the Environmental Review Expert Group, and the conditions of approval may be reviewed.

27. Should project designs be altered significantly from those presented in the in the feasibility phase EIA, additional reports on the impacts of the changes may be requested by MENR.

C. ADB Policy

28. ADB requires the consideration of environmental issues in all aspects of its operations. Superseding the previous environment and social safeguard policies, ADB's Safeguard Policy Statement, 2009 (SPS, 2009) sets out the policy objectives, scope and triggers, and principles for three key safeguard areas: (i) environmental safeguards, (ii) involuntary resettlement safeguards, and (iii) Indigenous Peoples safeguards. ADB adopts a set of specific safeguard requirements that borrowers/clients are required to meet in addressing environmental and social impacts and risks. Borrowers/clients comply with these requirements during project preparation and implementation. The environmental safeguard requirements are indicated in Appendix 1 of SPS 2009 (Safeguard Requirements 1: Environment). This states that ADB requires environmental assessment of all project loans, program loans, sector loans, sector development program loans, and loans involving financial intermediaries, and private sector loans.

29. **Screening and Categorization.** The nature of the environmental assessment required for a project depends on the significance of its environmental impacts, which are related to the type and location of the project, the sensitivity, scale, nature and magnitude of its potential impacts, and the availability of cost-effective mitigation measures. Projects are screened for their expected environmental impact are assigned to one of the following four categories:

- (i) **Category A.** Projects could have significant adverse environmental impacts. An environmental impact assessment (EIA) is required to address significant impacts.
- (ii) **Category B.** Projects could have some adverse environmental impacts, but of lesser degree or significance than those in category A. An IEE is required to determine whether significant environmental impacts warranting an EIA are likely. If an EIA is not needed, the IEE is regarded as the final environmental assessment report.
- (iii) **Category C.** Projects are unlikely to have adverse environmental impacts. No EIA or IEE is required, although environmental implications are reviewed.
- (iv) **Category FI.** Projects involve a credit line through a financial intermediary or an equity investment in a financial intermediary. The financial intermediary must apply an environmental management system, unless all projects will result in insignificant impacts.

30. **Environmental Management Plan.** An environmental management plan (EMP) which addresses the potential impacts and risks identified by the environmental assessment shall be prepared. The level of detail and complexity of the EMP and the priority of the identified measures and actions will be commensurate with the project's impact and risks.

31. **Public Disclosure.** ADB will post the following safeguard documents on its website so affected people, other stakeholders, and the general public can provide meaningful inputs into the project design and implementation:

- (i) For environmental category A projects, draft EIA report at least 120 days before Board consideration;
- (ii) Final or updated EIA and/or IEE upon receipt; and
- (iii) Environmental Monitoring Reports submitted by Implementing/Executing Agencies during project implementation upon receipt

D. Applicability of Environmental Legislations to the Subproject

32. Proposed water supply and sanitation project in Beylagan will attract the provision of EP Law, State Environmental Expertise. Therefore requires Environmental Impact Assessment Study and Report and its approval from MENR. The proposed groundwater abstraction also requires permission from MNER.

1. Standards on Effluents

33. As per ADB SPS 2009, Pollution Prevention and Abatement technologies and practices consistent with international good practice, as reflected in internationally recognized standards such as the World Bank Group's Environment, Health and Safety Guidelines are to be followed during the design, construction, and operation of the project. These standards contain performance levels and measures that are normally acceptable and applicable to projects. In the case where the regulations and standards of the host country differ from these levels and measures, the project is to achieve whichever is more stringent. In situations where national standards are more appropriate, a justification for their use (for the project) needs to be provided.

34. **Noise:** As seen in Appendix 3 the AZE national standards are more stringent and more detailed the WB/IFC standards. Therefore, the AZE standards are to be used for monitoring the project activities.

35. **Air Quality:** In the case of this project the activities to be undertaken under Tranche 4 (revised IEE) the project is located far from communities and therefore, small impact likely from dust is not considered significant enough to require monitoring.

36. **Water Effluent Standards:** The AZE national standards on maximum Allowable Wastewater Influent an effluent Levels are based on the European Directive No 91/271/EEC (European Economic Community), however, there is a discrepancy in this as the European directive requires a effluent BOD of 25mg/l while the AZE standard shows that the BOD level required is 35mg/l. Additionally, the national standards do not present levels for pH, oil & grease, and total coliform; hence, it is advised, that for the purpose of this project, the WB IFC standards for effluent be used. These are also presented in Appendix 3.

31. AzerSu is presently in the process of obtaining approvals/permissions from MNER.

E. Extent of this IEE Study

37. The Beylagan Town subproject is classified under the ADB SPS 2009 as environment category B, requiring IEE study. This is the IEE Report of the subproject. The purpose of this IEE is to assess potential environmental, health, safety and social impacts of the proposed subproject. No significant adverse environmental impacts have been noted in this subproject assessment.

38. The IEE was prepared during the Investment Program preparation in 2010 and was approved by ADB. the IEE is in line with the ADB SPS 2009.

39. There are only collector route changes in the design to be included in Tranche 4 and no location and major changes in the wastewater treatment plant design.

40. The IEE studies are conducted based on secondary information, primary data from various sources and field observations. During the site visit the specialists had discussions with town members and local executive powers for their feedback on the proposed project. The results of the social survey with town members as well as an evaluation of the institutional framework have been incorporated into this assessment.

III. DESCRIPTION OF THE PROJECT

A. Azerbaijan Water Supply and Sanitation Investment Program

41. The Asian Development Bank (ADB) funded Azerbaijan Water Supply and Sanitation Investment Program is intended to optimize social and economic development in selected secondary towns through improved water and sanitation (WSS) services. Currently, the WSS sector in Azerbaijan is characterized by institutional weakness, inefficient operation, outdated and dilapidated physical infrastructure and severe financial constraints. As a result, the WSS service levels provided to customers are low and of poor quality.

42. With the improvements undertaken in WSS sector under the ongoing assistance (ADB Loan 2119 - Azerbaijan Water and Sanitation Improvement Project), the Government of Republic of Azerbaijan has requested ADB's continued assistance in developing the country's WSS sector. The Government prioritized for ADB's consideration the implementation of WSS works in a number of secondary towns. The ADB has accepted the possibility of long-term engagement in the WSS sector through the Multi-Tranche Financing Facility (MFF) lending modality. The MFF modality is expected to comprehensively address WSS sector development through reduced forward processing time, focusing on expeditious and streamlined implementation of physical works, and addressing the much required sector and institutional reforms.

43. This Investment Program will cover: (i) WSS infrastructure development in the towns of Agdash, Goychay, Nakhchivan, Aghjabedi, Beylagan, Balakan and other developing urban centers in the Country including the peripheral areas of Baku; (ii) Management Improvement and Capacity Development of WSS agencies to manage WSS service delivery; and (iii) a Program Management Facility that will oversee the Program development, implementation and management. The Investment Program will be implemented over a period of 8 years (2010-2018).

44. The Azersu Joint Stock Company (AZERSU) will be the Executing Agency for all project activities except those in Nakhchivan Autonomous Republic, where the State Amelioration and Water Management Agency (SAWMA) will be the Executing Agency. The project management Facility (PMF) created at AZERSU and SAWMA will be responsible for supporting project implementation. Each PMF comprises international and national consultants and counterpart staff. At the field level, a Project Implementation Review Committee will be constituted to review monthly implementation progress and ensure timely resolution of operational issues.

B. Beylagan Town Water Supply & Sanitation Subproject

1. Need

45. Located at 282 km southwest of the Capital City Baku, Beylagan is an important town in the south central part of the country (Map 1). Under the Tranche 2 of the Investment program, it is proposed to implement water supply and sewerage subproject in Beylagan Town, with an objective to establish safe, reliable piped water supply and sewerage system and promote a healthier environment.

46. Similar to other towns in the country, lack of proper and reliable water supply and wastewater collection and treatment system is a major problem for Beylagan. and other towns in the Kura-Araz lowland. The water network in the town was installed in 1974. All pipelines have deteriorated beyond repair as they have been functioning more than two times their design operation life. Some pipelines have not been operated for a long time, and emergency situations frequently occur in the water distribution system due to significant leakage.

47. Beylagan town currently uses three boreholes for town water supply supplemented by surface water (Yuhari Garabag canal). However, the water quality of this surface water source is poor due to high sediment load. Pipelines are very old (40-50 years) and are in urgent need of replacement. Similarly, other infrastructure like reservoirs are also requires immediate replacement. Due to old system, water leakage is very high. With the existing system, only 38.9% of the town population receives water supply.

Map 1: Project Location



48. The sewerage system in Beylagan town was put into operation in 1963 and extended in 1980 and in 2002. The wastewater pipes are asbestos cement pipes. The length of the current sewerage system is 11.1 km and collects from approximately 18.8% of the population located in the center of town. Since the sewerage network has operated for many years without repair, the pipes are full and the technical condition of the network is inadequate. Sewage is collected in the open channels and surface ditches which collect storm runoff also.

49. Considering the grave situation, it is proposed to improve the Beylegan water supply and sewerage system is improved under Tranche-2 of the Investment Program.

50. Sewerage collector and the WWTP will be improved under Tranche-4 of the Investment Program.

2. Proposed Subproject Description

51. The following Table 3 shows the subproject components selected for implementation under Tranche-2 in Beylagan Town, for which, according to ADB requirement, the IEE has been conducted. Location of proposed subproject components is shown in Map 2. Proposed water sewerage collector system and location of facilities are shown in Map 3 and Map 4. Layout plans of proposed facilities are shown in Map 5 (Well field/well collection site – Area Site No.1), Map 6 (Reservoir Site – Area Site No.2), Layout plans of Administrative Building and Workshop Facility are presented in Map 7 and Map 8 respectively. Photographs of project sites are appended in Appendix 1.

52. Table 4 shows the subproject components selected for implementation under Tranche-4 in Beylagan Town, for which, according to ADB requirement, this updated IEE has been conducted.

53. Sewerage collector route and WWTP location layout plan are shown on Map 9 and WWTP layout is presented in Map 10. Photographs of project sites are appended in Appendix 9.

Table 3: Subproject Components of Tranche-2

Infrastructure	Function	Description	Location
-----------------------	-----------------	--------------------	-----------------

Infrastructure	Function	Description	Location
1. Water			
Well field development - Artesian wells – 5 no.s	To provide 6,200 m ³ of water daily	Diameter of well: 445 mm Depth: 120 m Water table depth: 20 m bgl Casing pipes with filter, water lifting pipes Collection pipes from wells to collection point within the well field (1.95 km total pipe length – 165-225 mm diameter) Submersible pumps 5 units of wellhead cubicles Power supply line from the mainline and transformer Area facilities: fencing, internal roads, lighting etc	- identified site is located near village Alinazarli, 5 km northeast of the town - site is situated in central part of Araks River alluvial cone (part of Mill foothill plain) - Site owned by AzarSu - wells will be drilled linearly maintaining a 250 m distance between the nearest ones
Water collection site	Collect water from all wells for further transmission	Reservoir (1 no. - 500 m ³ capacity) Pumping station Electrical transformer & back-up generator	- well collection point will be developed adjacent to the well field area near village Alinazarli
Transmission pumping water main	Convey water under pressure from well collection site to reservoirs	Length 8,358 m - 383 mm diameter polyethylene pipes	- From water collection point in the northeastern side to Reservoir Site (Area No.1) in the southwestern side of the town - Pipeline will be buried along the Beylagan-Agzabedi road passing through the centre of the town - Involves no tree cutting
Rehabilitation of storage reservoir	To store water for further supply	1 reservoirs of 2,000 m ³ each	- within the existing Reservoir Site (Area No. 2) - Site is located in the southwestern side of the town
Renovation of pump station at reservoir site	Pump water from reservoirs to distribution network	Civil works rehabilitation Installation of four new pumps of discharge capacity 110 m ³ /hour with a head of 70 m	- within the existing Reservoir Site (Area No. 2)
Chlorination facility	Disinfection of water	RCC building with all safety features and facilities for handling and administering chlorine in water supplies Chlorination devices – 3 units of 1 kg/hour capacity	- Within the existing Reservoir Site (Area No. 2)
Water testing lab	Regular monitoring of water quality	Construction of laboratory facility (25 m ² building) and provision of equipment	- Within the existing Reservoir Site (Area No. 2)
Water distribution network	To supply water to consumers	Total length: 70,905 m Diameter: 110- 400 mm Material: HDPE	- Network will cover entire town - Pipes will be buried along

Infrastructure	Function	Description	Location
		Road surface will be rehabilitated & reinstated to original after pipe laying work	the roads - Involves no tree cutting
Fire fighting hydrants	To provide water outlet for fire related emergencies	No: 334 units Water tapping points to provide adequate water for fire accidents	- The hydrants will be placed alongside the distribution mains at appropriate locations - The hydrants will be buried underground with a opening so that they do not create obstacle to the public.
House connections	To supply water to consumers at houses	3,363 no,s	- House service connections will be laid from the distribution line to the household premises covering northern part of the town
Water meters	To measures volume of water delivered to consumers	3,363no,s	-Water meters will be installed at the household premises covering northern part of the town
2. Sanitation			
Sewer network with manholes	To collect wastewater from house connections and convey to treatment plant	Total length: 78,828 m Diameter: 200- 400 mm Material: HDPE Manholes: 1,735 RCC units Road surface will be rehabilitated & reinstated to original after sewer laying work	- Network will cover southern part of the town - Pipes will be buried along the roads on the opposite side of water pipelines - Existing underground AC sewers will be left undisturbed in the ground as it is - Involves no tree cutting
House connections	To collect wastewater from houses and convey to network	2,313 no,s	- House service connections will be laid the household premises to sewer lines covering northern part of the town
Administration & Support facilities			
Administrative Office	Central administrative office for Beylagan JSC	<ul style="list-style-type: none"> • Main office building • Heating building • Transformer • Basic amenities 	- AzerSu owned land parcel, situated in the centre of the town along the Beylagan- Aghjabedi Road -Site is presently vacant and there are no trees
Workshop	For maintenance and repairs of water supply and sanitation infrastructure	<ul style="list-style-type: none"> • Guard house • Site office building • Car parking area • Heating building • Warehouse • Mechanical workshop 	- AzerSu owned land parcel, situated in the northern outskirts of the town -Site is presently vacant and there are no trees

Infrastructure	Function	Description	Location
		<ul style="list-style-type: none"> • 10 m3 water tower • Transformer • Basic amenities 	


Table 4: Subproject Components of Tranche-4

Infrastructure	Function	Description	Location
2. Sanitation			
Sewerage Collector	To convey collected wastewater by sewerage network to WWTP	Total length: 1,820 m Diameter: 800 mm Material: HDPE	<ul style="list-style-type: none"> - Pipes are laid along the northern side of the town - Involves no tree cutting
Wastewater Treatment Plant (WWTP)	To treat wastewater to meet Azerbaijan disposal standards	Process system: Extended aeration activated sludge including Capacity: 5,000 20 000 m3/day The treatment units are: <ul style="list-style-type: none"> • Coarse Screen • Fine Screen • Aerated Grit Chamber • Inlet Pumping Station • Anaerobic Tanks • Aeration Tanks(Biological Reactor) • Sedimentation tanks • Sand Filters • Ultraviolet Disinfection • Sludge Dewatering by using Decanter • Return & Excess sludge pumping station • Centrate pumping station 	<ul style="list-style-type: none"> - 5 ha AzerSu owned site on the northern side of the town - As the site is vacant, part of it is presently occupied by a sheep farm; - Displacement is being handled through Resettlement Planning - treated wastewater will be disposed in a channel flowing near the site - the dried sludge will be disposed on an adjacent site; area of the site is 2 ha


3. Implementation Schedule

54. Detailed design work for Tranche-4 will be completed in June 2016 for WWTP and sewerage collector. Bids are likely to be invited in October 2016 and the bid process is likely to be completed by December 2017. The construction work will commence in August 2018, and will take about 18 months.


Map 2: Location of Subproject Components of Tranche-2 and 4

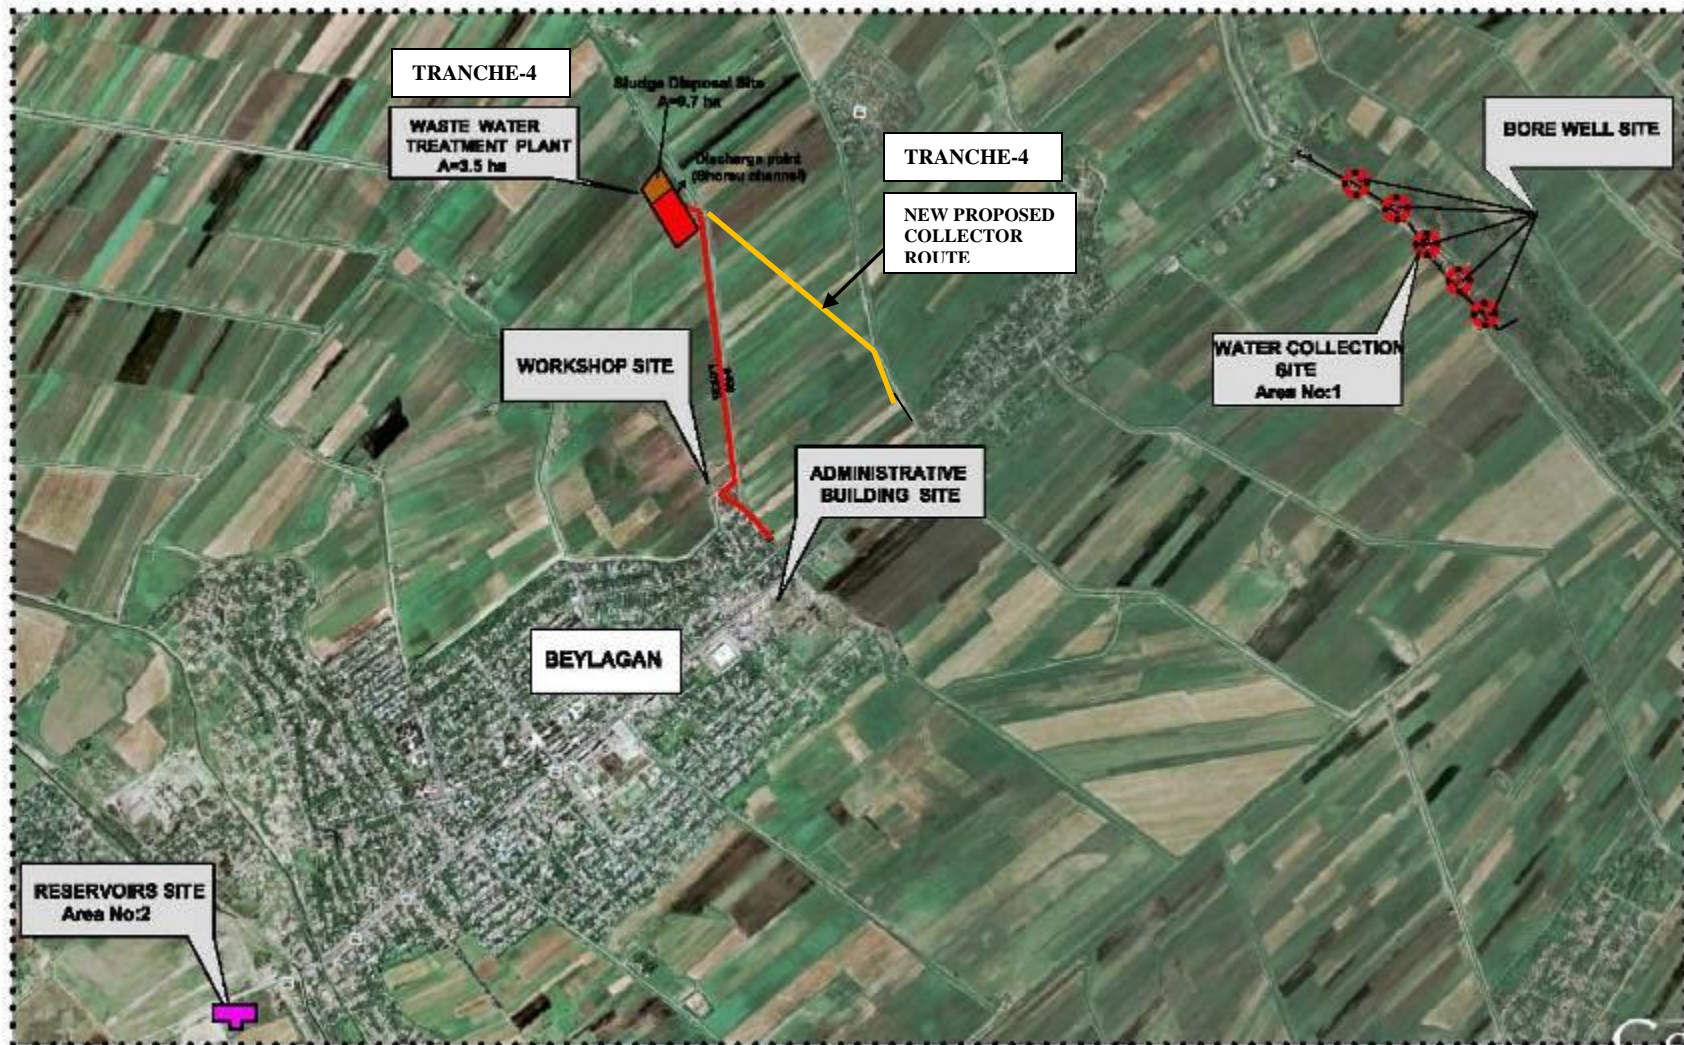


Map 3: Proposed Water Supply System

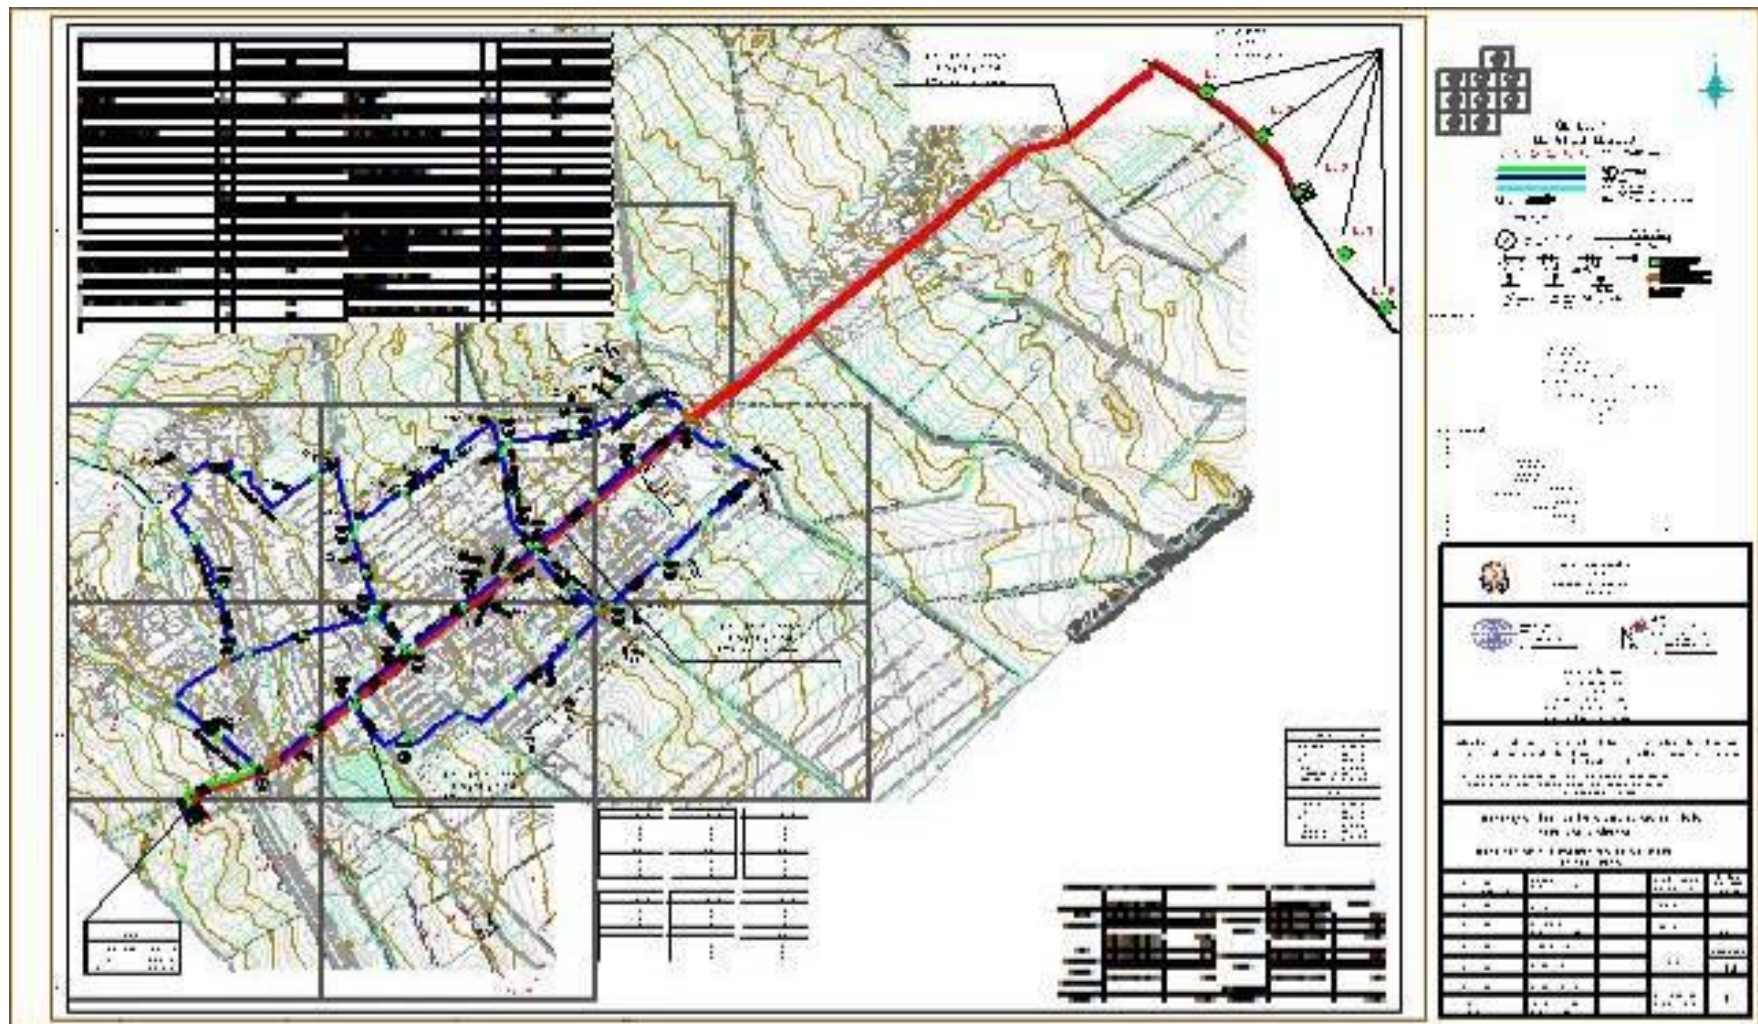


Map 4: Proposed Sewerage System

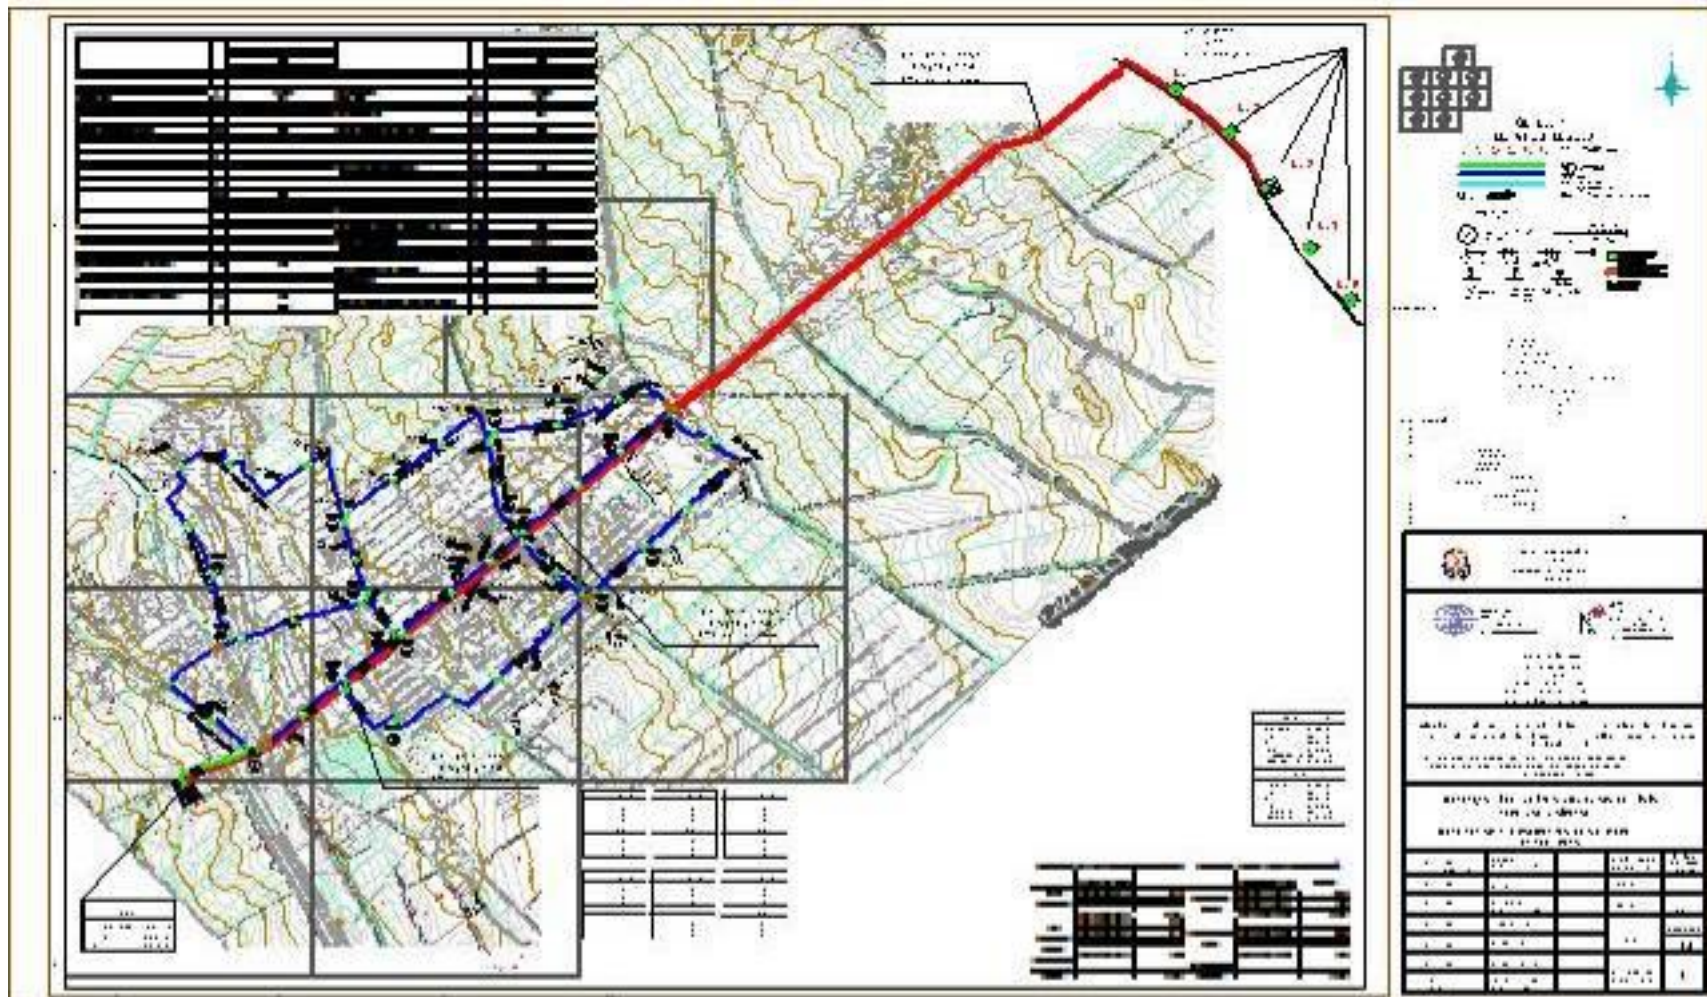


Map 5: Layout Plan of Water Collection Site (Area No. 1)

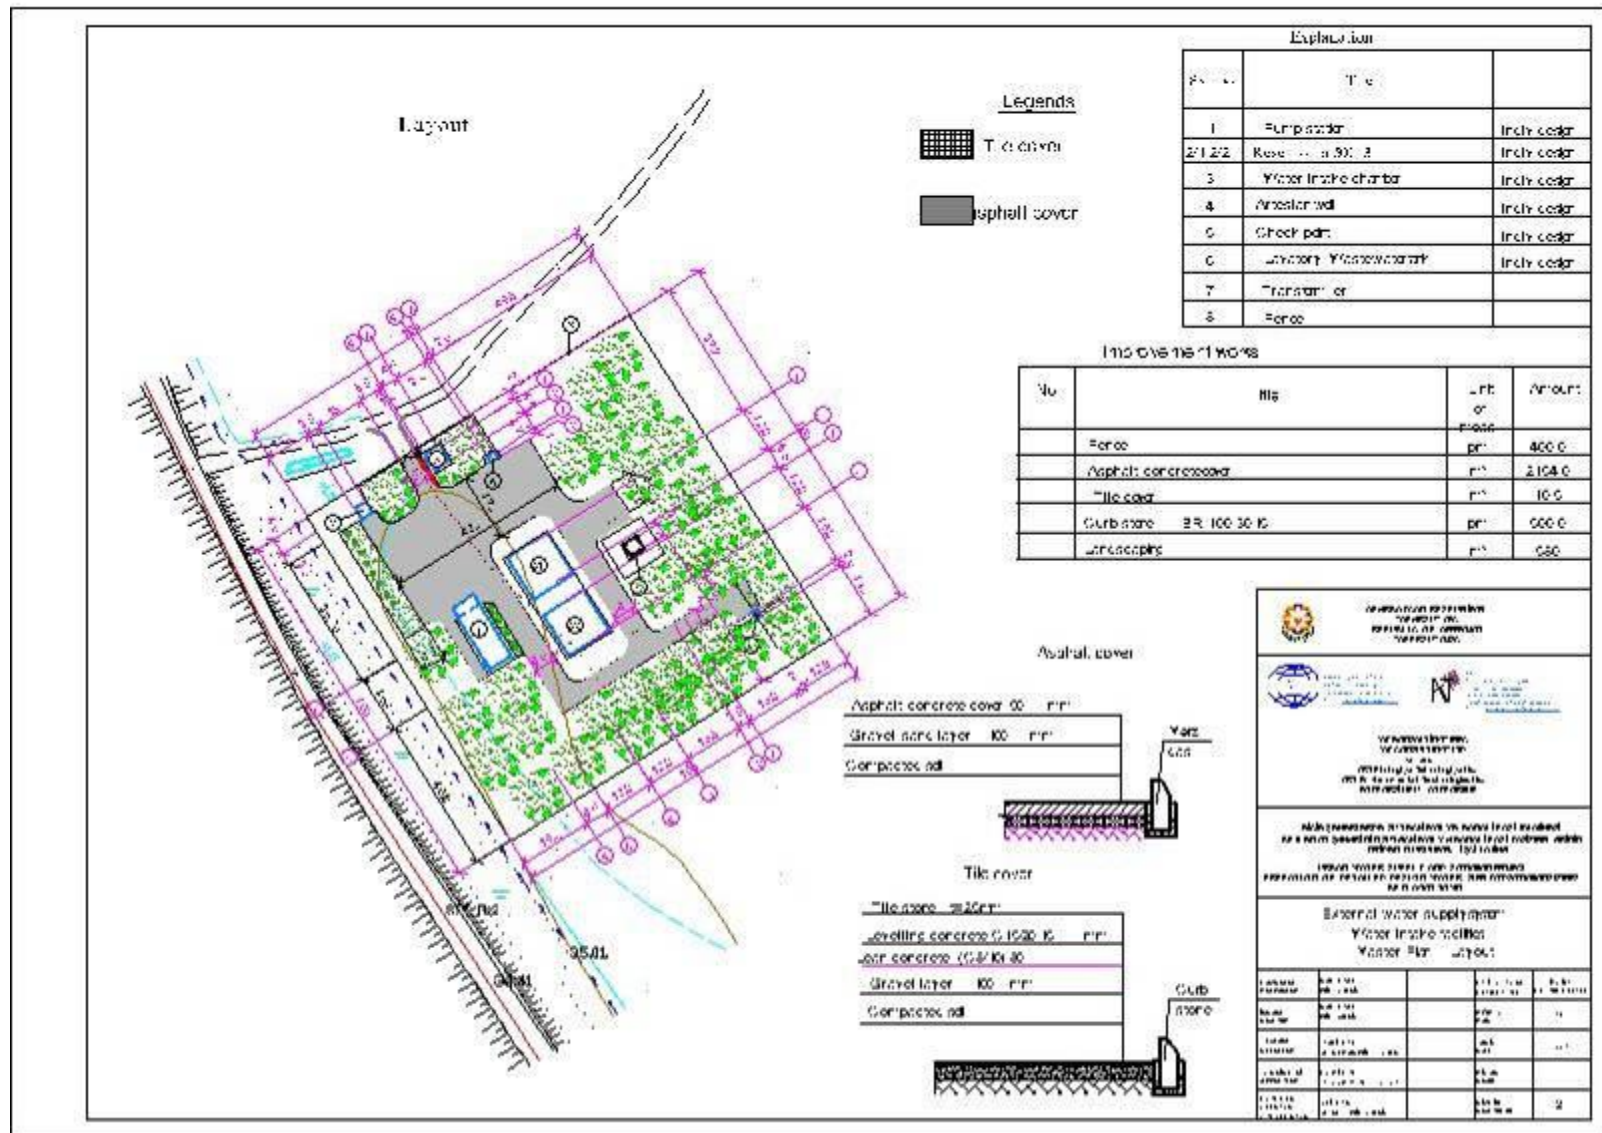


Map 6: Layout Plan of Reservoir Site (Area No. 2)

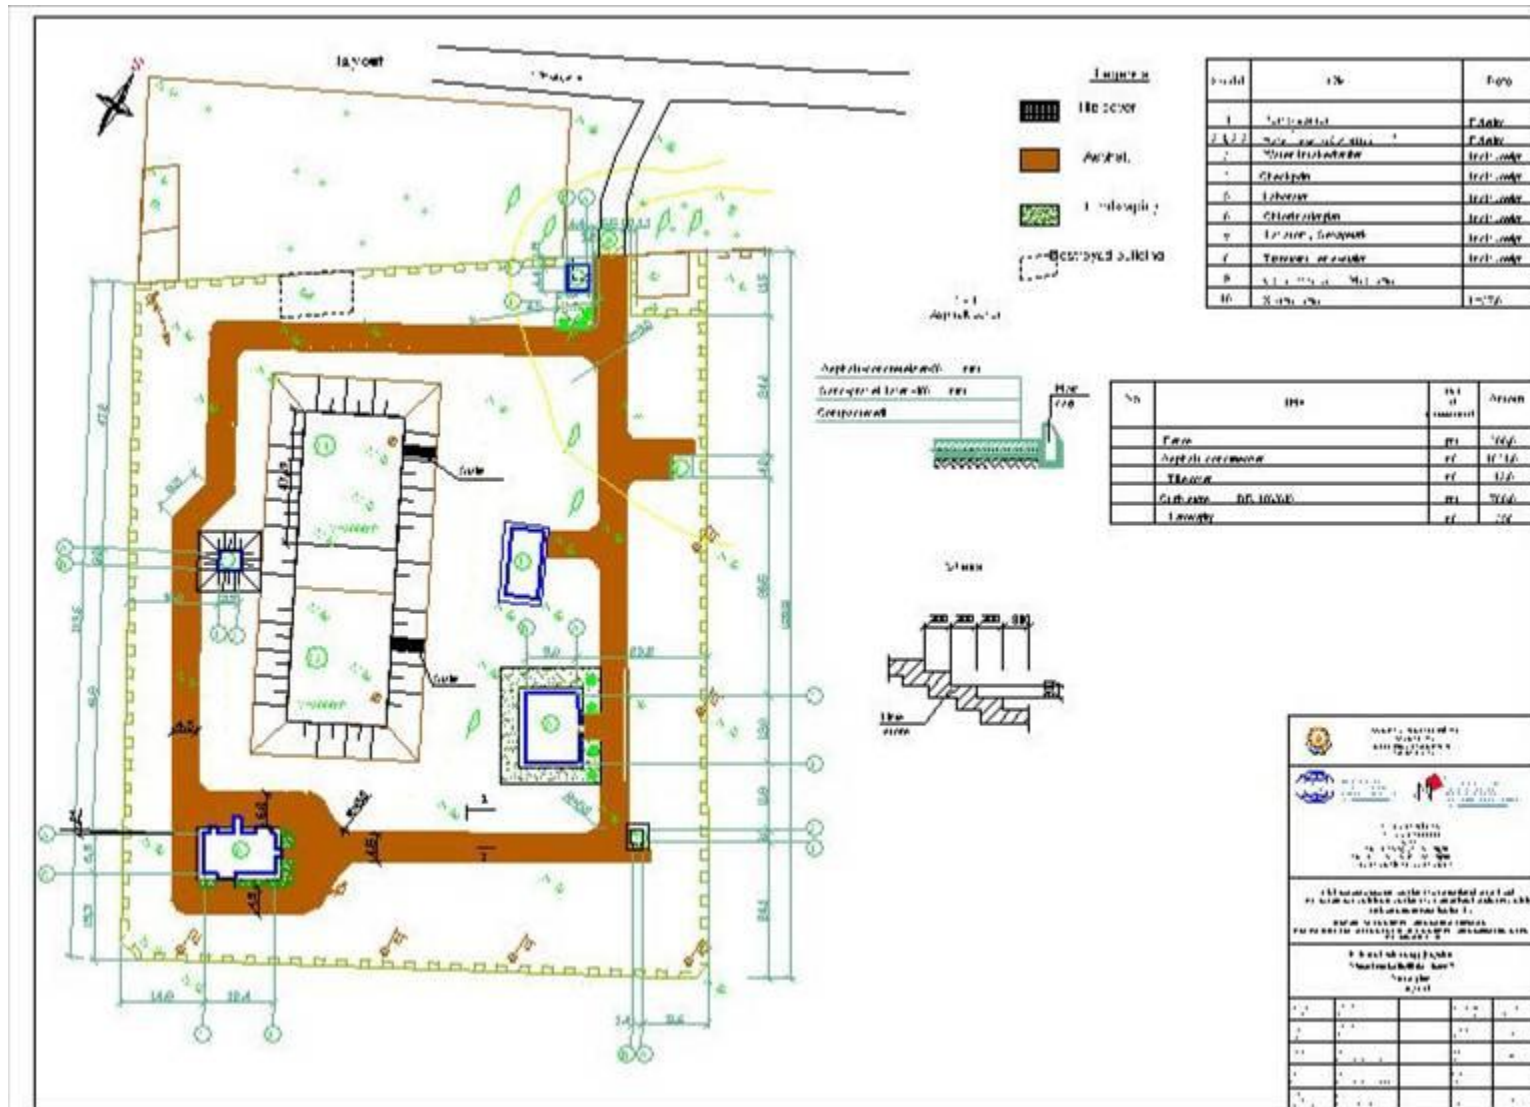


Map 8: Layout Plan of Workshop Site

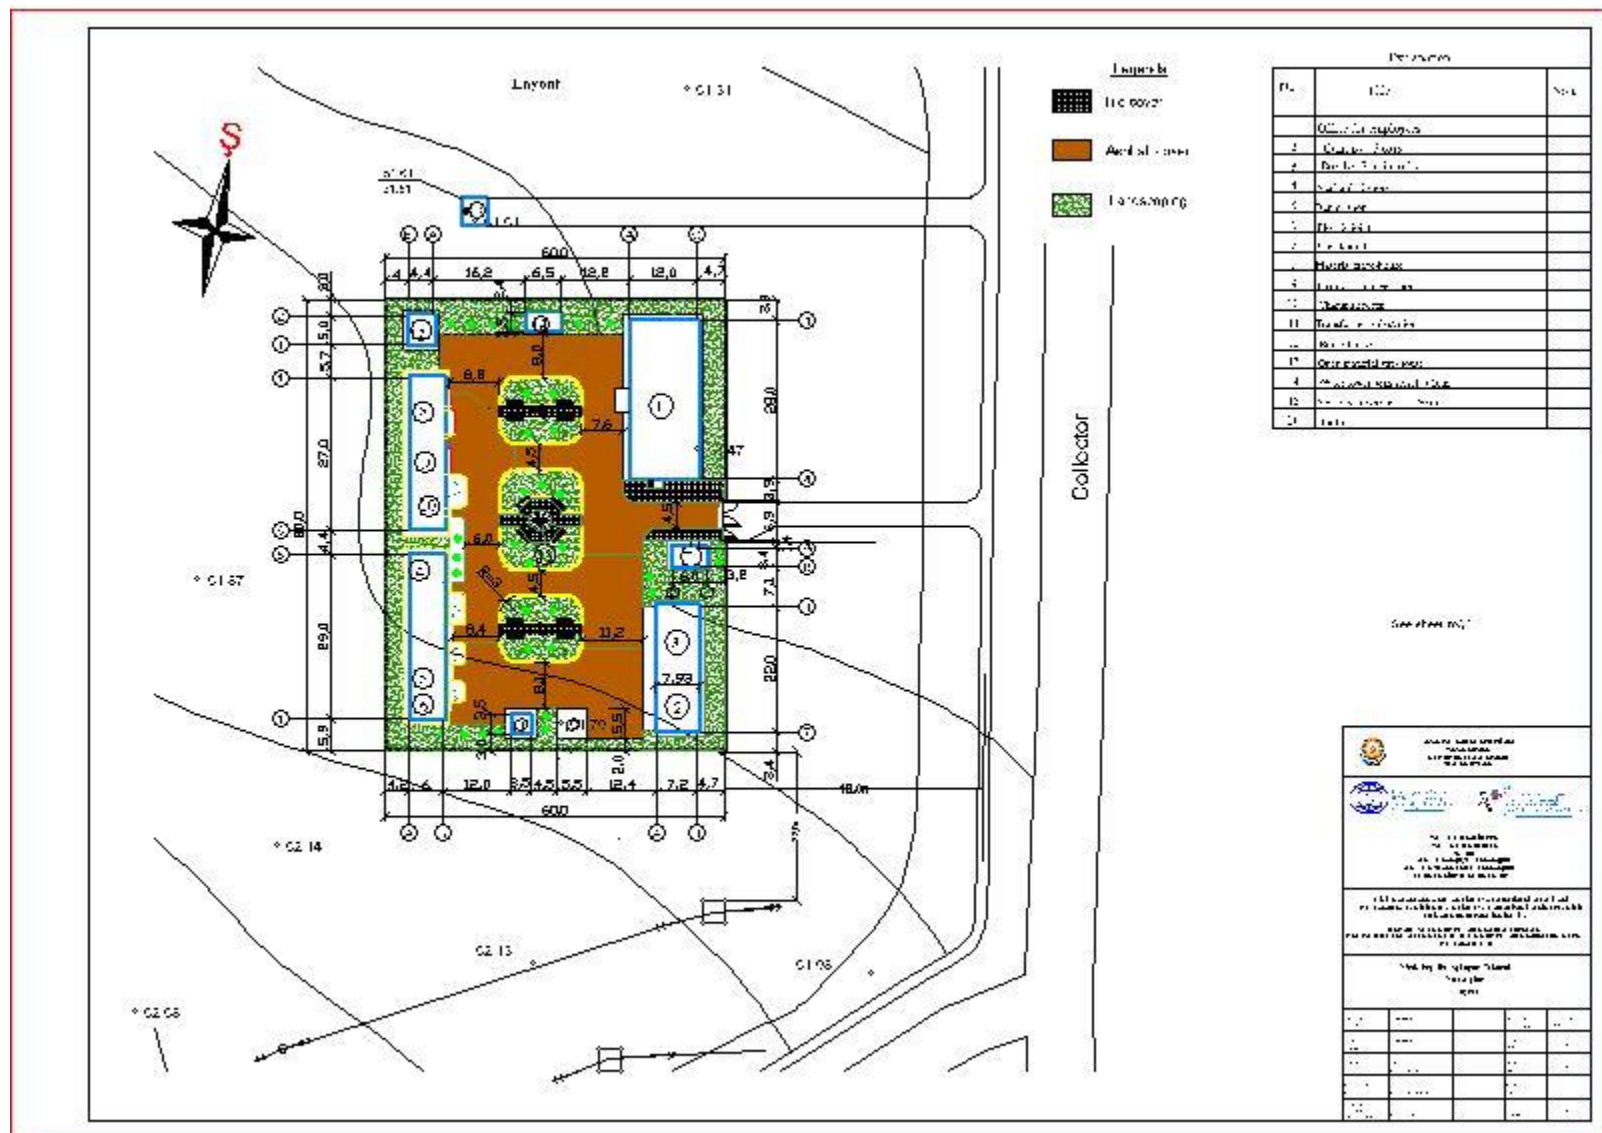

Map 9: Layout Plan of Sewerage Collector

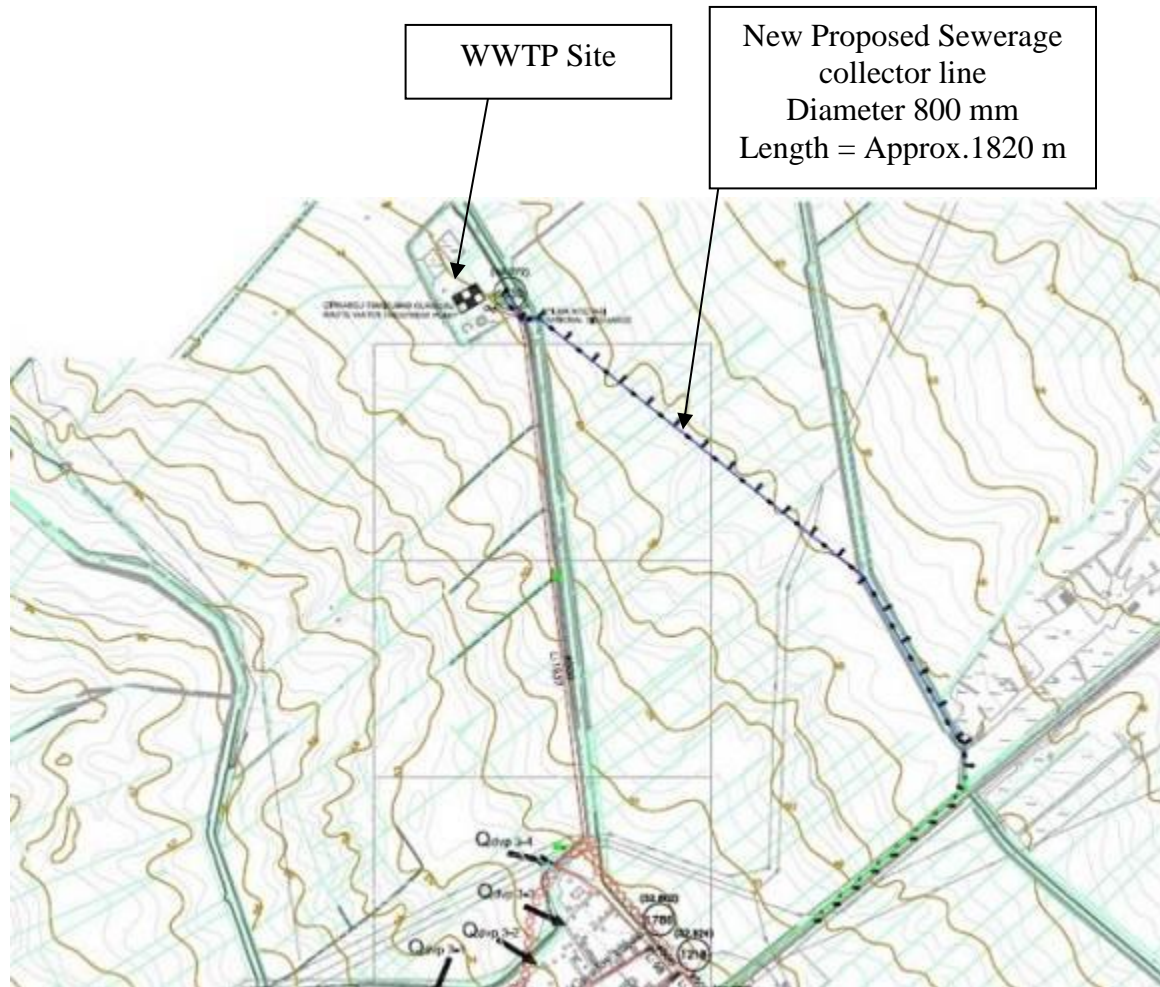

Map 10: Layout Plan of Wastewater Treatment Plant

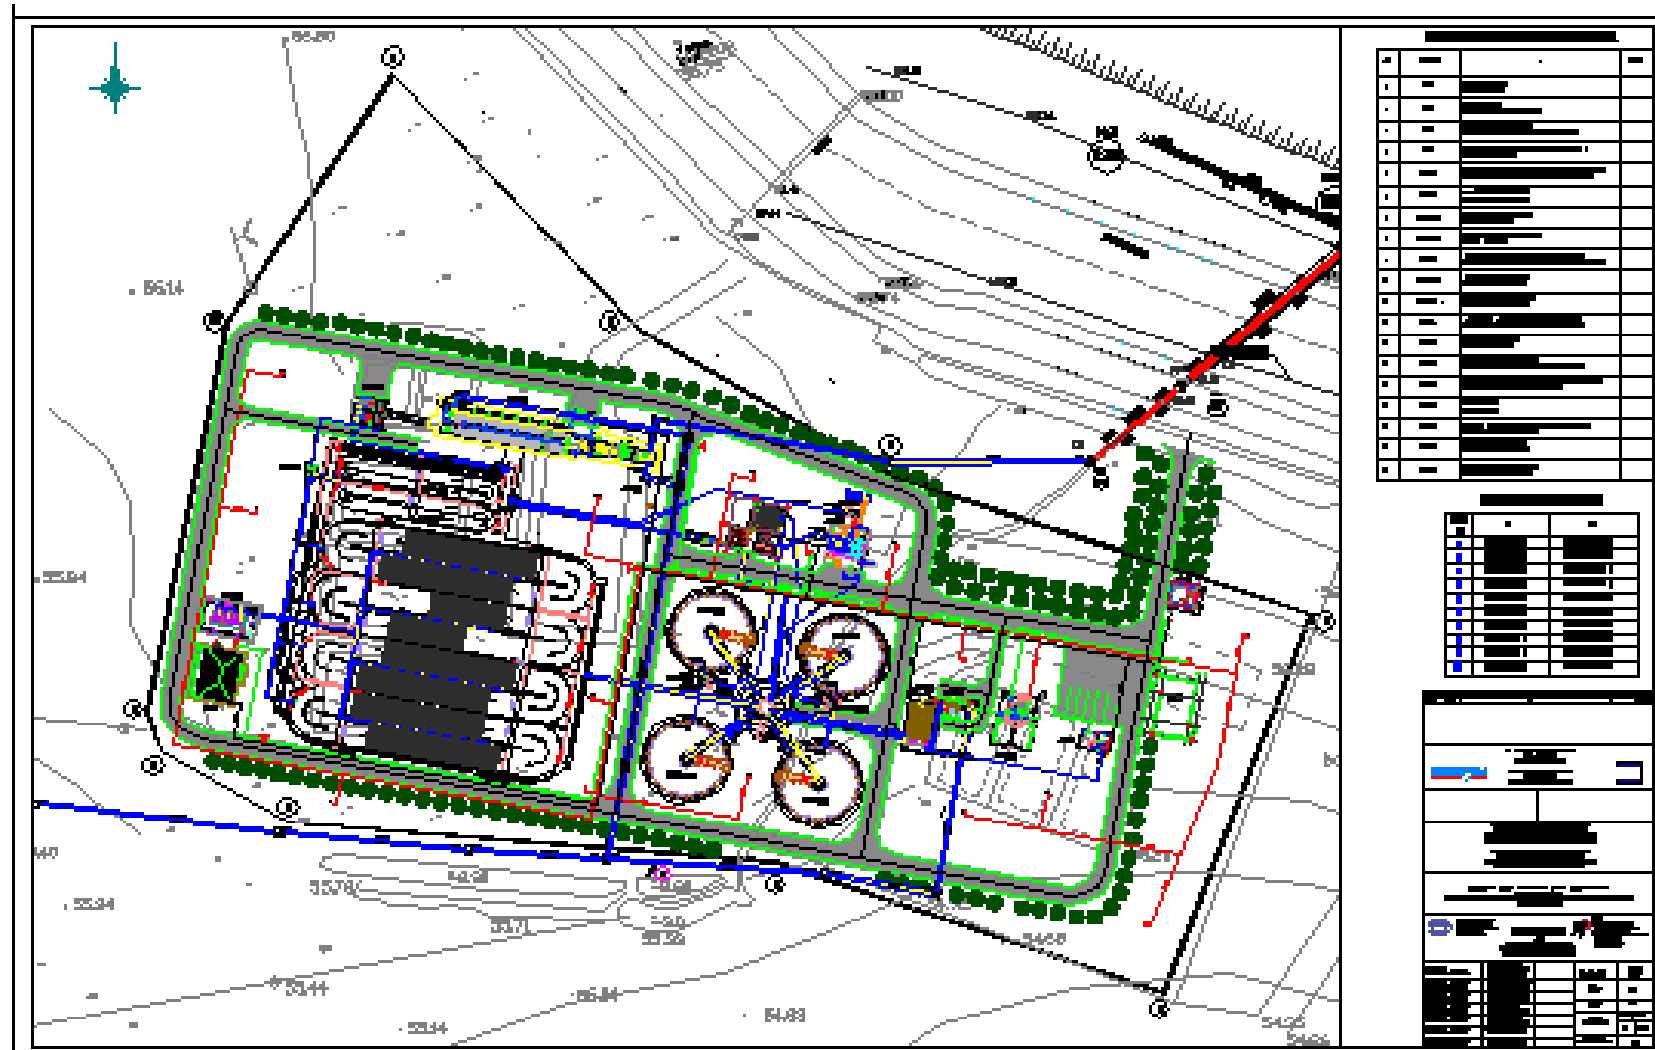

4. Construction Activities

55. As indicated in Table 3 and 4, there are nine main elements in the subproject: construction of artesian wells; installation of pumps and electrical equipment; construction of reservoirs; laying of water pumping mains and distribution lines; laying of sewers; construction of sewerage collector and WWTP; construction administrative building & workshop; construction of area facilities at various sites such as internal roads, fencing, lavatory, guard room, etc, and miscellaneous small scale works (laboratory, house connections, meters, etc). Construction practices of these works are briefed below:

56. **Construction of wells.** Wells (400 mm diameter) will be drilled by using a hydraulic rig/drilling machine, a casing pipe (perforated pipe) will be lowered as the drilling progress till a depth of 120 m. The drilling activity will generate slurry material (water mixed with silt/soil material), which will be disposed in a low-lying area near the site.

57. **Installation of Pumps and Electrical Equipments.** New pumps and a transformer will be brought to site on trucks, and installed using small pulley or hydraulic crane. New power supply line will be laid from the main power line near the sites via overhead cables carried on metal/concrete poles. This line will provide power supply to new wells and new facilities at Area Site No.2, Administrative building and workshop site.

58. **Construction of Reservoirs.** A new reservoir of 500 m³ will be constructed at Water Collection Site (Area Site No.1) and the existing reservoir at Reservoir Site (Area Site No.2) will be rehabilitated. The new reservoir construction work involves excavation for foundations, placing of reinforcement rods in wooden shutters and pouring of concrete in voids to form foundations, floor, walls and roof. Cement mortar plaster will be applied to walls (outside and inside), floor and roof for a smooth finish. Inlet and outlet pipes and fixers/valves will be installed. The excavated earth will be refilled around the foundations and excess soil will be used for construction roads or transported to a disposal site. Excavation for foundation will be done by backhoe digger or manually, where required. Concrete will be mixed in a mixer and a needle (pen) vibrator will be used for compaction of concrete around the reinforcement. The rehabilitation work will involve structural strengthening, surface finishing, replacement of fixtures etc.

59. **Laying of Water Mains and Distribution Network.** Pumping main (383 mm diameter HDPE pipe, 8,358 m length) will be laid from the water collection point reservoir in the northeast to reservoir site in southwest side of the town. This will be laid through centre of town along the Beylagan-Agcabedi main road. For small section near water collection point and at reservoir site pipeline will be laid along earthen roads. Distribution network (70.9 km diameter 110-400 mm HDPE) will be laid along the roads in the town, within the available roads right of way (RoW). All the pipelines (mains and distribution) will be laid in the vacant land available between the tarmac and the building line. In locations where there is no vacant land beside the tarmac or it is occupied by trees, pipeline will be laid into the tarmac to avoid any private land acquisition or tree cutting. Trenches will be dug using a backhoe digger, supplemented by manual digging where necessary. A sand bed of 10 cm thick will be prepared on the bottom and pipes will be placed in the trench manually. Pipes will be joined, after which sand procured from local quarries will be placed alongside and a top of about 10 cm thick. The remaining depth of trench on top will be refilled with the excavated soil and compacted manually. Road surface will be restored upon completion of work. The width of trench will be 1.1 m for 500 mm pipes and minimum will be 0.40m for 110 mm pipelines. Similarly, the depth of excavation will range from 1.3 m to 1.8 m. After construction, part

of trench will be occupied by pipe and sand beneath, top and side, and trench is refilled with the excavated material. This activity is expected to generate about 18,000 m³ of waste/surplus soil.

60. **Laying of Sewers.** Sewer network (78.8 km diameter 200-400 mm HDPE) will be laid along the roads in the town, within the available roads right of way (RoW). Sewers will be laid in the vacant land available between the tarmac and the building line. In locations where there is no vacant land beside the tarmac or it is occupied by trees, pipeline will be laid into the tarmac to avoid any private land acquisition or tree cutting. The sewer pipes will be laid on the opposite side of the water pipes, in separate trenches to prevent any likely contamination of treated water supplies due to leakages. The existing Asbestos Cement (AC) sewers will be abandoned in the ground and left undisturbed considering the environmental and health risks of working with asbestos². The AC sewers will be marked on the inventory drawings. Trenches will be dug using a backhoe digger, supplemented by manual digging where necessary. Excavated soil will be placed alongside, and the pipes will be placed in the trench manually. A sand bed of 10 cm thick will be prepared on the bottom and sewers will be placed in the trench manually. Sewers will be joined, after which sand procured from local quarries will be placed alongside and a top of about 10 cm thick. The remaining depth of trench on top will be refilled with the excavated soil and compacted manually. Road surface will be restored upon completion of work. The width of trench will be 1.4 m for 800 mm sewers and minimum will be 0.60m for 200 mm sewers. Similarly, the depth of excavation will range from 1.5 m to 6 m. After construction, part of trench will be occupied by pipe and sand beneath, top and side, and trench is refilled with the excavated material. This activity is expected to generate about 20,000 m³ of waste/surplus soil.

61. **Laying of sewerage collector.** Sewerage collector (Approx. 1.8 km diameter 800 mm HDPE) will be laid between the sewerage network and the WWTP site. The impact corridor will be 28 m width and 1800 m length. In total acquisition of 4.95 ha land is anticipated for the sewerage collector line. The affected areas are mostly used for cultivation of clover, but there are also barley, wheat and cotton cultivated land parcels. The list of DPs with potential land impact is provided in the Attachment 6: There are no protected areas, wetlands, mangroves, or estuaries. Trees, vegetation (mostly shrubs and grasses), and animals in the subproject site are those commonly found in built-up areas. Due to open area and no surrounding settlements, there will be no dust and noise effect.

62. **WWTP Construction.** This includes construction of following items (Table 5). WWTP involves considerable construction including both civil and mechanical structures, although construction activities will be conducted within the site. Civil construction will be of reinforced cement concrete. Mechanical structures will mostly be of cast iron or steel, and will be imported in the ready-to-install form. The major components - anaerobic tanks, aeration tanks, sedimentation tanks and filtration tanks, will be constructed in partly below and partly above the ground level and fitted with necessary mechanical equipment. For these tanks, a cavity will be created in the ground using back hoe for, and the soil will be used for raising the WWTP ground level and for internal roads. Metal reinforcing rods will be placed and concrete will be tipped into the cavity to create floor of the tanks. To create the walls, metal reinforcing rods will be incased in wooden/steel shuttering and concrete will be poured in, and this process is repeated gradually till required height is attained.

² Asbestos piping is dangerous to handle due to the risks of exposure to airborne asbestos fibers which may lead to diseases such as mesothelioma, asbestosis and lung cancer. Working with asbestos piping requires wearing disposable masks and suits, wetting worksites frequently, and using only manual tools for cutting pipes to prevent the formation of high quantities of asbestos particulates in the air. (National Asbestos Management Plan, 2006, Australia)

Inside surface will be smoothened and finished. Mechanical, equipments like shafts, aerators, diffusers will be brought to site on truck, and installed using cranes or manually.

63. To get necessary permissions from relevant authorities for using Sor channel near by the WWTP is applied and the reply letter is given in Appendix 10.

Table 5: WWTP Components

WWTP Components	Details
Coarse Screen	Coarse screen – iron mesh – fixed in an open concrete channel
Fine Screen	Particles small enough to pass the coarse screen will be hold at the fine screen. The screenings are automatically removed. Screens are operated mechanically and are placed steeper at 45-80° with the horizontal
Aerated Grit Chamber	Aerated grit chamber – rectangular tank with diffused aeration arrangement
Inlet Pumping Station	Pumping arrangement for lifting the incoming wastewater into WWTP inlet
Anaerobic Tanks	Rectangular tanks to hold the wastewater for some fixed period (0.5 – 0.75 hours). In this, specific bacteria (polyphosphate accumulating organisms, PAOs), are added to wastewater to enrich the bacteria thereby removing the phosphorous from wastewater
Aeration Tanks(Biological Reactor)	Rectangular tanks with aeration system - diffused air system consist of diffusers submerged in the wastewater
Sedimentation tanks	These are concrete tanks constructed as center-feed circular tanks with sloping bottoms towards bottom hoppers located in the centre of tanks. Activated sludge gravitated to the centre of the sedimentation tanks and distributed into the tanks below the inlet chamber. Mechanical sludge scrapers collect the settled sludge in a central sludge hopper from where it can be periodically removed.
Sand Filters	Rapid sand filter consists of circular concrete tank with filter media (sand and gravel), under drainage system and back wash system.
Ultraviolet Disinfection	The source of UV radiation is either low pressure or medium pressure lamps with low or high intensities.
Sludge Dewatering by using Decanter	Dewatering is a mechanical unit operation used to reduce the moisture content of sludge because dewatered sludge is generally easier to handle than the thickened or liquid sludge. Aerobically stabilised sludge is dewatered directly by using centrifuges (Decanter).
Return & Excess sludge pumping station	Rectangular room for installation of pumps and motors
Sludge Treatment & Disposal	Removal of dewatered sludge from plant can not be possible daily. For this reason, sludge storage area is projected. Odor problem, visual problems may occur at this site. To prevent the problems sludge may be conditioned expressly to improve its dewatering characteristics. The addition of chemicals is the most common method. Conditioning is used to advance of mechanical dewatering systems. Adding conditioning chemicals to sludge increase the dry solids content. For conditioning of dewatered sludge lime can be used. Lime can increase the dry solids by 20-30 percent.

	Sludge dewatering and conditioning aim to: <ul style="list-style-type: none"> • Facilitate further handling of sludge • Reduce transportation cost • Make the sludge more suitable for composting • Reduce the groundwater pollution at landfill
--	--

64. **Construction/Improvement of internal Roads.** The internal roads in the Water Collection Site, Reservoir Site and WWTP site will be strengthened with improvement of sub-base, base and top layers. Material will be procured from nearest licensed mines. Site will be cleared, sub base and base will be constructed either using earth moving equipment or manually, after which a bitumen layer will be laid to provide smooth surface. The surplus soil from the other activities (pipelines, reservoir construction) will be used in road construction.

65. **Construction of Administrative and Workshop Buildings.** These are typical reinforce cement concrete buildings involving construction of foundations, walls, roof, flooring, etc. Administrative building will also be provided with a centralized heating system.

66. **Miscellaneous Works.** These works include, construction of a laboratory building (50 m² area), area facilities at various sites (fencing, guard room and lavatory), provision of fire hydrants, water & sewer connections, and fixing of water meters. Septic tank and soak pits will be constructed for disposal of wastewater from lavatories. These works are very minor and simple, and not expected to generated significant waste/debris.

67. **Source of construction materials and Waste Disposal.** In Beylagan, construction material such as gravel, sand and aggregate is sourced from existing quarry sites available locally. The material will be procured from government approved quarries only. Surplus/waste soil will be mostly utilized for beneficial purposes and any leftover will disposed off at a suitable site. A disposal site will be identified for this purpose before the start of construction.

5. Operation Activities

68. Regular operation of improved water supply system in Beylagan involves groundwater abstraction, pumping to reservoirs in city, and distribution from reservoirs to the consumers. Operation will also involve chlorination, laboratory analysis of water supplies. The daily water abstraction from the five artesian wells will be 6,200 m³ per day (design demand of 2034). Pumps will be operated continuously, 24 hours a day.

69. The improved water supply system will service entire town population. Water supply infrastructure will require repair and maintenance activities like detection and repair of leaks. Since good quality pipes are being use breaks are very rare, and leaks will be mainly limited to joints between pipes. Repair work will be conducted in the same way as the pipe was laid, after locating the leaking section. The pumping equipment will require regular maintenance for efficient operation. Disinfection of water will be done by administering chlorine into water supplies. Chlorine cylinders sufficient for 1 month will be stored at the site. All necessary measures are included in the design for safe handling of chlorine.

70. The new sewer network provided in this subproject will collect domestic wastewater and sewage produced by entire town population. Sewerage collector in this subproject will convey the collected wastewater by sewerage network to the sewage treatment facility³ developed in this subproject is designed to treat the sewage to acceptable wastewater disposal limits⁴. The treated water will be disposed in the Channel flowing adjacent to the site. Alternatively, the treated wastewater can be used for irrigating the fields around the WWTP.

71. **WWTP Operation.** Extended aeration activated sludge including nitrogen and phosphorus removal (advanced treatment) technology is the most commonly used technology in the world which is very efficient and easy to operate and suits to the local conditions (climate) as well. The influent wastewater is screened to remove all large objects carried in the collection system. Screens can be classified as coarse and fine screens. After screening, grit chambers are used to remove grit, consisting of sand, gravel or other heavy solids that velocities and specific gravities of these particles are greater than the organic solids in the wastewater. In anaerobic tanks, phosphorus can be removed biologically. The degree of the biological phosphorus removal depends on the contact time. Minimum contact time for maximum dry weather inflow and return sludge flows is 0.5-0.75 hours. Phosphorus removal can also be achieved by chemical precipitation, usually with salts of iron aluminum or lime. For total nitrogen removal, nitrification and denitrification occur in biological reactor. Sludge age is the most important criteria. Biological reactor is aerated by using diffused air system consist of diffusers submerged in the wastewater. Sedimentation tank is used to separate the activated-sludge solids from the mixed liquor. Dewatering is a mechanical unit operation used to reduce the moisture content of sludge because dewatered sludge is generally easier to handle than the thickened or liquid sludge. Aerobically stabilized sludge is dewatered directly by using centrifuges (decanter). Removal of dewatered sludge from plant can not be possible daily. For this reason, sludge storage area is projected. Odor problem, visual problems may occur at this site. To prevent the problems sludge may be conditioned expressly to improve its dewatering characteristics. The addition of chemicals are the most common method. Adding conditioning chemicals to sludge increase the dry solid content. For conditioning of dewatered sludge lime can be used. Lime can increase the quantity of dry solids by 20-30 percent. The capacity of this treatment plant is 5,000 m³/day and will generate 1,750 kg/day of sludge. The treatment and drying processes kill enteric bacteria and pathogens. The dried sludge will be disposed off at an adjacent identified for the purpose. Also, because of its high content of nitrates, phosphates and other plant nutrients, the sludge is an excellent organic fertilizer and may be the local farmers can be allowed to use the dry material for application to their land.

72. The sewer pipes will not function without maintenance, as silt inevitably collects in areas of low flow over time. The project will therefore provide equipment for cleaning the sewers and other maintenance activity. Piped sewers are not 100% watertight and leaks can occur at joints. Any repairs will be conducted by sealing off the affected sewer, after which the faulty section will be exposed and repaired following the same basic procedure as when the sewer was built. Trenches will be dug around the faulty section and the leaking joint will be re-sealed, or the pipe will be removed and replaced.

³ The sewage treatment facility, which will be constructed in tranche -2, is likely to be operational by November 2013. Although sewer network is constructed in this subproject, the house sewer connections will be provided only when the STP is ready for commissioning. The main purpose of laying water & sewer network together is that the roads and people are not affected with repetitive trenching in the same street. Once the STP is ready, houses will be connected to network via manholes.

⁴ As there are no specific wastewater discharge limits set under Azerbaijan's regulations, the Ministry of Health (MOH) adopted the European Economic Community Directive (Directive No 91/271/EEC) to regulate urban wastewater treatment in Azerbaijan.

73. **Operation of administrative and workshop and other facilities.** Administrative office functioning is that of any modern office. Small quantities of solid waste (office waste like papers) and liquid waste from toilets will be generated. These will be collected and disposed via city waste disposal system, therefore no impacts envisaged. At workshop, the routine and minor maintenance work of mechanical and electrical equipment of water and sewerage system will be carried out. The design of workshop included provisions for collection of oil spills, grease and other waste to avoid pollution.

IV. DESCRIPTION OF THE ENVIRONMENT

A. Physical Resources

1. Location

74. Beylagan is located close to the center of the south border of Azerbaijan 282 km southwest from Baku, encompassing an area of 11,300 km². The district is part of the Kura-Araz lowland and lies on the Mil Plain enclosed between the Kura and Araz rivers. Beylagan town is completely surrounded by rural lands including mainly arable fields.

2. Topography

75. The Beylagan district is uniformly flat with a small gradient. The Program area around Beylagan town varies between 30 m altitude at the borehole area up to 70 m altitude at the treatment plant proposed location. The relief of the region peaks at the Lesser Caucasus foothills at 180 m MSL and descends to a flat alluvial steppe at -7 m MSL at the Aghgol National Park lake.

3. Geology and soils

76. The Beylagan region two dominant types of soil: sierozem and meadow. The meadow soils are located from lowland semi-dry areas up to arid steppe areas. The soil has a light, loamy structure and a medium degree of salinity. The sierozem soil is very similar to the meadow soil with the exception that it has a higher quantity of salinity. Both soil types are not that susceptible to erosion processes and they contain the necessary nutrients to cultivate crops. The soils in the region are used as pastures in the winter and arable lands in the warmer months.

4. Climate

77. This region has a dry sub-tropical climate with a moderate winter and a dry, hot summer. The average annual temperature is +14°C and the annual precipitation level is between 200 and 400 mm. The absolute temperature maximum and minimum were recorded as +41°C and -21°C respectively. The highest temperatures are usually registered during July-August and the lowest temperatures occur in January. August is the driest month receiving on average less than 25 mm of rain while March-May is the wettest season with an average monthly rainfall of 40 mm. The main wind directions are southwest in the wintertime and east in the summer.

5. Water Quality

78. A water quality sample was taken at the Alinazarli source site in the Gobelek artesian well on 31 January 2009. The sample was analyzed by the National Geological Exploring Service Unit of the Ministry of Ecology and Natural Resources (MENR). The chemical analysis showed that the groundwater meets the requirements of GOST 2874-82, Azerbaijan's potable water quality regulation as shown in Table 5. The investigation concluded that the subterranean waters are sweet and the mineralization rate is 735 mg/l, typical of a groundwater under pressure. In terms of chemical structure, the subterranean waters contain hydrocarbonate-sulphate, a type of salt. General hardness of the water is 1.22 mg-eqv/l. The results of bacterial analysis indicated that the quantity of micro-organisms is below QOST -2874-82 "potable water" limits. No groundwater pollution was identified in the territory, so the sanitary condition of the area is considered satisfactory. More frequent water quality testing will be recommended for the well site in the Environmental Monitoring and Management Plan.

Table 5: Water Quality Chemical Results

No	Water Quality Indicator	Gobelek artesian	Max Allowable Level, mg/l *
1.	Smell at 20°C temperature	0.00	<2
2.	Color	0.9	<20
3.	Turbidity	0.1	<1.5
4.	ph	6.7	6-9
5.	HCO ₃ ⁻	305	>3
6.	SO ₄ ²⁻	127	<500
7.	Cl ⁻	175	350
8.	Ca ²⁺	13	180
9.	Mg ²⁺	7	40
10.	Na+k	261	170
11.	NO ₂ ⁻	0.06	<0.1
12.	NO ₃ ⁻	0	<10
13.	NH ₄ ⁺	0.01	<2.0
14.	Fe ³⁺	0	0.3
15.	Hardness	1.22	7.0
16.	Mineralization	735	<1000 (1500)
17.	Solid residue	760	<1000 (1500)

* GOST Drinking Water Standards, 1992.

79. **Springs and Groundwater Water Quality.** Table 5 indicates that the Alinazarli source has good water quality. The source water will be extracted and disinfected at the reservoir site. No other water treatment is necessary. Mitigation measures are discussed in Section IV to prevent contamination of the Alinazarli source water.

80. **Surface Water.** There are no natural water bodies flowing through the Beylagan district. However, Beylagan is adjacent to the two biggest rivers of Azerbaijan, the Kura River to the north and the Araz river to the south. The important artificial sources of water in the region include 1) the Yuhari-Garabag canal which was constructed in the 1950's after the creation of the Mingachevir

water reservoir and 2) the Bash Mil-Garabag collector which will collect the wastewater discharge after treatment and provides irrigation water to the town.


B. Ecological Resources and Items of Archaeological Significance

81. Beylagan town itself is fully urbanized and surrounding settlements have intensive agriculture as the predominant land use. Two green parks exist and many houses have small private gardens. However, apart from the parks and green centers, there are no significant ecological resources, nor rare or endangered flora or fauna within the town boundaries.

82. Historical and archeological sites include two tombs, which are located in Beylagan town. (These are named Seyid Agha and Seyid Agha). Also, there are two mosques of local importance, a memorial monument for the locals who died in the Second World War, and a town cemetery. All preliminary designs avoid these cultural and historical sites.

83. No national reserve is located within the Beylagan town. Aghgol National Park is the closest reserve, located 15 km to the north. Attachment 3 shows the proximity of the town to the National Park. The park is semi-desert covered by dense ephemeral vegetation. It includes a lake fed by the two artificial canals aforementioned, the Yuhari-Garabag canal and the Bash Mil-Garabag collector. The Park was created to protect the breeding areas for important species of birds.

Map 10: Location of Aggyol National Park and Beylagan Town

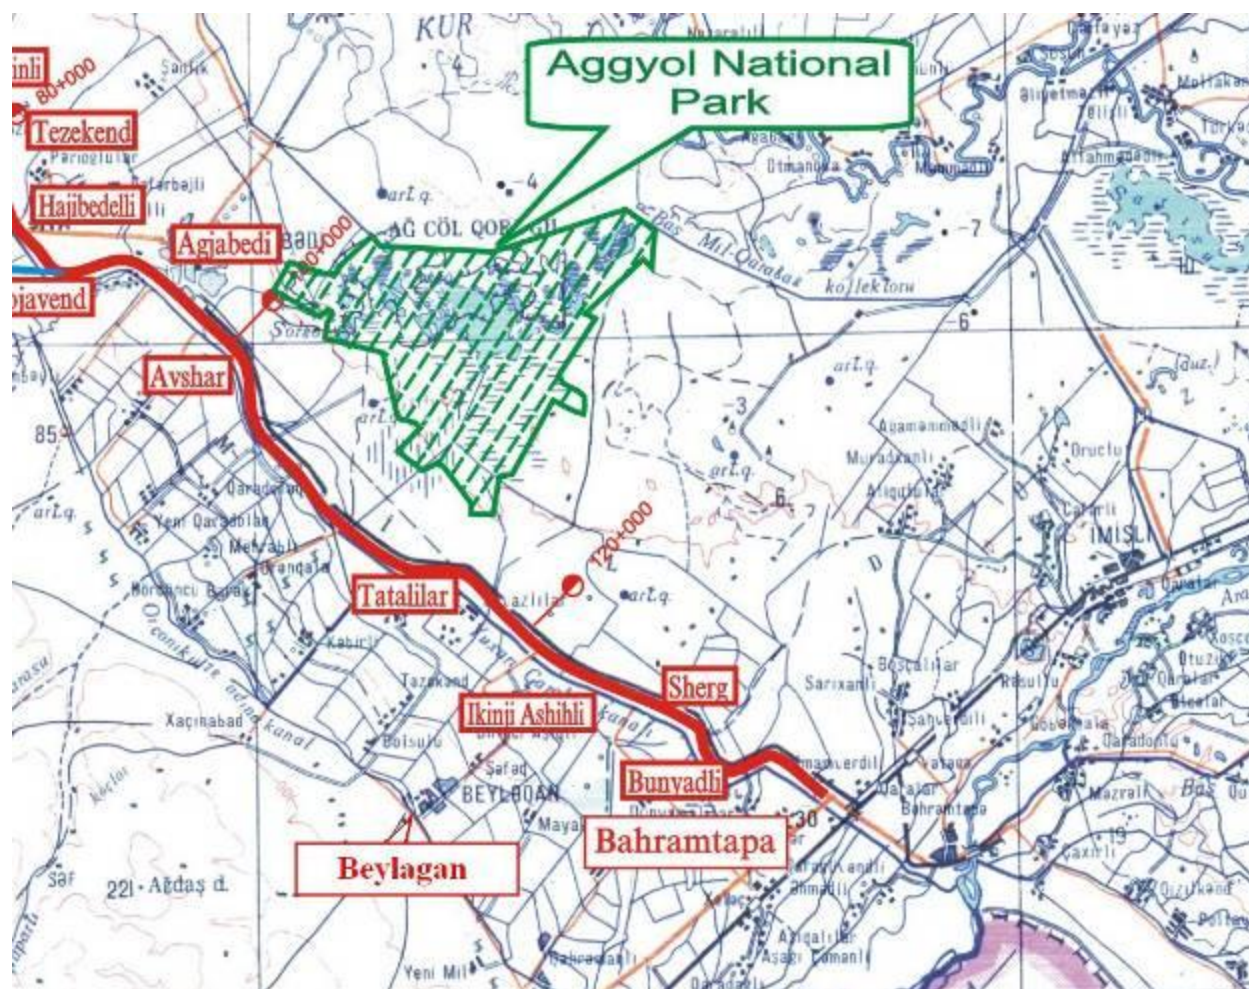

C. Social and Economic Development

84. **Population.** Beylagan has a gender ratio (male: female) of 0.49 for the overall district. A detailed assessment of the socio-economic profile of the Beylagan sub-project is provided in the accompanying Poverty and Social Analysis documents which accompany this IEE appendix.

85. **Occupations.** The base of the district economy is agriculture. The total area of the lands suitable for agricultural use in the region is 461 km². Crops include grains, vegetables, and cotton. Animal husbandry is the most developed sector of agriculture (387 km²). Due to some limited opportunities in the town, 3% of men work abroad to bring home money to their families. Also, women work in the public services such as in teaching, medicine, and nursing.

86. **Ethnic Groups.** Of the 14,400 people living in Beylagan, the majority are ethnic Azeris. 6,000 refugees are located in the town of Beylagan. There are no indigenous peoples in the region.

87. **Health Care.** There is a relatively decent representation of health care facilities within the Beylagan region. Eleven hospitals and medical institutions exist.

88. **Education.** There are 30 pre-school institutions and 54 educational schools in the Beylagan region. One technical/vocational school exists. Overall, the literacy rate for Beylagan is approximately 99.5%.

89. **Roads and Bridges.** 32 km of level 3 roads and 127 km of level 4 roads are located in Beylagan town. A major highway of importance to Azerbaijan is located close to the town. The highway was built to connect the southern part of the country with roads to the western borders. Bridges exist over the irrigation and combined storm water/sewage channels.

90. **Disadvantaged.** 13 percent of the town population is considered poor. Unemployed people in Beylagan suffer the most with the water supply because of their difficulty in paying for the water. Women and children of households not located close to the distribution systems taps or water trucks hold the burden of having to manually obtain potable water from the closest tap or truck. However, with the expansion of the distribution system under this subproject, there will be less disadvantaged women and children.

V. ANTICIPATED ENVIRONMENTAL IMPACTS AND MITIGATION MEASURES

91. This section of the IEE reviews possible subproject-related impacts, in order to identify issues requiring further attention and screen out issues of no relevance. ADB Environmental Policy requires that impacts and risks shall be analyzed during pre-construction, construction, and operational stages in the context of the subproject's area of influence. As defined previously, the primary impact areas are (i) well field/water collection site (ii) reservoir site (iii) WWTP site, (iv) collector pipeline route pipelines and sewer network sites; (v) main routes and/or intersections which will be traversed by construction vehicles; and (vi) quarries and borrow pits as sources of construction materials. The secondary impact areas are: (i) entire Beylagan area outside of the delineated primary impact area; and (ii) entire Beylagan Rayon in terms of over-all environmental improvement.

92. The screening process carried out for the IEE has identified minor possible adverse environmental impacts likely to be caused by the Project. Most potential negative impacts may occur during construction. However, they will be temporary and can be mitigated to acceptable levels. Effort are made to (i) limit specific impacts related to the pipeline routes; (ii) mitigate source contamination, (iii) eliminate risks of sewer system leakage and (iv) minimize construction pollution and waste.

A. Pre-Construction (Design & Location) Impacts and Mitigation Measures

93. **Groundwater Source Sustainability.** The proposed subproject will provide water supply from groundwater source. The five boreholes proposed under this subproject will abstract 6,200 m³/day of water to meet the design demand of Beylagan Town water supply. The hydrology and hydrogeology of the area around the town of Beylagan have been studied in considerable detail as part of the feasibility study in 2009. The new wells will be an area in the north-east of Beylagan near Alinazarli village. This source is selected because of its good water quality and most plentiful potential source in the vicinity of Beylagan Town. According to a study completed by the Commission of State Resources in 1974 under Order No. 72 23, 20.09.1974 of the Soviet of Ministers in the former USSR, this groundwater region has a favorable hydro-chemical composition

for potable water (Minutes 7224. 20.09.1974). Also, according to a study completed by the by the Commission of Resources of the Republic of Azerbaijan in 1978 (Order no.68, November 24, 1978), this groundwater region can deliver 72 thousand m³/day. Furthermore, the quality and quantity of the underflow water is consistent with government standards for safe and reliable supply to the consumers projected through 2034. The underground water resources are many times greater than the projected water demand (6,200 m³/day) if the depth of the wells is between 100 and 150 m to exploit pressured water. Detailed investigations were further carried out during the detailed design of the subproject in 2010. Water pumping tests were carried out using a groundwater exploratory well (72 hours continuous pumping) to check the draw down and yield. Yield is estimated as 15 liters/second. Recovery of the water level was observed after water pumping is finished. Lithology indicates that the top layer of 20-23 m is characterized by yellowish gray color gravel mixed with loam underlain by a clay layer of 10 m. This is again underlain by gravel/sand/loam layers till 80 m, beneath which there is another clay layer of 10 m thickness. The Hydro geological investigation report states that “based on investigation and hydro geological data review, it can be concluded that the selected site near Alinazarli Village in Mil foothill site of the Araks river alluvial cone is suitable for development of well field. Hydro-geological condition of the area through Mil foothill plain may be characterized as unrestricted ground water aquifer”.

94. The geological structure of the area is stable and no potential land subsidence is foreseen. Groundwater quality is good and meets the national standards. There are no source of pollution; the sewerage system proposed under this Investment Program will collect, treat and dispose the wastewater safely. Thus avoids any potential pollution due to leaching of contaminants into the ground. Nevertheless, the withdrawal of groundwater from confined deep aquifer means that the source is free from pollution due to surface leaching.

95. **Disposal of Sewage, Impairment of Quality of Receiving Water Body and Land Pollution.** The proposed sewerage system will collect wastewater from entire town and convey the wastewaters by sewerage collector to an adequate capacity WWTP is being developed under this subproject. This will treat the sewage to desirable standards (Appendix 3). A suitable site for WWTP has been identified in the northern side of the town, where the sewage from the town can flow under gravity. The treated water will be disposed in a nearby water channel. Alternatively, the treated wastewater can be used for irrigating the fields around the WWTP. There are no endangered species or sites of historical significance recognized along the alignments or within the land plots designated for proposed works. Also, the environmental assessment safeguards include a Detailed Measurement Survey to ensure that no designs will cross culturally sensitive areas such as the cemeteries (see Resettlement Framework). The Resettlement study will also ensure that any damage to crops or agricultural areas will be compensated appropriately, according to ADB standards.

96. **Damage to Soil, Crops, and Sensitive Areas.** There are no endangered species or sites of historical significance recognized along the alignments or within the land plots designated for proposed works. There are no trees in the collector route and the WWTP site cum water collection site, however, can careful layout design avoided cutting of trees. If any trees required to be removed, all affected trees will be replanted. No subproject components are located in sensitive social cultural area (religious places, cemeteries, etc).

97. **Resettlement.** There are no foreseen Resettlement issues; all the facilities and pipelines sites are located within the government owned lands at WWTP site. A part of the WWTP site is presently occupied by a sheep farm, the Resettlement Plan of this subproject addresses this issue. In the event emergence of any new issues during implementation, for instance for new pipeline

routes, a Resettlement Framework (RF) has been prepared to guide the program management facility (PMF) during detailed design and subproject implementation. 47 private land acquisition needs in the collector route.

98. **Treated Water Quality.** Quality of water meets the standards stipulated by Azerbaijan's potable water quality regulation. Water can be supplied directly after disinfection with chlorine. A disinfection facility and a laboratory is proposed in the subproject to enable chlorination and regular water quality monitoring. Chlorine residual level and water turbidity will be analyzed on a regular basis. To ensure raw water quality, the JSC will test the Beylagan water source monthly and seasonally and determine whether MOH parameters are met.

99. **Sewer and Water Pipeline Design.** In the town, new water and sewage lines will be constructed. The pipelines will have enough capacity to receive the 2034 projected flow rates and in the case of the sewage pipelines, the pipes will have enough grade to provide appropriate flushing velocities. The water and sewer pipes will be placed on opposite sides of the street. Also, water pipes will be constructed with PVC or HDPE on a sand bed. Additionally, Sewerage collector will be constructed in PVC.

100. **Delivery of Unsafe Water.** Regular water quality tests will be conducted as per the government regulations (specified in the next section), for which a water testing laboratory is being developed under this subproject. In the case of deviations from the water quality standards, the town of Beylagan has a procedure in place to verify and then aid the region where bad water quality measurements were taken. At first, the sample is collected again to ensure that the operators have not made any operational errors. If the sample has exceeded or gone below the allowable Ministry of Health approved standards, the region is localized by stopping water supply to the customers. The pipelines are disinfected with chlorine and the water is further disinfected with chlorine. Final samples are taken until good water quality is achieved before distributing.

101. **Increased Sewage Generation.** The overall improvement to the water supplies will result in an inherent increase in the generation of wastewater due to the use of more water for domestic purposes. The biological load is expected to increase as the standards of living improve, the population increases and as more people have access to the wastewater collection system. With the increase in water supply, the wastewater generation will also increase. The sewerage system in the town is being improved along with the water supply system. Wastewater treatment facility of adequate capacity to treat the sewage to Azerbaijan standards is also being constructed.

B. Construction Impacts and Mitigation Measures

102. **Construction Risks, Pollution and Wastes.** Since the work will be conducted in an urban open area congested with people and activities, it is likely to have no considerable impacts. Most of the likely impacts are associated with the construction process, and are produced because that process is invasive, involving trenching and other ground disturbance. Impacts mainly arise from (i) generation of waste soil/debris and their disposal; (ii) mining of construction materials; (iii) soil erosion from excavated areas and silting/pollution of water courses, rivers; (iv) generation of dust and emissions from construction activity; (v) inconvenience/disturbance to public due to construction activity such as impediment of access to houses and business, noise, dust, traffic blockages and public safety; (vi) disruption of services like water supply, power, telephone, gas; (vii) safety risk to public and traffic; (viii) Safety risk due to presence of underground AC sewers, and (viii) workers safety and impacts due to import of workers and temporary labour camps.

103. However the routine nature of the impacts means that most can be easily mitigated. These are common impacts of construction in urban areas, and there are well developed methods available for their mitigation. These effects can be mitigated via wetting water surfaces, proper scheduling installing silencers, constructing shoring in the trenches, and redirecting runoff. There will also be provisions for solid waste and used oil collection containers, with further removal to specially allocated disposal and reclamation sites. Sanitation facilities will be constructed at the work sites. After completion of construction works, all job sites will be cleaned.

104. Construction of WWTP will also involve considerable excavation/earthwork for tanks and foundations, although exact quantity is not yet known. The typical impacts of earthwork and surplus disposal are minimal due to the fact that the site is located away from the town with no major activities nearby, and the surplus soil will be utilized within the site for raising the ground level and/or for construction.

105. All the construction impacts and appropriate mitigation measures, monitoring measures and the agencies responsible for mitigation are presented in the Construction-stage Environmental Management Plan (Table 7) and Environmental Monitoring Plan (Table 9). This EMP will be part of the contract document and it will be binding on the contractor for implementation.

C. Operation Impacts and Mitigation Measures

106. Regular operation of water supply system in Beylagan involves groundwater abstraction, disinfection with chlorine, pumping to reservoirs in city, and distribution from reservoirs by gravity to the consumers. Operation will also involve laboratory analysis of water supplies. Water supply infrastructure will require repair and maintenance activities like detection and repair of leaks. Since good quality pipes are being use breaks are very rare, and leaks will be mainly limited to joints between pipes. Repair work will be conducted in the same way as the pipe was laid, after locating the leaking section. So no major impacts envisaged during the operation. There is invariably a safety risk when chlorine is handled and administered. Considering that inclusion of all necessary safety measures are included in the design of chlorination facility and provision of training to the operating staff is part of the project, and therefore no impacts envisaged.

107. There are also certain environmental risks from the operating sewerage system collector, most notably from leaking sewer pipes as untreated faecal material can damage human health and contaminate both soil and groundwater. The sewer pipes will not function without maintenance, as silt inevitably collects in areas of low flow over time. It will be imperative therefore that the agency responsible for operating the sewerage system establishes a procedure to routinely check the operation of the sewers, and to implement rapid and effective repairs where necessary. If trenches are dug to locate and repair leaks or remove and replace lengths of pipe, the work will follow the same procedure as occurred when the infrastructure was provided. The project will also provide equipment for cleaning the sewers to avoid blocking, overflowing and other maintenance activity.

108. As these repairs and maintenance work will be infrequent, and will affect individual small locations for short periods only, the impacts should be much less significant thus be negligible.

109. Regular monitoring will be conducted at WWTP to ensure that the treated water meets standards. There is occupational health and safety risk involved while working in STP however all the necessary precautionary measures are included. Adequate manpower, operation and

maintenance equipment will be provided. Necessary training will also be provided to the personnel. No impacts due to disposal of sludge envisaged as the sludge will be dried before its disposal. The treatment and drying processes kill enteric bacteria and pathogens.

VI. PUBLIC CONSULTATION AND INFORMATION DISCLOSURE

110. According to Azerbaijan regulation, public consultation for any Project has to be carried out twice – first at the detailed design stage (to address all important comments) and secondly at the end of the project when presenting Project results. All Project stakeholders as well as any affected persons (APs) have to be present at the second public consultation. Results of the first public consultation have to be documented in the Environmental Impact Assessment. Azerbaijan mandated the Public Participation in Decision-Making and Access to Justice in Environmental Matters at the UNECE Aarhus Convention in 1999. Since that time, the Aarhus Centre had been open to the public in the office of MENR. All Project documents related with environmental questions have to be stored in Baku's Aarhus Centre for easy access by the public and NGOs' representatives. A copy of the Environmental and Social Assessment documents also has to be filed at the public library (or any other relevant organization) of the Project town and must be accessible in Azeri.

111. ADB also requires public consultation in the environmental assessment process. For category-B projects, the borrower must consult with groups affected by the proposed Program and with local nongovernmental organizations (NGOs) if possible. The consultation needs to be carried out as early as possible in the Program cycle so that views of affected groups are taken into account in the design of the Program and within the mitigation measures proposed. Any grievance redress issues will be resolved according to the Program's Resettlement Framework.

112. 1. Public consultation was conducted during this IEE preparation to inform locals of the Program components and to encourage input to identify overlooked environmental issues. Salient features of the project and its impacts, benefits were presented to the Town Water Users Association (TWUA). Numerous questions of participants had been satisfactorily answered. It has been further agreed that more concrete information about the timing and details of the constructions will be given in further meetings before the start of constructions. It was also stipulated that members of the TWUA NGO will distribute obtained information among local people and thus prepared population to the further meeting.

113. Representatives of Azersu together with the Beylagan SuKanal, IPMC and Contractor conducted consultations with affected households and other stakeholders on 6 May, 2016. In total 25 persons attended the consultation. The consultation took place in Shafag village of Beylagan rayon. Officials of rayon and village municipality were informed about the Project and their assistance were solicited in the LARP and IEE preparation and implementation. Representative of IPMC gave general information on the planned sub-project and asked people to give questions and recommendations. She also showed the project design to the participants. All affected persons were dissatisfied with the location of sewerage collector as they do not want their land parcel to be divided in two segments. Representatives of Azersu and IPMC told to meeting participants that their opinions will be reflected in the report and will be transferred to Azersu to take appropriate measures. Annex 6 shows minutes of meeting and related photos

114. Direct public involvement has been an ongoing element in the preparation of the Project since beginning. As part of the Project's preparation a Social Assessment (SA) was undertaken in September 2011 to provide a picture of the existing user behavior and needs, and to develop a participatory framework to ensure a sustainable water supply and sanitation project. The SA process included 250 project household surveys; focus group meetings⁵; stakeholder consultations⁶, and informal interviews with vulnerable groups and other members of the community in Azeri. Information gathered included: (i) the frequency of delivery of water and collection of wastewater; (ii) water and wastewater tariffs charged to consumers currently; (iii) the community's willingness to pay for water and wastewater services; (iv) the status of water delivery to local companies; and (v) the companies' willingness to pay for water and wastewater services. Environmental concerns were noted during the public consultations. The primary concerns were continued water shortages and pressure problems. Also, the public complained most about chronic problems with unsanitary sewage overflows in public and private areas. Photographs of public consultation conducted in Beylagan in May 2011 are provided in Appendix 1.

115. 2nd public consultation conducted in Beylagan for Tranche-4 in May 2016. photographs and minutes of memorandum are provided in Appendix 8.

116. In accordance with ADB's Public Communications Policy (2005), consultations were held in 2009 and the proposed Program components and timeline of construction was disclosed to the public and local authorities. Public consultation has played an important role in the preparation process to screen design options to minimize social and environmental impacts. Issues raised in these consultations have been incorporated in the proposed mitigation measures.

117. Continuous dialogue with the town and relevant governments will be carried out during the implementation period. During implementation, the social and environmental specialists will coordinate with the JSC and Rayon administration and will ensure that any concerns and issues raised by the Town Water User's Association will be addressed and adequate feedback to the town will be provided.

118. The draft IEE reports were disclosed to public, made available (in Azeri language) available in public places for the project-affected and local NGOs. All the comments have been addressed and the report finalized.

VII. GRIEVANCE REDRESS MECHANISM

119. As the work is being done in an inhabited area, most of the impacts are construction-related, and therefore it is anticipated that improper or inadequate implementation of Environmental Management Plan may lead to disturbance and inconvenience to local people. In order to provide a direct channel to the affected persons for approaching project authorities and have their grievance recorded and redressed in an appropriate time frame, PMF will establish a Grievance Redress Mechanism, which will be functioned throughout the construction period.

120. A complaint register will be made available at the site office of the contractor, with a display board indicating availability of such facility. This will accept complaints regarding the environment

⁵ List of participants for Beylagan Focus group meetings is available upon request.

⁶ Stakeholders included Local Executive Bodies, SuKanal (the current institution responsible for water management), and Municipality members.

safeguard issues in implementation of the subproject. The grievances received and actions taken will be included into the environmental monitoring reports submitted to ADB. The following process will be followed in grievance redress: Complaints received (written or oral communication) will be registered in Complaint Register assigning complaint number with date of receipt. Supervision Consultant (SC) will review the complaint and direct the contractor for necessary action. In case of no satisfactory action, the complainant can approach Beylagan JSC for necessary action. For this purpose Beylagan JSC will open a facility to receive complaints with the support of Town Water Users Association. JSC will coordinate with the SC and PMF to resolve the issue.

VIII. ENVIRONMENTAL MANAGEMENT PLAN

A. Environmental Impact Mitigation and Monitoring

121. An Environmental Management Plan, consisting of impact mitigation and monitoring plan, is prepared as part of this IEE. The EMP is designed to follow the general template established during the preparation of the candidate subprojects, but adapted to the specific requirements of the subproject in question. The EMP has been updated and expanded And will be appended to the tender documents (particular conditions of contract). As part of the environmental management, the procedures for: workers' health and safety; public safety and reduce inconvenience and disposal of construction wastes, etc are developed.

122. A program of monitoring will be required to ensure that all concerned agencies take the specified action to provide the required mitigation, to assess whether the action has adequately protected the environment, and to determine whether any additional measures may be necessary. Regular monitoring of implementation measures by Civil Contractors will be conducted by the PMF, and overseen by AzerSu. Monitoring during operation stage will be conducted by the Operating Agency, Beylagan JSC.

123. During construction, most of the mitigation measures are fairly standard methods of minimizing disturbance from building in urban areas (maintaining access, planning work to minimize public inconvenience and traffic disruptions, finding uses for waste material, etc). Monitoring of such measures normally involves making observations in the course of site visits, although some require more formal checking of records and other aspects. During the construction, the air quality and noise must remain below specified concentrations and levels. The maximum allowable concentrations of air quality toxins are specified in Appendix 4 and the maximum allowable noise levels are specified in Appendix 5. The monitoring of ambient air quality and noise levels during construction is the responsibility of Contractor. The Program Consultant will supervise and monitor the contractor's performance during the construction

124. **Environmental Monitoring during Operation- Water.** Candidate subproject analysis and analysis of the Sanitary-Hygienic State regulations indicated that according to GOST 17.1.3.07-82 there are at least three points where water samples have to be taken – one is 1 km upstream and two are 0.5 and 1.5 km downstream from the point of intake. Each borehole will be sampled during operation and the raw water quality will be monitored continuously. The outlet of the treatment plant and reservoir will also be sampled. Under the Program it is required to test for both free and residual chlorine and perform chemical and microbiological tests. Control on water quality has to be conducted daily and commence at least 3 months before construction to establish a baseline. During operation, intermediate points as well as the extremities of the network will be sampled periodically. The PMF's Safeguard Specialist will be responsible for conducting periodic monitoring.

All potable water samples must adhere to the Ministry of Health's water quality guidelines as listed in Appendix 2.

125. The following Tables 7 to 9 show Environmental Management Plans respectively for various stages – preconstruction, construction and operation. These show mitigation activities, methods, project agencies responsible for implementation and monitoring of mitigation measures. The following Table 10 shows the proposed Environmental Monitoring Plan for this subproject, which specifies various monitoring activities to be conducted. It describes: (i) mitigation measures, (ii) location, (iii) measurement method, (iv) frequency of monitoring and (v) responsibility for monitoring.

Table 7: Environmental Management Plan - Preconstruction

Anticipated Impacts	Proposed Mitigation Measures	Responsible for Mitigation	Monitoring of Mitigation
<u>Source Protection</u> <ul style="list-style-type: none"> Inadequate protection of intake works, leading to pollution of raw water supply 	<ul style="list-style-type: none"> Construct raised concrete platforms over the wells to serve as a floor for the pump stations and eliminate the risk of surface runoff contamination Equip wells with full water quality and drawdown monitoring devices Provide a protection buffer zone of at least 30m surrounding boreholes, Article 22 of the Land Code (1999) Restrict access to intakes or boreholes with a fence or barrier Undertake baseline water quality tests 3 months prior to scheme construction Monitor and control activities in upstream catchment 	PMF, JSC, SES	Inspection of Feasibility Studies, IEEs, water quality test results, Program designs and contract documents.
<u>Receiving Water Body Protection. and odour nuisance</u>	<ul style="list-style-type: none"> Take water quality samples of receiving water body to see if water body can accept proposed biological load from the wastewater treatment plant Perform daily testing of wastewater effluent at outlet and downstream Develop a green buffer zone around the site Develop Standard Operating Manual for regular operation, and periodic and preventive maintenance. Provide necessary training to the operating staff 	PMF and JSC	Inspection of Feasibility Studies, IEEs, water quality test results, Program designs.
<u>Damage to Soil, Land, Ecology, Heritage</u> <ul style="list-style-type: none"> Soil erosion, land instability and damage to forests or vegetation 	<ul style="list-style-type: none"> Mainly confine subproject works to previously disturbed areas, access roads and tracks Avoid environmentally sensitive sites and those that would have negative impact on cultural heritage such as cemeteries Improve drainage where necessary Avoid constructing new access roads for water intakes, pipelines and reservoirs, but provide small access tracks for light vehicle access during construction and walking tracks for O&M of completed facilities 	PMF and JSC	Inspection of Feasibility Studies, IEEs, Program designs and contract documents.
<u>Damage to Crops and Tree Plantations</u> <ul style="list-style-type: none"> Damage to tree plantations and crops 	<ul style="list-style-type: none"> Avoid or minimize resettlement and damage to crops or plantations by adopting suitable locations and alignments for Program facilities and pipelines No trees shall be cut for laying pipelines; pipeline shall be laid into the tarmac if there is no vacant land between the building and road; use flexible pipes such as HDPE/PVC, so that it allows a small/local alignment change where required to avoid tree cutting Replace all vegetation destroyed accordingly if categorized under the Rule for Use, Protection and Preservation of Trees and Bushes (2005) 	PMF and JSC	Inspection of Feasibility Studies, IEEs, Program designs and contract documents.
<u>Resettlement</u> <ul style="list-style-type: none"> Dislocation or involuntary resettlement of residents and businesses Program effects on land 	<ul style="list-style-type: none"> Install water and wastewater pipelines in existing roads, footpaths or rights of way (ROW) wherever possible Restrict road and drain upgrading to existing ROW where possible Consult affected persons, prepare Resettlement Plans and provide adequate compensation and grievance redress mechanisms in line with ADB and Government 	PMF and JSC	Inspection of Feasibility Studies, IEEs, Program designs, RPs and contract documents.

Anticipated Impacts	Proposed Mitigation Measures	Responsible for Mitigation	Monitoring of Mitigation
and environment	<p>resettlement policies enumerated in the Resettlement Framework</p> <ul style="list-style-type: none"> • Provide information disclosure and public consultations in accordance with ADB's Public Communications Policy (2005) • Implement appropriate compensatory measures, as per the RP, for sheep farm presently occupying the WWTP Site 		
<u>Treated Water Quality</u> <ul style="list-style-type: none"> • Safeguard quality of water supply and wastewater discharge 	<ul style="list-style-type: none"> • Cover, ventilate and fence all treated water reservoirs • Design distribution network for minimum residual pressure of at least 10 m to prevent entry to mains of contaminated groundwater or backflow • Provide adequate spare parts 	JSC	Inspection of Feasibility Studies, IEEs, Program designs and contract documents.
<u>Design of Sewer and Water Pipelines</u> <ul style="list-style-type: none"> • Sewage leakage into potable water 	<ul style="list-style-type: none"> • New water pipelines must be constructed at a higher elevation than the sewer pipelines and in different trenches than the water pipelines to prevent leakage of sewage water into the water supply. • Water and wastewater pipes should be constructed with uPVC or HDPE on a sand bed 	Construction contractor, PMF and JSC	Inspection of Feasibility Studies, IEEs, Program designs and contract
<u>Delivery of Unsafe Water</u> <ul style="list-style-type: none"> • Water quality violation 	<ul style="list-style-type: none"> • In the event that poor quality water is delivered to the consumers due to insufficient treatment, the PIU must put into effect a mitigation plan. At first, the sample must be collected again to ensure that the operators have not made any operational errors. If the sample has exceeded or gone below the allowable SES approved standards, the region is localized by stopping water supply to the customers. The pipelines are disinfected with chlorine and the water is further disinfected with chlorine. The water will be distributed to the region once tests demonstrate good water quality results and sufficient disinfection. 	JSC, SES	Inspection of Feasibility Studies, IEEs, Program designs and contract
<u>Increased sewage and impacts due to its disposal</u>	<ul style="list-style-type: none"> • Improvement to water supplies will result in an inherent increase in the generation of wastewater. Detailed design calculations must account for the potential impacts of increased sewage generation in each community to verify that channels and infiltration rates can accept increased flow. • Develop a treatment facility to treat the wastewater to desirable standards and with a safe final disposal • Do not commission the new sewer network until the WWTP is constructed and ready for commissioning • No house sewer connections shall be provided under this subproject • The existing sewer network shall not be disturbed or discontinued unless the new system is fully function with treatment facility 	PMF, JSC	Inspection of Feasibility Studies, IEEs, Program designs and contract

Table 8: Environmental Management Plan - Construction

Anticipated Impacts	Proposed Mitigation Measures	Responsible for Mitigation	Monitoring of Mitigation
Removal of vegetation/trees for construction	<ul style="list-style-type: none"> Pipelines along the roads shall be laid into the roads or vacant space; no road side trees shall be removed for this purpose Use flexible pipes such as HDPE/PVC allows a small/local alignment change where required to avoid tree cutting Bushes and grasses shall be cleared only in actual construction area all other preparatory works (material storage, mixing, etc) shall be conducted on barren lands where there is no vegetation Minimize tree cutting at Reservoir Site No.1 by better site layout; plant two trees of same specie for each tree that is cut for construction. 	Construction Contractor	<p>Review construction drawings prior to start of construction</p> <p>Site inspections and construction records</p>
Excavation could damage utilities existing infrastructure along the roads	<ul style="list-style-type: none"> Avoid disruption of existing infrastructure lines (power supply, telephone, gas etc) by a proper pipeline alignment In unavoidable cases, identify the services to be affected in each area and coordinate with respective agencies for alternative arrangement Provide prior public information about the likely disruption of services In the event of water supply disruption beyond reasonable time , provide water supply through alternative means, for instance, through tankers 	JSC in assistance of Contractor	<p>Review construction drawings prior to start of construction</p> <p>Site inspections and construction records; interview with local people</p>
Impacts due to excavation and generation of waste soil/debris (soil/)	<ul style="list-style-type: none"> Utilize waste/surplus soil for beneficial purposes - in construction activities or to raise the level of land prior to construction of roads, buildings, etc, or to fill previously excavated areas Dispose the surplus soil /debris that could not be put to beneficial use at designated site (site should be approved by local authority/MENR) Identify the disposal site prior to start of construction; site shall be approved by PMF/JSC Surplus soil/debris shall not be disposed in water courses or along the roads Asphalt waste from road cutting shall be transported to bitumen plants for reuse, where possible Maintain a log book for waste soil/debris disposal at the site indicating material, source and quantity 	Construction Contractor	<p>Site inspections</p> <p>Log book/records inspection</p>
Impacts due to mining of construction materials	<ul style="list-style-type: none"> Procure construction material (sand, gravel, aggregate, etc) only from government approved existing quarry sites Minimize extraction of construction materials from rivers and stream beds Maintain a material entry log book at the site indicating material, source and quantity 	Construction Contractor	Log book inspection
Soil erosion from	<ul style="list-style-type: none"> Avoid scheduling of excavation work during the rainy season 	Construction	Site inspections; verify construction

Anticipated Impacts	Proposed Mitigation Measures	Responsible for Mitigation	Monitoring of Mitigation
excavated/refilled areas and likely impacts on surface water bodies due to construction activities	<ul style="list-style-type: none"> • In unavoidable circumstances, protect open trenches from entry of rain water by raising earthen bunds with proper compaction • Confine construction area including the material storage (sand and aggregate) so that runoff from upland areas will not enter the site • Construct silt ponds and install silt retention barriers near the site to prevent the entry of silt laden runoff into drains • Ensure that drains are not blocked with excavated soil • Minimize vegetation clearance as far as possible • Minimize the time during which excavations/trenches are open • Ensure proper compaction of refilled soil and there shall not be any loose soil particles on the top ; the material shall be refilled in layers and compacted properly layer by layer • Rehabilitate disturbed surfaces as soon as possible after completion of construction activity • No vehicle/equipment repair/maintenance activities shall be conducted on site; if necessary, the works shall be conducted on impervious surface; there shall be no spillage of oils/grease on ground 	Contractor	schedule; interviews with people and workers
Collection of groundwater in trenches as their being dung and its disposal This is most unlikely because the water table is deeper than the excavations	<ul style="list-style-type: none"> • Do not dispose the water directly into the water courses/ drains, which may lead to silting • Create a temporary pond at the site and dewater into pond • Dispose the clarified water from pond into natural courses • Ensure the receiving water body has free flowing course and it will lead to overflowing or flooding of surroundings 	Construction Contractor	Site inspection
Silt of drains and water courses due to disposal of slurry from bore hole drilling	<ul style="list-style-type: none"> • Construct a temporary silt pond to hold slurry water produced from bore well drilling • Dispose clarified water from pond to nearest water course • Level the pond area and restore to original position once the work is completed 	Construction Contractor	Site inspections
Impact on ambient air quality due to dust generation and vehicle emissions	<ul style="list-style-type: none"> • Cover or damp down by water spray on the excavated mounds of soil to control dust • Apply water prior to leveling or any other earth moving activity to keep the soil moist throughout the process • Bring the material (aggregate and sand) as and when required; • Don't allow access in the work area except workers to limit soil disturbance and prevent access by fencing • Ensure proper consolidation/stabilization of top surface when un-surfaced/ /earthen roads are used for construction activity; sprinkle water on road 	Construction Contractor	Site inspections; interviews with people and workers; verify vehicle emission permit records

Anticipated Impacts	Proposed Mitigation Measures	Responsible for Mitigation	Monitoring of Mitigation
	<p>surface to arrest dust generation</p> <ul style="list-style-type: none"> • Use tarpaulins to cover loose material that is transported to and from the site by truck Control dust generation while unloading the loose material (particularly aggregate and sand) at the site by sprinkling water or unloading inside barricaded area • Clean wheels and undercarriage of haul trucks prior to leaving construction site • Ensure that all equipment & vehicles used for construction activity are in good condition • Ensure that all equipment & vehicles confirms to government emission and noise norms 		

Anticipated Impacts	Proposed Mitigation Measures	Responsible for Mitigation	Monitoring of Mitigation
Impediment of access to houses and business establishments due to laying of pipelines	<ul style="list-style-type: none"> Do not close/obstruct any road/path for construction purpose; if unavoidable alternative temporary access should be made available Inform local people about the nature and duration of work well in advance so that they can make necessary preparations; Provide wooden planks across trenches for pedestrians and metal sheets where vehicle access is required 	Construction Contractor	Site observations interviews with local people and business
Disturbance/nuisance due to construction activities and public/community safety	<ul style="list-style-type: none"> Provide prior public information about nature, schedule of work, and likely disturbances during the construction through local mass media Intimate the sensitive establishments near the construction site (hospitals/schools/religious places/cemetery/burial ground/parks etc) about the nature and schedule of works; Schedule noisy activities in consultation and put in place a complaint receiving mechanism No nighttime construction activities including material haulage near (500 m) any settlement area; sensitivity to noise increases during the nighttime hours in residential neighborhoods – work hours shall be limited to daylight hours 06:00 – 21:00 Hrs Use less noise generating equipment; inform the local community prior to any noisy works such as cutting of roads using pneumatic drills Educate drivers: speed limits; avoid use of horn; parking at designated places; no idling on roads etc. Sites shall be barricaded, guarded and public entry restricted; provide solid barricades where required to stop persons/vehicles falling into the trenches Provide road signs and flag persons to warn public of dangerous conditions Provide reflective barricades for easy visibility and identification of construction area The work area including material, waste storage is isolated within the barricaded site 	Construction Contractor	Verify construction schedule and records; site observations interviews with workers and local people
Traffic disturbances during construction along the roads	<ul style="list-style-type: none"> Identify important roads that are to be affected by construction work and provide prior intimation to the public Plan works in important roads in consultation with traffic police and municipality; Provide information, direction and warning boards, provide traffic guards with danger flags Provide prior public information about the work, traffic disruptions/diversions Plan vehicle (material & waste) transport routes & schedules avoiding 	Construction Contractor	Site observations interviews with local people and traffic police

Anticipated Impacts	Proposed Mitigation Measures	Responsible for Mitigation	Monitoring of Mitigation
	narrow/sensitive roads and peak traffic timings <ul style="list-style-type: none"> • Heavy vehicles should not enter narrow local roads and sensitive areas of the town, except in the immediate vicinity of delivery sites • Carry out construction in sections, give adequate notice of construction activities, provide effective road signs, diversions or barricades 		
Occupational Health and Safety of workers	<ul style="list-style-type: none"> • Provide all workers appropriate personal protection equipment (such as helmet, gum boots, safety belts, gloves, and ear plugs; etc) and ensure their usage • Prohibit unauthorized entry into work site • Provide health and safety orientation training to all workers to ensure that they are apprised of the basic site rules of work at the site, personal protective protection, and preventing injuries to fellow workers; • Ensure that workers follow documented procedures for all site activities; • Provide qualified first-aid at all times and equipped first-aid stations shall be easily accessible • Provide medical insurance coverage for workers; • Provide supplies of potable drinking water • Ensure the visibility of workers through their use of high visibility vests when working on roads or walking through heavy equipment operating areas; • Disallow worker exposure to noise level greater than 85 dBA for a duration of more than 8 hours per day without hearing protection. The use of hearing protection shall be enforced actively • Appoint a Environment, Health and Safety (EHS) manager; prepare a construction site layout plan • Document and report work-related accidents 	Construction Contractor	Site observations; verify contractor records; interviews with workers; verify accident reports
Risk due to deep excavations, collapse of trench and damage to adjacent structures	<ul style="list-style-type: none"> • Provide shoring in all trenches/excavations deeper than 1.2 m • Shoring should erected, altered, dismantled only by a competent worker under strict supervision • Excavation and installation shoring should proceed by stages till it reaches the required depth • As far as possible, deep excavations shall not be conducted close to buildings; in unavoidable case provide necessary measuring such as shoring to prevent collapse of fall when the stability of structure may be affected by excavation work 	Construction Contractor	Site observations and review of final alignment drawings of sewers
Safety risk – public and worker, due to existing underground AC sewers	<ul style="list-style-type: none"> • Existing AC sewers shall be not be disturbed and left as it is in the ground • Mark on inventory drawing and identify on site before start of excavation for new lines and instruct the workers involved in excavation so that they 	Construction Contractor	Verify inventory drawings and proposed alignment drawings

Anticipated Impacts	Proposed Mitigation Measures	Responsible for Mitigation	Monitoring of Mitigation
	<p>will not accidentally damage the pipes</p> <ul style="list-style-type: none"> • Ensure proper supervision by a trained person • In the event that AC sewers must be removed in narrow lanes, working with asbestos pipe requires wearing disposable masks and suits, wetting worksites frequently, and using only manual tools for cutting pipes to prevent the formation of high quantities of asbestos particulates in the air. Waste AC pipe must be removed as intact as possible and placed in designated containers in a wet state for appropriate toxic disposal 		Site verifications
Impacts due to import of labor and establishment of temporary labor camps	<ul style="list-style-type: none"> • Avoid/minimize temporary worker camps by employing local people as far as possible • In unavoidable case: <ul style="list-style-type: none"> ○ Establish the camp in consultation with the local authority ○ Camp site shall be located away from water bodies ○ No clearance of trees vegetation shall be allowed for establishment of camp ○ Provide appropriate & adequate accommodation ○ Provide water in good quality & adequate quantity ○ Provide sufficient and suitable washing facilities including soap & towels ○ Provide sufficient lavatories; and separate lavatories for men and women workers. ○ Provide cooking fuel and no worker shall be allowed to cut any tree ○ Ensure regular and clean maintenance of the camp ○ Ensure proper wastewater collection & disposal facilities; septic tanks and soak pits shall be provided for wastewater disposal ○ Provide solid waste collection bins and dispose waste through municipal system; ensure that solid waste is not burnt at the site ○ Conduct awareness programs on HIV/AIDS and other communicable diseases • Restore camp site to original status after completion of work 	Construction Contractor	Site observations;; interviews with workers
Historical, archeological chance finds during excavation	<ul style="list-style-type: none"> • Contractor shall put in place a protocol in conducting any excavation work, to ensure that any chance finds are recognized and measures are taken to ensure they are protected and conserved. This should involve: <ul style="list-style-type: none"> ○ Provide training to the construction supervisors to identify any suspicious objects ○ Stop work immediately to allow further investigation if any finds are suspected; • Call in the state archaeological authority if a find is suspected, and taking 	Construction Contractor	Interview with site supervisors; verify construction records for any chance finds detected

Anticipated Impacts	Proposed Mitigation Measures	Responsible for Mitigation	Monitoring of Mitigation
	any action they require to ensure its removal or protection in situ.		

Table 9: Environmental Management Plan – Operation

Anticipated Impacts	Proposed Mitigation Measures	Responsible for Mitigation	Monitoring of Mitigation
<u>Health and Safety</u> <ul style="list-style-type: none"> Hazards for AzerSu Workers and the public 	<ul style="list-style-type: none"> Ongoing training programs for first aid and Occupational Health and Safety training to AzerSu Undertake periodic inspections of electrical equipment by qualified staff and periodic safety audits 	JSC	Monthly inspection of complaints register and safety records Periodic health check up
<u>Sustainability of Infrastructure Systems</u> <ul style="list-style-type: none"> Efficiency and reliability of water supply and drainage systems 	<ul style="list-style-type: none"> Provide training for water and wastewater network and metering repair training Provide O&M training for water and sewer distribution networks; maintaining pressures and detecting leaks Provide adequate budgets and undertake planned maintenance programs in accordance with specific O&M plans Provide vocational training for AzerSu staff Undertake planned cleaning of town drains and dispose of sludge to designated disposal sites 	JSC	Training programs conducted Preventive maintenance activities Time taken for leak repair

Table 10: Environmental Monitoring Plan

Mitigation measures	Parameters to be Monitored	Location	Measurements	Frequency	Responsibility
Pre-Construction Phase					
All design related mitigation measures	Inclusion in the project design	-	Design review	As needed before tendering	PMF
Construction Phase					
All construction related mitigation measures	Implementation on site	All construction sites	Observations on/off site; construction records; review of site layout & safety plan; vehicle log records of construction material and waste transport; interviews with people and workers	Bi-weekly during construction	PMF through supervision consultant
Dust and emission control from construction activities	Ambient air quality (SPM, RSPM, CO, SO ₂)	Three sampling locations covering subproject area	Comparison with base values	Once before start of construction; quarterly (4 times a year) during construction	Construction Contractor
Noise generation	Ambient noise levels (day, night levels), dB(A)	Three locations as above	Comparison with base values	Once before start of construction; quarterly (4 times a year) during construction	Construction Contractor
Long Term Surveys					
• Conduct source quality monitoring	As per the government regulations	1 sample from each bore hole	Comparison with the base values and standards as per government regulations (Appendix 2)	Monthly	JSC
• Treated water quality monitoring	As per the government regulations	At the outlet of chlorination plant; at reservoir sites; and at extreme points of network in various locations in town	Comparison with the standards as per government regulations (Appendix 2)	Daily/ monthly/quarterly as required	JSC
• Influent and effluent wastewater quality at WWTP	As per the government regulations	At the inlet and outlet of WWTP	Comparison with the disposal standards (Appendix 3)	Daily/ monthly/quarterly as required	JSC


126. **Environmental Reporting.** The contractor will submit monthly progress reports, which include a section on implementation status of environmental management measures. The environmental monitoring and management reports will be prepared by the PMF's Safeguard Specialist with assistance from the Program Consultant. The reports will be submitted biannually to ADB who will disclose it to the public on receipt. The monitoring report will include the following: (i) compliance with ADB loan covenants and government regulations; (ii) significant issues or changes in scope; (iii) summary of monitoring report findings; (iv) required follow-up actions; and (v) conclusions

B. Implementation Arrangements

1. Responsibilities and Authorities

127. Figure 1 provides a schematic representation of the institutional arrangements for implementing the EMP. A summary of the Environmental Assessment and Review Procedures and respective responsibilities are summarized in Table 11. The Program will be implemented by AzerSu's Program Management Facility (PMF) and the agency responsible for operation of improved infrastructure will be Beylagan Joint Stock Company. The PMF will provide guidance on environmental issues, and will be the first level of internal monitoring. AzerSu has a significant experience in implementing donor-funded projects, and the necessary technical expertise in monitoring environmental management plans. During the operations phase, the Program will be implemented by the JSC.

Figure 1: Institutional Arrangement

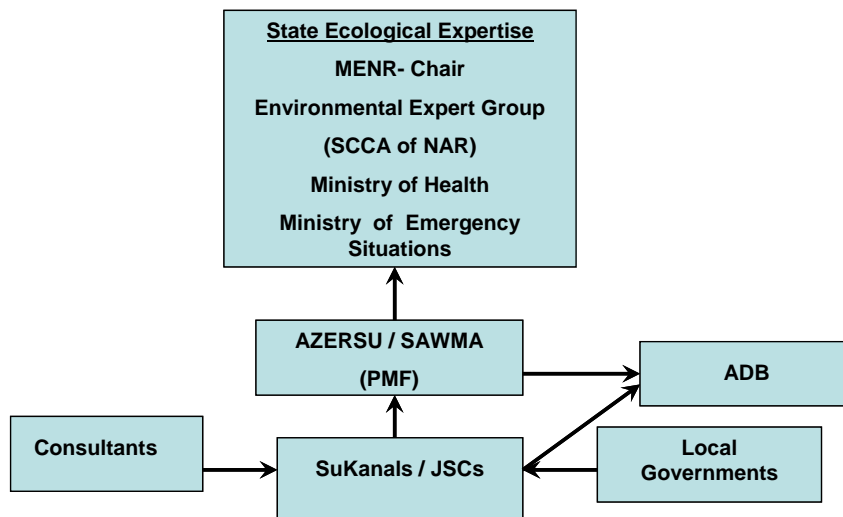

128. The JSC will establish laboratories for chemical analysis and monitoring of water quality at the reservoir sites in each town. Biological and epidemiological monitoring of water will be carried out by the JSC, in accordance with the Ministry of Health, Sanitary Epidemiology Service (SES) and their relevant administrative procedures.

129. The SESs are responsible for health and water quality-related issues. Under the Program, such agreements will be worked out between the JSC and the SESs. The SESs, acting under the approved schedule of the Ministry of Health, will conduct regular tests of water quality, and will be taking supervisory charge in monitoring water quality. Within the town, they will have responsibility to take potable water samples from key locations in the distribution

system to ensure compliance with the health regulations. Post-construction and during the operation they will take sewage samples prior to the inflow to the wastewater treatment plants and also at a discharge point after treatment. The quality of drinking water supply will be monitored according to international and local standards.

130. The overall responsibility for environmental protection lies with the Ministry of Ecology and Natural Resources (MENR). At the rayon level they are represented by the rayon agency, which is located within or near the towns. The MENR is charged with a task of providing national monitoring services that includes a monitoring network of baseline information on water sources. Compliance with the EMP will be undertaken by the Safeguards Specialist at the PMF as part of his/her technical supervisory duties.

131. The responsibility for construction standards is with the Ministry of Emergency Situations. Their standards together with ADB's environmental requirements will be incorporated into the Program design. There are no significant environmental management issues relating to the post construction and operation of the Program. The major ones relate to control of leakage from the sewer lines, the safe discharge of sewage to the sewerage system, the safe operation of the wastewater treatment plants and safe discharge of the treated sewage. Environmental management will be regulated through the existing legislation as well as specific clauses with the Contractor. Daily control and monitoring of construction works will be part of the Contractor's responsibilities.

132. The Program's environmental impacts will be closely monitored. Specifically, the monitoring and evaluation (M&E) activities by the PMU will include (i) collecting, collating, and analyzing monitoring data related to the environmental conditions in the Program towns; (ii) environmental gains as a consequence of Program implementation, and (iii) evaluating environmental impacts within the selected systems. (AzerSu's internal monitoring department is called the Ecology and Monitoring Section.) The M&E activities at the JSC-level will also have site inspectors, who will work with the responsible Rayon agencies. For environmental monitoring, they will collect and analyze information on quality of water supplied, sewage discharged, and minimization of construction impact within the towns. The Program performance, monitoring, and evaluation will be done in accordance with ADB's guidelines on its program performance management system.

133. Existing Town Water User's Association (TWUA) will act as advocacy groups to represent the interests of consumers, and will be recognized by the JSC as important partners in ensuring that WSS services achieve consumer satisfaction.

Table 11: Institutional Responsibilities

Organization		Responsibilities
JSC	JSC, Program Consultant Social and Environmental Specialists, and PMF	<ul style="list-style-type: none"> • Preparing Env. Management Plan (EMP) for SEE review • Periodic submission of environmental monitoring report to ADB for public disclosure • Establishing environmental classifications under ADB regulations & determining need for Subproject (Sp) IEEs • Screening & preparation of Sp EEs including cost estimates for mitigation measures & monitoring plans • Conducting public consultations: Informing affected people and community focus groups before or during consultation in the early stage of IEE preparation and conducting continuing consultation during implementation in accordance with ADB and government requirements • Preparing SpIEEs for SEE and obtaining IEE clearance (development consent approval) from SEE

Organization		Responsibilities
		<ul style="list-style-type: none"> • Submitting to ADB first IEE and all IEEs over \$2 million • Ensuring tender documents will be updated with any changes to the EMP • Ensuring contract document including environmental clearance certificate & conditions and ensuring ADB gets copies of these documents • Implementing and updating environmental mitigation and monitoring measures • Incorporating environmental requirements in civil work contracts • Performing water quality monitoring and reporting to the SEE and local governments • Performing civil work surveys • Ensuring the Contractors have access to the IEE reports • Ensuring that Contractors have fully implemented and completed the detailed EMP and have submitted this to SEE for approval • Providing environmental training • Undertaking remedial action when unexpected environmental impacts occur during implementation • Preparation and submission of quarterly reports to the SEE and ADB including i) compliance with ADB loan covenants and government regulations, ii) significant issues or changes in scope, iii) summary of monitoring report findings, and iv) required follow-up actions • Undertaking monitoring of operation and preparing monitoring reports every year for 4 years after construction
PMF	Safeguards Specialist	<ul style="list-style-type: none"> • Overall coordination with government entities and supervision responsibilities • Approval of the management contract • Submission of IEEs for SEE approval • Monitoring and evaluation of the Program
Environment Expert Group	SEE (within MENR)	<ul style="list-style-type: none"> • Review of environmental clearance • Providing guidance for upholding environmental policy requirements
ADB	Social and Environmental Sector Specialists	<ul style="list-style-type: none"> • Reviewing first IEE and all IEEs over \$2million • Disclosing reports over ADBs website (Responsibility of ADB Project Leader) • Reviewing all statutory environmental clearances granted by SEE • Reviewing quarterly reports & taking necessary actions • Monitoring EMP implementation and due diligence
Local Govts and TWUAs		<ul style="list-style-type: none"> • Coordination with JSC and making key decisions on behalf of the community

2. Institutional Assessment

134. AzerSu acting as the PMF has significant experience with managing water and wastewater treatment systems. The organization has accumulated WSS management and mitigation experience through current and completed water and wastewater improvement and construction works throughout the country.

135. Similarly, the Beylagan JSC (hitherto SuKanal), the local branch of AzerSu has been operating the existing systems for many years. They are experienced with chlorination, distribution systems and wastewater treatment. The Program Consultant's environmental specialist will provide significant aid and guidance with the required environment, resettlement and public consultation requirements of ADB and the SEE.

C. Environmental Management Budget and Resources

136. Most of the mitigation measures require the contractors to adopt good site practice, which should be part of their normal construction contract, so there are no additional costs to be included in the EMP. Costs of design-related mitigation measures are included in the budgets for the civil works.

137. The cost for hiring a Program Consultant covering social and environmental issues for the periods before, during and after construction are already included in the project implementation costs. The budget needed for the Safeguard Specialist and support staff has also been included in the Program costs as these employees will come from within the PMF/AzerSu.

138. The ambient air quality monitoring and noise monitoring to be conducted by the contractor during construction will be additional, and therefore shown here. Long-term surveys such as source water quality and treated water quality supplies to consumers will be conducted by in-house laboratory and as per the government regulations. So no budget is provided here for this purpose. AzerSu has capacity and knowledge to perform water quality tests. Extensive training must be provided in the subproject due to the risks of construction, chemical handling, and specific water and wastewater network operations and maintenance tasks. These costs already included in the program part of capacity building.

139. Following Table 12 shows the environmental management costs of this subproject.

Table 12: Environmental Management Costs

Item	Quantity	Unit Cost	Total Cost
Implementation of EMP (1.5 years)		US \$	US \$
International Environmental Specialist (Supervision Consultant)	0.25 months	22,000	5,500
National Environmental Specialist (Supervision Consultant)	1.50	6,000	9,000
Environmental Management Specialist (AzerSu-PMF)	0.50 months	3,000	1,500
Ambient air quality monitoring	3x7	200	4,200
Noise	3x7	70	1,470
<i>Total</i>			<i>21,670</i>
Water Quality Monitoring (long-term)			
Source water quality, treated water supplied in the town –	Samples as required	-	Part of laboratory operational costs
Influent and effluent waste quality at WWTP	Samples as required	-	
<i>Total</i>			<i>21,670</i>

IX. CONCLUSION AND RECOMMENDATION

A. Findings and Recommendation

140. The environmental impacts of the infrastructure elements proposed in the water supply and sewerage subproject in Beylagan has been assessed and described in the previous sections of this document. Potential negative impacts were identified in relation to design,

location, construction and operation of the improved infrastructure. Mitigation measures have been developed to reduce all negative impacts to acceptable levels.

141. According to this assessment, the proposed Beylagan Project is unlikely to cause any adverse environmental impacts because: (i) proposed Project activities are designed primarily to improve the quality of life and quality of environment of the town; (ii) potential negative impacts associated with the design, construction and operation of the proposed Project activities will be temporary, minor, and localized in extent and can be mitigated to acceptable levels; (iii) no Project activities will involve permanent or temporary loss of income and/or livelihood; (iv) the institutional framework has been developed to specify the procedural requirements and responsibilities to ensure environmentally sustainable implementation; and (v) all construction and operation activities will be monitored and reported by the PMF in accordance with the Environmental Monitoring Plan.

142. The construction stage Environmental Management Plan (Table 9) and the monitoring to be conducted by the Contractor (Construction phase monitoring indicated in Table 11) should form part of the contract documents.







143. All the measures such as designing a robust treatment system, availability of adequate manpower, O&M equipment and manual, and training is considering in the design of the project. Appropriate compensatory measures are planned for relocation of sheep farm presently occupying the WWTP site. These measures will be implemented before the award of civil works contract.

B. Conclusion

144. The level of environmental assessment within this IEE is sufficient to indicate the subproject's impacts and to outline the necessary mitigation measures for the subproject. No additional studies, such as an EIA, are required. The proposed Beylagan subproject will have significant positive impacts on the quality of life for community members through providing a safe, reliable water supply, an improved water distribution network and improvements to the sewage collection system. The proposed Environmental Management and Monitoring Plans in this IEE will ensure that proper water quality monitoring and environmental management is conducted. The IEE was disclosed to the public, and the stakeholder concerns were incorporated into the IEE. The proposed subproject these components will contribute to the overall sustainability of the water supply as well as environmental conditions in Beylagan.

145. As per the Republic of Azerbaijan's (RA) Law, the proposed subproject requires following permissions from the government regulatory agencies: Environmental permit and groundwater abstraction permit. AzerSu is in the process of obtaining both these permits before the award of contract for civil works.

Appendix 1: Photographs**Photo 1: Well Field / Water Collection Site (Area Site 1)****Photo 4: Existing Pumping Station****Photo 2: Existing Self-flowing Well at Well Field Site****Photo 5: Proposed WWTP Site****Photo 3: Existing Reservoirs (Area Site No. 2)****Photo 6: Water Channel near WWTP Site**

 A wide, flat, grassy field under a cloudy sky. In the distance, a line of trees is visible on the horizon. A timestamp "20/09/2011 12:32" is in the bottom right corner.	 A narrow, paved road flanked by high, light-colored stone walls. The road curves slightly to the right. A timestamp "20/09/2011 12:38" is in the bottom right corner.
Photo 7: Proposed Workshop Site	Photo 10: Narrow Roads in the Town
 A dirt road leading to a building with a stone wall and a gate. A person in a white shirt and dark pants stands in the middle of the road. A timestamp "20/09/2011 12:06" is in the bottom right corner.	 A wide, paved road with a yellow-painted curb and a black street lamp. Trees and buildings are visible in the background. A timestamp "20/09/2011 13:12" is in the bottom right corner.
Photo 8: Proposed Administrative Office Site	Photo 11: Wide Roads in the Town
 A narrow, paved street with a yellow-painted curb and a utility pole with wires. A timestamp "20/09/2011 12:00" is in the bottom right corner.	 A wide, paved road with multiple lanes, showing traffic including a large orange truck, several cars, and a person walking. A timestamp "20/09/2011 13:40" is in the bottom right corner.
Photo 9: Narrow Streets with utilities	Photo 12: Main Roads with Traffic

Appendix 2: Maximum Allowable Concentrations (MAC) In Drinking Water

o	Substances	MAC Limits (mg/l)
1.	Smell at 20°C temperature	<2 threshold odor number
2.	Color	<20 color units
3.	Turbidity	<1.5 NTU
4.	Ph	6-9
5.	HCO ₃ ⁻	>3
6.	Ca ²⁺	180
7.	Mg ²⁺	40
8.	Na ⁺	170
9.	Polyphosphate residual (PO ₄ ⁻)	3,5
10.	Hardness	7.0 mg – eqv
11.	Mineralization	<1000 (1500)
12.	Total dissolved solids	1000.0
13.	N ₂ O ₅	29.0
14.	NO ₂	Traces
15.	NO ₃	10.0
16.	NH ₄	Traces
17.	Cl ⁻ (chlorine)	25 – 50
18.	Cl ₂ (chloride)	350
19.	SO ₄ ²⁻	100
20.	both iron oxides Fe ²⁺ and Fe ³⁺	0.3
21.	total content of Fe ⁺ and Mn	0.5-1.0
22.	Oxidation	O ₂ 2.5-3.0
		KMnO ₄ 10.0
23.	Pb (lead)	0.03
24.	As (arsenic)	0.05
25.	Cu (copper)	1.0
26.	F ⁻ (fluoride)	1.5
27.	Al (aluminum)	0.5
28.	Be (beryllium)	0.0002
29.	Mo (molybdenum)	0.25
30.	Se (selenium)	0.001
31.	Sr (strontium)	7.0
32.	Zn (zinc)	5.0
33.	H ₂ S	0.0
34.	Hg, Ba, hexavalent Cl ⁻ and other poison contaminations	0.0
35.	TVC @ 37°C	100 in 1 cm ³
36.	Total Coliforms in 1000 ml water (E coli-index) (MPN)	3

Source: Maximum Allowable Concentrations, GOST 2874-8, MOH

Note: There are some exclusions for drought regions: content of total dissolved solids can be up to 2,500-3,000 mg/l; Cl₂ up to 400-800 mg/l; SO₄²⁻ up to 1,000-1,500 mg/l; and general water hardness up to 21-40 mg-eqv.

Ministry of Health's water quality guidelines

Appendix 3: Wastewater Disposal Limits

Maximum Allowable Wastewater Influent and Effluent Levels

Parameter (at rated temperature 15°C)	MAC at entry (mg/l)	MAC at exit (mg/l)	World Bank (MAC at exit)
COD (chemical oxygen demand)	620	125	125
BOD (biological oxygen demand)	375	35*	30
N (general nitrogen)	35	15	10
P (general phosphorus)	8	2	2
Suspended matters	310	35	50
pH			6 – 9 pH
Oil and grease			10 mg/l
Total coliform bacteria			400 MPN / 100 ml

Source: Directive No 91/271/EEC, European Economic Community

Maximum Allowable Concentrations for Water Bodies Used for Fishing

Parameter	MAC (mg/l)
COD (chemical oxygen demand)	3.0
BOD (biological oxygen demand)	20.0
Ammonium	0.5
Potassium	50.0
Calcium	180.0
Magnesium	40.0
Sodium	120.0
Nitrate-ion	40.0
Sulphate-ion	100.0
Chloride-ion	300.0
Fluorine-ion	0.75
Phosphorous	0.3

Appendix 4: National Ambient Air Quality Standards

Pollutants	Maximum allowed concentrations (mg/m ³)	
	Maximal concentration for a given moment	Average daily concentration
Carbonic Oxides	3.0	1.0
Sulfur Dioxide (SO ₂)	0.5	0.03
Nitrogen Oxides	0.085	0.085
Benzole	1.5	0.8
Fluoride Compounds	0.02	0.005
Phenol	0.01	0.01
Non-toxic Dust	0.5	0.15
Soot	0.15	0.05
Formaldehyde	0.035	0.012
Chlorine	0.1	0.03
Hydrogen Sulfide	0.008	0.008
Nitrobenzene	0.008	0.008
Ammonia	0.2	0.2
Acetone	0.35	0.35
Methanol	1.0	0.5
Ozone (O ₃)	0.16	0.03
Hydrocarbon (HC)	1.0	-
Lead and its compounds (except tetraethyl lead)	0.0010	0.0002

Source: Maximum allowable concentrations of toxic elements in the working area GOST 12.1.005-88; Ministry of Ecology and Natural Resources, 2003

Appendix 5: Maximum Allowable Noise Levels

Land use	Noise standard (max) in decibel (dBA)	
	Daytime (07:00-23:00)	Nighttime (23:00-07:00)
Residential Areas	40	30
Commercial Areas	55-60	55-60
Hotels and dormitories	45	35
Industrial areas:		
a) highly qualified workplaces	50	50
b) permanent workplaces within territory or buildings of plants	80	80
c) workplaces of track drivers and service	70	70
d) workplaces of drivers and service for tractors and other equivalent agricultural and melioration mechanisms	80	80
Sensitive areas: a) hospitals and sanatoriums	35	25
b) schools, libraries and conference halls	40	40

Source: Noise Standards GOST 12.1.003-83 UDK 534.835.46:658.382.3:006.354; GOST 12.1.036-81 ST SEV 2834-80

Appendix 6: Photographs of Public Consultation, September 2011, Beylagan

Appendix 7: Photographs of Tranche-4 components

Photos of wastewater treatment plant area and with sheep farming temporary shelters.⁷



⁷ Note: Semi-constructed structure made from stone is owned by Azersu Beylagan Sukanal

Photos of collector route

Appendix 8: Public consultation, Photographs and MOM, 6 May 2016

Appx. a: Photos from public consultation



2016 –cı il tarixli yığıncağının

Yığıncağın sədri: *Sifurov Novruz*
Yığıncağın katibi: *Nomizov Samir*

Yığımcağda iştirak etdi: 25 nofər
Böcəci, Bəsir, ƏS-ün, Hənək, Nəzirov, R. Ağayev, İ.

Gündəlik məsələ

Deputatın su. və təqəbbuatiya vətəniyə yamirənən vətəniyə
təqəbbuatiya. Gələcək su təminatı üçün gələcək, gələcək vətəniyə
təqəbbuatiya. Gələcək su təminatı üçün gələcək, gələcək vətəniyə
təqəbbuatiya. Gələcək su təminatı üçün gələcək, gələcək vətəniyə

Sigalide adrese pārstāvēs mūzikveidnieku
būvniecības firmu arh.-apzīmē, dīkstāvē
vā pārstāvēs sigalide firmu ēk. mēri
tādē

Yığıncaq çıxışları dinləyərək qərara alır

QƏRAR

Halatın nəzərlənməsinə qərar alaraq layihə təkliflər
yeni bir cəhətdən müvafiq baxılmaqda saxlanıl
tılmalıdır.

Yığıncağın katibi: Emrah

Sotiq qasab Balsediyyasi P. Calilov



Translation of the minutes of meeting:

Beylagan rayon,
Protocol of the public consultation held on 06 May 2016

Chairman of meeting: Shirinov Novruz

Secretary of meeting: Mamishov Sameddin

Participated: 25 persons, as well as construction supervisor of Azersu Faig Agayev

Agenda:

Rehabilitation of water and sewerage lines Project in Beylagan, Construction of Waste Water Treatment Plant and sewerage collector line that passes through private land plots

Listened:

Opinions of all participants who were listed here were listened and their opinions are shown in the list.

Based on speeches the following was decided:

It is recommended to revise the project proposal according to the relevant legislation by considering people's dissatisfaction.

Chairman of meeting: *(signature)*

Secretary of meeting: *(signature)*

Head of Shafag municipality: P.Jalilov *(stamp)*

Appx. 6c: List of participants

List of Participants
İştirakçıların siyahısı

Place/Ərazi: *Beyləqan r-m* Date/Tarix: *06.05.2016*

N	Surname and name (ad və soyad)	Rayon/village (rayon/kənd)	Signature (imza)
1	<i>Səfərov Oğtay İbrahim</i>	<i>Beyləqan r-m</i>	<i>[Signature]</i>
2	<i>Əliyev Dəvə</i>	<i>Səfəv qəsəbə</i>	<i>[Signature]</i>
3	<i>Əliyev Rəşad</i>	<i>" - "</i>	<i>[Signature]</i>
4	<i>Əbbasov Nəbi</i>	<i>" - "</i>	<i>[Signature]</i>
5	<i>Zeynəlov Cəbir</i>	<i>" - "</i>	<i>[Signature]</i>
6	<i>Zeynəlov Xəzr</i>	<i>" - "</i>	<i>[Signature]</i>
7	<i>Zeynəlov Cəmi</i>	<i>" - "</i>	<i>[Signature]</i>
8	<i>Məmmədov Əyvan</i>	<i>" - "</i>	<i>[Signature]</i>
9	<i>Səlimov Yusif</i>	<i>" - "</i>	<i>[Signature]</i>
10	<i>Qəsimov Məmməd</i>	<i>" - "</i>	<i>[Signature]</i>
11	<i>Əbrikimov Rüstəm</i>	<i>" - "</i>	<i>[Signature]</i>
12	<i>Zeynəlov Məhərriz</i>	<i>" - "</i>	<i>[Signature]</i>
13	<i>Rəsimov Məhərriz</i>	<i>" - "</i>	<i>[Signature]</i>
14	<i>Məmmədov Sərdar</i>	<i>" - "</i>	<i>[Signature]</i>
15	<i>Yusifov Rəmil</i>	<i>" - "</i>	<i>[Signature]</i>
16	<i>Mərzəyev Vələd</i>	<i>" - "</i>	<i>[Signature]</i>
17			
18			
19			
20			
21			
22			
23			
24			
25			

Səfəv qəsəbə Bələdiyyəsi

[Signature]

[Stamp: Səfəv qəsəbə Bələdiyyəsi]

Apx 6d: Tentative list of affected persons

No	Name and Surname	Losses	Total area (ha)	Land use
1	Atakişiyeva Elmira Şükür	Part of agric. land	2.55	clover
2	Mirzəyev Vilayət Bəylər	Part of agric. land	3.88	clover
3	Mirzəyeva Aynurə Arif	Part of agric. land	0.83	clover
4	Mirzəyeva Kəmalə Bəylər	Part of agric. land	1	clover
5	Əliyev Həbil Əsədulla	Part of agric. land	0.99	clover
6	Atakişiyev Oktay Məhəmməd	Part of agric. land	3.83	clover
7	İbrahimova Şərabani Abbas (v)	Part of agric. land	1	clover
8	İbrahimov Məhərrəm İbrahim	Part of agric. land	3.81	barley
9	İbrahimov Rüstəm İbrahim	Part of agric. land	4.88	clover
10	Mikayılova Rəmilə Zakir	Part of agric. land	4.91	clover
11	Abbasov Əlövsət Qalamirzə	Part of agric. land	1	clover
12	Abbasov Əbülfət Qalamirzə	Part of agric. land	0.98	clover
13	Mikayılova Rəmilə Zakir	Part of agric. land	4.89	clover
14	Kərimova Bilur Muxtar	Part of agric. land	5.93	clover
15	Mahmudova Könül Həmet	Part of agric. land	1.94	clover
16	Qarayeva Aynurə Oruc	Part of agric. land	1	clover
17	Fərzəliyeva Rəyhan Oruc	Part of agric. land	0.99	clover
18	Mikayılova Rəmilə Zakir	Part of agric. land	4.89	clover
19	Əbdullayev Vədadi Qurban	Part of agric. land	3.99	clover
20	Bəhbudov Rövşən Qədir	Part of agric. land	2.94	clover
21	Zeynalov Xəqani İsmayıl	Part of agric. land	3.8	barley
22	Zeynalov Mubəriz İsmayıl	Part of agric. land	3.99	grain (2), alf (1.99)
23	Zeynalov Cami İsmayıl	Part of agric. land	1	clover
24	Zeynalov Cabir İsmayıl	Part of agric. land	2.78	clover
25	Qasımov Məhəmməd	Part of agric. land	5.83	clover
26	Əliyev Tiflis Şahmar	Part of agric. land	3.76	clover
27	Əliyeva Elmira Şahmar	Part of agric. land	1	clover

28	Qasımov Məhəmməd Mahir	Part of agric. land	2.88	clover
29	Əliyeva Qərənfil Akif	Part of agric. land	0.96	clover
30	Məmmədov Sərdar Qurbanəli	Part of agric. land	3.66	wheat
31	Aslanov Vahid Əmir	Part of agric. land	3.99	clover
32	Əliyev Rəşad Savalan	Part of agric. land	7.48	clover
33	Şirinov Yusif Rza	Part of agric. land	2.9	clover
34	Məmmədov Bayraməli Həsən	Part of agric. land	3.86	clover
35	Kərimov Məmmədəli Həbib	Part of agric. land	3.92	clover
36	Cəlilov Paşa Kamil	Part of agric. land	3.99	barley
37	Cəlilov Kövər Ramazan	Part of agric. land	1.94	barley
38	Qasımov Rəfayıl Ziyəddin	Part of agric. land	4.89	clover
39	Dadaşov Xanlar Bəhlul	Part of agric. land	3.88	clover
40	Qasımov Rəfayıl Ziyəddin	Part of agric. land	3.99	cotton
41	Mahmudova Humaya Ələşrəf	Part of agric. land	0.88	cotton
42	Səfərova Suqra İbrahim	Part of agric. land	1.99	cotton
43	Yusifov Ramil Şəmiddin	Part of agric. land	0.89	clover
44	Yusifov Vüqar Şəmiddin	Part of agric. land	3.99	clover
45	Əsgərova Ruhiyyə Abbas	Part of agric. land	3.95	clover
46	Mahmudov Məhərrəm Mehdi	Part of agric. land	2.9	clover
47	Nərimanov Cahid Əlövsət	Part of agric. land	1.58	clover
48	Safarov Oktay Idris	Animal shelter and temporary dwelling shelter	-	-

Appdx 6d: Decree of Beylagan District Authority on WWTP Land Allocation



Azərbaycan Respublikası

Beyləqan rayonu İcra hakimiyyəti başçısının

S Ə R Ə N C A M I

№ 79

"22" dekabr 2008-ci il.

"Azərsu" Səhmdar Cəmiyyəti "Birləşmiş Sukanal MMC-nin" Beyləqan Sukanal İdarəsinə istehsalat bazasının və kanalizasiya təmizləyici qurğuların tikintisi altına torpaq sahəsi ayrılması

Barədə

"Azərsu" Səhmdar Cəmiyyəti "Birləşmiş Sukanal MMC-nin" Beyləqan Sukanal İdarəsi rayon İcra hakimiyyətindən daxil olmuş 19 dekabr 2008-ci il tarixli 362 sayılı məktubunda Asiya İnkişaf Bankının krediti hesabına Beyləqan şəhərinin su təchizatı və kanalizasiya sisteminin yenidən qurulmasına texniki iqtisadi lahiyə hazırlandığını bildirir və bunun üçün istehsalat bazasının tikinti altına 1,0 ha, kanalizasiya təmizləyici qurğuların tikintisi altına isə 3,5 ha torpaq sahəsi ayrılmasını xahiş edir.

Azərbaycan Respublikasında "Torpaq Məcəlləsi"nin 56-cı maddəsinin 5-ci bəndinə və Azərbaycan Respublikası Dövlət Torpaq və Xəritəçəkmə Komitəsinin Beyləqan rayon şöbəsinin 22 dekabr 2008-ci il tarixli 92 sayılı təqdimatına əsas götürərək

Qərara alıram

1. "Azərsu" Səhmdar Cəmiyyəti "Birləşmiş Sukanal MMC-nin" Beyləqan Sukanal İdarəsinin Asiya İnkişaf bankının krediti hesabına Beyləqan

şəhərinin su təchizatı-kanalizasiya sisteminin yenidən qurulması məqsədi ilə təchizat bazasının və kanalizasiya təmizləyici qurğuların tikintisi altına torpaq sahəsi ayrılması barədə 19 dekabr 2008-ci il tarixli 362 sayılı məktubu nəzərə alınsın.

2. "Azərsu" Səhmdar Cəmiyyəti "Birləşmiş Sukanal MMC-nin" Beyləqan Sukanal İdarəsinə su təchizatı və kanalizasiya sisteminin yenidən qurulması üçün istehsalat bazasının tikintisinə 1,0 ha, kanalizasiya təmizləyici qurğuların tikintisi altına 3,5 ha Dostluq qoyunçuluq üzrə damazlıq müəssəsinin torpaqlarından torpaq sahəsi ayrılısın.
3. Dövlət Torpaq və Xəritəçəkmə Komitəsinin Beyləqan rayon şöbəsinə tapşırılsın ki, "Azərsu" Səhmdar Cəmiyyəti "Birləşmiş Sukanal MMC-nin" Beyləqan Sukanal İdarəsinə su təchizatı və kanalizasiya təmizləyici qurğuların tikintisi altına ayrılmış torpaq sahəsinə qanuna müvafiq yer quruluşu sənədlərinin hazırlanmasını təmin etsin.
4. Bu qərarın icrasına nəzarət Beyləqan rayon İcra Hakimiyyəti başçısı aparatının Tikinti və Memarlıq şöbəsinə tapşırılsın.

Beyləqan rayon
İcra Hakimiyyətinin başçısı:


I.N. Əliyev.


*Unofficial English Translation***The Decree of****Head of Beylagan Executive Power****No 79****December 22, 2008**

On land allocation for the
construction of workshop of
Beylagan Sukanal and
wastewater treatment station

Subject to letter no 362 dated December 19, 2008, Beylagan Sukanal reported to Beylagan Executive Power about the preparation of feasibility study for the reconstruction of water supply and sanitation systems in Beylagan town and requested to allocate 1.0 ha land for the construction of workshop, while 3.5 ha for the construction of wastewater treatment stations. Based on Item 5, Article 56 of Land Code of Azerbaijan Republic and presentation no 92 dated December 22, 2008 of Beylagan regional department of State Land and Mapping Committee, hereby decided:

1. To consider letter no 362 dated December 19, 2008 by Beylagan Sukanal on land allocation for the construction of workshop and wastewater treatment station under the Project on Reconstruction of water supply and sanitation systems in Beylagan town, funded by Asian Development Bank.
2. To allocate 1.0 ha and 3.5 ha from the area of Dostlug sheep pedigree enterprise respectfully for the construction of workshop and wastewater treatment station for Beylagan Sukanal under the reconstruction of water supply and sanitation systems.
3. Regional Department of State Land and Mapping Committee is to ensure preparation of documents for the land site allocated for the construction of workshop and wastewater treatment station in accordance with Law.
4. Construction and Architecture department of Beylagan Executive Power is to control the execution of this decision.

Appx 6e: Annex to the decree of the Head of Executive Power for allocation of land for Wastewater Sewerage Treatment Plant

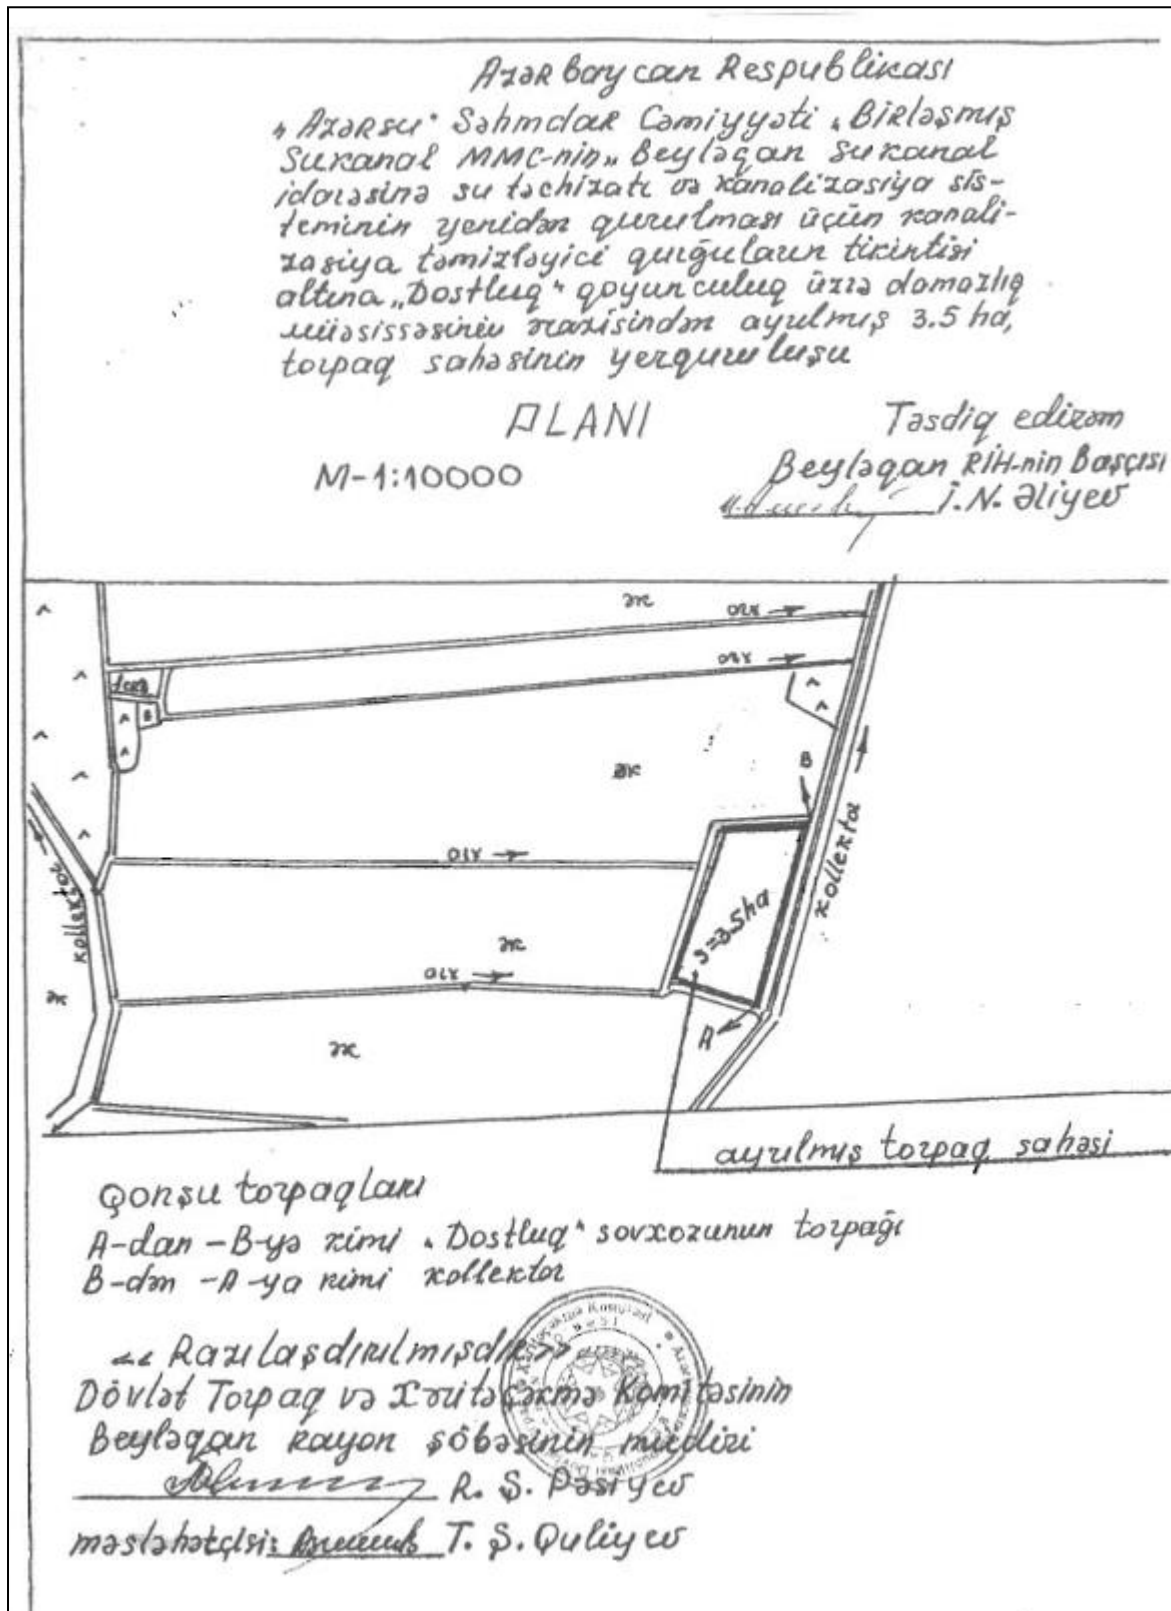

Appendix 9: Letter about treated water discharge permission



AZƏRBAYCAN RESPUBLİKASI "AZƏRSU" AÇIQ SƏHMDAR CƏMİYYƏTİ

Az1012 Bakı şəh., Moskva pr., 67. Tel.: (+994 12) 430 01 31, faks: (+994 12) 430 28 87 E-mail: office@azersu.az

" 35 " 05 2016-cı il

№ 08/02.00/1/5044

"Ay Konsaltinq Ltd"-nin
direktoru
cənab Abid Feyzullayeva

Hörmətli Abid müəllim

Beyləqan şəhərinin su təchizatı və kanalizasiya sisteminin yenidən qurulması layihəsi çərçivəsində inşa olunacaq tullantı su təmizləyici qurğular kompleksində təmizlənmiş suyun Mil-Muğan kollektorunun qəbuledici qoluna nəql etdirilməsinə razılığın verilməsi üçün "Azərsu" Açıq Səhmdar Cəmiyyətinin müraciəti ilə əlaqədar Azərbaycan Meliorasiya və Su Təsərrüfatı ASC tərəfindən müvafiq məlumatların təqdim edilməsi üçün 06/03-45 nömrəli, 17.03.2016-cı il tarixli məktub daxil olmuşdur.

Azərbaycan Meliorasiya və Su Təsərrüfatı ASC -nin müraciətini Sizə təqdim edərək araşdırılması və qeyd olunan məlumatların Cəmiyyətə təqdim edilməsini xahiş edirik.

Əlavə: Azərbaycan Meliorasiya və Su Təsərrüfatı ASC – 1 vərəq.

"Azərsu" ASC sədrinin müavini
"Birləşmiş" Sukanal MMC-nin direktoru

Etibar Məmmədov



**AZƏRBAYCAN
MELİORASIYA VƏ SU TƏSƏRRÜFATI
AÇIQ SƏHMDAR CƏMIYYƏTI**

Poçt indeksi: AZ 1000, Bakı şəhəri
C.Hacıbəyli küç. 80. Hökumət Evi

Tel: (+994 12) 598 47 64
Faks: (+994 12) 4935165

"17" mart 2016 il

№ 66/63-45

«Azərsu» Açıq Səhmdar Cəmiyyətinin
Sədr müavini- «Birləşmiş Sukanal»
MMC-nin direktoru

cənab Etibar Məmmədova

surəti: Beyləqan Meliorasiya idarəsinin rəisi

Nadir Əliyevə

Sizin 03 mart 2016-cı il tarixli 07/07-1/2-2681
nömrəli məktubunuza

Hörmətli Etibar müəllim!

Sizin, Beyləqan rayonunda tikilən kanalizasiya şəbəkəsindən çıxacaq təmizlənmiş çirkəb sularının Mil-Muğan kollektorunun qəbuledici qoluna axıdılmasına icazə verilməsi barədəki müraciətinizə Azərbaycan Meliorasiya və Su Təsərrüfatı Açıq Səhmdar Cəmiyyətində təkrarən baxılmışdır.

Bildiririk ki, Beyləqan rayonundan drenaj suları Sarısu selötürücüsü vasitəsi ilə Yuxarı Qarabağ kanalına və K-2-1 kollektoru vasitəsi ilə Ağ gölə axıdılır.

Sarısu suötürücüsü Yuxarı Qarabağ kanalına axdığından və kanalın suyundan içməli-məişət məqsədləri üçün də istifadə edildiyindən çirkəb sularının ora axıdılması məqsədmüvafiq deyildir.

K-2-1 kollektoru isə Beyləqan şəhərindən xeyli aralıdan keçir.

Ona görə də ilk növbədə suyu axıtmaq istədiyiniz obyektə Beyləqan Meliorasiya idarəsi ilə yerində müəyyənləşdirməli, kənarlaşdırılacaq suyun axıdılacağı piketi və axıdılma üsulu barədə məlumatları əlavə etməyiniz məqsəduyğun olardı.

Məsələyə yalnız bu məlumatları təqdim etdikdən sonra baxıla bilər.

Hörmətlə,

Sədrin birinci müavini

Məmməd Sadiq Quliyev

6586
28 Mart 16