



Environment and Social Impact Assessment Report (Additional Scheme 2 Volume 1)

**Jharkhand Urja Sancharan
Nigam Limited**

Final Report

August 2018

www.erm.com

Jharkhand Urja Sancharan Nigam Limited

Environment and Social Impact Assessment Report (Additional Scheme 2 Volume 1))

14 August 2018

Reference # 0402882

Prepared by **Suvankar Das**
Consultant



Indrani Ghosh
Consultant



Reviewed &
Approved by: **Debanjan**
Bandyapodhyay
Partner



This report has been prepared by ERM India Private Limited a member of Environmental Resources Management Group of companies, with all reasonable skill, care and diligence within the terms of the Contract with the client, incorporating our General Terms and Conditions of Business and taking account of the resources devoted to it by agreement with the client.

We disclaim any responsibility to the client and others in respect of any matters outside the scope of the above.

This report is confidential to the client and we accept no responsibility of whatsoever nature to third parties to whom this report, or any part thereof, is made known. Any such party relies on the report at their own risk.

TABLE OF CONTENTS

EXECUTIVE SUMMARY	I
1 INTRODUCTION	1
1.1 BACKGROUND	1
1.2 PROJECT OVERVIEW	1
1.3 PURPOSE AND SCOPE OF THIS ESIA	2
1.4 STRUCTURE OF THE REPORT	2
1.5 LIMITATION	3
1.6 USES OF THIS REPORT	3
2 POLICY, LEGAL AND ADMINISTRATIVE FRAME WORK	5
2.1 APPLICABLE LAWS AND STANDARDS	5
2.2 WORLD BANK SAFEGUARD POLICY	8
3 PROJECT DESCRIPTION	10
3.1 REGIONAL SETTING	10
3.2 PROJECT LOCATION	12
3.2.1 Location	12
3.2.2 Accessibility	13
3.3 SITE SETTING	14
3.3.1 Project Site	14
3.4 SITE VICINITY	17
3.5 PROJECT COMPONENTS	19
3.6 PROJECT TIMELINE AND PROJECT COST	19
3.7 RESOURCE REQUIREMENT	20
3.8 DISCHARGES AND WASTES	20
4 ESIA METHODOLOGY	21
4.1 SCREENING & SCOPING	21
4.2 BASELINE STUDIES	22
4.3 IMPACT IDENTIFICATION AND ASSESSMENT	22
4.3.1 Impact Assessment	22
4.4 ENVIRONMENTAL AND SOCIAL MANAGEMENT PLAN PREPARATION	23
5 DESCRIPTION OF THE ENVIRONMENT	24
5.1 INTRODUCTION	24
5.2 LAND USE/LAND COVER	24
5.3 SOIL	26
5.4 CLIMATE AND METEOROLOGY	26
5.5 NATURAL HAZARD	27
5.6 AIR & NOISE ENVIRONMENT	27
5.7 DRAINAGE AND WATERBODY	27
5.8 GROUND WATER RESOURCES	29

5.9	ECOLOGICAL ENVIRONMENT	30
5.9.1	<i>Vegetation within the Study area</i>	31
5.9.2	<i>Wildlife Habitat and Faunal Diversity</i>	31
5.10	SOCIO ECONOMIC ENVIRONMENT	33
5.10.2	<i>Education profile</i>	35
5.10.3	<i>Economic Activity & Livelihood Pattern</i>	38
5.10.4	<i>Gender Profile</i>	40
5.10.5	<i>Drinking Water & Sanitation Facilities</i>	41
5.10.6	<i>Irrigation</i>	41
5.10.7	<i>Health Infrastructure</i>	42
5.10.8	<i>Others physical infrastructure</i>	42
6	IMPACT ASSESSMENT AND MITIGATION MEASURES	43
6.1	POTENTIAL IMPACT	43
6.1.1	<i>Impact Aesthetic and Visual Quality</i>	46
6.1.2	<i>Air & Noise Quality</i>	46
6.1.3	<i>Impact on Land use, Soil & Drainage</i>	47
6.1.4	<i>Impact on Water Resources</i>	48
6.1.5	<i>Impact on Surface Water Bodies</i>	49
6.1.6	<i>Impact on Biological Environment</i>	49
6.1.7	<i>Impact on Socio-economic Condition</i>	50
6.1.8	<i>Influx of Labour</i>	51
6.1.9	<i>Impact on Community Health and Safety</i>	52
6.1.10	<i>Occupational, Health and Safety</i>	53
7	STAKEHOLDER ENGAGEMENT	54
7.1	INTRODUCTION	54
7.2	IDENTIFICATION OF STAKEHOLDERS	54
7.3	SUMMARY OF STAKEHOLDER CONSULTATIONS	56
8	ENVIRONMENTAL AND SOCIAL MANAGEMENT PLAN	60
8.1	MITIGATION MEASURES	60
8.2	ENVIRONMENT AND SOCIAL ACTION PLAN	68
8.2.1	<i>Labour Management Plan</i>	68
8.2.2	<i>Occupational Health and Safety Management Action Plan</i>	69
8.2.3	<i>Gender Action Plan</i>	69
8.2.4	<i>Citizen Engagement Action Plan</i>	70
8.3	ENVIRONMENTAL MONITORING & REPORTING	74
8.4	INSTITUTIONAL SETTING AND IMPLEMENTATION ARRANGEMENTS	79
9	CONCLUSION AND RECOMMENDATION	80

LIST OF TABLE

Table 1.1	Details of the substation and interlinked project (Additional Scheme 3)	2
Table 2.1	Regulation Triggered for the Project	5
Table 2.2	World Bank Policies Triggered for the Project	8
Table 3.1	Salient Features of the Project Location	12
Table 3.2	Project Components in the 132/33 kV Substation at Surda	19
Table 3.3	Resource Requirement in Construction and Operation of 132/33 kV Grid Substation at Surda	20
Table 3.4	Emission and Discharges from 132/33 kV Grid Substation	20
Table 5.1	Existing Land Use/ Land Cover Pattern of the Study Area	24
Table 5.2	Demographic profiles of the villages located within study area	33
Table 5.3	Demographic profiles of the Surveyed Population	34
Table 5.4	Demographic profiles of the Surveyed PAP Population	35
Table 5.5	Education Infrastructure in study area	37
Table 5.6	Occupational pattern of villages in the study area	38
Table 5.7	Health care facilities in study area	42
Table 6.1	Environmental and Social Impact Identification Matrix	44
Table 7.1	List of key stakeholders	55
Table 7.2	Stakeholders and Key Points Discussed	56
Table 8.1	Impact Mitigation Matrix	61
Table 8.2	Information Disclosure Plan	70
Table 8.3	Summary of Consultation Mechanism	72
Table 8.4	Monitoring Plan	75
Table 8.5	Responsibility Matrix	79

LIST OF FIGURE

Figure 3.1	Regional Setting map of Surda GSS	11
Figure 3.2	Mouza Map Showing Proposed GSS Site	12
Figure 3.3	Project Site Access Road	13
Figure 3.4	Location, Site Boundary and Access shown on Satellite Imagery (along with adjacent settlements)	14
Figure 3.5	Present Usage of Patta Land	15
Figure 3.6	Status of Squatting Land	15
Figure 3.7	Land parcels with different stakes within the proposed GSS site	16
Figure 3.8	Photographs of Site and its Surroundings	18
Figure 3.9	Typical Layout of a 132/33 kV substation Planned in the JPSIP	19
Figure 4.1	Impact Assessment Process	23
Figure 5.1	Land Use/ Land Cover Map of the Study Area	25
Figure 5.2	Soil in the GSS site	26
Figure 5.3	Stream flowing within the Study Area	28
Figure 5.4	Drainage Map of the Study Area	29
Figure 5.5	Age Group Distribution of the Surveyed Population	34
Figure 5.6	Literacy profile of the study area villages	36
Figure 5.7	Educational Status of the Surveyed Population	37
Figure 5.8	Employment Status of the Surveyed Population	39
Figure 7.1	Consultations with Local Communities	55

LIST OF ANNEXURE

<i>Annexure 1: List of Sub Projects in JPSIP</i>	<i>I</i>
<i>Annexure 2: General Conditions of Contract</i>	<i>V</i>
<i>Annexure 3: Special Conditions of Contract</i>	<i>XVI</i>
<i>Annexure 4: Format for Reporting of ESMP Implementation</i>	<i>XVIII</i>
<i>Annexure 5: Format for Registering Grievance from Community/ PAP</i>	<i>XXI</i>
<i>Annexure 6: DGMS Prescribe Permissible Limit of Vibration</i>	<i>XXIV</i>
<i>Annexure 7: Labour Management Plan</i>	<i>XXVI</i>
<i>Annexure 8: Health & Safety Management Plan (HSMP) Template</i>	<i>XXXVI</i>
<i>Annexure 9: Socio Economic Survey Formats</i>	<i>XLIII</i>
<i>Annexure 10: Paper related to Patta Land of Shibu Hembram, Shyam Hembram and Palu Hembram</i>	<i>XLVII</i>
<i>Annexure 11: Assessment of Impact Significance</i>	<i>L</i>

ABBREVIATIONS

BMTPC -	Building Material and Technology Promotion Council of India
CEA -	Central Electricity Authority
CFC -	Chlorofluorocarbon
CGWB -	Central Groundwater Authority Board
CPCB -	Central Pollution Control Board
dB -	Decibel
DG -	Diesel Generator
DVC -	Damodar Valley Corporation
EA -	Environmental Assessment
EMP -	Environmental Management Plan
ERM -	Environmental Resources Management
ESIA -	Environmental and Social Impact Assessment
ESMF-	Environmental and Social Management Framework
ESZ -	Eco-Sensitive Zone
GCC-	General Conditions of Contract
GM -	Gair Mazrui
GOI -	Government of India
GPS -	Global Positioning System
GSS -	Grid Sub Station
IESE -	Initial Environmental and Social Examination
IMD -	India Meteorological Department
IS -	Indian Standard
IUCN -	International Union for Conservation of Nature
IWPA -	Indian Wildlife Protection Act
JPSIP-	Jharkhand Power System Improvement Project
JUSNL -	Jharkhand Urja Sancharan Nigam Limited
KL-	Kilo Litre
KLD -	Kilo Litre per Day
Km -	Kilometer
KVKVA -	Kilo-Volts-Ampere
MVA -	Mega-Volts-Ampere
NBWL -	National Board of Wildlife
NH-	National Highway
JSPCB -	Jharkhand State Pollution Control Board
PCB -	Polychlorinated Biphenyls
PfA -	Power for All
PPP -	Public Private Partnership
PUCC -	Pollution Under Control Certificate
SCC-	Special Conditions of Contract
SF6 -	Sulfur Hexafluoride
TCE -	TATA Consulting Engineer
TL -	Transmission Line
WPR-	Work Participation Ratio

EXECUTIVE SUMMARY

The Jharkhand Urja Sancharan Nigam Limited (JUSNL) with financial assistance from the World Bank is implementing the transmission infrastructure development/upgradation under the Jharkhand Power System Improvement Project (JPSIP) and will include: (a) Creation of 25 new 132 kV substations, and (b) Development of associated 132 kV transmission lines of around 1800 kms. These 25 substations and associated transmission lines have been organized into 26 schemes. The proposed new 132 kV Grid substation at Surda is covered under the **Additional Scheme 2 of Phase III**.

The proposed substation would be located on Plot no. 944/Part of the Surda Village, Musabani Block in East Singhbhum District. Area of the plot is approximately 10.3 acres, which has already been allotted to JUSNL by the District Collector East Singhbhum for development of the 132/33 kV substation. The site lies 1.5 km away from –Jamshedpur –Musaboni road (2 lane undivided carriageway) and connected through a village road. A part of this village road, which is metaled (approx. 3m wide) needs improvement for transportation of construction machinery and project component.

The project activities would involve the design, construction and operation of a 132/33 kV substation. The key components of the project would include: 2 Nos 50 MVA oil cooled transformers, incoming and outgoing bays connecting to the transmission line, control room and residential quarters for JUSNL employees. Setting up of the substation would involve a permanent change in land use from presently fallow land to infrastructure. Construction activities are expected to cause temporary disturbances because of plying of vehicles in approach roads, site preparation involving cutting and filling of earth and soil, operation of construction machinery and equipment, and the involvement of a labour force.

During operational phase, about 16-20 employees would be located at site. Resource use would comprise of about 9 KLD of water, to be sourced through a bore well at site. On a regular basis, small amounts of domestic waste and waste water would be generated from the site. From time to time, minor amounts of hazardous waste would also be generated and would be disposed off in conformance to regulatory requirements.

The baseline studies have profiled the environmental and social conditions of the Surda site and the study area of 2 km around it. The studies were designed to collect information from secondary sources and to obtain primary information through site visits and consultations with local communities and other related stakeholders. Overall, the baseline is reflective of the environmental and social landscape of the area and the East Singhbhum District. Site specific environmental and social baseline is described in the Table below:

Environmental Setting	
Terrain & Slope	The substation site is located on undulating land. The level difference between the highest contour and the lowest contours within the site is 9 m and the slope is from south-west to north-east direction.
Soil	The soil at site is clayey-loam in nature.
Elevation data	The highest and lowest contours of the site are 99 m (Northern corner) and 108 m (South) respectively. Since the site is located on relatively high ground it is thus not prone to flooding.
Existing drainage pattern	Subarnarekha River flows at the Eastern side of the study area. One prominent stream flows with in the study area, at approx. 780m South of the site, flowing from West to East.
Environmental pollution in the vicinity	The proposed substation is located in a rural setting. There are no sources of air pollution in the vicinity. During the site reconnaissance no industries were observed to be present in the adjoining areas.
Other environmental sensitivity	A medium sized (100m X 100m) pond is located within the project site.
Social Setting	
Status of Land	The land parcel belongs to the Land Revenue Department, Government of Jharkhand, The rights of the land has been transferred to JUSNL free of cost.
Habitations	There are 5 settlements within 2 km of the project site. The closest settlement (of Surda village) is located at approx.200m from the project site. Other settlements are Sohada, Tilabani, Barhaniyan and Laukeshra.
Religious & Culture related sensitivity	There are no religious or cultural sensitivity within immediate vicinity of the site.

In addition to the baseline surveys, a community consultation exercise was undertaken in the adjoining Surda village. Residents of the village were consulted to validate secondary information on the socio economic status of the village, the perceptions of the local people with respect to the planned GSS project and to identify any existing dependency of the local community on the proposed site. During consultation and socio-economic survey, it was reported that one parcel of land (1.3 acres) within the proposed GSS site was a “*patta*” land that was provided to three brothers from the Revenue Department for cultivation. Further, there are two other parcels of land (0.5 acres and 0.4 acres) within the proposed GSS site that is being used for cultivation of paddy in monsoon (squatting on the land parcel). There is a small pond located within the proposed site that is used by the local people for domestic purposes. The local community requested for access to be maintained to this pond in the future. Overall, most of the villagers consulted had a positive mindset towards the project.

The potential and associated impacts of the proposed project were identified and evaluated using standard procedures. Source references including past project experience, professional judgment and knowledge of both the project activities as well as environmental and social setting of the site and surroundings were used in the assessment.

The change in land use from “*Purani Parti Kabil Abad*” (old fallow land suitable for cultivation) land to infrastructure type may be considered to be having

insignificant impact because the small extent of such change within the study area, which has the presence of considerable percentage of agricultural land, would be minimal. Excavations, cutting and filling of soil present on site may lead to erosion and runoffs which may adversely impact adjoining land parcels and / or waterbodies. In addition, local drainage in and around the site may get impacted due to the changes in local site topography, if proper site design is not undertaken considering these factors.

With the construction phase lasting about 1 year, construction related activities are expected to cause local level impacts (adjoining settlements of Kasidih Tola of Surda village) on environmental quality due to re-entrainment of dust in air from earth works and construction dumps, air and noise emissions from vehicles and construction equipment, discharge of domestic waste water from labour camps and generation of construction and domestic wastes. In the construction phase, health and safety related issues are expected due to involvement of labour in project construction activities. Influx of people (migrant workers, subcontractors and suppliers) may lead pressure on existing social infrastructure and their interactions with nearby rural communities or potentially lead to cultural conflicts, and result in additional vulnerability to women and population belonging to scheduled castes or tribes. At the same time, positive socioeconomic impacts are also expected with scope for business opportunities for local subcontractors, skill acquisition for local workforce and employment opportunities arising from recruitment of local construction labour and staff, improvement of roads and access.

Adverse impacts caused by the project during the operational phase are expected to be minimal, with no plans for any point source emissions or discharges from the GSS to any environmental media. The operation of the facility is expected to result in generation of small amount of wastes, some of which (like oily rags, waste oil, etc.) may be hazardous in nature and are not expected to cause any significant adverse impacts if adequate safeguards and mitigation measures are adopted, as delineated in the ESMP.

In order to ensure that the mitigation measures developed for the significant impacts of the proposed project are implemented and maintained throughout the project duration, an Environmental Management Plan (EMP) has been developed. The EMP outlines management strategies for managing all associated and potential impacts that could affect the environment and living conditions of people in the area. These mitigation measures and plans include:

- The farmers holding “patta” land will be provided with a land of similar size and productivity by Jharkhand Government in the immediate vicinity;
- 0.5 acres of land parcel, that is being cultivated by one of the squatter farmer on the northern side of the allocated plot, will not be included within the proposed GSS site;
- Resettlement Action Plan will be prepared for one squatter, who cultivates approximately 0.4 acres of land to the southern side of the allocated plot

and necessary compensation for displacement will be provided as per Resettlement Framework that is part of ESMF;

- The pond will be conserved and free access will be provided to the villagers throughout the lifecycle of the project.
- Plan for the substation site layout and for cutting and filling of earth in a manner that local drainages are not disturbed and ensure that the pond within the project site is not damaged;
- Adopt appropriate engineering and associated mitigation measures and plans to minimise adverse impacts to local communities during construction activities.
- Ensure that community resources are not for the project purpose;
- Adopt appropriate EHS safeguards and good practices to be adopted by construction contractors to ensure that occupational health and safety risks of labours are maintained at acceptable levels. The labour force should also undergo compulsory training on work related health and safety measures.
- Ensure local suppliers and contractors implement local employment and procurement policies to the benefit neighbouring communities of Surda, Tilabani, Sohada, Barhaniyan and Laukeshra.

In order to ensure that the ESMP is implemented during construction phase, specific conditions of contract for Site Contractors to be engaged have been laid down which would be made part of the Bidding document. An ESMP monitoring plan would also be implemented to be enabling JUSNL to ensure that the planned mitigation measures are being implemented and adverse impacts are kept to the minimum possible level.

For the implementation of the JPSIP Project JUSNL has developed a Project Implementation Unit (JPSIP PIU) headed by the Chief Engineer (Transmission, World Bank Funded Projects). The JPSIP PIU would also be responsible for driving the implementation of the E&S safeguards in JPSIP. At the field level, the Chief Engineer cum GM of the Jamshedpur Zone of JUSNL would be responsible for implementing the technical aspects of the JPSIP with respect to the Surda GSS and would be responsible for overseeing the implementation of the ESMP and the E&S safeguards adopted by the contractor. In addition, it is recommended that the Contractor implementing the subprojects would induct Environment and Social personnel to supervise implementation of the E&S safeguards on the ground.

Through the process of consultation and disclosures, JPSIP would ensure that the project information is communicated to the stakeholders and the feedback from the community is integrated into the execution phases of the project. A Consultation Framework has been prepared to ensure involvement of stakeholders' at each stage of project planning and implementation. In addition, a three-tier Grievance Mechanism has been proposed for handling any grievances of community related to the project i.e. Tier 1 -Circle level, Tier 2 -Zone level, Tier 3- Grievance Redresses Cell located centrally at the JPSIP PIU in Ranchi.

1.1

BACKGROUND

The Government of Jharkhand with active support of the Government of India's has planned for implementing 24x7 Power for All (PfA) in Jharkhand. The program is aimed at achieving 24x7 reliable powers for all the households by FY 2019. The PfA roadmap includes interventions in generation, transmission, distribution, renewable energy and energy efficiency/ proposed to be implemented during FY16 to FY19. Government of Jharkhand through Jharkhand Urja Sancharan Nigam Limited (JUSNL) has planned to develop the transmission infrastructure in the State. This transmission infrastructure development is being funded from different sources e.g. domestic fund, Public Private Partnership (PPP) and multilateral funding. The Jharkhand Urja Sanchar Nigam Limited (the state run power transmission utility company) has approached the World Bank for assistance to fund a part of the transmission infrastructure under the Jharkhand Power System Improvement Project (JPSIP). The project covers the entire state of Jharkhand except for the districts served by the Damodar Valley Corporation i.e. Dhanbad and Hazaribagh. The project would include creation of 25 new 132 kV substations and associated 132 kV transmission lines of around 1800 Kms.

JUSNL intends to develop the projects in a sustainable manner. Towards this objective, an Environmental and Social Management Framework (ESMF) has been developed to lay out a mechanism for integrating environmental and social concerns into the planning, designing and implementation phase of JPSIP. Based on the higher level guidance provided in the ESMF, each project component is undergoing a project specific Environmental and Social Impact Assessment (ESIA). Based on the outcome of the assessment, a project specific Environmental and Social Management Plan (ESMP) is laid down for all the sub-projects.

1.2

PROJECT OVERVIEW

As part of the JPSIP, JUSNL has planned for development of 25 new substations and associated transmission lines. These substations and transmission lines have further been consolidated into schemes. For the purpose of implementation, these schemes are divided into 3 Phases. The subprojects in each of the Schemes are presented as *Annexure 1*.

In Phase III there are 9 schemes. Two (2) nos of these schemes are located in Deoghar district and remaining seven (7) schemes are located in Palamu, Garhwa, Saraikela Kharsawan, Simdega, Latehar, Deoghar, East Singhbhum and Palamu district.

This Environment and Social Impact Assessment Report deal only with the construction and operation of the new 132/33 kV Substation at Surda,

Musabani which is part of Additional Scheme 2 of Phase III. The details of the other interlinked subprojects in the Scheme are presented in *Table 1.1*.

Table 1.1 *Details of the substation and interlinked project (Additional Scheme 3)*

Sl. No	Details of Additional Scheme 2	Capacity (MVA)	Length (km)
1.	132 kV GSS at Surda	100	
2.	132 kV D/C 3 Ph. Surda-Jadugoda Transmission Line		20.813
3.	132 kV D/C 3 Ph.Surda -Musabani (DVC)Trans. Line		4.566
4.	132 k D/C Ph.Surda – Bahragoda Trans. Line		43.04

Source: DPR

The Environmental and Social Assessment of the transmission lines associated with the Surda substation are presented as **Additional Scheme 2: Volume 2**.

1.3 *PURPOSE AND SCOPE OF THIS ESIA*

The ESIA process involves the identification of the potential environmental issues in the project and trying to address them through design interventions. The ESIA further carries out impact prediction and evaluation of residual environmental and social issues of a Project. It then goes on to outline the proposed mitigation measures for residual impacts and enhancement measures for positive impacts, which the Project will implement.

The objectives of this document are to:

- Identify all potentially significant adverse and positive environmental and social issues of the Project. Enumerate the design modification which has been influenced by the ESIA process and define the final alignment of the Grid Substations (GSS);
- Gather baseline data to inform the assessment of impacts on the environment as a result of the Project;
- Suggest appropriate mitigation measures to effectively manage potential adverse impacts; and
- Developing an Environmental and Social Management Plan (ESMP) to implement suggested mitigation measures to minimize adverse impacts through effective management systems including formulation of monitoring and reporting requirements.

1.4 *STRUCTURE OF THE REPORT*

The report has been organized considering the following:

- Chapter 1 above contains a brief background of JPSIP. It also presents a broad context to the ESIA Study;
- Chapter 2 presents the regulations and policies applicable and actions which are required by JUSNL;

- Chapter 3 presents the description of the proposed substation and interaction with the bio-physical and socio-economic environment;
- Chapter 4 provided methodology adopted the ESIA study;
- Chapter 5 outlines the environmental and social setting of the proposed substation which forms the basis for assessment of potential impacts;
- Chapter 6 presents the likely impacts from the proposed substation over the lifecycle of the project along with its severity levels;
- Chapter 7 elaborates on the stakeholder identification process adopted and a brief of the public consultations under taken to capture the local residents / stakeholders perceptions;
- Chapter 8 presents the mechanism of the implementation of the proposed mitigation measures complete with responsibility and resources requirements; and
- Chapter 9 presents the Conclusions and Recommendations.

1.5

LIMITATION

ERM would like to highlight the following limitations with regard to this ESIA document:

- Project planning for proposed transmission line has been undertaken by Tata Consulting Engineer (Hereinafter referred to as “Design Consultant”) based on desktop studies and a Detailed Project Report has been developed based on the same. Detailed field survey of the project components is currently being undertaken by Design Consultant. The present draft of the ESIA therefore considers the project configuration as has been outlined in Design Consultant’s Report and impacts for the same has been accordingly assessed.

1.6

USES OF THIS REPORT

The Client acknowledges that report provided by ERM in relation to the provision of Services is delivered to the Client solely for the Client’s benefit. ERM, its officers, employees, contractors, and agents shall owe no duties, obligations or liabilities to any persons in connection with any use of or reliance on the Project information provided by JUSNL. We make no warranties, express or implied, including without limitation, warranties as to merchantability or fitness for a particular purpose.

ERM is not engaged in social and environmental, health & safety consulting and reporting for the purposes of advertising, sales promotion, or endorsement of any client's interests, including raising investment capital or recommending investment decisions, or other publicity purposes. The client acknowledges that the report prepared by ERM are for exclusive use of the client and agrees that ERM's reports or correspondence will not be used or reproduced in full or in part for such promotional purposes, and may not be used or relied upon in any prospectus or offering circular. The client also

agrees that none of its advertising, sales promotion, or other publicity matter containing any information obtained from these assessments or reports, either in parts or entirety, will make reference to ERM's trade name. Nothing contained in this report shall be construed as a warranty or affirmation by ERM that the site and property described in the report are suitable collateral for any loan or that acquisition of such property by any lender through foreclosure proceedings or otherwise will not expose the lender to potential environmental or social liability.

The ESMF identifies all the national and state level legislation, rules and guidelines, which would be applicable to JPSIP. It has also identified all the World Bank Policies and guidelines, which are applicable in JPSIP. This section highlights only the relevant environmental and social policies and regulations, World Bank guidelines that are applicable for this sub-project.

2.1 APPLICABLE LAWS AND STANDARDS

The applicable acts, regulations, and relevant policies in the context of the project is presented in *Table 2.1*

Table 2.1 Regulation Triggered for the Project

Sl. No.	Regulation	Applicability & Action Required	Responsibility
A.	Electricity Related Regulation		
1.	Electricity Act 2003 and Indian Telegraph Act 1885	<p>Under the provisions of Section 68(1):- Prior approval of the Govt. of Jharkhand (GoJ) is a mandatory requirement to undertake any new transmission project 11 kV upward in the State which authorizes JUSNL to plan and coordinate activities to commission a new Transmission project.</p> <p>Under Section 164:- GoJ, may by order in writing, authorize JUSNL for the placing of electric line for the transmission of electricity confer upon licensee (i.e. JUSNL) in the business of supplying electricity under this act subject to such conditions and restrictions, if any, as GoJ may think fit to impose and to the provisions of the Indian Telegraph Act, 1885, any of the power which the Telegraph authority possesses.</p> <p>The Electricity Act and Telegraph Act provide guidance on the compensation payable for damages to crops/ trees and structures for setting up of transmission line. As per the provision of the above mentioned Acts, JPSIP would require to pay compensation for any damage or loss due to its projects.</p>	JUSNL, JPSIP
2.	Technical Standards for Construction of Electrical Plants and Electric Lines Regulations, 2010; Measures relating to Safety and Electric Supply Regulations, 2010	Both the Regulations are framed by Central Electricity Authority (CEA) of India under Indian Electricity Act, 2003. These regulations provide technical standard for construction of electrical lines and safety requirements for construction/ installation/ protection/ operation/ maintenance	JPSIP, Contractor

Sl. No.	Regulation	Applicability & Action Required	Responsibility
		nance of electric lines and apparatus. JPSIP and its contractors would comply with the requirements of these regulations.	
B. Environment/Social Legislation			
1.	Environment Protection Rules, 1986 and applicable standards	The standards for discharge/emission from different type of pollution source (e.g., DG sets) and industries have been laid down by CPCB under EP Rule, 1986. JPSIP would ensure that all these standards are complied during the planning, construction and operation of the project.	JPSIP, Contractor
2.	Ancient Monuments & Archaeological Sites and Remains Act, 1958; Indian Treasure Trove Act, 1878; Jharkhand Ancient Monuments and Archaeological Sites, Remains and Art Treasures Act, 2016.	Proposed substation site is not located near or inside archaeological site. Thus National and State level Acts on Ancient Monuments and Archaeological Sites will not be triggered for this project. However, treasure, archaeological artefacts can be found during excavation work; for which procedure laid down in Indian Treasure Trove Act, 1878 would be followed.	JPSIP, Contractor
3.	Hazardous and Other Wastes (Management and Transboundary Movement) Rules, 2016	Generation of waste oil and used transformer oil at site would attract the provisions of Hazardous Waste and other waste Rules, 2016. The hazardous wastes have to be disposed through CPCB/SPCB approved recyclers only. JPSIP would obtain authorization for hazardous waste under this Rule. JPSIP would also maintain record of hazardous waste and submit the desired return (Form 4) in prescribed form to JSPCB.	JPSIP
4.	E-Waste (Management) Rules, 2016	JPSIP, being the bulk consumer of electrical and electronic equipment will ensure that e-waste generated is channelized through collection center or dealer of authorized producer or dismantler or recycler or through the designated take back service provider of the producer to authorized dismantler or recycler.	JPSIP
5.	Battery (Management & Handling) Rules 2001	It is the responsibility of the bulk consumer ⁽¹⁾ (JPSIP) to ensure that the used batteries are deposited with the dealer, manufacturer, or registered recycler for handling and disposal. A half-yearly return (Form-1) is to be filed as per the rule to JSPCB.	JPSIP
6.	Ozone Depleting Substances (Regulation and Control) Rules, 2000	JPSIP shall follow the provisions of the notification and shall phase out all equipment, which uses these substances.	JPSIP, Design Consultant

(1) 'Bulk Consumer' means a consumer such as the Departments of Central Government like Railways, Defense, Telecom, Posts and Telegraph, the Department of State Government, the Undertakings, Boards and other agencies or companies who purchase hundred or more than hundred batteries per annum.

Sl. No.	Regulation	Applicability & Action Required	Responsibility
7.	Central Ground Water Authority (CGWA) Public Notice dated 4 th January 2017	In case of substation no equipment would be procured which contain CFC's. Permission need to be obtained from State Level Ground Water Resources Development Authority and Central Ground Water Authority for installation of bore well and abstraction of ground water resource.	JPSIP
8.	Regulation of Polychlorinated Biphenyls Order, 2016	The use of polychlorinated biphenyls or any equipment containing PCB would be prohibited entirely from 31 st December 2025. As per the DPR, insulating oils that will be used in the transformers will be of PCB free.	JPSIP and Design Consultant
C. Labour related Legislation			
1.	The Child Labour (Prohibition and Regulation) Act, 1986	This Act prohibits engagement of children in certain employments and regulates the conditions of work of children in other certain employments. JPSIP and its contractors would comply with the requirements of these regulations.	JPSIP, Contractor
2.	Contract Labour (Regulation & Abolition) Act 1970	This Act regulates the employment of contract labours in certain establishments and prohibits for its abolition in certain circumstances. JPSIP and its contractors would comply with the requirements of these regulations.	
3.	Minimum Wage Act, 1948	Under this Act, Jharkhand State government has notified minimum wage rate for the workers. JPSIP's contractors would provide minimum wage to its workers as per the minimum wage rate provided in the said notification.	
4.	Bonded Labour System (Abolition) Act, 1976	This Act abolished bonded labour system to prevent the economic and physical exploitation of the weaker sections of the people. JPSIP and its contractors would comply with the requirements of these regulations.	
5.	Grievance Redressal Machinery under Industrial Disputes Amendment Act, 2010	This Act provides mechanism for setting up of grievance redressal committee in industrial establishment. JPSIP and its contractors would comply with the requirements of these regulations.	
6.	Employees' Provident Fund and Miscellaneous Provisions Act, 1952	This Act provides for the institution of provident funds, pension fund and deposit-linked insurance fund for employees in factories and other establishments. JPSIP and its contractors would comply with the requirements of these regulations.	
7.	The Payment of Wages Act, 1936, amended in 2005; Workmen's Compensation Act, 1923	This Act provides for timely disbursement of wages payable to employed persons covered by the Act. JPSIP and its	

Sl. No.	Regulation	Applicability & Action Required	Responsibility
8.	Maternity Benefit Act, 1961;	contractors would comply with the requirements of these regulations. This Act regulate the employment of women in certain establishments for certain periods before and after child-birth and to provide for maternity benefit and certain other benefits. JPSIP and its contractors would comply with the requirements of these regulations.	
9.	Employees State Insurance Act, 1948	This Act provides certain benefits to employees in case of sickness, maternity and 'employment injury'. This Act is applicable to employees earning Rs 15,000 or less per month. JPSIP and its contractors would comply with the requirements of these regulations.	
10.	Inter-state Migrant Workmen Act, 1979	This Act regulates the employment of inter-State migrant workmen and provides for their conditions of service. JPSIP and its contractors would comply with the requirements of these regulations.	
11.	Intimation of Accidents (Forms and Time of Service of Notice) Rules, 2004	This Rule comes in force for occurrence of accident in connection with the generation, transmission, supply or use of electricity and electric line. JPSIP would incorporate requirements of these regulations in contract document of procurement.	
12.	The Building and Other Construction Workers (Regulation of Employment and Conditions of Service) Act, 1996	This regulation provides conditions of service for building and other construction workers including their safety, health and welfare measures. JPSIP and its contractors would comply with the requirements of these regulations.	

2.2

WORLD BANK SAFEGUARD POLICY

The implementation of the World Bank Operational Policies seek to avoid, minimize or mitigate the adverse environmental and social impacts, including protecting the rights of those likely to be affected or marginalized by the proposed project. Based on the information gathered during the study, following Policies are triggered and would require adequate measures to address the safeguard concerns.

Table 2.2 *World Bank Policies Triggered for the Project*

Sl. No.	World Bank Policies/Guidelines	Applicability	Responsibility
1.	OP 4.01 Environmental Assessment	The Bank requires environmental assessment (EA) of projects under Bank financing to help ensure that they are environmentally sound and sustainable. EA takes into account the natural environment (air, water, and land);	Environmental and Social Consultant of JPSIP

Sl. No.	World Bank Policies/Guidelines	Applicability	Responsibility
		human health and safety; social aspects (involuntary resettlement, indigenous peoples, and physical cultural resources); and transboundary and global environmental aspects. As per requirement of the OP 4.01, environmental assessment is being carried out for this project.	
2.	BP 4.11 Physical Cultural Resources	<p>This policy requires Bank financing projects to assess impacts on physical cultural resources at the earliest possible stage of the project planning cycle. Environmental assessment involves the preparation of a physical cultural resources management plan that includes (a) measures to avoid or mitigate any adverse impacts on physical cultural resources; (b) provisions for managing chance finds; (c) any necessary measures for strengthening institutional capacity for the management of physical cultural resources; and (d) a monitoring system to track the progress of these activities. Though presently there are no physical cultural resource found to be affected by the project, possibility of "chance finds" cannot be ruled out. If something is found at later stage of the project (construction phase), procedures laid down in "Indian Treasure Trove Act, 1878".</p> <p>The ESIA Study for the Surda substation has been carried out to have a better understanding of physical and cultural resources present in the site (if any).</p>	Environmental and Social Consultant of JPSIP
3.	OP 4.10 Indigenous Peoples	<p>This policy contributes to the Bank's mission of poverty reduction and sustainable development by ensuring that the development process fully respects the dignity, human rights, economies, and cultures of Indigenous Peoples.</p>	Environmental and Social Consultant of JPSIP/JPSIP
4.	IFC/WB General EHS Guidelines	Recommendations of these guidelines would be incorporated in ESMP and	Environmental and Social Consultant and
5.	IFC/WB Guidelines for Power Transmission and Distribution	Bidding document for this project.	Design Consultant of JPSIP


3 *PROJECT DESCRIPTION*

3.1 *REGIONAL SETTING*

The proposed substation at Surda is located at Kasidih Tola of Surda Village Musabani Block in East Singhbhum District. The Surda village is part of the Surda Gram Panchayat.

The regional setting map is provided in *Figure 3.1*.

Figure 3.1 Regional Setting map of Surda GSS

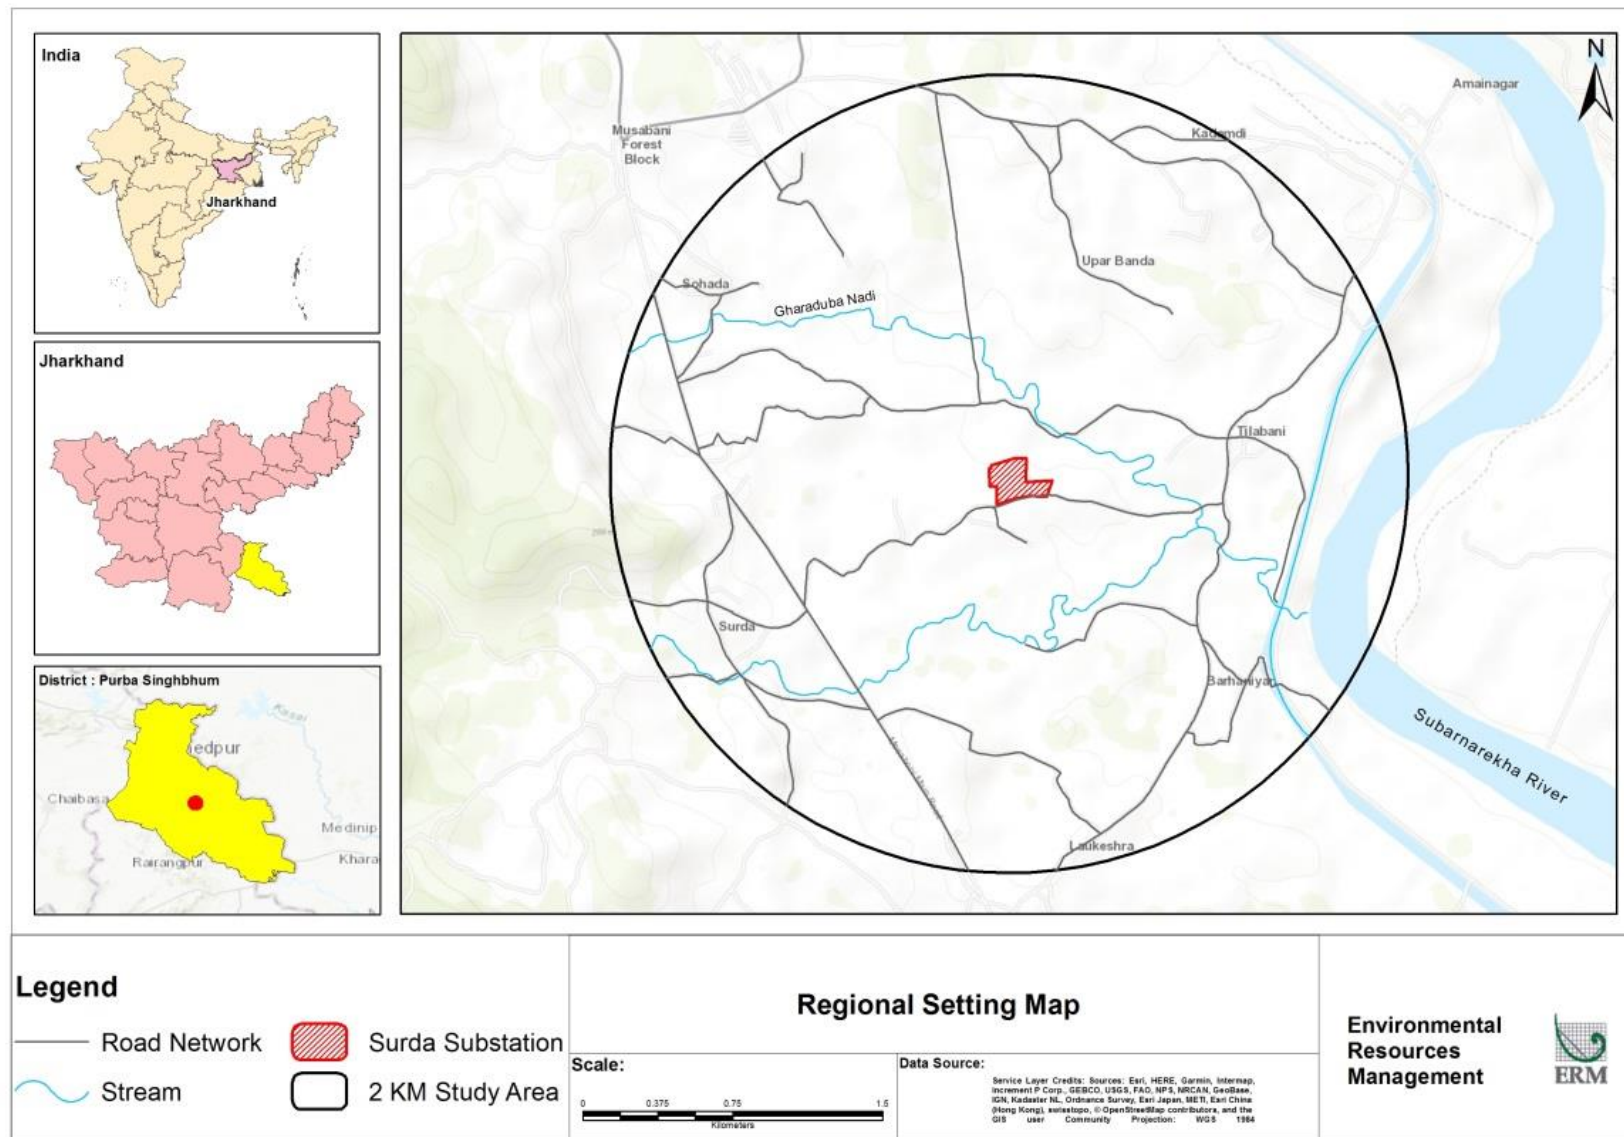

3.2 PROJECT LOCATION


3.2.1 Location

The proposed substation at Surda is planned to be located on Plot No 944/Part in Surda village, Khata no. 225, Thana Number 102 of East Singhbhum district. The total area of Plot No. 944 is approximately 23 acres. The District Collector of East Singhbhum district has allotted approximately 10.3 acres of the total plot to JUSNL for development of the 132/33 kV substation. The salient feature of the project location is presented in Table 3.1. Proposed project site on Mouza Map is shown in Figure 3.2.

Table 3.1 Salient Features of the Project Location

Sl. No	Item	Description
1.	Plot No/s	944/Part
2.	Area	10.3 acre/4.17 Hectares
3.	Allotment Letter No	XI-187/2016/1789 dated 9 th August, 2017 of Revenue Branch, District Collector Office East Singhbhum
4.	Type of Land	Purani Parti Kabila Abad, Anabad Bihar (Jharkhand) Sarkar
5.	Ownership	Government of Jharkhand
6.	Coordinate	22°33'27.86"N, 86°27'11.83"E

Figure 3.2 Mouza Map Showing Proposed GSS Site

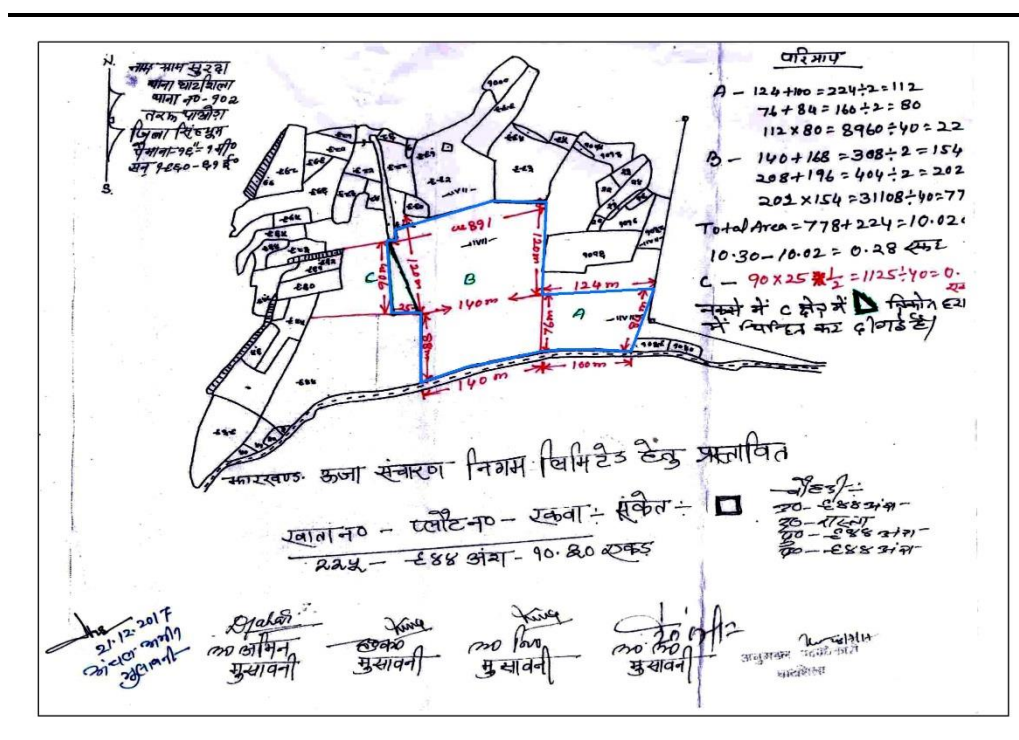


3.2.2

Accessibility


The GSS site can be accessed from Jamshedpur or Ghatshila via Jamshedpur-Musabani metalled road, a 2 lane undivided carriageway. Beyond Surda village, a concrete village road branches towards Taladih Tola (of Surda village), Kasidih Tola (of Surda village) and Baraghat Tola (of Surda village). There is a Believers Church, Taladih on the right hand side of the T-Junction that can be identified as landmark for accessing the target road to the proposed site. The GSS site is located approximately 1.5 km away from the T-Junction and lies adjacent to this village road. This village road needs to be repaired and strengthened to allow for transportation of construction machinery and project component.

Figure 3.3 *Project Site Access Road*

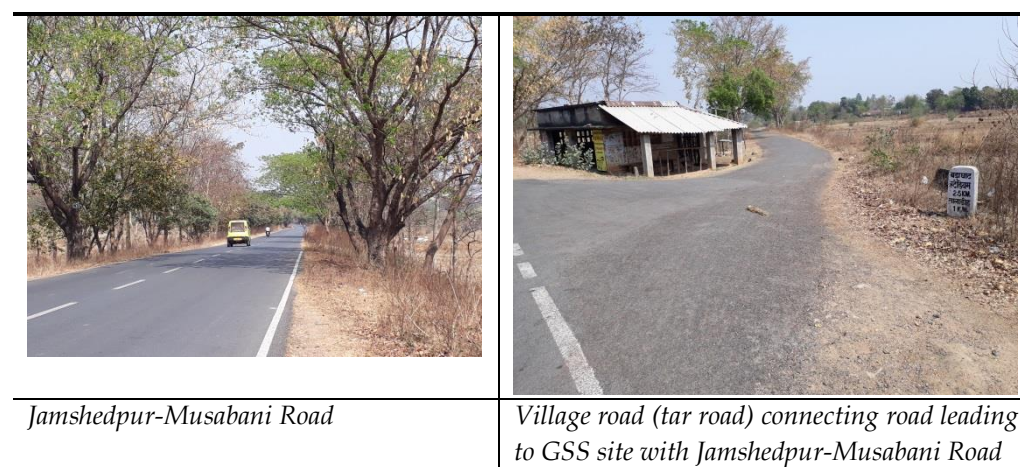

The location, boundary and access to the site, as plotted on high resolution satellite imagery, are shown in **Figure 3.4** below.

Figure 3.4 Location, Site Boundary and Access shown on Satellite Imagery (along with adjacent settlements)

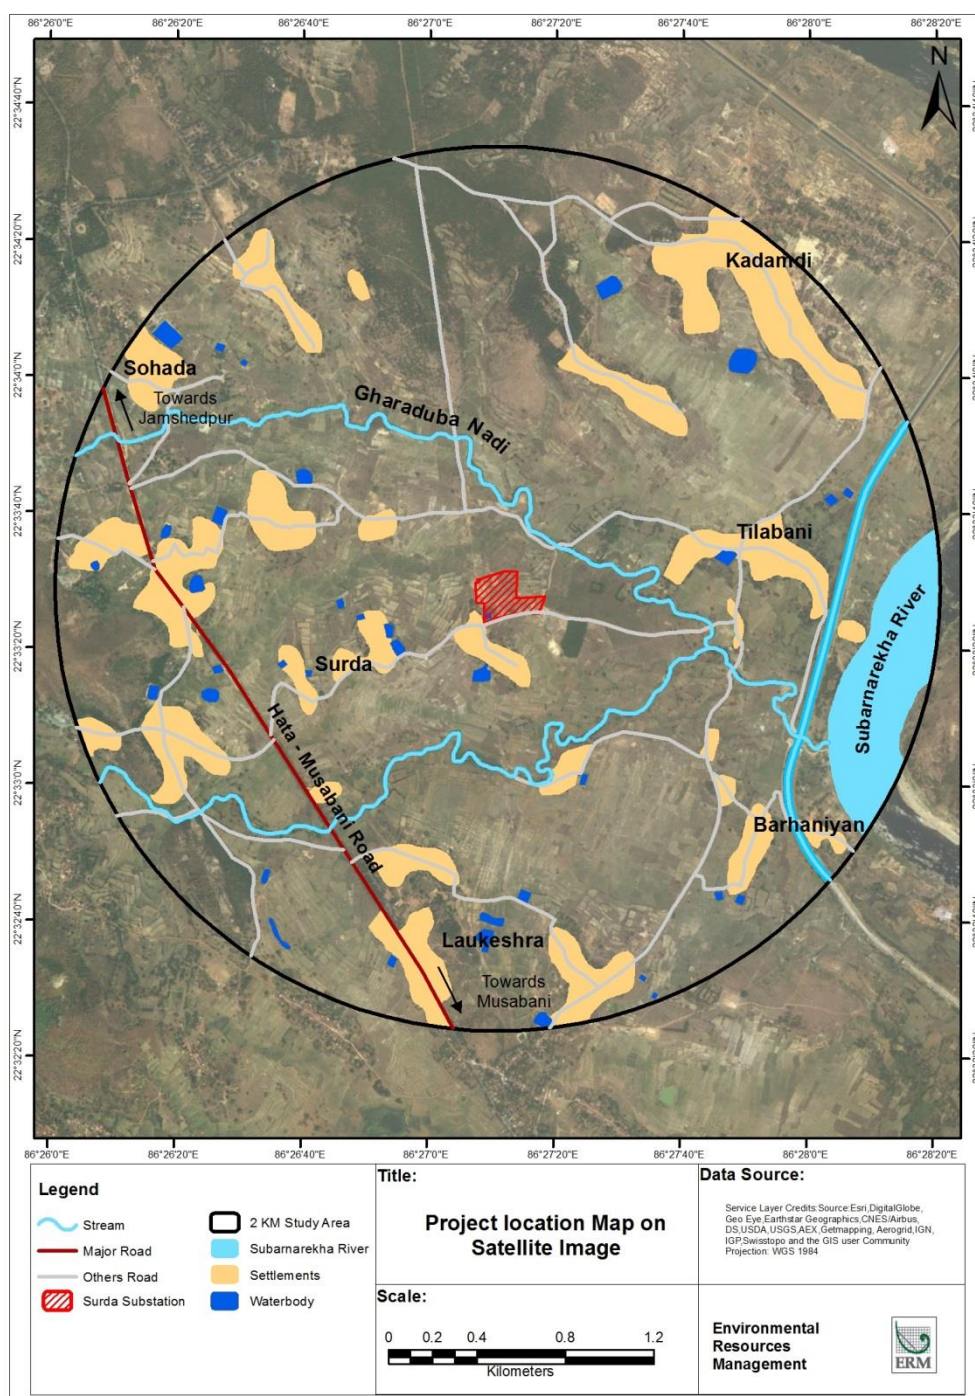

3.3 SITE SETTING

3.3.1 Project Site

The land for the proposed GSS site is categorized as “Purani Parti Kabil Abad” (old fallow land suitable for cultivation) in the revenue record of East Singhbhum district and belongs to Jharkhand State. Of the 10.3 acres of land allocated to GSS, 1.3 acres of land was reported to be “patta” land. The “patta” was provided for cultivating the land to three brothers (Shibu Hembram,

Shyam Hembram and Palu Hembram) by Bihar Revenue Department in 1995 (*Annexure 10*). The “patta” land is located on the southern part of the proposed site. It was reported and also observed during the site visit (28th July, 2018) that the land is undulating and is not used for cultivation (refer *Figure 3.5*).

Figure 3.5 *Present Usage of Patta Land*



Undulating “patta” land not under cultivation

Source: ERM Site Visit on 28th July, 2018

Further, there are two other smaller parcels of land that are being cultivated within the proposed GSS site. The first parcel of land is located in the northern part of the site and measures 0.5 acres and is being cultivated by Shibu Hembram (one of the patta holders). The second parcel of land measures approximately 0.4 acres and lies close to the road on the southern part of the proposed site. This land is cultivated by Fagu Murmu. However, these farmers cultivating the above mentioned land parcels have no legal rights on the land, hence they qualify as squatters.

Figure 3.6 *Status of Squatting Land*



Land cultivated by Fagu Murmu

Land cultivated by Shibu Hembram


Source: ERM Site Visit on 28th July, 2018

The different land parcels showing different stakes have been depicted in *Figure 3.7*.

There is a waterbody (approx. 100 m X 100 m) lying in the southwest corner of the site. Further, there are transmission towers (one 33 kV(A) and one 132 kV(A)) located within the site.

The proposed GSS site is undulating. The highest contour (108 m) located at the southwest corner of the GSS site. The lowest contour (100 m) is located in the northern boundary of the site. The general slope of the site is towards north.


Figure 3.7 Land parcels with different stakes within the proposed GSS site

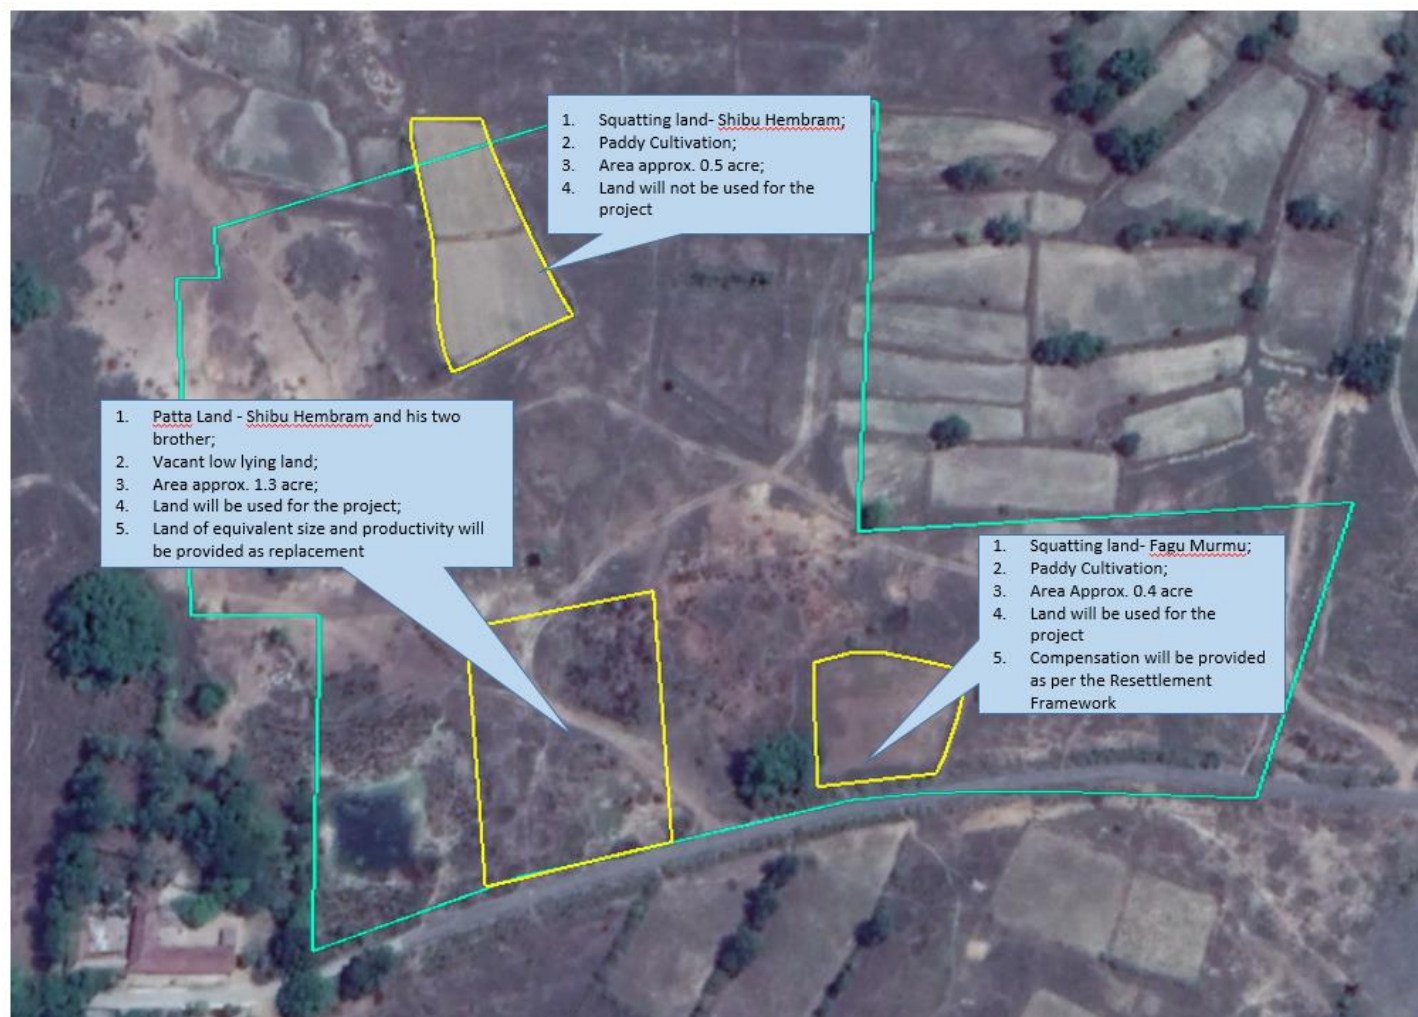

The physical features, built structures (habitations, roads) and other environmental sensitivities presented below.

Direction	Features
North	In the immediate north of the project site, there are agricultural lands. An ephemeral channel, at approximately 200 m away from the proposed site, flows from north-west to south-east. A road runs 250 m away from the project site connecting Baraghat Tola and Latabera Tola (of Upparbandha village).
East	In the immediate east of the project site, there are agricultural lands. Settlement of Baraghat Tola lies approximately 750 m away from the site. Subarnarekha River flows from north to south approximately 1.6 km away from the project site. An irrigation canal that flows parallel to the River.
South	Taladih –Baraghat road is present adjacent to the site. Agricultural lands are present beyond this road. Kasidih Tola is present at approx. 500 m of the project site. A stream (Gharaduba River) flows from south-west to south-east approximately 650 m away from the proposed site.
West	Part of the Kasidih Tola lies at approx. 300 m of the project site. Taladih village is located at approx. 600 m in south-west. Latabera village lies on the north-west. Surda village is located approx. 1.4 km away and Jamshedpur-Musaboni road lies approximately 1.5 km away from the project site.

Figure 3.8 *Photographs of Site and its Surroundings*

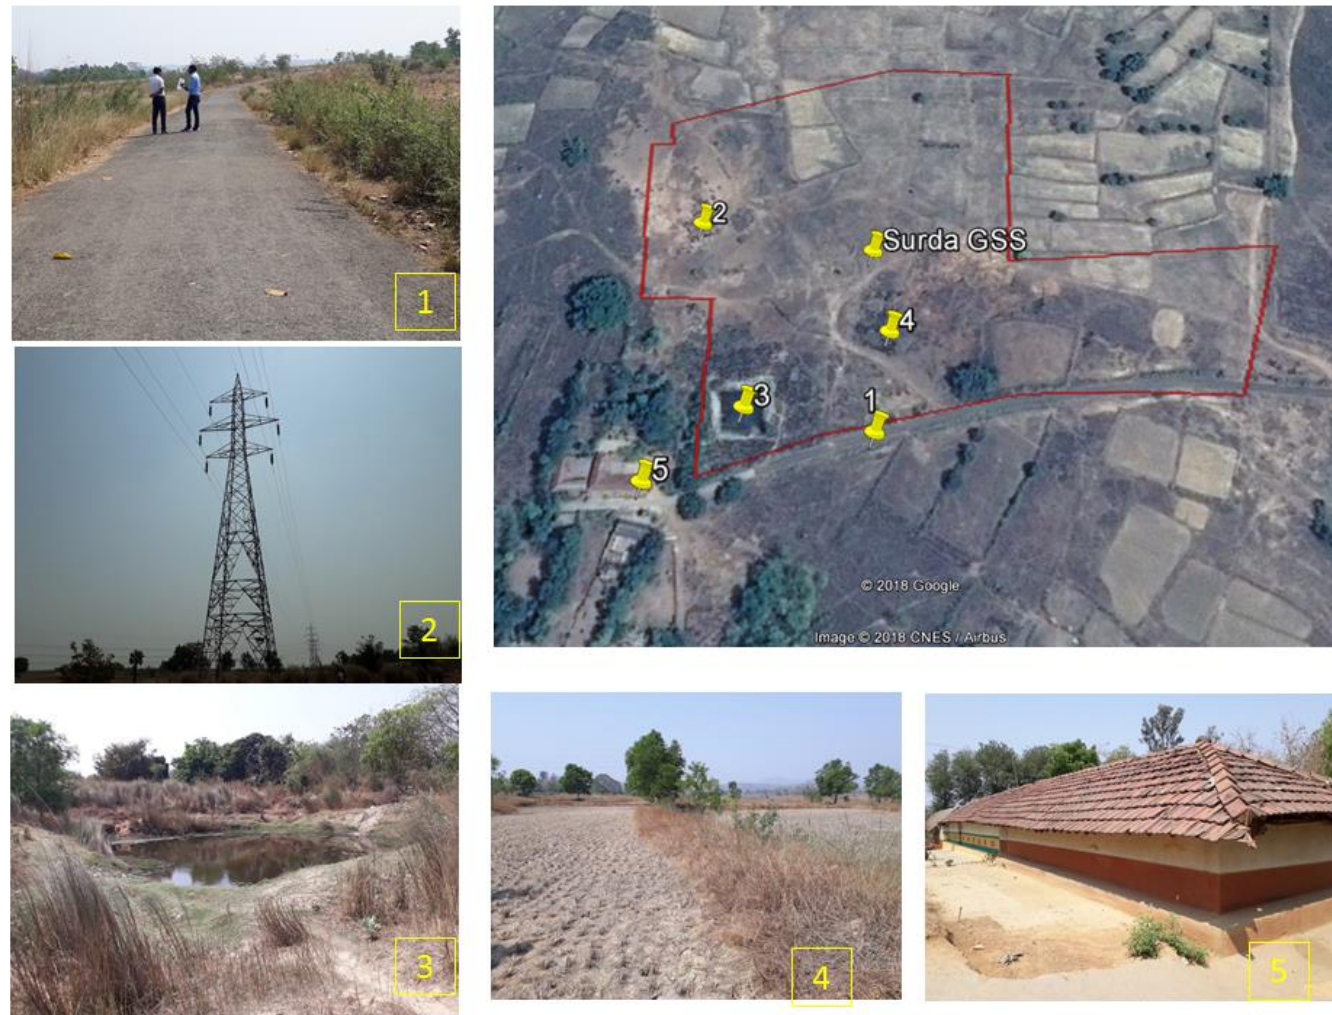


1. Metalled road running along the site; 2. Transmission tower present within the site; 3. Pond located in the South-West corner of the site; 4. Patches of agricultural land present at site; 5. House present close to the site.

The key project components which have been planned in the project are presented in the *Table 3.2* and the typical substation layout is presented in *Figure 3.9*.

Table 3.2 *Project Components in the 132/33 kV Substation at Surda*

Sl. No	Component	Description
A. Core Infrastructure		
1.	Transformer	2 nos of 50 MVA Oil Cooled 132/33 kV Transformer
2a.	Bays (incoming)	9 nos of 132 kV bays (4 for future Expansion)
2b.	Bays (outgoing)	11 Nos of 33 kV bays (4 nos for future Expansion)
3	Transformer Oil	Would be as per the Regulation of Polychlorinated Biphenyls Order, 2016
B. Associated Infrastructure		
4	Control Room	One number with control panel
5	Residential Quarters	8 nos of 1 bedroom flat, Type III 8 nos of 2 bedroom flats, Type II 1 four rom bungalow, Type I
6	Pump House	1 nos of submersible pump

Figure 3.9 *Typical Layout of a 132/33 kV substation Planned in the JPSIP*

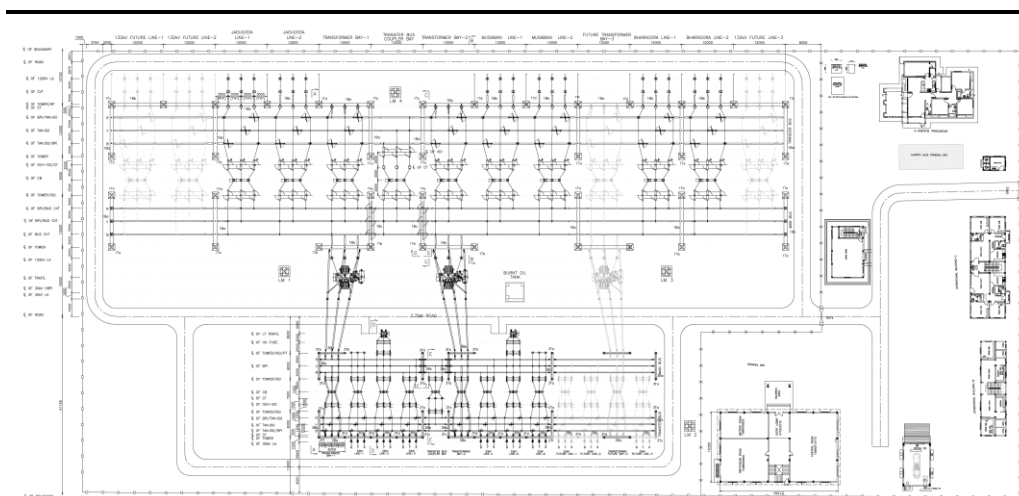

Source: DPR

The estimated cost for construction of the 132/33 kV Surda substation would be around INR 65.14 crores. This cost includes the cost of civil works, cost of procurement of electrical equipment and associated materials, installation and commissioning. It is estimated the construction would be completed within a maximum period of 18 months. However, it is expected that site preparation, construction and civil works of the substation would be completed in and about 12 months.

3.7 RESOURCE REQUIREMENT

The resources required during the construction are presented below in *Table 3.3*.

Table 3.3 *Resource Requirement in Construction and Operation of 132/33 kV Grid Substation at Surda*

Sl. No	Description	Resource Requirement
1.	Land (Total)	10.3 acres
2a.	Manpower (Construction Phase)	The peak manpower requirement is expected to 50.
2b.	Manpower (Operation Phase)	The Peak manpower is expected to be 16-20
3a.	Water (Construction Phase)	10-13 KLD (peak water)
3b.	Water (Operation Phase)	8.4 KLD (for domestic purpose)
4.	Construction Material	Steel, Cement, Aggregate and Sand

3.8 DISCHARGES AND WASTES

During the lifecycle of the substation i.e. construction and the operation the discharges and waste which would be generated is presented in *Table 3.4*.

Table 3.4 *Emission and Discharges from 132/33 kV Grid Substation*

Sl. No	Description	Quantity
1a.	Waste Water (Construction)	Peak generation of 2.5 KLD
1b.	Waste Water (Operation)	6.7 KLD
2a.	Solid Waste (Construction)	The Municipal solid waste would be around 722-25 kg per day. In addition construction waste would be generated.
2b.	Solid Waste (Operation)	The municipal solid waste generated during the operational stage would be around 8-10 kg/day
3.	Used Transformer Oil	The waste transformer oil would be produced at an interval of 15 years.
4.	e-Waste	The e-waste generated from the panels at the end of the life
5.	Air Emission (construction)	Dust will be generated at places where earthwork, cutting and filling operations.
		Particulates, CO, SOx, NOx and unburnt hydrocarbons (VOCs) will be emitted by vehicles, batching plants (if used), heavy equipment and DG sets associated with site clearing and construction activities.

A project level Environmental and Social Impact Assessment (ESIA) is method of systematic identification and evaluation of the potential impacts (effects) of a proposed substation relative to the physical, biological and socioeconomic components of the environment. The ESIA study can be considered as an important project management tool that can assist in collecting and analyzing information on the environmental effects of a project and ultimately identify actions which can ensure that the projects benefits outweigh the impact on the bio-physical and social environment. The activities which have been undertaken in each of these steps/stages are presented in the subsection below.

4.1 SCREENING & SCOPING

An initial reconnaissance visit was conducted to the site to understand the extent of the site and prevailing environment and social setting in its immediate vicinity and use it as a basis of screening and scoping exercise for the ESIA.

An effort was also made to understand the decision process that led to the selection of the site and how environmental and social issues were factored into the selection process. Discussions with the respective Zone and Division of JUSNL revealed that a number of available plots of land belonging to the government were proposed by the Land Revenue Department and the decision towards confirmation of the site was made based on the following technical, environmental and social considerations:

- A total of more than 8 acres of land was available;
- The plot had good road access;
- It did not comprise of prime agricultural land and did not have any residential premises within it;
- There were no major settlements in the immediate vicinity.

As per the ESMF, an initial environmental and social examination (IESE) was conducted to determine whether or not there would be key environmental and social impacts from the construction and operation of Surda GSS at the allocated site. The results of the IESE has been recorded in an Environmental and Social Impact Identification Matrix presented in the IA Section (Chapter 6) and was used as a tool for scoping the ESIA to potential environmental and social issues of concern. The IESE also helped in determining the requirement for other specialized studies (Resettlement Action Plan (RAP), Biodiversity Action Plan and Tribal Peoples' Plan) ; in this case a RAP will be required for mitigation of impacts for the squatter farmer. _.

Establishing baseline helps in understanding the prevailing environmental and socio economic status of the study area. It provides the background environmental and social conditions for prediction of the future environmental and social characteristics of the area due to the operation of the proposed project during its life cycle.

Considering the project activities described in **Chapter 3** it is anticipated that scale and magnitude of project induced impacts are likely to be perceived within 2 km radius of the GSS site location and has been considered as study area for the ESIA. Site surveys were conducted in the study area understand the environmental setting of the site and the study area, understanding of the drainage patterns, presence of physiographic features e.g. hillocks, rocky outcrops, location of the habitations with respect to the site, condition of the approach road to the site etc. Ecological surveys and community consultations were also conducted to collect the information related to the local community and biological environmental conditions of the study area. Secondary baseline data collection involved identifying and collecting available published material and documents on relevant environmental and social aspects (like soil quality, hydrogeology, hydrology, drainage pattern, ecology, meteorology and socio-economic conditions) from veritable sources including Govt. Departments, Research papers, etc.


The key aim of the impact assessment process was to characterize and evaluate potential environmental and social impacts arising out of the project and prioritize them so that they can be effectively addressed through Environment & Social Management Plans (ESMPs). The potential impacts have been identified through a systematic process wherein the activities (both planned and unplanned) associated with the project, across the construction and operational phases have been considered with respect to their potential to interact with environmental and social resources or receptors. Thereafter, sequential impact assessment steps involving impact prediction, evaluation, mitigation and enhancement and evaluation of residual impacts have been followed in a phased manner.

Prediction of impacts was undertaken as an objective exercise to determine what could potentially happen to the environmental and social receptors as a consequence of the project and its associated activities and took into account baseline conditions at site, stakeholder's opinion and expert judgement. The evaluation of impacts was done using a semi-quantitative, based on the delineation of a set of criteria as follows:

- *Scale*: Degree of damage that may be caused to the environmental components concerned.
- *Extent*: The extent refers to spatial or geographical extent of impact due to proposed project and related activities.
- *Duration*: The temporal scale of the impact in terms of how long it is expected to last.
- *Magnitude*: Degree of change caused by a project activity is a function of Scale, Extent and Duration, as applicable.
- *Vulnerability of Receptor*: Represents the sensitivity of the receptor based on the relationship between the project and present baseline environment (the receptor).

Once magnitude of impact and sensitivity/ vulnerability/ importance of resource/ receptor have been characterized, the significance was assigned for each impact using an impact score for each criteria, following a systematic rating method, leading to the qualification of significance of impact as Negligible, Minor, Moderate and Major. The overall impact assessment methodology is presented in *Figure 4.1* below.

Figure 4.1 *Impact Assessment Process*

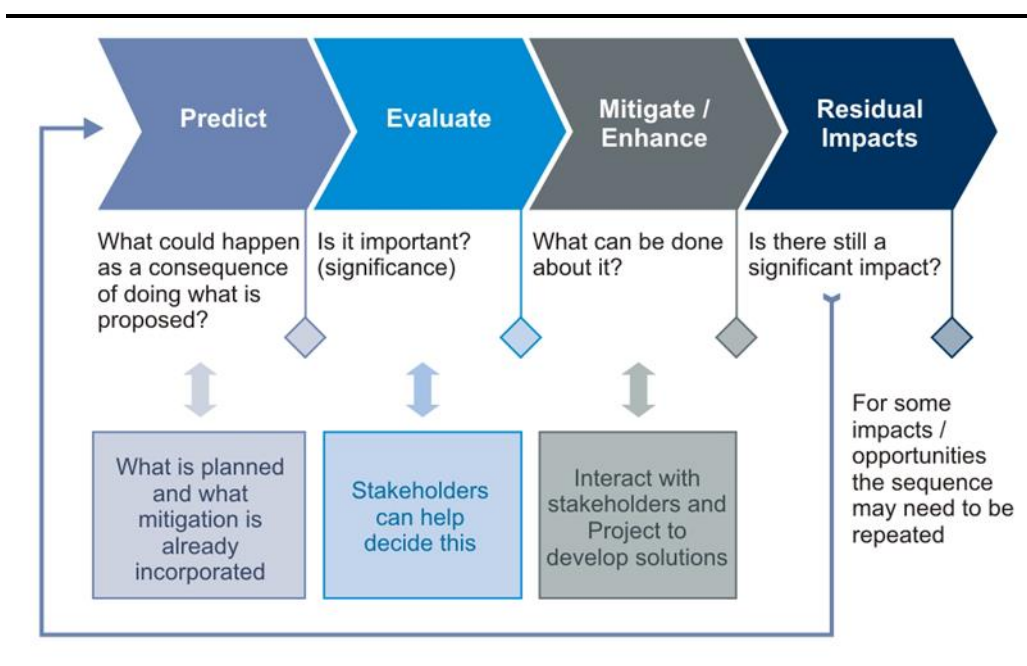

4.4 ENVIRONMENTAL AND SOCIAL MANAGEMENT PLAN PREPARATION

The Environmental & Social Management Plan along with a Monitoring Plan has been prepared as a site specific document for the construction and operation of the GSS. The ESMP would act as a guidance document for JPSIP to ensure that they can implement the project in an environmentally sound manner where project planners and design agencies, contractors, relevant government departments and stakeholders of concern understand the potential impacts arising out of the proposed project and take appropriate actions to properly manage them.

5.1 INTRODUCTION

This section establishes the baseline environmental and socio economic status of the project site and surrounding area to provide a context within which the impacts of the Project are to be assessed.


5.2 LAND USE/LAND COVER

Total land under the proposed GSS site is 10.3 acre and it is presently under the ownership of land revenue department of East Singhbhum district. Agricultural land is the most predominant land use within the study area followed by settlements. Existing land cover pattern within the study area is presented in *Table 5.1* and the land use map of the study area is shown in *Figure 5.1*.

Table 5.1 Existing Land Use/ Land Cover Pattern of the Study Area

Name	Area in Sq. Km.	Percentage
Agriculture Land	6.33	50.46
Stream	0.27	2.19
Forest Land	1.54	12.29
Open Scrub	2.23	17.78
River	0.38	3.01
Road	0.25	2.02
Settlements	1.43	11.39
Waterbody	0.11	0.87
Total	12.55	100

Figure 5.1 *Land Use/Land Cover Map of the Study Area*

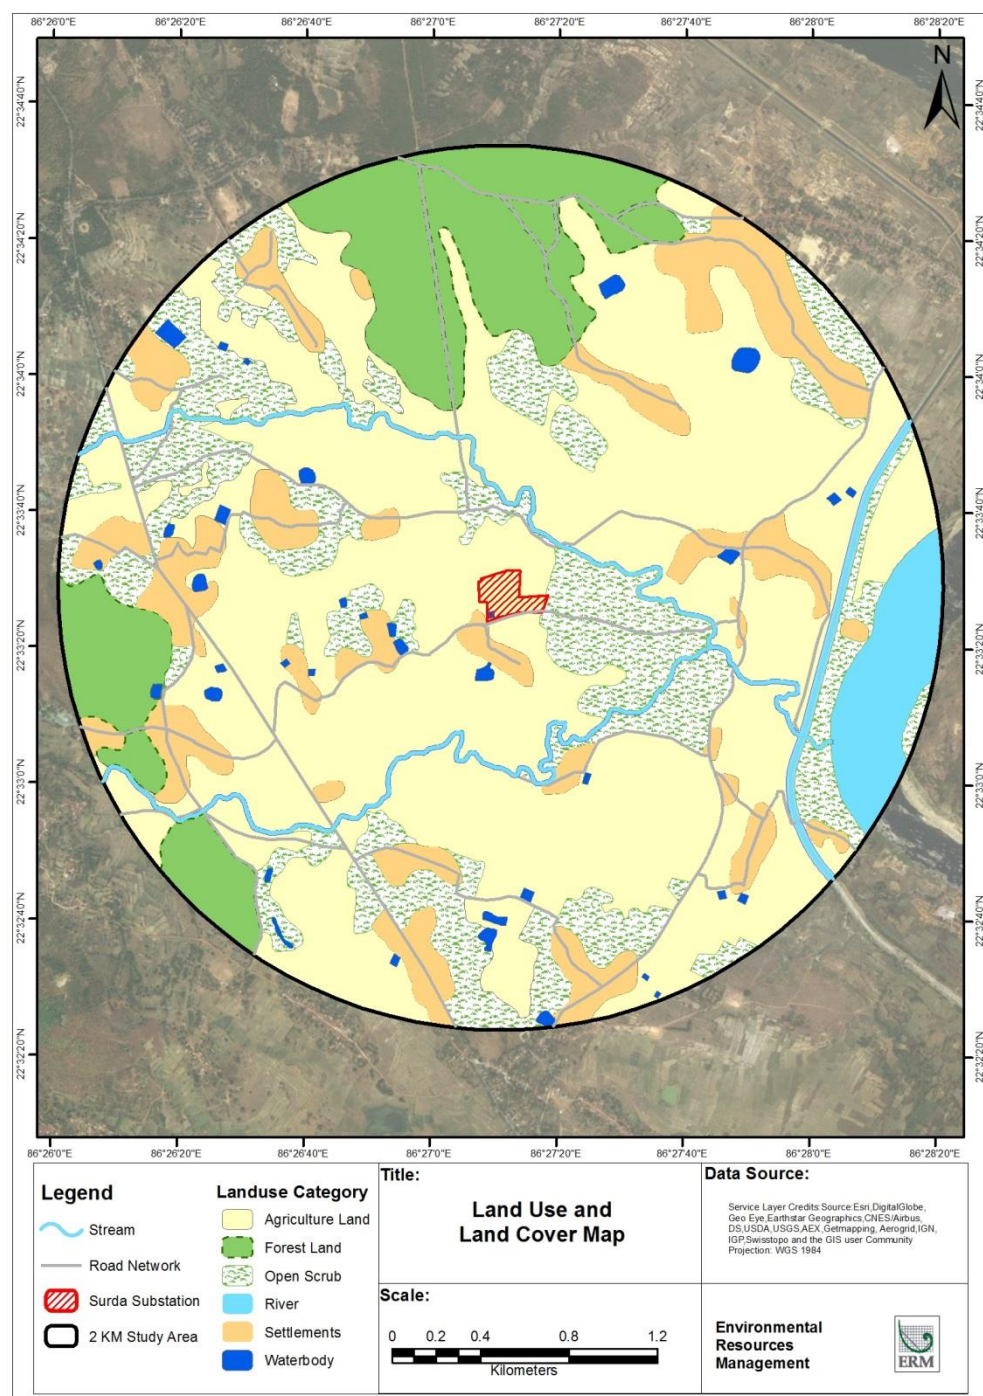

The soils occurring in different landforms in Jharkhand have been characterized during soil resource mapping of the state on 1:250,000 scale (Haldar et al. 1996) and three soil orders namely Entisols, Inceptisols and Alfisols were observed in East Singhbhum district. In East Singhbhum district Alfisols (Red sandy soil) were the dominant soils covering 71.4 percent of TGA followed by Entisols (13.4 %) and Inceptisols (12.8 %).

Land for proposed GSS is located in a undulating land and the existing soils type of this land and adjoining area are fine loamy soil in character, light yellow in colour and moderately permeable. Photograph of soil exposed at the project site is presented in *Figure 5.2*.

Figure 5.2 *Soil in the GSS site*



Source: ERM Site Visit

The climate in this area is humid and sub-tropical. The year can be divided in to three main seasons, the winter season from November to March, the summer season from March to May and Monsoon season from June to September. October is a transitional month between Monsoon and Winter seasons. December and January are the coolest months. In winter the temperature goes down to 8°C. By March temperature begin to rise steadily. In May and early part of June the maximum temperature can be as high as 44°C on individual days. Humidity is generally normal in this district, except in Monsoon months.

From the onset of the Monsoon by the middle of June, amount of rainfall gradually increases reaching the peak level in July-August and continue to till the September. The annual variation of rainfall recorded is not much. The

average normal rainfall of the district as a whole is 1500 mm. During winter season, the District records less than 10 cm rainfall.

5.5 *NATURAL HAZARD*

Natural hazard is rare phenomena in East Singhbhum district. According to District Disaster Management Plan 2016, parts of the East Singhbhum district are vulnerable to forest fire, drought, earthquake (Zone –II). Discussions with locals reveal, that there is no risk of flooding in GSS site and surrounding area.

5.6 *AIR & NOISE ENVIRONMENT*

The study area can be characterized as a rural area comprising of several small habitations, farm lands. No major industrial set up was found to be present within 2 km of radius of the site. However, there are few underground copper mines along with associated above ground infrastructure present in the north-western portion (approximately 1.6 km – 2 km). As they are primarily underground operations, they are not anticipated to have any significant impact on the air quality of the study area. Existing sources of generation of particulate matter and gaseous air pollutants is primarily because of the transportation of vehicles through adjoining roads and from burning of fossil fuels for domestic purposes. Considering this context, the ambient air quality is expected to be well within the National Ambient Air Quality Standards (NAAQS) for all parameters.

The ambient noise quality of the study area is also representative of ambient noise quality typically expected in rural residential areas. The main source is that of noise emitted vehicles plying through the adjoining roads. Mainly light utility vehicles and motor bicycles were observed on Taladih- Baraghat road, and no significant noise levels were reported by the villagers during consultations.

5.7 *DRAINAGE AND WATERBODY*

The study area falls in the Subarnarekha River basin. The drainage pattern is dendritic in nature. Subarnarekha River flows approx. 1.5 km away from the site, from North to South direction. There is an ephemeral channel that drains the study area from north-west to south-east and meets another stream at south of the study area (*Figure 5.3*). Apart from the rivers and streams there is an irrigation canal, part of Subarnarekha Multi-Purpose Project that runs parallel to Subarnarekha River. There is a water body (100m X 100 m) within the site. This water body is fed by rain water and dries up in summer. During consultation it was learnt that the water body is used by the local people for domestic purposes. There are few other waterbodies lying scattered in the study area.


Figure 5.3 *Stream flowing within the Study Area*



Source: ERM Site Visit

Drainage map of the study area is presented in *Figure 5.4*. As per the site assessment, there is no defined drainage channel present within the proposed GSS site. Water from the project site drains along the gradient of this area and reaches the above-mentioned stream.

Figure 5.4 Drainage Map of the Study Area

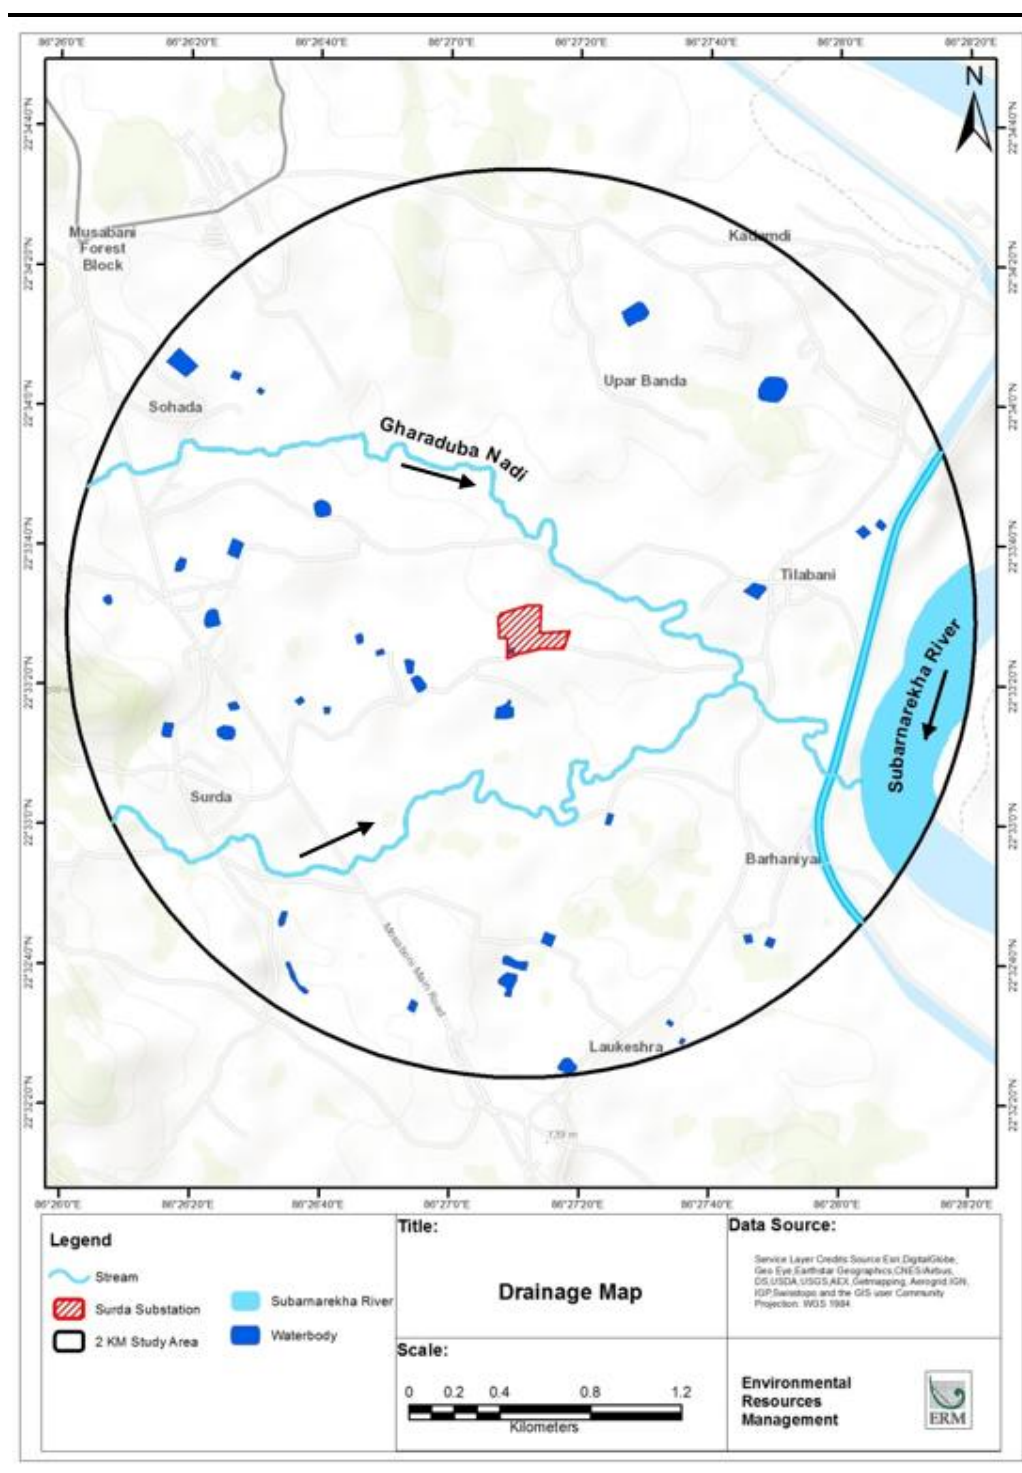

5.8

GROUND WATER RESOURCES

As per the hydrogeological map of the District drawn up by the Central Ground Water Board (CGWB), East Singhbhum district is covered by three major geological formations viz, the Tertiaries, the Dalma Volcanics/Lower Proterozoics and the Singhbhum Group. Ground water occurs mostly under phreatic condition in all the lithological units and locally under semiconfined and confined condition. As of 2013, the annual ground water draft for all uses

in the Block was 1406.25 ham and the stage of ground water development was about 11.79 % and declared safe for future groundwater development.

From the aquifer characteristic and water resourcing angle, the depth to water table in the Musaboni Block is reported to vary between 5-10 m bgl during pre-monsoon season whereas >2 m bgl during post-monsoon season (as per CGWB Groundwater Information Booklet for East Singhbhum District, 2013). The dug wells generally tap the initial shallow aquifer and many of such wells dry up during summer months. The hand pumps generally tap the first fracture zones in the lateritic terrain while the bore wells tap the deeper granite terrain zones. Discharge of the bore wells range from 2.7 m³/hr to 78 m³/hr (moderate to high).

Consultations with villagers in the study area revealed that ground water is pre-dominantly used for drinking and domestic purposes and is sourced through dug wells or tube wells. From the ground water quality perspective, the water quality has been found to be potable in general and from the ground water quality perspective, ground water parameters are within permissible limit.

5.9 ECOLOGICAL ENVIRONMENT

The proposed GSS site in East Singhbhum district of Jharkhand State falls in 6B Deccan Peninsula – Chota-Nagpur Bio-geographic Province¹.

Terrestrial Ecosystem

As per site assessment proposed land for GSS site is located within the part kadim land. There are few trees such as one banyan (*Ficus benghalensis*), one mango (*Mangifera indica*), two date palm (*Phoenix dactylifera*), five toddy palm (*Borassus flabellifer*) and ten akashmoni (*Accacia acculiformes*), present in the area. There is also few herbs and shrubs within the GSS site.

Natural vegetation in the region can be broadly classified into 5B Northern Tropical Dry Deciduous Forests. The dominant species in the region is Sal (*Shorea robusta*).

5B Northern Tropical Dry Deciduous Forests – In this region dry deciduous forest are found in the drier parts, mostly in the upper ridges. Here also the dominant species is sal (*Shorea robusta*). Other species that are associated with sal are *Terminalia belerica*, *Terminalia chebula*, *Haldina cordifolia*, *Madhuca latifolia*, *Butea monosperma*, *Diospyros melanoxylon*, *Ailanthus excelsa*, *Cassia fistula* etc.

¹ http://iipsenvis.nic.in/Database/Envis_5275.aspx

5.9.1

Vegetation within the Study area

There is open mixed jungle within 2 km study area of the Surda GSS.

Homestead plantation

During the primary survey trees like palas (*Butea monosperma*), mohua (*Madhuca latifolia*), neem (*Azadirachta indica*), peepal (*Ficus religiosa*), wad (*Ficus benghalensis*), aam (*Mangifera indica*), date palm (*Phoenix dactylifera*), sugar palm (*Borassus flabellifer*), bans (*Bambusa arundinacea*), ashoka (*Saraca asoka*), Siris (*Albizzia lebbek*), munga (*Moringa oleifera*), semal (*Bombax ceiba*), kadam (*Haldina cordifolia*), kathal (*Artocarpus heterophyllus*), sajne (*Moringa oleifera*), etc. were found to occur frequently in proximity to the human settlements within the study area.

Roadside plantation

Along the roadside following trees were recorded viz. babool (*Acacia nilotica*), semal (*Bombax ceiba*), wad (*Ficus benghalensis*), radhachura (*Peltophorum pterocarpum*), munga (*Moringa oleifera*), ashoka (*Saraca asoka*), rain tree (*Samanea saman*), shisham (*Dalbergia sisso*), gulmohor (*Delonix regia*), peepal (*Ficus religiosa*), chhatim (*Alstonia scholaris*).

Riparian Vegetation

Riparian vegetation is observed on the sides of streams and waterbodies. Major vegetation observed are jamun (*Syzygium cumini*), semal (*Bombax ceiba*), wad (*Ficus benghalensis*), peepal (*Ficus religiosa*) etc.

Invasive Alien species

Major invasive species recorded during the study are: *Lantana camara*, *Parthenium hysterophorus*, *Acacia auriculiformis* etc.

5.9.2

Wildlife Habitat and Faunal Diversity

Wild Life Habitat

No Sensitive Ecological Habitat like National Park, Wild Life Sanctuary, Tiger Reserve or Elephant Reserve is located within the study area of the GSS. However, during consultation it was learnt that there was no designated habitat within the study area but elephants did visit the study area and the proposed GSS site.

Faunal Diversity

Herpetofauna

Two species of amphibians viz. Common Toad (*Duttaphrynus melanostictus*) and Indian Bullfrog (*Hoplobatrachus tigerinus*) etc. are observed from the study area. All the species are listed Least Concern as per IUCN Classification

(IUCN Version 2017-3). Six species of reptiles were observed/ reported from the study area. The list includes Indian Cobra (*Naja naja*), Common Krait (*Bungarus caeruleus*), Indian Rat Snake (*Ptyas mucosus*), Checkered Keelback (*Xenochrophis piscator*), Indian Monitor (*Varanus bengalensis*) and Oriental Garden Lizard (*Calotes versicolor*). The list includes three Schedule II species as per the Indian Wildlife Protection Act, (1972) viz. Indian Cobra, Indian Rat Snake and Checkered Keelback.

Avifauna

A total of 28 species were recorded from the study area. The species list includes terrestrial and aquatic birds. Terrestrial and aquatic birds recorded are presented below

Terrestrial birds- Shikra (*Accipiter badius*), Common Myna (*Acridotheres tristis*), Paddyfield Pipit (*Anthus rufulus*), House Swift (*Apus nipalensis*), Common Pigeon (*Columba livia*), House Crow (*Corvus splendens*), Black Drongo (*Dicrurus macrocercus*), Asian Koel (*Eudynamys scolopaceus*), Coppersmith Barbet (*Psilopogon haemacephalus*), Little Green bee-eater (*Merops orientalis*), Black Kite (*Milvus migrans*), House sparrow (*Passer domesticus*), Baya weaver (*Ploceus philippinus*), Plain Prinia (*Prinia inornata*), Rose-ringed Parakeet (*Psittacula krameri*), Red-vented Bulbul (*Pycnonotus cafer*), Indian Robin (*Copsychus fulicatus*), Eurasian Collared Dove (*Streptopelia decaocto*) etc.

Aquatic birds- Common Kingfisher (*Alcedo atthis*), White-breasted Waterhen (*Amaurornis phoenicurus*), Grey Heron (*Ardea cinerea*), Indian Pond Heron (*Ardeola grayii*), Cattle Egret (*Bubulcus ibis*), Little Egret (*Egretta garzetta*), White-throated Kingfisher (*Halcyon smyrnensis*), Intermediate Egret (*Ardea intermedia*), Little Cormorant (*Microcarbo niger*), Red-wattled Lapwing (*Vanellus indicus*) etc.

Shikra (*Accipiter badius*) and Black Kite (*Milvus migrans*) are listed as Schedule I as per Wildlife Protection Act, 1972. All the species are listed as Least Concern as per IUCN Classification (IUCN version 2017-3).

Mammals

Total 8 species of mammals are reported/ recorded from the study area. The mammals observed/ reported in the study area are Five-striped Palm Squirrel (*Funambulus pennantii*), Golden Jackal (*Canis aureus*), Indian Fox (*Vulpes bengalensis*), Common Grey Mongoose (*Herpestes edwardsii*), Northern Plains Langur (*Semnopithecus entellus*), Rhesus macaque (*Macaca mulatta*), Wild Pig (*Sus scrofa*), House Rat (*Rattus rattus*) etc. Large mammals were reported to be absent in the study area. The list includes five Schedule II species Golden Jackal, Common Grey Mongoose, Indian Northern Plains Langur, Indian Fox, and Rhesus macaque. All the species are listed as Least Concern as per IUCN Classification (IUCN version 2017-3).

Proposed Surda substation is located in East Singhbhum district. The population of East Singhbhum district according to the 2011 census is 22,93,919 which were 1,96,5161 as per the Census of 2001, registering a decadal growth of 16.73%. The analysis reveals that East Singhbhum district accounts for 6.95% of total population of Jharkhand State. Literacy rate in East Singhbhum district is 75.5% as against the State figure of 66.41%.

According to the 2011 census data, the sex ratio of East Singhbhum district is 949, which is equal to that of the state average of 949. The ST population constitutes 28.51% against the State figure of 26.2% but trend is found to be different in case of the SC categories, i.e., 4.86% SC population in East Singhbhum district against 12.08% in the State.

Total household in Musabani block, where the proposed GSS site would be located, is reported to be 22480 with average household size of 4.76. The total population of the Musabani block is 107084 as per Census Report 2011. The literacy rate is 70.94% and the sex ratio is reported to be 974.

Demographic Profile of the Study area Villages

Proposed GSS land is situated in Surda mouza of Musabani block, while four villages are located within the 2 km study area i.e. Sohada, Tilabani, Barhaniyan and Laukeshra. All of these villages are located in Musabani block.

As per the 2011 Census records, the study area has a total of 1439 households and a population of 6566. Demographic profile of the study area villages is presented in *Table 5.2*.

Table 5.2 *Demographic profiles of the villages located within study area*

Village	Total Household	Total Population	Average Household Size	Male	Female	SC Population	ST Population	Literary Rate (%)	Male Literary rate (%)	Female Literary rate (%)
Sohada	585	2754	4.71	1407	1347	179	1352	76.45	85.76	66.86
Surda	309	1432	4.63	735	697	10	725	77.85	87.69	67.47
Tilabani	333	1440	4.32	718	722	0	1019	59.41	70.99	47.84
Barhaniyan	110	463	4.21	237	226	0	319	57.46	74.88	38.14
Laukeshra	102	477	4.68	228	249	1	407	58.69	68.93	49.09

Source: Census 2011 Data

Demographic Profile of Surveyed Population (Surda village)

A general socio economic survey of 50 households was conducted during the month of March, 2018 as a part of the ESIA study to understand the present socio-economic scenario of Surda village. The questionnaire template used for

administering the survey is presented in *Annexure 9*. Community consultations were also conducted to supplement the survey findings.

Total number of surveyed population is 177 residing in 50 households. The average household size is 3.53, which is lower than the household size of Surda village recorded in the 2011 census data. Among the 177 surveyed populations, total male and female population is 53.60% and 43.40% respectively and the sex ratio is 739.


Table 5.3 *Demographic profiles of the Surveyed Population*

Village	Total Household	Total Population	Average Household Size	Male (%)	Female (%)	SC Population	ST Population (%)	Literary Rate (%)	Male Literary rate (%)	Female Literary rate (%)
Surda	50	177	3.53	56.60	43.40	-	94.34	39.62	50.00	26.09

Source: ERM Socio Economic Survey

Age group distribution of the surveyed population show that maximum number of population belongs to the working age group of 21 to 50 followed by the young age group (11 to 20) which potentially will become the working age group in the future. *Figure 5.5* represents the age group distribution of the surveyed population.

Figure 5.5 *Age Group Distribution of the Surveyed Population*

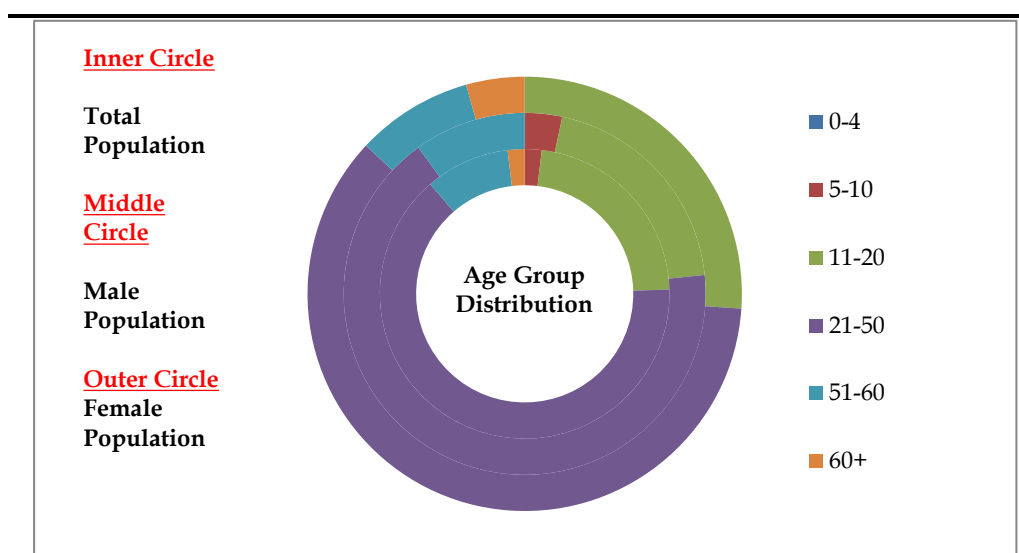

Source: ERM Socio Economic Survey

Demographic profile of Project Affected Persons (PAPs)

There are four families, that qualify as Project Affected Persons. Three families belong to Shibu Hembram, Shyam Hembram and Palu Hembram that have "patta" for cultivating 1.3 acres of land within the project site. The fourth

family belongs to Fagu Murmu who is presently cultivating approximately 0.4 acres of land within the allocated project site. The demographic profile of the PAPs has been provided below in *Table 5.4*.

Table 5.4 *Demographic profiles of the Surveyed PAP Population*

Village	Total Household	Total Population	Average Household Size	Male (%)	Female (%)	SC Population	ST Population (%)	Literary Rate (%)
Surda	4	29	7	35.71	64.28	-	100	99

Source: ERM Socio Economic Survey

29 persons are affected in the 4 households, out of which 35.71% are male and 64.28% are female.

SC/ST Population

Scheduled Caste population in the study area villages are 2.89%. However, Scheduled Tribe population in the study area is 58.21%. Maximum percentage of SC population i.e., 6.50% is recorded in Sohada village.

Remaining population is further classified into General Caste and OBC (Other Backward Caste) that is not accounted for in the Census survey of India. Considering the project activities, no impacts are envisaged on the SC population of the area.

SC & ST Population of Surveyed Village (Surda village)

Among the 177 surveyed populations, ST population is 167 which is 94.34 percent of the total surveyed population, resides in 47 household, which is 94 percent of total surveyed households. Other caste like general population is 5.66 percent, however SC and OBC are not present in the Surda village. It can be observed that ST is predominant in Surda Village. Male and female ST population surveyed is 96.67 percent and 91.30 percent respectively.

SC & ST Population of PAPs

All the project affected persons (direct) belongs to Scheduled Tribes.


5.10.2 *Education profile*

Literacy Profile

Literacy status of the study area villages is presented in *Figure 5.6* and it suggests that average literacy rate in study area villages (70.40%) is lower than that observed at the State level (66.41%). Average female literacy rate in the study area villages is 59.48%. In Surda village; literacy rate among male

population is highest (87.69%). A general trend of education level attained in the study area as reported during consultations is that most teenagers drop out after Secondary School and key reasons for higher drop-out rates are economic conditions of the families as well as lack of higher education infrastructure in the vicinity.

Figure 5.6 *Literacy profile of the study area villages*

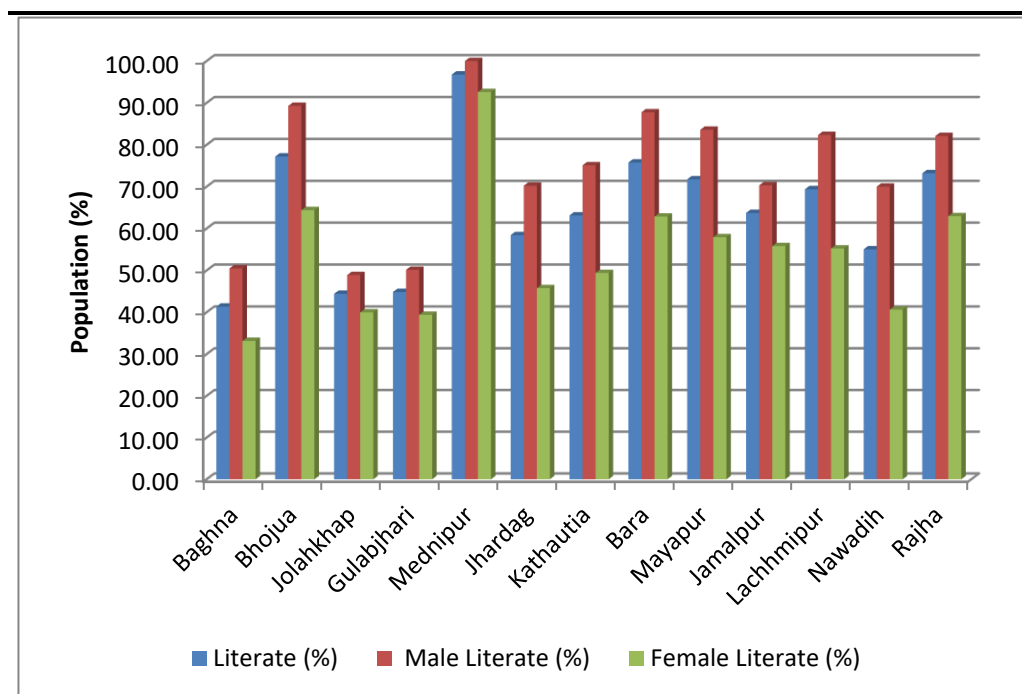


Source: Census 2011 Data

Educational profile of Surveyed Population (of Surda village)

Out of total 177 surveyed population, 39.62 percent are literate and 60.38 percent are illiterate. Male and female literacy rates are 50 percent and 73.91 percent respectively.

The educational profile of the surveyed population indicates that they study up to primary level and tend to drop out majorly in subsequent stages with few progressing to obtain higher degrees. The data is indicative of the fact that lower percentage of the population completes secondary school level and graduation level. None of the surveyed population possessed technical qualification or post-graduate level degrees. Educational status of the surveyed population is presented in *Figure 5.7*.

Figure 5.7 *Educational Status of the Surveyed Population*

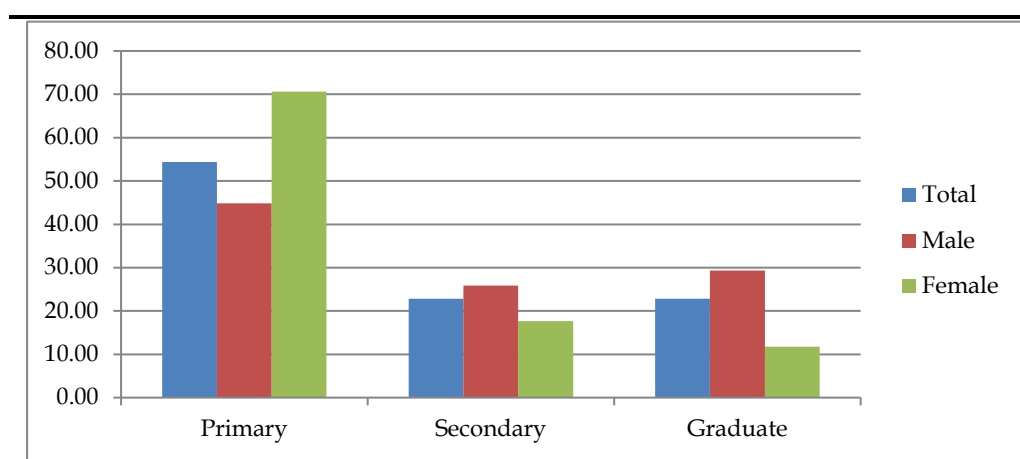

Source: ERM Socio Economic Survey

Educational Status of PAPs

All the farmers are literate.

Educational Infrastructure

Assessment of education facilities and education promotion programs provided by the government in study area indicates that available education infrastructures in terms of number of schools are not adequate. Number of schools and colleges existing in study area villages is shown in *Table 5.5*. The information is compiled from village directory, 2011. The table reflects that each village is having a primary school in its peripheral boundary, however, numbers of middle school, secondary, senior secondary school and college in the study area is not adequate.

Table 5.5 *Education Infrastructure in study area*

Study Area Villages	Pre-primary school	Primary school	Middle school	Secondary school	Senior secondary school	Degree college
Sohada	N	Y	Y	Y	Y	N
Surda	N	Y	Y	Y	Y	N
Tilabani	N	Y	Y	N	N	N
Barhaniyan	N	Y	N	N	N	N
Laukeshra	N	Y	N	N	N	N

Source: Village Directory, Census 2011 (Y – Yes; N – No)

Educational Infrastructure of Surveyed Village (Surda village)

All respondents informed that a Primary and Secondary school is present within 1 to 1.5 km of the village, however no colleges are present.

5.10.3 *Economic Activity & Livelihood Pattern*

Occupational Pattern

The most important factor, which governs the occupational pattern of an economy, is the availability of the total work force in an economy. The analysis of workers' profile reflects that 23.09% of total population of East Singhbhum District is total main workers, 13.14% are marginal workers and 63.50% are non-workers, who depend for their livelihood on the toils of the main workforce. The non-workers comprise of old, diseased, disabled and most of them are children of non-working age group beside housewives.

In case of Musabani block, 36.61% of the total population comprises the total worker population. Of the total working population, 49.05% are main workers whereas 50.95% comprises the marginal worker population. The employment pattern in this area suggests that 33.63% of local people are employed in agricultural sector category whereas 62.69% workers are engaged in other sector.

Occupational Pattern of the Study area Villages

Most of the people residing in the study area are mainly involved in works other than agricultural sector and household businesses. Classification of working population of the study area as well as of the study area as per census 2011 data is presented in the *Table 5.6*.

Table 5.6 *Occupational pattern of villages in the study area*

Name of the village	WPR	Main Workers	Marginal Workers	Cultivator	Agricultural Labourers	Household Industry	Other Workers
Sohada	31.99	73.44	26.56	13.05	5.11	6.02	75.82
Surda	35.13	57.65	42.35	8.15	14.91	0.80	76.14
Tilabani	40.07	67.76	32.24	5.55	35.70	4.68	54.07
Barhaniyan	35.64	95.15	4.85	34.55	41.21	0.00	24.24
Laukeshra	31.87	82.24	17.76	34.21	49.34	0.00	16.45

Source: Census 2011 Data; Note: WPR – Work Participation Ratio

Work Participation ratio (WPR), defined as percentage of total workers including main and marginal workers out of the total population of the study area, is 36.61% which suggests the study area villages have relatively higher unemployment rate.

Other noticeable aspects as evident in the above table is that proportion of Other Workers is relatively high in most of the study area villages (except Barhaniyan and Laukeshra), which may be indicative of the fact that agriculture and household businesses are not providing well for their livelihood and are on lower side in study area.

Community consultations also revealed that most of the people belonging to the local community has marginal to small land holdings, which is not sufficient for earning their livelihood.


Economic Status of the Surveyed Population (Surda village)

The survey conducted by the ERM team revealed that 100 percent households are under below poverty level¹.

Employment Status of the Surveyed Population (Surda village)

It can be seen from the primary survey data that 56.82 percent of the surveyed population are employed while 43.18 percent population are not employed. The male and female employment rates among surveyed households were found to be 76.92% and 27.78% respectively. It can also be observed from figure below that unemployment rate is higher in female population than the male population. This is because most of the women in the villages were mainly involved in household work. Employment status of surveyed population is presented in *Figure 5.8*.

Figure 5.8 *Employment Status of the Surveyed Population*

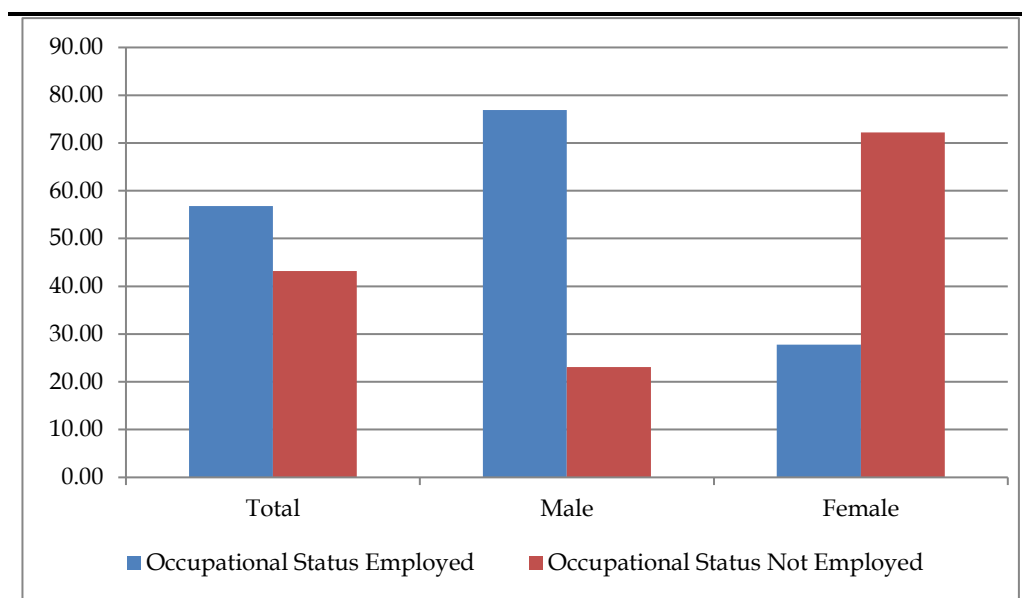

Source: ERM Socio Economic Survey

Occupational Pattern of the Surveyed Population (Surda village)

Entire surveyed population (100%) is involved in agricultural activity during monsoon months as the agriculture in this area is dependent on rain water and no irrigation facility is available. Apart from that, people are also involved in other activity like daily wage labour in nearby mines and nearby urban areas like Ghatsila, Musabani for sustenance of their families during remaining part of the year.

¹ In 2011-12, the average Monthly Per Capita Expenditure (MPCE) of Jharkhand in urban and rural areas was INR 1894 and INR 920, respectively. – Report of Task Force on Poverty Elimination in Jharkhand, Rural Development Department, Govt. of Jharkhand (The monthly per capita consumption expenditure is treated as the poverty line at all India level as per the Tendolkar Commission Report.

Skill of the Surveyed Population (Surda village)

Survey data show that the residents of this village are not having any significant indigenous skills.

Occupational Pattern of the PAPs

As mentioned above, almost of the project affected persons (direct) were found to be daily wage labourers during non-monsoon season. During the remaining period, they involved in agricultural activities and paddy cultivation.

5.10.4 Gender Profile

Sex Ratio

Sex ratio is one of the most important indicators defining gender equality. This indicates improvement in one of the Human Development indicators that can enhance gender equality influencing progress in productivity, improve development outcomes and make institutions more representative.

The average sex ratio in the study area villages as per the Census 2011 is 975, which is higher than the State average (948). Within the study area villages Laukeshra (1092) recorded the highest sex ratio and Surda (948) recorded the lowest sex ratios.

Education

Improving female educational levels has been demonstrated to have clear impacts on the health and economic future of young women, which in turn improves the prospects of their family and entire community.

Average literacy rate in study area villages (70.40%) is lower than that observed at the State level (77.13%), as per census 2011. According to 2011 census data, the average male and female literacy rate in the study area was recorded as 81.05% and 59.48% respectively, which indicates that the female literacy rate is low when compared to the male literacy in this area. Among the study area villages, the highest and lowest female literacy rate was recorded at Surda (67.47%) and Barhaniyan (38.14%), whereas highest and lowest male literacy rate was recorded at Surda (87.69%) and Laukeshra (68.93%).

Female Workforce Participation

Female labour force participation is a driver of growth and therefore participation rates indicate the potential for a state to grow more rapidly. The participation of women in the labour is driven by a wide variety of economic

and social factors including economic growth, increasing educational attainment, social norms, etc.

In the study area, male work participation rate (51.64%) is quite higher than the female work participation rate (17.31%), as per 2011 Census. Main work force⁽¹⁾ for male and female workers was recorded to be 79.44% and 43.85% respectively. This figure indicates male workers constitute a dominant part of the main work force. However, in case of marginal work force⁽²⁾, the trend was reversed in terms of contribution of male workers (20.56%) and female workers (56.15%). It's observed that female marginal workers outnumber the male marginal workers, indicating that more number of females are possibly involved in cultivation, as agricultural labourers, and also as workers in household industries. The low literacy rate amongst the female population can also be attributed as one of prime reason for their increased involvement as marginal workers.

5.10.5 *Drinking Water & Sanitation Facilities*

The social organization and settlement pattern in the study area is predominantly arranged around the available agricultural land and water resources in the area. Land based livelihood being the key feature of the community, proximity and availability of water is often linked to the economic status of the family/ household. Also typically in a village, water for drinking and other purposes defines the household hygiene/ sanitation and ultimately the standard of living of the community. For drinking purpose, the only available source is:

- Ground water sourced through hand pump and bore wells serve mostly to the needs of household drinking water consumption however no filtration facility is available for drinking water;
- Supply of water is not available in study area villages;

Community consultations revealed that very few households in the village have access to individual sanitation facility and majority of the community reportedly resort to open defecation.

Primary surveys revealed that majority (100 percent) of households are dependent of tube well for drinking water and domestic purposes. It was observed that all these tube wells are shared water resources.

5.10.6 *Irrigation*

During community consultation and site walks, it was noted that limited irrigation facilities are available in study area. During site visit in the month of February 2018, cultivation was observed in the study area.

(1) Workers who worked for more than 6 months (180 days) in the reference period are termed as Main Workers.

(2) Workers who worked for less than six months (180 days)

5.10.7 *Health Infrastructure*

Health care infrastructure is very poor in the study areas. There are no hospitals, primary health centre (PHC) and health sub-centre (SC) in the study area.

Table 5.7 *Health care facilities in study area*

Study villages	Hospitals	PHC	Sub-Centre
Sohada	N	N	N
Surda	N	N	N
Tilabani	N	N	N
Barhaniyan	N	N	N
Laukeshra	N	N	N

Source: Village Directory, Census 2011 (Y – Yes; N – No)

Above **Table 5.7** shows that health infrastructure located in study area villages. There are no hospitals located within the study area. The nearest hospital is located at Ghatsila, nearly 3.75 km away from the study area. Primary surveys reveal that entire population is dependent on government run health facilities in Ghatsila, Surda and Musabani.

5.10.8 *Others physical infrastructure*

Road & Transportation

All the study area villages are connected with Surda through metal roads. However, concrete or earthen roads were also observed at some places. For the local transportation, use of auto rickshaw is very common in the study area. Economically well placed families uses individual motorcycle for transportation.

Electricity

All study area villages have access to electricity supply and most of the households were reported to be connected with the existing electricity supply network.

Postal Service, Bank, Telecommunication

As per 2011 census data, only Surda village in the study area are having post office. However, none of the villages in the study area have operational branches of banks. Nearest bank facility is available in Ghatsila village.

Status of Govt. of Scheme Implementation in Surda Village

Implementation of old age pension scheme, widow pension scheme and PDS scheme was reported during household survey.

This section identifies and assesses the potential impacts to the physical, biological and socioeconomic environment that can be expected from the proposed substation project at Surda. The impacts due to the Project activities across different phases have been identified and assessed.

Impacts are identified and predicted based on the analysis of the information collected from the following:

- Project information (as outlined in *Section 3*);
- Baseline information (as outlined in *Section 5*).

6.1

POTENTIAL IMPACT

The identification of likely impacts during construction and operation phases has been carried out based on understanding of activities and their consequent impacts on various environmental and socio-economic resources or receptors. The impact identification matrix in *Table 6.1* captures the likely interactions between the activities on one axis and the resources / receptors on the other axis.

Table 6.1 *Environmental and Social Impact Identification Matrix*

Project Activity/ Hazards	Environmental Resources										Ecological Resource				Social-Economic Resources									
	Aesthetic & Visual Impact	Land Use	Soil Quality	Air Quality	Noise & Vibration	Topography & Drainage	Surface water resource	Surface water quality	Ground water resource	Ground water quality	Traffic (Road)	Terrestrial Flora	Terrestrial Fauna	Aquatic Flora & Fauna	Protected /Migratory Species	Migratory Path/Corridor	Job & economic opportunity	Economy & Livelihoods	Common Property Resources	Land Use (Economic Displacement)	Infrastructure & Services	Cultural Resources	Community Health & Safety	Occupational health & safety
Construction Phase																								
Land Procurement																								
Clearance (Vegetation & other structure)																								
Site Development (cutting & filling)																								
Construction of Site approach road																								
Transportation of construction materials, equipment & machineries																								
Storage & handling of construction materials																								
Construction of switch yard and Other building																								
Storage, handling and disposal of construction waste																								
Generation of sewage and discharge																								
Sourcing of construction water & domestic water																								
Surface Runoff from construction site																								
Operation Phase																								
Physical presence of sub-station																								
Maintenance of Substation & generation of transformer oil and e-waste																								
Sourcing of water for earthing pit & residential units																								
Storm water runoff																								

Project Activity/ Hazards	Environmental Resources										Ecological Resource			Social-Economic Resources											
	Aesthetic & Visual Impact	Land Use	Soil Quality	Air Quality	Noise & Vibration	Topography & Drainage	Surface water resource	Surface water quality	Ground water resource	Ground water quality	Traffic (Road)	Terrestrial Flora	Terrestrial Fauna	Aquatic Flora & Fauna	Protected /Migratory Species	Migratory Path/Corridor	Job & economic opportunity	Economy & Livelihoods	Common Property Resources	Land Use (Economic Displacement)	Infrastructure & Services	Cultural Resources	Community Health & Safety	Occupational health & safety	
Generation of MSW & Disposal																									
Generation of sewage & discharge																									
	= Represents “no” interactions is reasonably expected																								
	= Represents interactions reasonably possible but none of the outcomes will lead to significant impact																								
	= Represents interactions reasonably possible where any of the outcomes may lead to potential significant impact																								

6.1.1

Impact Aesthetic and Visual Quality

Potential impacts to aesthetics and visual quality because of the setting up and operation of the Surda GSS may arise because of two key factors – disruption and degradation of views in the surrounding landscape; and, use of nighttime lighting for construction and security purposes. Visual impacts of GSS projects along with associated transmission lines (in and outgoing) are highly variable and depends on several factors like location of the project, lines of sight, scenic vistas and most importantly the perception of the people. Degradation of views from setting up of the GSS in the identified plot of land may result from vegetation clearance, handling of construction and domestic wastes, and setting up of physical infrastructure (including some transmission towers which are to be constructed on the boundary of the site) associated with the GSS. After the GSS is commissioned, night-time security lighting would be operational and would lead to addition of strong artificial lights in what is at present is a predominantly rural area with no street or external lighting. With the study area, not being recognized as a place of natural scenic beauty or a touristic destination, these factors are unlikely to lead to any significant adverse visual and aesthetic impacts in the area and it can be rated as **negligible**.

6.1.2

Air & Noise Quality

The GSS is not planned to house any point or area source of air emissions (particulate matter, pollutant gases, etc.) and neither does the study area have any industrial air pollution sources – Jamshedpur-Musaboni road passing close to the site (approx. 1.5 km), through which regular vehicular movement occurs (mainly light utility vehicles and motorcycle) is the only line source of air pollution, caused by vehicular emissions and because of re-entrained dust from the road surface. Based on visual observations, the quality of the air shed can be categorized as good and no indicators or existing sources of air pollutants were noted in the study area that could potentially result in air quality parameters to exceed National Ambient Air Quality Standards (NAAQS).

During site preparation and construction, the project is likely to generate dust (as particulates) in spite of best efforts to control it and there will be times during the construction phase when elevated dust concentrations may occur. Higher amounts of dust will be generated at places where earthwork, cutting and filling operations take place or in material handling and storage areas. A large percentage of such dust emissions from construction sites have been found to comprise of particles which are coarse in size (>10 microns) and has a tendency to settle down within a few hundred meters of the source of emissions. The smaller fractions (PM₁₀) can however be carried over longer distances in a dust cloud, in the case wind velocity is higher and depending on prevailing wind direction maybe deposited in the adjoining Kasidih Tola of Surda village with a potential to cause soiling of residential premises, deposition on agricultural crops, etc. However, this will be a short-term impact lasting for a few months. Particulates, CO, SO_x, NO_x and unburnt hydrocarbons (VOCs) will be emitted by vehicles, batching plants (if used),

heavy equipment and DG sets associated with site clearing and construction activities.

The operational GSS site at Surda will not have any specific source contributing to air emissions. However, the site will house transformers, switches and associated cables which may contain insulating gases such as Fluorocarbons and Sulfur hexafluoride (SF₆). If accidentally released during maintenance work or equipment overhauling, they may release these gases which are categorized as greenhouse gases and having significantly higher global warming potential (GWP) than CO₂. The frequency of such non-routine incidents is predicted to be very few in the entire lifecycle of the operation of the GSS. Overall, the impact on air quality during the construction and operational phase of the project can be rated as **negligible to minor**.

Noise and vibration at the Surda GSS site is expected to be primarily generated during the site preparation and construction phases of the project. Such noise may be generated from blasting (if required), operation of heavy construction equipment and machineries, DG sets and the transportation of equipment and materials. During operational phase, the transformers and switches to be installed within the GSS would also emit typical humming noise caused because of magnetostriction (involving the expansion and contraction of the iron core due to the magnetic effect of alternation current flowing through the transformer coils). Though the emitted noise may vary in characteristics depending on the rating of the transformer, typically the intensity and amplitude transformer emitted noise is about 120 Hz and 55 dB (A). As the transformers and other sound emitting equipment would be located well within the boundary of the site, any incremental contribution to the ambient noise quality at the boundary of the site would be **negligible**.

The study area has no major noise sources, except for vehicular noise on the Jamshedpur-Musaboni road. However, the road is quite far (approx. 1.5km) from the project site. The noise generated from the construction phase activities is likely to be attenuated to acceptable levels as per the ambient noise standards within 200 m of the site. Such noise may however, cause discomfort the construction workers at site and nearby receptors at Kasidih tola of Surda village, which is located at approx. 300m from project site. The construction activities, especially those with a potential to generate high noise levels would be temporary in nature and are not expected to last more than 12 months. The spatial scale of impact will be limited to a few hundred meters. The overall significance of the noise related impacts is rated as **moderate**.

6.1.3 *Impact on Land use, Soil & Drainage*

The proposed Surda GSS is planned to be constructed over 10.3 acres of land. The present land use of the site is categorized as GM land (Purani Parti Kadim), with few mature trees (Refer *Section 5.9.1*). JUSNL will divert the land use of the tract of land to industrial use and this would result in a permanent change of land use. Because of the nature of the project and low level of anthropogenic activity to be associated with the site during

operational phase, it is unlikely that the GSS project would induce any significant change of land use in other land parcels in the immediate vicinity.

The proposed site is undulating. Thus, levelling would be required before the construction of the GSS. The preparation of land for the construction activities at site would involve top soil stripping and cutting, filling and levelling activities in order to make the site topography suitable for setting up of the GSS.

Disposal of solid waste and spills of lubricants, fuels and chemicals during land clearing, terrain sloping, levelling and construction activities creates the potential for soil and water contamination. The specific type of solid wastes likely to generated during the construction of the Surda GSS sites would include defective or compromised building materials, waste concrete, wastes from on-site machineries and repair of machineries and equipment, packaging pallets and crates and wastes associated with onsite activities of workers (in relation to the number of workers present) like domestic solid wastes.

During the operational phase, hazardous wastes generated from the GSS would include small quantities of used oil, contaminated absorbent material, burned out bulbs or tube lights, used parts, scrap and debris. The transformer oil is expected to be changed every 15 years and the waste oil is planned to be reused through authorized recyclers. E-waste (electrical parts, panels, etc. which will need replacement) and used lead acid batteries would also be collected and disposed off or recycled through authorized agencies. In addition, as all hazardous waste will be stored in covered areas which have a lined floor and with appropriate physical barriers for containment of spills, it is very unlikely to contaminate soil or underlying groundwater at site. Overall, the impact on drainage and soils is expected to be **minor**.

6.1.4 *Impact on Water Resources*

Water resourcing requirements for a GSS project are minimal, as there is no process or activities that require a steady supply of water. In the operational phase, water would need to be sourced on the long term to meet the domestic needs of about 16 – 20 people and the daily requirement would be about 8.4 KLD. The water requirement during the construction phase is expected to be more intense – an estimated amount of 10-12 KLD (including provision for domestic water supply to labourers of approx. 2 KLD) and about 3-4 KLD during the rest of the construction period. It is estimated that the civil works would be completed within 1 year and the construction phase would last 2 years.

With no nearby source or provision to provide piped or treated water from a surface water being present, the project would depend on extraction of ground water resources, using a bore well, to be dug at site. The bore well would be planned to extract water from the deeper aquifers. As per CGWB report (2013), the level of ground water development in this area is 11.79 % with expected yield of 2.7 m³/hr to 78 m³/hr, should be sufficient to meet the

water requirement of the Surda GSS during the short to medium term. The neighboring settlements source water using dug wells and tube wells and both of them utilize the shallow, near shallow aquifers; so, there is expected to be no conflicting demands on ground water resources. Considering the amount of water planned to be sourced, the limited spatial extent which would be impacted and the sensitivity of the resource, the significance of the project's impact on water resources can be considered to be **minimal**.

6.1.5 *Impact on Surface Water Bodies*

The site is expected to generate surface water runoff, both during the construction and operational phases, when it rains and the water will be channelized through a storm / surface water drainage system through a point of discharge, to an existing natural drainage channel maintaining gravity flow, for further drainage into an adjacent stream or surface water body. Runoff from the GSS site, if allowed to flow off areas where wastes are stored (as has been identified in the previous sub-section) or from areas where contaminants like lubricants, fuels and chemicals have been spilled, have the potential to impact the receiving surface water body or stream. During operation, about 7 KLD of domestic waste water / sewage will be generated from the residential quarters and the toilets. The sewage would be treated through a septic tank system and any overflows along with the domestic waste water would be discharged through an outlet into the nearby surface water drainage, meeting prescribed standards for surface water effluents.

There is one pond located at southwest corner, within the project site and reportedly used by the local villagers. If both during construction and operation phase of the project, waste water and surface runoff from the GSS site flows into this pond, it has potential to pollute water of this pond. However, the possibility is meager as this pond has embankment around it of approx. 1m above the ground level. The impact significance is expected to be **minimal**.

6.1.6 *Impact on Biological Environment*

As discussed earlier in *Section 5.9.1*, there are few matured trees with species *viz.* Banyan, Akashmoni, Date Palm, Toddy Palm, Aam etc. and few shrubs and herbs within the site. Site preparation will involve removal of the trees, shrubs and herbs present at site which will cause change in the modified habitat within the site leading to a loss of floral biodiversity at local level.

Faunal species that have high probability of occurrence within the site include amphibians (Common toad), reptiles (lizards and snakes), birds (House crow, Common sparrow, Common myna, Drongo, doves, parakeets, kites etc.) and mammals (Indian Grey mongoose, squirrels, rat etc.). Removal of vegetation from the site can adversely affect residential burrowing faunal species *viz.* reptiles (lizards and snakes), ground roosting birds (sparrows, pigeon, doves etc.) and mammals (mongoose, rat etc.). In most cases however it has been observed that faunal species migrate to other local habitats which are adjacent, if the land affected is not very large.

The floral species that would be affected because of site clearance and preparation are few trees, shrubs and herbs. The loss of trees, shrubs and herbs from the site will not create any habitat degradation or fragmentation in the area. None of the floral or faunal species expected to be present within the site is threatened as per IUCN Classification (Version 2017-3). Vegetation clearance may affect the faunal species mentioned above, however, there are similar habitats in the vicinity and the species can easily relocate to those areas. The scale of impact will be medium as it causes irreversible damage to a modified habitat. Duration of the impact will be long term as vegetation clearance would create a permanent impact within the site area. Extent of the impact would be only within the project site and immediate vicinity.

Construction activities will include excavation, movement of machineries, increased anthropogenic movement (men and transport) and may lead to minor disturbances to floral and faunal habitats in the vicinity of the site because of deposition of dust, noise and light generated during construction activities may affect feeding, breeding and movement of animals. However, these disturbances will be for a temporary period and expected to be of low magnitude and local in scale.

During the operation phase, several species of birds identified during the ecological study which can perch (*viz.* doves, pigeon, mynas, kites etc.) or make nests within the GSS area (*viz.* sparrows, pigeons, doves etc.) with a possibility for electrocution. The same could occur to small mammalian species like macaques, langurs may get electrocuted within the GSS area. However, the chances of birds and mammalian species getting electrocuted within the GSS site are rare; moreover the species having the potential to get electrocuted are common in the area and of low sensitivity. Overall the significance of impact on biological environment can be rated to be between **minor to moderate**.

6.1.7 *Impact on Socio-economic Condition*

Proposed Surda GSS will be constructed on 10.3 acres of land which belongs to the government and therefore would not require any land acquisition (through any involuntary mechanism / application of powers of eminent domain) or negotiations for purchase of land for setting up the project.

As part of socio-economic consultation and survey, it was learnt that three farmers of Surda village have “*patta*” for cultivating 1.3 acres of land within the proposed GSS site. One of the farmers (Shibu Hemmbram) who holds “*patta*” also cultivates 0.5 acres of a separate parcel of land within the proposed GSS site. Further, another farmer (Fagu Murmu from Kasidih Tola of Surda Village) is cultivating 0.4 acres of separate parcel of land within the proposed GSS site. Thus, the construction of GSS on the proposed land is anticipated to impact the livelihood of the above-mentioned farmers. However, the farmers also own additional private land. Hence, the severity of the impact will be less. As part of the proposed project, a Resettlement Action

Plan has been prepared for the affected farmers. The plan will encompass compensation for the project affected persons. For, the farmers that have patta, the same area of land with similar productivity will be identified by the Circle Office, Revenue Department, Government of Jharkhand and provided to them to compensate for their loss.

In terms of shared community resources, there is village pond (of approx. 100 m X 100 m) at southwest corner, within the project site. This pond is presently used for domestic purpose by local community. Therefore, potentially if the water body is taken for the GSS site or the access to the water body is restricted, the local people using the pond water for domestic purposes will be impacted. However, as part of consultation with JUSNL officials, it was learnt that the pond will not be filled up and would be retained as it is. Further, there may be a chance of deterioration of the quality of the water of the pond to be used for domestic purpose. It was observed during site visit, that the embankment of the pond was higher (1m) than the adjoining land. Hence, the potential for contamination is low.

However, several nominally positive socio-economic impacts can result from the project. There is scope for generation of indirect employment opportunities during the site preparation and construction phases of the project. It is anticipated that about 50 workers would be employed during the construction phase that also includes unskilled workers. The demand for the unskilled workers may be met from local villages. There would also be a scope for some small contracts to be provided to local contractors for supply of construction materials, vehicles, tractors, etc. In addition, the presence of workers, contractors, engineers during the construction period is expected to stimulate a demand for other economic activities (shops, restaurants, etc.) and thus giving a boost to local businesses. It should be noted that these opportunities would be short-term, as the operational phase of the project would involve deployment of a small number (about 8 – 10) of technical skilled workmen (mostly engineers). Both the beneficial and adverse socio-economic impacts can be rated to be **high** in terms of significance.

6.1.8 *Influx of Labour*

It is envisaged that during construction phase of the project, labourers for various jobs such as civil, mechanical and electrical works will be hired through authorised manpower agencies. Even though unskilled labour force can be sourced locally, for skilled labour required for the project would be primarily migrant labour.

The influx of migrant labour will have both negative and positive impacts on the nearby community and local environment. The labour will be accommodated in temporary campsite within the project boundary which can have some interface with the nearby community. However, the influx of migrant workers would lead to a transient increase of population in the immediate vicinity of the project area for a limited time. This may put some

pressure on the local resources such as roads, fuel wood, water etc. Some of the significant issues related with migrant labour would include:

- Conflict amongst workers, and between workers and local community, based on cultural, religious or behavioral practices;
- Discontent amongst local community on engagement of outsiders;
- Outbreaks of certain infectious diseases;
- Security issues to local women from migrant workforce;
- Use of community facilities such as health centers, temples, transport facility etc. by migrant labour may lead to discontent with local community; and
- In case contractors bring in unskilled migrant labour, there stands the risk of exploitation of a labourer. This can happen in the form of hiring underage labourers, low and unequal wage payments, forced labour and discrimination on basis of the basis of caste, religion or ethnicity.

The impacts described above may primarily extend to the settlements in the immediate vicinity, therefore localize in nature. From the context of project site setting, it would be noted that, no vulnerable community like women headed family, scheduled tribes etc. was recorded from community consultation and from socioeconomic survey.

The socioeconomic survey in Surda village, indicates that there is approximately 43.18 % population unemployed. The finding indicates that there is a pool of labour-resource who can be engaged in the project as unskilled labour. The project would source unskilled workers from surrounding villages (e.g., Surda, Sohada, Tilabani, etc.). Also a planned labour camp for skilled workers within the GSS site may further reduce the assessed potential impacts related to labour influx. Therefore, impact from labour influx is evaluated to be of **minor** significance.

6.1.9 *Impact on Community Health and Safety*

Experience shows that because of its nature and scale, project like GSS's can be expected to have a limited interface with the local community and as a result will have minimal impact on the safety and health of local communities. During the construction stage of the project, there will be an influx of workmen and labours, with some of them being from different socio-cultural settings as compared to the villages around site. In the case that hygienic conditions are not maintained at the construction site, there may be a cause for vector borne diseases and other ailments in the immediate vicinity. Unless proper sensitisation of neighbouring communities is undertaken and appropriate safeguards are adopted, there is a possibility for increase in sexually transmitted diseases, although the possibility appears quite remote.

The site clearing activities and construction activities (involving fill materials, brick and concreting work) would result in emissions of dust and noise, discharge of sanitary waste water and potential littering from labour quarters

for around 12 months and has a potential to contribute to additional nuisance levels for the community and households located immediately adjacent to site. However, there is no fence line community present and the habitation of Surda village being located at a distance of 100 m, no significant health related impacts are expected to the communities in the area. The increase in vehicular movements as a result of plying of construction vehicles on the adjoining highway and the site access road would add to the risk of accidents in which local villagers may be involved. In addition, the GSS project would have incoming and outgoing transmission lines (132KV KV), house transformers and associated equipment that has the potential to create electro-magnetic fields (EMF). Although there is a public concern over the potential health effects associated with the exposure to EMF, empirical data is insufficient to demonstrate adverse health impacts from typical EMF levels originating from high voltage power lines and substation equipment. Considering good construction practices and planned embedded measures for mitigating these impacts, the overall significance of community health and safety impacts can be rated to be **minor**.

6.1.10 Occupational, Health and Safety

During the construction phase of the project, about 50 workers would be involved in construction related activities, some of which are inherently unsafe, unless adequate precautions and safeguards are adopted by the workers and construction site contractors. Safety issues related to construction of the GSS at Surda may involve physical hazards like working at height, exposure to heat, particulate matter, noise and vibration, collision with vehicles/ moving equipment; exposure to electrical hazards; exposure to chemicals hazards (both inhalation and physical contact) like organic solvent vapours, reactive and toxic chemicals (acids's, bases, insecticides, etc.). Such occupation hazards would vary with the nature of work undertaken by the workmen, as they may employed by different contractors responsible for doing a particular component of the work.

The construction work would involve several contractors who in turn would engage different labourers having varied skillsets. The duration and extent for most workmen is expected to extend for a few months and the occurrence of any accidents and consequent injuries/fatalities will lead to adverse impacts that could range from loss of productive time to loss of livelihoods (of workmen). If local workers are hired, they may not have appropriate training for adopting a safety culture expected at an industrial construction site – so receptor sensitivity may be anticipated to be high. There is also a possibility of legal non-compliance which may lead to temporary stoppage of work affecting construction schedules. Hence the receptor sensitivity is high. Overall, the impact significance for occupational health and safety can be considered to be **moderate**.

7.1 INTRODUCTION

A stakeholder is defined as “an individual, group, or organization, who may affect, be affected by, or perceive itself to be affected by a decision, activity, or outcome of a project”. “Stakeholder Analysis” is the process of sorting identified stakeholder groups according to their impact on the project and the impact the project will have on them. This information is then used to assess the manner in which the interests of the stakeholders or projects impact on them should be addressed in the project development plan or its operation.

The importance of stakeholder analysis lies in the assessment and understanding of the socio-political environment surrounding the project. It allows for:

- Identification of the interests, concerns and societal risks surrounding the stakeholders, as well as conflicts of interests (if any);
- Identification of relations between stakeholders that may enable “coalitions” of project sponsorship, ownership and co-operation as well as the mechanisms which may influence other stakeholders;
- Key groups/ individuals to be identified who need to be informed about the project during the execution phase;
- Identifying stakeholders (those who might have an adverse impact on the project) and taking appropriate measures to mitigate their influence; and;
- Development of a framework for participatory planning and implementation of various project activities including interventions for community development.

The identification of stakeholders and their inclusion in the decision-making process is thus essential in the process of prioritizing, analyzing and addressing issues; and in creating management systems and strategies to address the concerns/ expectations of various stakeholders.

The following sub-sections provide a profile of the various stakeholders in the project as well as their concerns and relative influence with regards to the project.

7.2 IDENTIFICATION OF STAKEHOLDERS

The stakeholders who would directly impact or are directly impacted by the project are known as Primary Stakeholders, those who have an indirect impact or are indirectly impacted are known as Secondary Stakeholders. Keeping in mind the nature of the project and its setting, the stakeholders have been identified and listed in the table below;

Table 7.1 *List of key stakeholders*

Stakeholder Category/ Group	Key Stakeholders
Primary Stakeholders	
Local Community	• Local Community
Other Primary Stakeholders	• Jharkhand Urja Sancharan Nigam Limited
	• World Bank
Secondary Stakeholder	
Institutional Stakeholders	• Circle Office, District Administration
Other Secondary Stakeholder	• Contractors

Consultations with Local Communities

Community consultations were conducted in close vicinity boundary to gather the opinion of the public on the proposed project and assess its potential effect on the public especially vulnerable groups. Consultations were carried out with community people residing in the adjacent to the proposed Substation site to assess the extent of impact on the common people.

Figure 7.1 *Consultations with Local Communities*



The brief outcome of the consultations with the key stakeholder groups are listed below.

ERM undertook consultations/ meetings with identified stakeholders during the course of the site visit. The intensive deliberations provided a platform for two-way communication between the team of consultants and the stakeholder groups. This in turn helped in developing an understanding of the perceptions of stakeholders with regards to the project and also allowed for a means of recording their feedback. The key points discussed with each of these stakeholders are provided in the table below:

Table 7.2 Stakeholders and Key Points Discussed

S. No.	Stakeholder Category	Key Points Discussed	Findings of the Consultation
Local Community			
1.1	Local Community (Location- Kasidih tola (Surda village); Date- 17/03/2018; Number of participants- 7 people)	<ul style="list-style-type: none"> • Current engagement scenario –livelihood options; • Basic amenities in the village – electricity, drinking water, etc.; • Health scenario in the village and distances of Hospitals/ Clinics; • Perception of local community towards the project; 	<ul style="list-style-type: none"> • Total 23-25 households are present in Kasidih Tola of Surda Village. All belong to Santhal community; • Availability of water is scarce in this region. All the three tube wells provided through Government Scheme does not work. Hindustan Copper Limited has provided a bore well with storage system. The villagers depend on this source for meeting their drinking water. For other needs, they either go to water fall (approx. 1km away) or to Subarnarekha River. Part of the domestic and irrigation requirement is filled by rain fed ponds present in the village; • Toilets are present in every house but not in use due to non-availability of steady source of water; • Electricity is present in every household and the availability is 16-18 hours per day; • A middle school up to class-8 is available in Surda village; • High school (+2) is available at Musaboni; • No Primary health centre is available in this village. Nearest health centre facility is available at Baraghat; • The men of the village usually work as labourers in mines or at Ghatshila town. During monsoon, they cultivate paddy in their fields; • A pond was observed adjacent to the GSS boundary. Size of the pond is about 100 m x 100 m with a depth of 5 ft. Reportedly, this pond is

S. No.	Stakeholder Category	Key Points Discussed	Findings of the Consultation
			<p>used for domestic purpose by local community.</p> <ul style="list-style-type: none"> • The community people expressed that they may face some problem related to domestic usage if the pond is covered within GSS site; • Makar/Tusu is the major festival and celebrated in mid of January; • Local people are very positive about the proposed project. They expect some work during construction activity. They have expressed their hope that this project will improve the economic development in this area. • When discussed about labour camps, villagers have shown no objection. They have also suggested that the barren land located adjacent to the GSS site can be used for labour camp; and • The villagers had few expectations apart from employment and these are 1) improved water supply, 2) a community hall.
1.2	Local Community (Location- Baraghat tola in Surda village; Date- 17/03/2018; Number of participants- 4 people)	<ul style="list-style-type: none"> • Current engagement scenario -livelihood options; • Basic amenities in the village - electricity, drinking water, etc.; • Health scenario in the village and distances of Hospitals/ Clinics; • Perception of local community towards the project; 	<ul style="list-style-type: none"> • Consultation was held with the Mukhia- Ms. Shanti Hansda of Surda village (Panchayet) and the office bearers. The office is present in Baraghat tola. Baraghat tola is located 750 m away from the proposed GSS site; • The Mukhia said that she was present on the day the land was surveyed and demarcated by the land revenue department. • The Mukhia had stated during the first consultation that the villagers were supportive to the establishment of GSS at the proposed site; • Later during consultation in July, 2018, it was learnt that few farmers were opposing the construction of the GSS since their land would be affected. The Mukhia was contacted thereafter and she said that few parcels of the GSS land was cultivated by few squatters and farmers with "Patta" or "Bandobast" and were not in favour of the project; • On request, the Mukhia arranged for a direct consultation with the project affected persons. • Baraghat tola (in Surda village) was dominated by Santhals (ST's)

S. No.	Stakeholder Category	Key Points Discussed	Findings of the Consultation
			<p>(nearly 90 %) followed by Scheduled Castes (10 %);</p> <ul style="list-style-type: none"> • The major livelihood is working as labourers in agricultural fields during rainy season and in mines or at Ghatshila town; • 1 Tubewell is available in this village. There are 8 tube wells present in the village; • One primary and one middle school is present in the village; • For higher education, students go to Ghatshila; • Toilets have been provided in most of the houses, however they are not in much use due to non-availability of water.
1.3	Consultation with Project Affected Persons (PAPs) Dated: 06/07/2018	Dependency on the land falling within GSS site, livelihood profile, expectations from the project	<p>During site visit in July, 2018, the Mukhia had called the Project Affected Persons (PAPs) to her office for consultation. The summary of consultation with the Project Affected Persons' has been provided below:</p> <ul style="list-style-type: none"> • There were four project affected persons from Baraghat and Kasidih tola of Surda village; • Out of four farmers, three farmers (all are brothers) had "patta" or "bandobasti" or legal rights for cultivating land. They live in Baraghat tola; • The papers (naksha or map, khatiyaan, etc.) related to bandobasti, had been submitted to Circle Office, Musabani for verification; • Of the three brothers, one (Shibu Hembram) has been cultivating 0.5 acres of separate land though he did not have any patta for the same. CO of Musabani has reported that, this land parcel is illegally cultivated by Shibu Hembram; • Similarly, another farmer (Fagu Murmu) from Kashidih tola, Surda village was cultivating approximately 0.4 acres of land within the proposed GSS site though he did not have any patta for cultivation. CO reported that, this land parcel is illegally cultivated by Fagu Murmu; • Reportedly, paddy is being cultivated during monsoon season only in every year in above mentioned areas.;

S. No.	Stakeholder Category	Key Points Discussed	Findings of the Consultation
			<ul style="list-style-type: none"> The PAPs shared the approximate area of land parcel they cultivated but could not provide the exact measurement; The PAPs were interested to know if they would be provided crop compensation every year against the land. They were informed that the provision of crop compensation will be one time only. It was learnt during consultation that the PAPs had a common demand of employment at the GSS during its operation. However, it was conveyed to them that provision of employment is not feasible as per the Resettlement Action Plan.
	Consultation with Circle Officer (CO), Musabani, Dated: 31/07/2018		<p>Consultation was undertaken with Mr. Sadhucharan Deogam, CO of Musabani Circle to understand present status of the land allotted for the GSS. From consultation with CO, following information are gathered;</p> <ul style="list-style-type: none"> Surda GSS would be located on Plot No. 944, which is revenue land. Total area of the plot is approx. 23 acre, from which 10.3 acre is allotted for the GSS site. 1.3 acre of land from the GSS site (of 10.3 acre) is "patta" land. For this land "bandobasti" was given to three brothers (Shibu Hembram, Shyam Hembram and Palu Hembram) by Bihar Revenue Department in 1995. As proposed GSS project will use this 1.3 acre of land, three brother for whom "bandobasti" was arranged, would be provided with alternative land of similar size (1.3 acre) and productivity. Alternative land would be arranged near their existing land (which would be used for the project). Revenue land is already available in his area, which would be provided as alternative land.

The ESIA for the Surda GSS site has been undertaken to assess and report the environmental and social impacts of this component of the JPSIP project. In course of the project's planning and the ESIA, project design decision have been made taking into account the need to avoid, minimize and reduce adverse impacts. Further, this Environmental and Social Management Plan (ESMP) provides project and site specific mitigation measures to minimize damage to the local environment and disruption to local communities.

The ESMP comprises of site and activity specific mitigation measures in the form of an *Impact Mitigation Matrix (IMM)* as detailed in *Table 8.1*, structured according to the sequential flow of activities in the project life cycle and accounting for a choice of design criteria, construction methods, practices and logistics, pollution prevention and reduction measures, labour and community related safeguards. In addition, the IMM is supported by several complementary *Environment & Social Action Plans (ESAP)*, which provide customized best practice recommendations to ensure that the impacts of the GSS projects are managed in accordance to national and international best practices and benchmarks.

8.1 MITIGATION MEASURES

The Impact Mitigation Matrix (IMM) is detailed in *Table 8.1*. In order to ensure that the ESMP is being adhered to by Contractors, who will be responsible for implementing the project, provisions with respect to specific mitigation measures have been incorporated as a part of General and Special Conditions of Contract. The General and Special Conditions of Contract are presented in *Annexure 2* and *Annexure 3* respectively.

Table 8.1 **Impact Mitigation Matrix**

Sl. No.	Project Phase /Activity	Potential Impacts	Proposed Mitigation Measures	Responsibility
	Planning/Pre-construction			
1.1.1	Procurement of land	Loss of livelihood	An alternate land parcel of similar size (1.3 acres) and productivity will be allocated to the title holders (Shibu Hembram, Shyam Hembram and Palu Hembram) of the “ <i>patta</i> ” land. An alternative land parcel has been identified and provided in Figure 8.1 .	Revenue Department, Government of Jharkhand, JUSNL Circle/Divisional Office, Revenue Department
1.1.2			The parcel of land which is being used for agricultural purpose by Shibu Hembram (present in the Northern part of the proposed GSS) will not be used for proposed GSS.	JUSNL Circle/Divisional Office, Revenue Department, Contractor
1.1.3			Resettlement Action Plan (RAP) will be prepared as per the Resettlement Framework (RF) and appropriate compensation will be provided against the produce of the squatting land to Fagu Murmu.	JUSNL Circle/Divisional Office, Revenue Department, External Consultant
2	Felling of trees on the land	Loss of precious ecological values	There are few mature trees located within the project boundary that would be felled.	JUSNL Circle/Divisional Office/External Consultant
3	Substation location and design	Access restriction on use of common property	Substation layout to ensure that the pond which is located at southwest corner, within the project site, is not damaged. It would also be ensured that local people who are using this pond would not be restricted from using this pond.	Design Consultant/ Contractor
4	Design of residential quarter and office at substation	Water/soil pollution	Septic Tank with soak pit to be designed as per IS: 2470 (Part-1) - 1985 (Code of Practice for Installation of Septic Tank).	Design Consultant/ Contractor
4.1	Construction Site preparation and construction work	Loss of topsoil	<ul style="list-style-type: none"> • Top soil from the construction site will be stripped before commencement of construction work; • Top soil will be stored in a dedicated top soil storage site, having adequate mitigation measures for preventing erosion due to runoff; • Activities will be scheduled (as far as possible) to avoid extreme weather events, such as heavy rainfall; • Top soil will be used for landscaping within the GSS site. 	Contractor

Sl. No.	Project Phase /Activity	Potential Impacts	Proposed Mitigation Measures	Responsibility
4.2.1		Noise and vibrations	All equipment/machineries to be regularly maintained to ensure efficient operation	Contractor
4.2.2			DG sets with acoustic enclosure should be used	Contractor
4.2.3			Construction work during night time (10 pm to 6 am) to be prohibited. In case of emergency work at night approval of JUSNL Division/ Circle is mandatory	Contractor
4.3.1		Air Pollution	Water sprinkling to be carried out twice a day during dry season on exposed surface area.	Contractor
4.3.2			Vehicles transporting loose construction/excavated materials shall be covered with tarpaulin sheets.	Contractor
4.3.3			Loose construction material/ excavated material shall be stored against any structure or would be kept covered with tarpaulin sheet at the construction site.	Contractor
4.3.4			All vehicles utilized in transportation of raw materials and personnel, will have valid Pollution under Control Certificate (PUCC)	Contractor
4.3.5			Regular maintenance of machines, equipment and vehicles that will be used for construction activities of substation/tower construction	Contractor
4.4.1		Water/Soil Pollution	Septic tanks and soak pits/modular bio-toilets would be provided at all construction site and labour camp	Contractor
4.4.2			<ul style="list-style-type: none"> A peripheral site drainage channel would be constructed at the beginning of the construction work. The peripheral site drainage channel would be provided with a sedimentation tank to prevent sediments to be carried away by the runoff. Storm water drainage should not be discharged to into any agricultural field or pond. 	Contractor
4.5		Depletion of water resource	Consumption of water would be reduced to the extent possible through the application of water conservation measures and through reuse/recycling of water, wherever possible.	Contractor

Sl. No.	Project Phase /Activity	Potential Impacts	Proposed Mitigation Measures	Responsibility
5.1	Community Health and Safety	Injury and sickness of local people	<ul style="list-style-type: none"> • Coordination with local communities for construction schedules; access restriction for local people at the construction site. • Undertaking regular health check-ups of the work-force and reporting any major illnesses at the earliest to Block health officer for disease control and surveillance. • Creating mass and labour awareness on HIV and STDs; 	Contractor
5.2		Local Woman Community	<ul style="list-style-type: none"> • Labour Camp should be located away from the village and it should have access control for the local people. • Awareness should be created among the migratory labour that they should not be entered in the village without prior information to the villagers. • Local resource like hand-pump, bathing ghat should not be used by the labours. 	Contractor
6	Occupational health and safety	Injury and sickness of workers	<ul style="list-style-type: none"> • Provide safety equipment's (PPEs) for construction workers; • Prevent entry of un-authorized person at construction site; • Provide training on health and safety to all the workers. 	Contractor
7.1	Blasting (in case of hard rock formation)	Noise and Vibration	Adopt appropriate engineering safeguards to meet the regulatory standard [DGMS Prescribed Permissible Limit of Ground Vibration (refer <i>Annexure 6</i>)] for blasting operation.	Contractor
7.2		Damage to Structure	In case there are any damages to the structures due to blasting, the same will be assessed and would be repaired	Contractor
7.3		Occupational health and safety	<ul style="list-style-type: none"> • Implement mitigation measures to control fly rock; • Secure and limit access to blasting areas to qualified personnel involved in, and necessary for, blasting operations; • Arrange for adequate safety measures (as per Explosives Rules, 2008) for transport and storage of explosives; • Provide protective equipment to all the personnel engaged in blasting activity. 	Contractor
8.1	Health, Hygiene, Safety and Security of Workers in Labour Camp	Labour camp related EHS and Hygiene Issues	Facilities would be provided at the labour camp as per provisions of IFC Guidance Note on Worker's Accommodation 2009. Some of the relevant provisions to be complied are as follows:	Contractor

Sl. No.	Project Phase /Activity	Potential Impacts	Proposed Mitigation Measures	Responsibility
			<ol style="list-style-type: none"> 1. Worker's accommodation; 2. Provision of safe drinking water; 3. Appropriate arrangement for cooking; 4. Management of waste water and solid waste from the camp site; 5. Availability of medical facility (first aid) 6. Security arrangement of the camp site. 7. Arrangement to register and redress grievance of workers. <p>Refer <i>Annexure 7</i> for detail guideline. Hiring of local unskilled labours during the construction period will further reduce the burden of any potential impact related to labour influx.</p>	
8.2		Conflict with local community due to sharing of local resources	The pond located at the southwest corner of the project site would not be used for this project. It would also be ensured that workers engaged in this project don't use this pond.	Contractor
8.3		Conflict with local population due to disturbance on religious/cultural site/common property resource	<ul style="list-style-type: none"> • Boundary wall or fencing should be constructed before commencement of construction work. • The boundary wall should not enclose the pond and the access to the pond should not be restricted for use by local people. Construction waste and debris should not be dumped on the agricultural land adjacent to GSS site. • Construction waste and debris should not be dumped in the irrigation canal adjacent to the GSS site. • Construction waste and debris should not be dumped in the pond which is located at southwest corner, within the project site. • Awareness camp for labour regarding the sensitivity of the Makar/Tusu festival should be organised on regular interval. 	Contractor
	Operation and Maintenance			
9	Drainage of storm water	Water/Soil Pollution	<ul style="list-style-type: none"> • All internal drainage channels from the substation site would be connected to a peripheral site drainage channel. 	Contractor

Sl. No.	Project Phase /Activity	Potential Impacts	Proposed Mitigation Measures	Responsibility
10.1.1	Handling and disposal of waste	Water/Soil Pollution	<ul style="list-style-type: none"> The peripheral site drainage channel would be provided with a sedimentation tank and oil-water separator to prevent sediments and oil & grease to be carried away by the runoff. Storm water drainage should not be discharged into the pond or agricultural field. 	JUSNL Subdivision Office
10.1.2			<p>The municipal solid waste would be composted in composting pits</p> <ul style="list-style-type: none"> Authorization for hazardous waste generation (used transformer oil) should be obtained from the Jharkhand State Pollution Control Board ⁽¹⁾; Hazardous waste need to be disposed through CPCB/PCB authorised recyclers; Annual return [Form 4 Hazardous and Other Wastes (Management and Transboundary Movement) Rules, 2016] to be submitted to JSPCB. 	JUSNL Subdivision Office
11	Storage and handling of SF6	Emission of most potent GHG causing climate change	<p>Procedure would be put in place for storage, handling and refilling of SF6 gas cylinders. Every refill would be documented and any unusual variation in gas volume would be reported to JPSIP for review and rectification. Each and every leakage will be promptly detected, addressed and documented and reported to the JUSNL Management.</p>	JUSNL Subdivision Office
12.1.1	Occupational health and safety of staff	Injury/ mortality to staff during O&M work	<p>During the testing and charging of electrical lines and substation, electricity insulating protective equipment like footwear (ISO 20345: 2004 Part-2), rubber gloves (IS 4770: 1991) would be provided to workers. In addition, provisions of the "Central Electricity Authority (Measures Relating to Safety and Electric Supply) Regulations 2010" would be adhered to.</p>	JUSNL Subdivision Office

(1) As per recommendation made by the Jharkhand Pollution Control Board

Sl. No.	Project Phase /Activity	Potential Impacts	Proposed Mitigation Measures	Responsibility
12.1.2			Induction training to the entire new employee and six monthly refresher training for substation O&M staff would be organised.	JUSNL Subdivision Office
12.2		Injury/ mortality from emergency situation	Preparation of fire emergency action plan and training given to staff on implementing emergency action plan	JUSNL Subdivision Office
13	Community health and safety	Injury/ mortality to public	Integrity of compound wall would be maintained all time	JUSNL Subdivision Office

Figure 8.1 Location of alternate land parcel against use of “patta” or “bandobasti” land for the proposed project



*Note-*This Toposheet is compiled from 1:25000 Survey, 1992-93 and updated for major details during 2005-06

The supporting ESAP's are as follows:

- Labour Management Plan;
- Occupational Health and Safety Management Plan;
- Gender Action Plan; and
- Citizen Engagement Action Plan.

In addition, Contractors/JUSNL would be expected to work upon customised and site specific Action Plans (e.g., waste management plan, pollution prevention and management plan, top soil management plan etc.), as a part of this ESMP, to demonstrate that the requirements specified therein would be followed during the construction and operational phases of the JSPIP project.

8.2.1 *Labour Management Plan*

It is envisaged that during construction phase of Surda GSS, labourers for various jobs such as civil, mechanical and electrical works will be hired through authorised manpower agencies. It is anticipated that the peak labour requirement during construction phase of the project will be approx. 50 persons involving unskilled, semi-skilled and skilled labourers. Unskilled labourers is likely to be recruited from local villages, while semi-skilled and skilled labourers (approx. 10 to 15) may come from outside area. For labourer, who will spend the night onsite, accommodation will be provided.

The influx of construction labourer will have both negative and positive impacts on the nearby community and local environment. The labourer will be accommodated in temporary campsite within the project boundary, which can have significant interface with the nearby communities. This might also put pressure on the local resources such as roads, fuel wood, water etc.

Labour Management Plan has been prepared to minimize potential health, safety and social impacts associated with influx of project workers on the host population and ensure provision of safe and healthy working conditions, for such workers in consistent with IFC PS 2 and 4 requirements and national labour laws. This labour management plan (refer *Annexure 7*) has covered following aspects:

- HR Policy and Employment Contract
- Working Hours
- Non-Discrimination and Equal Opportunity
- Child Labour
- Worker Health & Hygiene
- Wage Payment & Benefits
- Worker Accommodation
- Emergency Preparedness & Response
- Worker Grievance Management
- Inspection & Reporting

There may be potential safety hazards for workers or labourers involved during the construction phase of the project. IFC PS2 requires providing the workers with a safe and healthy work environment, taking into account inherent risks and hazards specific to the work.

In view of the above, the construction Contractor shall develop a site specific Health & Safety Management Plan (HSMP) in consistent with all applicable health and safety regulations. The same shall be submitted to JUSNL for approval with progress on the implementation of the plan to be shared with JUSNL on a monthly basis. Template for HSMP, which would be prepared by the contractor is provided in *Annexure 8*.

As discussed in Section 5.10 of this report, there is imbalance in socio-economic profile of men and women in the study area related to sex ratio, literacy rate and workforce participation.

Following measures are suggested during project implementation to improve gender equality:

- Prioritize temporary employment of women in the project construction work, in keeping with the required skill set;
- Ensure equal pay for equal work for women and men workers;
- Provide basic amenities (such as separate toilets for male and female workers, clean water, drinking water facilities, resting place etc.) for male and female workforce at construction site and labour camp;
- Implement provisions of the Sexual Harassment of Women at Workplace Act, 2013;
- Address gender based violence risk through (i) community engagement throughout project lifecycle, (ii) labour management plan, and (iii) grievance redressal mechanism.

Gender Monitoring Indicators:

Following indicators would be used to adequately monitor gender action plan:

- Number of women employed as a percentage of total persons employed in construction activities;
- Number of women workers earning same wage as men workers, as a percentage of total women workers employed in construction activities;
- Availability of basic amenities and separate toilet at campsite; and
- Constitution of "Internal Compliant Committee" in JUSNL to register sexual harassment case.

This plan aims at allowing the engagement of citizens in a systematic manner, which will allow the various stakeholder groups and citizens, to express their individual views, opinions and concerns, while allowing for the project to appropriately respond to them. The plan is aimed at enabling active meaningful engagement with the stakeholder groups, one of the most important mechanisms of which is grievance redressal.

Information Disclosure

Information disclosure is a critical component of the engagement activities to be undertaken for the project. The information disclosure will be undertaken primarily through two means; *preparation and dissemination of briefing material* and *organization of community consultations or group meetings*. Key goal of the disclosure process will be to make information accessible and available to all in a simple and easy to understand manner. The briefing material shall be prepared in local language, i.e. Hindi. Following communication tools shall be designed for effective dissemination of relevant information:

- **Executive Summary of ESIA and ESMP Reports:** This will be kept at the offices of local gram panchayats and also at the project office.
- **Non-technical Summary/Brochures in Hindi:** Sufficient number of the brochures will be circulated during subsequent public meetings/individual consultations during project implementation.
- **Posters on Grievance Mechanism along with contact details:** To be made available at the Gram Panchayat office and other government offices where local people gather frequently.

All documents shall be made available to the public in accordance with relevant provisions of the RTI Act, except when otherwise warranted by legal requirements. Information shall be provided in a timely and regular manner to all stakeholders, affected parties and the general public. The following table provides an understanding of the specific information to be disclosed.

Table 8.2 *Information Disclosure Plan*

Project Phase/Activity	Disclosed document	Place & Mode for disclosure	Responsible Agency	Target Stakeholder
Planning/ Preparation of DPR, ESIA & EMP	Environmental and Social Impact Assessment Report; Environmental and Social Management Plan	1. JUSNL website 2. World Bank's Infoshop Online, through Project website.	JUSNL Project Office	All citizens

Project Phase/Activity	Disclosed document	Place & Mode for disclosure	Responsible Agency	Target Stakeholder
Construction / Commencement of Construction	Executive Summary of ESIA and ESMP Reports	1. Local Gram Panchayat office 2. Site Office of the EPC Contractor	Contractor along with the JUSNL Circle/Divisional Office	Community People especially the land owners adjacent to the site, Village Panchayat
Construction / Ongoing construction work	Posters on Grievance Mechanism along with contact details	Printed out Documents 1. Gram Panchayat office and other government offices where local people gather frequently. 2. Construction site and labour campsite	Contractor along with the JUSNL Circle/Divisional Office	People especially the land owners adjacent to the site, people residing near site, Village Panchayat
Construction / Ongoing construction work	Non-technical Summary of Project/ Brochures in Hindi	Printed Posters 1. Site Office of the EPC Contractor 2. Places of public meetings/individual consultations	Contractor along with the JUSNL Circle/Divisional Office	Local community
Operation / Commencement of operation	Information about date of start of operation and charging of substation and associated transmission line	Printed out Documents 1. Gram Panchayat office and other government offices where local people gather frequently. 2. Site Office of the EPC Contractor 3. Places of public meetings/individual consultations Public Announcement & leaflets	JUSNL Circle/Divisional Office	People especially the land owners adjacent to the site, people residing near site, Village Panchayat

As part of the information disclosure process, the stakeholders shall be provided with an opportunity to provide feedback and inputs related to the project using the grievance mechanism as defined in *Section 8.6.3*. The feedback should be recorded and documented. This information disclosure process will thus facilitate the transparency, accountability, and legitimacy as well as operations overseen by it.

Consultation Mechanism

A consultation mechanism has been prepared to ensure involvement of stakeholders' at each stage of project planning and implementation. The mechanism for JPSIP GSS projects is proposed in *Table 8.3*.

Table 8.3 *Summary of Consultation Mechanism*

Project Phase	Activity	Details	Responsible Agency	Target Stakeholders
Planning	Securing of Land for substation Site	Consult to identify sensitivities around the site and common property and agree to mitigations.	Contractor along with the JUSNL Circle/Divisional Office	Community, , especially the land owners adjacent to the site, people residing near site, Revenue Officer, Village Panchayat, Civil Society
Construction	Commencement of Construction	Consult on proposed activity and period of activity- e.g., location of project site, construction and labour camp and associated impacts, ESMP implementation, benefit from the project, procedure for grievance redressal	Contractor along with the site-in-charge (JUSNL)	Do
	Ongoing construction work	Communicate about the progress of construction activity, impact and benefit from the project, record community grievance and redress the same	Contractor along with the site-in-charge (JUSNL)	Do
Operation	Commencement of operation	Communicate about the date of start of operation and charging of substation and associated transmission line	JUSNL Circle/Divisional Office	Do

Grievance Mechanism

A three tier Grievance Mechanism would be used for handling any grievances of the local community related to the project. The Three Tier grievances redressal process is presented in **Box 8.1**.

Tier1: Circle Level: The aggrieved stakeholder can file a complaint with the respective Junior Engineer in charge of the site or at the Divisional/Sub-Divisional Offices of JUSNL. The complaints would be attended to by the Electrical Superintending Engineer of the Jamshedpur Circle and all the Executive Engineers and Assistant Engineers in the Golmuri Division within 21 days of the filing of Complaint. In case the aggrieved is not satisfied with the solution provided at Tier 1, he may escalate it to Tier 2: Zone Level.

Tier 2: Zone Level: The Chief Engineer cum GM of Jamshedpur Zone and the Superintending Engineers of the Jamshedpur Circle would be the members of Tier 2 level. They would hear the aggrieved and also review the proceedings of the Jamshedpur Zone and provide relief to the aggrieved. The entire process would be completed within 45 days of the complaint being referred to Tier II. Unsatisfied with the solution the Complainant can approach the Tier III: GRC Level.

Tier 3: Grievance Redresses Cell (GRC): The GRC for JPSIP would be housed at the JPSIP-PIU. The cell would be headed by the Managing Director, JUSNL or his representative not below the rank of Director (Projects). It would have the Director Projects, JUSNL, Chief Engineer (Transmission, World Bank Funded Projects), Superintendent Engineer, JPSIP-PIU, Executive Engineer (JPSIP-PIU) as members. The Chief Engineer of Jamshedpur Zone would be an invited member. Hearing the complaint the GRC would provide its decision. The process at the GRC would be completed with 60 days of the complaint being registered in Tier 3.

Court of Law: If the grievance/ complaint is not resolved through the GRC mechanism or if the complainant is not satisfied with the resolution provided by GRC, the person may approach the Court of Law.

Mechanism for Registering and Communicating grievances: The Junior Engineer responsible for overseeing the activities of the project would be the first point of contact for registering the grievance. He shall be responsible for registering all grievances in the Grievance Form. The Grievance Form (*Annexure 5*) would be placed at the Office of the Junior Engineer of the respective sub-division and would also be available with the Supervisor of the Contractor. The contact number of the Junior Engineer shall also be displayed prominently at the site of the construction activity. The aggrieved person can either fill the Grievance Redress form and submit it at the nearest sub-division office of JUSNL or call up the Junior Engineer and register the grievance. The Junior Engineer in the latter case will complete the grievances Redress Form and pass it to the Tier 1 for redressal. The outcome of the grievances redressal process shall be sent to the person registering the grievance by Registered Post.

Nodal officer for Grievance Redressal for Surda GSS

Jamshedpur Circle (Tire 1)	Name: Sri Arun Kumar (Electrical Superintending Engineer) Number: 7070816390
Jamshedpur Zone (Tire 2)	Name: Sri Arun Kr. Prashad (GM-cum-CE) Number: 9431707313
Project Implementation Unit (PIU) (Tire 3)	Name: Sri C S Jha Chief Engineer (Transmission, World Bank Funded Projects) Number: 9431780254
Golmuri Division (Surda, Sundarnagar and Chakuliya)	Name: Sri Ashwini Kr. Kachhap (Electrical Executive Engineer) Number: 9471707319

8.3

ENVIRONMENTAL MONITORING & REPORTING

The monitoring indicators, frequency for measurement and the responsibility for monitoring for each of the mitigations proposed in the management plan are described in *Table 8.4*. The monitoring of the EMP provisions would be carried out by the respective agencies at a frequency mentioned in the Environmental Management Plan.

For ensuring effective implementation and evaluation of the performance of the environmental mitigation measure a reporting mechanism has been drawn up and presented in *Section 5.3* of the Environmental and Social Management Framework. The reporting of the implementation of the ESMP for this project is presented *Annexure 4*.

Table 8.4 **Monitoring Plan**

Sl. No.	Project Phase /Activity	Potential Impacts	Parameter to be monitored/indicator	Monitoring frequency	Responsibility
Planning/Preconstruction					
1.1.1	Procurement of land	Loss of livelihood	Allotment of alternate land parcel of similar size (1.3 acres) and productivity to the title holders (Shibu Hembram, Shyam Hembram and Palu Hembram)	Once - before construction	JUSNL PIU, Revenue Department
1.1.2			Land parcel (present in the Northern part of the proposed GSS) used for cultivation (by Shibu Hembram) is left out from the project site boundary	Once - before construction	JUSNL PIU
1.1.3			Resettlement Action Plan (RAP) and compensation award to Fagu Murmu	Once - before construction	JUSNL PIU
2	Felling of trees on the land	Loss of precious ecological values	Substation design avoiding tree felling	Once- Before commencement of construction activity	JUSNL Subdivision/Division/Circle / JPSIP PIU
3	Substation location and design	Access restriction on use of common property	Design consideration to avoid restriction on use of pond	Once- during the detailed design	JUSNL Subdivision/Division/Circle Office/ JPSIP PIU
4	Design of residential quarter and office at substation	Water/ soil pollution	Provisioning of septic tank with soak pit in substation design	Once- during the detailed design	JUSNL Subdivision/Division/Circle Office/ JPSIP PIU
Construction					
4.1	Site preparation and construction work	Loss of topsoil	Practice adopted to store and reuse topsoil which is removed from the construction site	Every week	JUSNL Subdivision/Division/Circle Office/ JPSIP PIU

Sl. No.	Project Phase /Activity	Potential Impacts	Parameter to be monitored/indicator	Monitoring frequency	Responsibility
4.2.1		Noise and vibrations	Maintenance log book of vehicle/ machinery , Number of equipment /vehicle undergoing regular maintenance	Every week	JUSNL Subdivision/Division/Circle Office/ JPSIP PIU
4.2.2			Presence of acoustic enclosure in DG set	Every week	JUSNL Subdivision/Division/Circle Office/ JPSIP PIU
4.2.3			Job card containing duties or maintenance work carried out at night time	Every week	JUSNL Subdivision/Division/Circle Office/ JPSIP PIU
4.3.1		Air Pollution	Water sprinkling at dust generating area	Every week	JUSNL Subdivision/Division/Circle Office/ JPSIP PIU
4.3.2			Tarpaulin cover on vehicle carrying loose construction/excavated materials	Every week	JUSNL Subdivision/Division/Circle Office/ JPSIP PIU
4.3.3			Tarpaulin cover on loose construction/ excavated materials	Every week	JUSNL Subdivision/Division/Circle Office/ JPSIP PIU
4.3.4			Number of vehicle not having valid PUCC certificate	Every Month	JUSNL Subdivision/Division/Circle Office/ JPSIP PIU
4.3.5			Maintenance log book of vehicle/ machinery, Number of equipment /vehicle undergoing regular maintenance.	Every Month	JUSNL Subdivision/Division/Circle Office/ JPSIP PIU
4.4.1		Water/Soil Pollution	Availability of Septic tanks and soak pits/modular bio-toilets	Every Month	JUSNL Subdivision/Division/Circle Office/ JPSIP PIU
4.4.2			Availability of peripheral site drainage channel, sedimentation tank	Every Month	JUSNL Subdivision/Division/Circle Office/ JPSIP PIU
4.5		Depletion of water resource	Water conservation measures adopted at construction and labour camp	Every Month	JUSNL Subdivision/Division/Circle Office/ JPSIP PIU

Sl. No.	Project Phase /Activity	Potential Impacts	Parameter to be monitored/indicator	Monitoring frequency	Responsibility
5.1	Community Health and Safety	Injury and sickness of local people	Number of accidents of local people (if any) at construction site, number of grievance recorded Review of document related to regular health check-up of the work force	Every Month	JUSNL Subdivision/Division/Circle Office/ JPSIP PIU
5.2		Local Woman Community	Review of document related to awareness camp organised periodically Physical observation of the labour camp before commencement of construction and during construction period.	Every Month	JUSNL Subdivision/Division/Circle Office/ JPSIP PIU
6	Occupational health and safety	Injury and sickness of workers	Awareness of workers, use of PPE by workers	Every 15 days	JUSNL Subdivision/Division/Circle Office/ JPSIP PIU
7.1	Blasting (in case of hard rock formation)	Noise and Vibration	Measures adopted to control noise and vibration at blasting site	Every 15 days	JUSNL Subdivision/Division/Circle Office/ JPSIP PIU
7.2		Damage to Structure	Record of any damaged and repaired structure	Every one month	JUSNL Subdivision/Division/Circle Office/ JPSIP PIU
7.3		Occupational health and safety	Measures adopted to control fly rock, safety measures adopted for transport and storage of explosives, use of protective equipment, measures adopted for access restriction at blasting site	Weekly during blasting work	JUSNL Subdivision/Division/Circle Office/ JPSIP PIU
8.1		Labour camp related EHS and Hygiene Issues	Condition of labour camp, awareness of workers, complainant register	Every 15 days	JUSNL Subdivision/Division/Circle Office/ JPSIP PIU

Sl. No.	Project Phase /Activity	Potential Impacts	Parameter to be monitored/indicator	Monitoring frequency	Responsibility
8.2		Conflict with local community due to sharing of local resources	Grievance register	Every Month	JUSNL Subdivision/Division/Circle Office/ JPSIP PIU
	Operation and Maintenance				
9	Drainage of storm water	Water/Soil Pollution	Availability of internal and peripheral site drainage channel, sedimentation tank and oil-water separator at outfall of peripheral site drainage channel	Every Month	JUSNL Subdivision/Division/Circle Office/ JPSIP PIU
10.1.1	Handling and disposal of waste	Water/Soil Pollution	Municipal disposal arrangement for GSS, Availability of composting pit		JUSNL Division/Circle/ JPSIP PIU
10.1.2			Availability of authorization letter, Annual return (Form 4)	Annually	JUSNL Division/Circle/ JPSIP PIU
11	Storage and handling of SF6	Emission of most potent GHG causing climate change	Leakage and gas density/level	Monthly	JUSNL Division/Circle/ JPSIP PIU
12.1.1	Occupational health and safety of staff	Injury/ mortality to staff during O&M work	Accident-Incident register	Monthly	JUSNL Division/Circle/ Head Office
12.1.2			Document pertaining to training/awareness programs and mock drills/awareness level of staff engaged in O&M work of substation	Monthly	JUSNL Division/Circle/ JPSIP PIU
12.2		Injury/ mortality from emergency situation	Accident-Incident list	Monthly	JUSNL Division/Circle Office/ JUSNL PIU
13	Community health and safety	Injury/ mortality to public	Accident-Incident list	Monthly	JUSNL Division/Circle/ Head Office

For the implementation of the Jharkhand Power System Improvement Project JUSNL has developed a Project Implementation Unit (JPSIP PIU). The JPSIP PIU is located at the JUSNL headquarters in Ranchi and is headed by the Chief Engineer (Transmission, World Bank Funded Projects). The JPSIP PIU would also be responsible for driving the implementation of the E&S safeguards in JPSIP.

At the field level the Divisional/ Circle offices of JUSNL, who would be responsible for implementing the technical aspects of the JPSIP; he would also be responsible for the implementation of the E&S safeguards. The Junior Engineer of the respective division of JUSNL responsible for overseeing the project would also be responsible for overseeing that the provisions of the ESMP is being implemented by the Contractor. The Chief Engineer cum GM of the Jamshedpur Zone however has the ultimate responsibility of ensuring that the project is implemented successfully and also ensuring the project's desired environmental and social outcomes are attained. In addition the Environmental Officer and the Social Officer at the Project Implementation Unit of JPSIP would also undertake periodic site visits to oversee the operations and suggest corrective actions in case it is warranted.

In addition, the Contractor implementing the subprojects would also have an Environment and Social personnel to actually carry out the E&S safeguards on the ground.

The roles and responsibilities of various officials of JUSNL for carrying out activities related implementation of ESMP, Forest Clearance, Land/ Rehabilitation & Resettlement (R&R) and obtaining ROW are detailed in below table.

Table 8.5 Responsibility Matrix

Sl. No.	Designated Official	Role
1.	Electrical Superintending Engineer (ESE) of Jamshedpur Transmission Circle	<ul style="list-style-type: none"> Overall responsibility for implementation of ESIA and ESMP. ESE shall be responsible for obtaining Forest Clearance, undertaking Land/ R&R and ROW clearance and shall carry out activities such as submitting proposals, coordinating with concerned authorities, responding to clarifications, making payments etc. ESE shall be supported by EEE, AEE and JEE. In addition, there shall be a Nodal Officer (EEE rank) in each Circle for environmental and social activities.
2.	Chief Engineer (Transmission WB Projects) in HQ	<ul style="list-style-type: none"> Monitoring implementation of ESMP. Obtaining approvals for release of payments for forest, land, compensation etc. to ESE's Office
3.	Project Monitoring Consultant (PMC)	<ul style="list-style-type: none"> Support monitoring of implementation of ESMP. Coordinate with concerned ESE's Office to obtain progress and status reports.

It is understood from the ESIA study that the Project activities related to the development of the substation may create some impacts on air quality, community health and safety during the construction phase. However, most of these impacts are temporary in nature and can be mitigated with proper mitigation measures. Overall, the development of the 132/33 KVKV Surda substation would improve the availability of quality power in the region.

The Environmental and Social Management Plan (ESMP) describes mitigation measures for impacts specific to the Project activities and also discusses implementation mechanisms. The implementation of the recommended mitigation measures suggested would result in reduction of adverse impacts on air quality, ground water etc. though there would be a few permanent residual impacts like change of land use. As part of consultation and socio-economic survey, it was reported that few parcels of proposed site is being used for cultivation and one parcel of land was awarded “*patta*” for cultivation. Few of the farmers were identified to be squatters and few had rights to cultivate on these lands. Resettlement Action Plan will be prepared for the squatters and necessary compensation will be provided as per Resettlement Action Plan. The farmers holding “*patta*” land will be provided with a land of similar size and productivity by Jharkhand Government. It has also been identified that the common resource – pond present within the site has to be conserved and free access is to be provided to the villagers throughout the lifecycle of the project. On the positive side, the project is going to lead to betterment of economic conditions in terms of increase of local employment and business opportunities.

To conclude, the adoption and implementation of ESMP will lead to a reduction of environmental and social impacts triggered by this project, result in compliance to national/state regulatory framework as well as meet World Bank’s requirements with regard to environmental and social performance.

Annexure 1

List of Sub Projects in JPSIP

PHASE-I

Sl. No	Name of GSS / Transmission Line	Capacity	Length of TL
Scheme - D			
1	132/33 KVKV GSS Irba (2x50 MVA)	100 MVA	
2	132 KVKV D/C 3 ph Irba- Kanke Transmission Line		23.598 km
3	132 kVkv D/C 3 Ph. Irba - Ratu Transmission line		42.678 km
Scheme - E			
1	132/33 kVkv GSS at Shikaripara (2x50 MVA)	100	
2	132 kVkv D/C 3 Ph. Dumka - Shikaripara Transmission line		51.30 km
Scheme - H			
1	132/33 kVkv GSS at Silli (2x50 MVA)	100	
2	132 kVkv D/C 3 Ph. Silli - Chouka Transmission line		52.185 km
Scheme - O			
1	132/33 kVkv GSS at Mahuadanr (2x50 MVA)	100	
2	132 kVkv D/C 3 Ph. Latehar- Mahuadanr Transmission line		86.72 km
Scheme - P			
1	132/33 kVkv GSS at Angada (2x50 MVA)	100	
2	132 kVkv D/C 3 Ph. Silli - Angada Transmission line		39.048 km
3	132 kVkv D/C 3 Ph. Angada - Irba Transmission line		34.529 km
Scheme - S			
1	132/33 kVkv GSS at Jarmundi (2x50 MVA)	100	
2	LILO of 132 kVkv D/C 3 Ph. Dumka-Deoghar Transmission line at GSS Jarmundi		3.69 km
Scheme - X			
1	132/33 kVkv GSS at Chakuliya (2x50 MVA)	100	
2	LILO of both 132kVkv Bahragora - Dhalbhumgarh Transmission line at GSS Chakuliya		21.64 km
Scheme - Q			
1	132/33 kVkv GSS at Hansdiha (2x50 MVA)	100	
2	LILO of 132 kVkv Lalmatia - Dumka Transmission line at GSS Hansdiha		3.36 km
3	132 kVkv D/C Hansdiha - Jasidih Transmission line		43 km
Scheme - T			
1	132/33 kVkv GSS at Amarapara (2x50 MVA)	100	
2	132 kVkv D/C 3 Ph. Amarapara - Godda Transmission line		67.45 km
3	132 kVkv D/C 3 Ph. Amarapara - Pakur Trans. line		24.75 km

PHASE-II

Sl. No	Name of GSS / Transmission Line	Capacity	Length of TL
Scheme-A			
1	132/33 kVkv GSS at Chainpur (2x50 MVA)	100	
2	132 kVkv D/C 3 Ph. Chainpur - Mahuandanr Tran. line		53.63 km
3	LILO of 132 kVkv Gumla - Simdega Transmission line at GSS Chainpur		10 km
Scheme - G			
1	132/33 KVKV GSS Sundarnagar (2x50 MVA)	100	
2	LILO of 132 kVkv Ramchandrapur - Jadugoda Old Transmission line at GSS Sundarnagar		17.50 km
Scheme - K			
1	132/33 kVkv GSS at Ramkanda (2 x 50 MVA)	100	
2	32 kVkv D/C 3 Ph. Ramkanda - Garhwa (220KVKV GSS) Transmission line		60 km
Scheme - N			
1	132/33 kVkv GSS at Chhatarpur (2x50 MVA)	100	
2	132 kVkv D/C 3 Ph. Chhatarpur - Daltonganj (220 kVkv GSS) Transmission line		41.53 km
3	132 kVkv D/C 3 Ph. Chhatarpur - Japla Transmission line		29.09 km
Scheme - W			
1	132/33 kVkv GSS at Kalebira (2x50 MVA)	100	
2	132 kVkv D/C 3 Ph. Kalebira-Kamdara Transmission line		38.63 km
3	132 kVkv D/C 3 Ph. Kalebira - Simdega Transmission line		16.44 km
Scheme - AA			
1	132/33 kVkv GSS at Chouka(2x50 MVA)	100	
2	132 kVkv D/C 3 Ph. Chouka - Tamar Transmission line		27.60 km
Scheme - R			
1	LILO of one Ckt of 132 KVKV D/C 3 ph Chaibasa-Manoharpur Transmission Line at 132/33 KVKV GS/S at Goelkera including with 2 nos. of 132 kVkv bay		14 km

PHASE-III

Sl. No	Name of GSS / Transmission Line	Capacity	Length of TL
Scheme - F			
1	132/33 kVkv GSS at Meral (2 x 50 MVA)	100	
Scheme - I			
1	132/33 kVkv GSS at Panki (2x50 MVA)	100	
2	132 kVkv D/C 3 Ph. Chhatarpur - Panki Transmission line		50 km
Scheme - J			
1	132/33 kVkv GSS at Nagar Untari (2 x 50 MVA)	100	
2	132 kVkv D/C 3 Ph. Nagar Untari - Garhwa Trans. line		15.85 km
Scheme - V			
1	132/33 kVkv GSS at Kandra (2x50 MVA)	100	
2	LILO of 132 kVkv D/C 3 Ph. Chandil - Rajkharsawan Transmission line at Kandra		10 km
Scheme - Y			
1	132/33 kVkv GSS at Kurdeg (2x50 MVA)	100	
2	132 kVkv D/C 3 Ph. Kurdeg - 220/132 kVkv Simdega GSS Transmission line		45 km
Scheme - Z			
1	132 kVkv GSS at Chandwa (2x50 MVA)	100	
2	132 kVkv D/C Chandwa - Latehar Transmission Line		30 km
Additional Scheme-1			
1	132/33kVkv GSS at Sarath (2 x 50 MVA)	100	
2	132k DC Sarath - Palojori TL		20.10 km
4	132k DC Sarath - Chitra TL		15.14 km
Additional Scheme-2			
1	132/33kVkv GSS at Surda (2 x 50 MVA)	100	
2	132 kVkv D/C Surda - Jadugoda Transmission line		20.81 km
3	132 kVkv D/C Surda - Musabani (DVC) Transmission line		4.6 km
4	132 kVkv D/C Surda - Bharagora Transmission line		43.04 km
Additional Scheme-3			
1	132/33kVkv GSS at Naudiha (Palamu) (2 50 MVA)	100	
3	132k DC Naudiha - Chhatarpur TL		18.49 km
Additional Scheme-4			
1	132/33kVkv GSS at Narayanpur (Devipur) (2 x 50 MVA)	100	
2	LILO of 132kVkv DC Jamtara - Madhupur TL at Narayanpur (Devipur)		27 km

Annexure 2

General Conditions of Contract

1.1 GENERAL EHS CONDITIONS

- GCC 1.1
- i. The contractor shall take all necessary measures and precautions, otherwise ensure that the execution of the works and all associated operations on-site or of-site are carried out in conformity with statutory and regulatory environmental health safety requirements including those prescribed elsewhere in the Environmental and Social Management Framework.
 - ii. The Contractor shall ensure that the construction site will be secured by means of fencing to prevent unauthorized entry into the site. The Contractor shall also ensure that the access to the construction site is restricted to public at all times.
 - iii. The Contractor shall take all the measures and precautions to avoid any nuisance or disturbance arising from execution of the work. This shall, wherever possible, be achieved by suppression of the nuisance at source rather than abatement of the nuisance once generated. The provisions of the Environmental, Social Health Safety Management Plan would be implemented for the suppression of nuisance, but it shall not be limited to these provisions of the ESMP. The provisions of this sub-clause shall however, be disregarded in respect of emergency work required for saving life or the safety of the works.
 - iv. In event of any spoil or debris or silt from the sites being deposited on adjacent land, the Contractor shall immediately remove such spoils, debris or silt and restore the affected area to its original state to the satisfaction of the JUSNL. No debris should be dumped on the community land like Gochars, thans etc. In case the extra excavated earth is placed for levelling the playground the same should be done with the written consent of the community. Such materials should be spread in such a manner as to limit subsequent erosion and shall be re-vegetated as existing ground cover dictates. JUSNL should be absolved of any liabilities arising such works which are undertaken
 - v. Surplus excavated material from the tower footing shall be carried out to the substation for the purpose of filing in case the tower is located within 15 kms of the substation area. The cost of hauling the material shall be considered within the cost for the earthwork for the substation. Additional borrow pits shall only be allowed by the Junior Engineer, only after the excavated material has been exhausted.
 - vi. The Contractor should contain requisite quantity and type of spill kits to control the spills of fuel and other oils e.g. transformer oil to prevent the pollutant from spreading either outside the area of the spill or into the ground.
- GCC 1.2
- a) All fuel and chemical storage shall be sited on an impervious base within an embanked area and secured by fencing. The storage area shall be located away from any watercourse or wetland. The base and walls of the embankment shall be impermeable and of sufficient capacity to contain 110% of the volume of tanks/ containers taken together.
- In case of filling/ refuelling of fuel or oil, filling and refuelling shall be strictly controlled and subjected to formal procedures. The contents of any tank or drum shall be clearly marked. Measures shall be taken to ensure that no contamination happens or discharges enter any drain or

watercourses. All discharge from the Oil storage areas shall be passed through a Oil Water Separator (OWS) before it being discharged outside.

b) All internal drainage channels from the site would be connected to a peripheral site drainage channel. The peripheral site drainage channel would be provided with a sedimentation tank and oil-water separator to prevent sediments and oil & grease to be carried away by the runoff.

GCC 1.3

(i) All water and liquid waste products arising on the sites shall be collected and disposed off at location onsite or offsite and in a manner that shall not cause nuisance or pollution.

(ii) The Contractor shall not discharge or deposit any matter arising from the execution of the works into any place except at the designated places without the permission of the Environmental and Social Officer and the regulatory authorities concerned.

GCC 1.4

(i) The Contractor shall carry out dust suppression by sprinkling of water or methods of working to minimise dust, gaseous or other air born emissions and carry out the works in such a manner as to minimise adverse impacts on air quality. Sprinkling of water shall be carried out twice a day on exposed surface area during dry season.

(ii) Stockpiles of materials should be sited in sheltered areas or within hoarding, away from sensitive areas. Stockpiles of friable materials shall be covered with clean tarpaulins with application of sprayed water during dry and windy weather. Stockpiles of debris shall be dampened prior to their movement, except where this is contrary to the specifications.

(iii) Any vehicle with an open load carrying area used for transport of potentially dust producing materials shall have properly fitting side and tailboards. Materials having potential to produce dust shall not be loaded to a level higher than the side and tail boards and shall be covered with clean tarpaulin in good condition. The tarpaulin should be properly secured and extended to at least 300 mm over the edges of the sideboard and tailboard.

(iv) During high wind, no dust generating operations shall be permitted within 200m of residential areas having regard to the prevailing direction of the wind.

(v) Construction vehicles and machinery shall be kept in good working order and engines turned off when not in use. Appropriate measures shall be taken to limit exhaust emissions from construction vehicles, machinery and plant and the contractor shall include details of such proposed measures in the mitigation and monitoring plan to be submitted to the Employer or his representative.

(vi) All vehicle employed in the project shall have valid Pollution under Control (PUC) Certificate. The Contractor should maintain PUC Certificate log book on a regular basis and shall provide it to the Employer or his representation for inspection when asked for.

- GCC 1.5 (i) The Contractor shall consider noise as an environmental concern in his planning and during execution of the works.
- (ii) The Contractor shall use plant and equipment conforming to National and International standards and directives on noise, vibrations and emissions.
- (iii) The Contractor shall take all necessary measures to ensure that operation of all mechanical equipment and construction processes on and off the site shall not cause any unnecessary or excessive noise, taking into account all applicable environmental requirements. The Contractor shall use all necessary measures and shall maintain all plant and silencing equipment in good condition so as to minimise the noise emissions during construction works.
- (iv) The operations of the Contractor which is likely to generate noise shall be restricted during the night time (22.00 hrs to 6.00 hrs) especially if it is near residential areas.
- GCC 1.6 (i) The Contractor shall take all necessary measures to protect any archaeological finds or antiquities as required.
- (ii) Where antiquities are shown on the drawing or otherwise identified during the course of the works, these shall be protected by means of suitable fencing and barriers to the satisfaction of the EHS Engineer of JUSNL. The Contractor shall abide by the provisions of the Indian Treasure Trove Act, 1878, Jharkhand Ancient Monuments and Archaeological Sites, Remains and Art Treasures Act, 2016.
- GCC 1.7 On completion of the works, the Contractor shall reinstate all areas with natural vegetation to the satisfaction of the Environmental Officer of JPSIP PIU. Where directed by the Environment Officer the Contractor shall improve and reinstate the land on which informal roadside service area have been established by removing all debris and contaminated soils, re-grading to natural ground levels and re-establishing the natural vegetation where appropriate. All debris and contaminated materials shall be disposed off site as approved by the Environment Officer at the PIU.
- GCC 1.8 The Contractor shall ensure that the labour accommodation within the site /fly camp/ laydown area is provided with toilets/modular bio-toilets, septic tank and soak pits. The municipal solid waste generated shall be composted in pits located within the site.
- GCC 1.9 The Contractor shall adopt all possible means to ensure that groundwater usage is minimised during the construction activities. The bore well/s used for extraction of water for construction purpose shall be provided with water metres to monitor the ground water abstraction. The Contractor should maintain a daily water abstraction log book of water extracted from the bore well. Daily water abstraction log book should be produced to the employer or his representative on demand.

1.2 COMPLIANCE WITH LABOUR REGULATIONS

- GCC 2.1 During continuance of the contract, the Contractor and his sub-contractors shall abide at all times by all applicable existing labour enactments and rules made thereunder, regulations notifications and byelaws of the State or Central Government or local authority and any other labour law (including rules), regulations byelaws that may be passed or notification that may be issued under any labour law in future either by the State or the Central Government or the local authority. The employees of the Contractor and the Sub-contractor in no case shall be treated as the employees of the Employer at any point of time.
- GCC 2.2 The Contractor shall keep JUSNL indemnified in case any action is taken against the Employer by the competent authority on account of contravention of any of the provisions of any Act or rules made thereunder, regulations or notifications including amendments.
- GCC 2.3 If the Employer is caused to pay under any law as principal employer such amounts as may be necessary to cause or observe, or for non-observance of the provisions stipulated in the notifications / byelaws/ Acts / Rules/regulations including amendments, if any, on the part of the Contractor, the Employer shall have the right to deduct any money due to the Contractor under this contract or any other contract with the employer including his amount of performance security for adjusting the aforesaid payment. The Employer shall also have right to recover from the Contractor any sum required or estimated to be required for making good the loss or damage suffered by the Employer.
- GCC 2.4 The contractor shall abide by the provision of the following acts:
- a) Workmen Compensation Act 1923
 - b) Payment of Gratuity Act 1972
 - c) Employee P.F. and Miscellaneous Provision Act 1952
 - d) Maternity Benefit Act 1951:
 - e) Contract Labour (Regulation & Abolition) Act 1070
 - f) Minimum Wages Act 1948
 - g) Payment of Wages Act 1936
 - h) Equal Remuneration Art 1970
 - i) Payment of Bonus Act 1965
 - j) Industrial Dispute Act 1947
 - k) Industrial Employment (Standing Orders) Act 1946
 - l) Trade Unions Act 1926
 - m) Child Labour (Prohibition & Regulation) Act 1986
 - n) Inter-State Migrant workmen's (Regulation of Employment & Conditions of Service Act 1979
 - o) The Building and Other Construction workers (Regulation of Employment and Conditions of Service) Act 1996 and the Cess Act of 1996
 - p) Factories Act 1948
- GCC 2.5. During continuance of the contract, the Contractor and his sub-contractors shall abide at all times by all applicable existing World Bank Group labour requirements (refer *Annexure 7* Management of Labour Influx)

1.3 COMPLIANCE TO ENVIRONMENTAL & SOCIAL REGULATIONS

GCC 3.1 If the employer is caused to pay under any law as proponent such amounts as may be necessary to cause or observe, or for non-compliance of the provisions or negligence of the Contractor for any provision stipulated in the notifications / byelaws/ Acts / Rules/regulations including amendments and Orders of the Hon'ble National Green Tribunal/ Hon'ble Court of Law, if any, on the part of the Contractor, the Employer shall have the right to deduct any money due to the Contractor under this contract or any other contract with the employer including his amount of performance security for adjusting the aforesaid payment.

The Contractor shall ensure to adhere provisions of the following acts;

- a) The Water (Prevention and Control of Pollution) Act, 1974
- b) The Air (Prevention and Control of Pollution) Act, 1981
- c) The Environment (Protection) Act 1986
- d) The Public Liability Insurance Act, 1991
- e) Wild Life Protection Act, 1972, as amended
- f) Forest Conservation Act, 1980 & Forest Conservation Rules, 2003 (as amended) & corresponding orders and judgements
- g) Jharkhand Biological Diversity Rules 2007
- h) Ancient Monuments & Archaeological Sites and Remains Act, 1958
- i) Indian Treasure Trove Act, 1878
- j) Jharkhand Ancient Monuments and Archaeological Sites, Remains and Art Treasures Act, 2016
- k) Jharkhand Timber and Other Forest Produce (Transit and Regulation) Rules, 2004
- l) Ozone Depleting Substances (Regulation and Control) Rules, 2000
- m) Chota- Nagpur Tenancy Act, 1908
- n) Santal Pargana Tenancy Act, 1949
- o) Hazardous and Other Wastes (Management and Transboundary Movement) Rules, 2016
- p) E-Waste (Management) Rules, 2016
- q) Battery (Management & Handling) Rules 2001
- r) Ozone Depleting Substances (Regulation and Control) Rules, 2000
- s) Central Ground Water Authority (CGWA) Public Notice dated 4th January 2017
- t) Regulation of Polychlorinated Biphenyls Order, 2016

GCC 3.2 (i) If the Employer is caused to pay under any law as principal employer such amounts as may be necessary to cause or observe, or for non-observance of the provisions stipulated in the notifications / byelaws/ Acts / Rules/regulations including amendments, if any, on the part of the Contractor, the Employer shall have the right to deduct any money due to the Contractor under this contract or any other contract with the employer including his amount of performance security for adjusting the aforesaid payment. The Employer shall also have right to recover from the Contractor any sum required or estimated to be required for making good the loss or damage suffered by the Employer.

(ii) The Contractor shall (a) abide by the Environmental Management Plan (b) carry out all the monitoring and mitigation measures set forth in the environmental management plan and (c) allocate the budget required to ensure that such measures are carried out. The Contractor

shall submit to the Employer Monthly Reports on the carrying out of such measures.

(iii) The Contractor shall adequately record the conditions of roads, agricultural land and other infrastructure prior to transport of material and construction commencement before start of the construction activity. In case of deterioration during the construction activity the Contractor shall fully reinstate pathways, other local infrastructure and agricultural land to at-least their pre-project condition upon construction completion. In case of any grievance of the community regarding damage to any common property e.g. roads/ walkways/ pathways, bridges, wells or any place of worship due to any construction activity; it shall be the responsibility of the Contractor to reinstate the same to its original condition (before the start of construction) unless other he can prove that the same was not constructed due to his activities.

(iv) The Contractor shall undertake detailed survey of the affected persons during transmission line alignment finalization under the Project, where applicable. The Contractor shall provide the information to the employer for records and use wherever required. Any compensation due to the damage of property shall be commensurate to the provisions in the entitlement matrix.

(v) The Contractor shall include a Social Officer in his team. The Social Officer shall explain to the land owners the process of the procurement of land through a negotiated settlement process.

(vi) The Contractor shall conduct health and safety programme for workers employed under the Contract and shall include information on the risk of sexually transmitted diseases, including HIV/ AIDS in such programs.

- GCC 3.3 The procurement or deployment of any machinery by the Contractor for the project should be in accordance to the environmental rules and regulations in place at the time of implementation. All DG sets should conform to the CPCB standards for noise and emission mentioned under the Environment (Protection) Act, 1986.
- GCC 3.4 The Contractor shall procure transformer oil in conformance to the Regulation of Polychlorinated Biphenyls Order, 2016.
- GCC 3.5 The Contractor shall procure CFC free equipment in conformance to the Government of India Guidelines

1.4 SAFETY PRECAUTIONS

- GCC4.1 The Contractor shall observe all applicable regulations regarding safety on the Site.
Unless otherwise agreed, the Contractor shall, from the commencement of work on Site until handing over, provide:
- a) fencing, lighting, guarding, putting up reflective strips and watching of the Works wherever required, and
 - b) temporary roadways, footways, guards and fences which may be necessary for the accommodation and protection of Employer / his representatives and occupiers of adjacent property, the public and others.
- GCC 4.2 The Contractor shall ensure proper safety of all the workmen, materials, plant and equipment belonging to him or to the employer or to others, working at the Site. The Contractor shall also be responsible for provision of all safety notices and safety equipment required both by the relevant legislations or as may be directed by the Engineer of JUSNL or as he may deem necessary.
- GCC 4.3 The Contractor will notify well in advance to the JUSNL Division / JPSIP PIU of his intention to bring to the site any container filled with liquid or gaseous fuel or explosive or petroleum substance or such chemicals which may involve hazards. The JUSNL Division / JPSIP PIU shall have the right to prescribe the conditions, under which such container is to be stored, handled and used during the performance of the works and the Contractor shall strictly adhere to and comply with such instructions. The JUSNL Division / JPSIP PIU shall have the right at his sole discretion to inspect any such container or such construction plant/equipment for which material in the container is required to be used and if in his opinion, its use is not safe, he may forbid its use. No claim due to such prohibition shall be entertained by JUSNL. JUSNL shall not entertain any claim of the Contractor towards additional safety provisions/conditions to be provided for/constructed as per the JUSNL Division /JUSNL PIU Instructions. Further, any such decision of the JUSNL Division /JUSNL PIU shall not, in any way, absolve the Contractor of his responsibilities and in case use of such a container or entry thereof into the Site area is forbidden by the JUSNL Division /JUSNL PIU, the Contractor shall use alternative methods with the approval of the JUSNL Division /JUSNL PIU without any cost implication to the Employer or extension of work schedule.
- GCC 4.4 All equipment used in construction and erection by Contractor shall meet Indian/International Standards and where such standards do not exist, the Contractor shall ensure these to be absolutely safe. All equipment shall be strictly operated and maintained by the Contractor in accordance with manufacturer's Operation Manual.
- GCC 4.5 Periodical examinations and all tests for all lifting/hoisting equipment & tackles shall be carried-out. In accordance with the relevant provisions of Factories Act 1948, Indian Electricity Act 1910 and associated Laws/Rules in force from time to time. A register of such examinations and tests shall be properly maintained by the Contractor and will be promptly produced as and when desired by the JUSNL Division /JUSNL PIU or by the person authorised by him.

- GCC 4.6 The Contractor shall provide suitable personal safety equipment of prescribed standard to all employees and workmen according to the Job Safety Analysis carried out by the Contractor, or as may be directed by the Employer. The Employer or his representative will also have right to examine these safety equipment to determine their suitability, reliability, acceptability and adaptability. The Contractor shall arrange biannual safety training for all workers.
- GCC 4.7 The Contractor shall provide safe working conditions to all workmen and employees at the Site including safe means of access, railings, stairs, ladders, scaffoldings etc. The scaffoldings shall be erected under the control and supervision of an experienced and competent person. For erection, good and standard quality of material only shall be used by the Contractor.
- GCC 4.8 The Contractor shall not interfere or disturb electric fuses, wiring and other electrical equipment belonging to the Owner or other Contractors under any circumstances, whatsoever, unless expressly permitted in writing by the Employer to handle such fuses, wiring or electrical equipment.
- GCC 4.9 Before the Contractor connects any electrical appliances to any plug or socket belonging to the other Contractor or the Employer, he shall:
- a) Satisfy the JUSNL Division /JUSNL PIU that the appliance is in good working condition;
 - b) Inform the JUSNL Division /JUSNL PIU of the maximum current rating, voltage and phases of the appliances;
 - c) Obtain permission of the JUSNL Division /JUSNL PIU detailing the sockets to which the appliances may be connected.
- GCC 4.10 The JUSNL Division /JUSNL PIU will not grant permission to connect until he is satisfied that:
- a) The appliance is in good condition and is fitted with suitable plug;
 - b) The appliance is fitted with a suitable cable having two earth conductors, one of which shall be an earthed metal sheath surrounding the cores.
- GCC 4.11 No electric cable in use by the Contractor/Owner will be disturbed without prior permission. No weight of any description will be imposed on any cable and no ladder or similar equipment will rest against or attached to it.
- GCC 4.12 No repair work shall be carried out on any live equipment. The equipment must be declared safe by the JUSNL Division /JUSNL PIU and a permit to work shall be issued by the JUSNL Division /JUSNL PIU before any repair work is carried out by the contractor. While working on electric lines/equipment, whether live or dead, suitable type and sufficient quantity of tools will have to be provided by the Contractor to electricians/workmen/officers.
- GCC 4.13 The Contractors shall employ necessary number of qualified, full time electricians/electrical supervisors to maintain his temporary electrical installation.

- GCC 4.14 The Contractor employing more than 100 workmen whether temporary, casual, probationer, regular or permanent or on contract, either directly or through the Contractor shall employ at least one full time officer exclusively as EHS Officer (who shall have a Bachelors degree in Environmental Management/ Environmental Engineering /Environmental Science with additional qualification in safety) to supervise safety aspects of the equipment and workmen, who will coordinate with the Environmental Officer and Social Officer . In case of work being carried out through Sub-Contractors, the Sub-Contractor's workmen/employees will also be considered as the Contractor's employees/workmen for the above purpose. Contractor shall employ a social team as it may deem fit. The Social Team would be led by the Social Officer (who shall have degree Sociology/ Anthropology/ Economics or any other Social Science with experience in handling resettlement of multilateral funded projects) and would assist the Contractor to carry out negotiation with the land owners. The name and address of such EHS Officer and Social Officer of the Contractor will be promptly informed in writing to JUSNL with a copy to JUSNL Division /JUSNL PIU before he starts work or immediately after any change of the incumbent is made during currency of the Contract.
- GCC 4.15 In case any accident occurs during the construction/ erection or other associated activities undertaken by the Contractor thereby causing any minor or major or fatal injury to his employees due to any reason, whatsoever. It shall be the responsibility of the Contractor to promptly inform the same to the JUSNL Division /JUSNL PIU in prescribed form and also to all the authorities envisaged under the applicable laws.
- GCC 4.16 The JUSNL Division /JUSNL PIU shall have the right at his sole discretion to stop the work, if in his opinion the work is being carried out in such a way that it may cause accidents and endanger the safety of the persons and/or property, and/or equipment. In such cases, the Contractor shall be informed in writing about the nature of hazards and possible injury/accident and he shall comply to remove shortcomings promptly. The Contractor after stopping the specific work can, if felt necessary, appeal against the order of stoppage of work to the JUSNL Division /JUSNL PIU within 3 days of such stoppage of work and decision of the JUSNL Division /JUSNL PIU in this respect shall be conclusive and binding on the Contractor.

15 EHS RULES

- GCC 5.1 Each employee of the Contractor shall be provided with initial indoctrination regarding Environment Health and Safety by the Contractor, so as to enable him to conduct his work in a safe and sustainable manner.
- GCC. 5.2 No employee shall be given a new assignment of work unfamiliar to him without proper introduction as to the hazards incident thereto, both to himself and his fellow employees.
- GCC 5.3 Under no circumstances shall an employee hurry or take unnecessary chance when working under hazardous conditions.

- GCC 5.4 Employees must not leave naked fires unattended. Smoking shall not be permitted around fire prone areas and adequate firefighting equipment shall be provided at crucial location.
- Employee should also not leave any equipment/machinery /activity unattended if it has the potential to cause harm to the environment
- GCC 5.5 Employees under the influence of any intoxicating beverage, even to the slightest degree shall not be permitted to remain at work.
- GCC 5.6 The contractor shall make suitable arrangement at every work site for rendering prompt and sufficient first aid to the injured.
- GCC 5.7 The staircases and passageways shall be adequately lighted.
- GCC 5.8 The employees when working around moving machinery must not be permitted to wear loose garments. Safety shoes, safety helmets (IS 2925: 1984) are recommended when working in the construction site or any activity related to the project where materials or tools are likely to fall. When working at height the Contractor shall ensure that all employees use full body harness (as per IS 3521: 1999). Only experienced workers shall be permitted to go behind guard rails or to clean around energized or moving equipment. The employer shall at periodic intervals or as he may deem fit inspect these equipment and ask the Contractor for replacement of the personal safety equipment.
- GCC 5.9 The employees must use the standard protection equipment intended for each job. Each piece of equipment shall be inspected before and after it is used. During the testing and charging of electrical lines and substation, the Contractor shall provide electricity insulating protective equipment like footwear (ISO 20345: 2004 Part-2), rubber gloves (IS 4770: 1991) to workers. In addition, provisions of the “Central Electricity Authority (Measures Relating to Safety and Electric Supply) Regulations 2010” would be adhered to.
- GCC 5.10 Requirements of ventilation in underwater working to licensed and experienced divers, use of gum boots for working in slushy or in inundated conditions are essential requirements to be fulfilled.
- GCC 5.11 In case of rock excavation, blasting shall invariably be done through licensed blasters and other precautions during blasting and storage/transport of charge material shall be observed strictly.

Annexure 3

Special Conditions of Contract for Surda Substation

- SCC 1.1 It would be ensured that mature trees located at southern side of the project boundary would not be felled.
- SCC 1.2 Construction waste and debris should not be dumped in the pond which is located at southwest corner, within the project site
- SCC 1.3 Substation layout to ensure that the pond which is located at southwest corner, within the project site, is not damaged. It would also be ensured that local people who are using this pond would not be restricted from using this pond.
- SCC 1.4 Substation layout to ensure that the land parcel which is being used for agricultural purpose by Shibu Hembram (present in the northern part of the proposed GSS) will be left out from the project site boundary.

Annexure 4

Format for Reporting of ESMP Implementation

JHARKHAND POWER SYSTEMS IMPROVEMENT PROJECT

ENVIRONMENTAL MANAGEMENT PLAN MONTHLY IMPLEMENTATION STATUS REPORT

Name of the Substation_____

Period/Month _____

EMP Refer ence	Activities	Observation/ Status till end of last Observation/ Period	Status till end of this Period
8.	Site Preparation		
8ai	Has the pre-construction equipment checks been carried out (use additional sheets to provide the monitored Leq values)		
8aii	Is regular equipment maintenance being carried out? (Use additional sheets to provide maintenance log)		
8aiv	Has monthly noise monitoring been carried out for DG sets		
8av	Has any permission been provided by Chief Engineer for night time work?		
8bi	Has quarterly air quality monitoring been carried out during the earthwork?		
8biii	Is PUCC certificate log book being maintained on regular basis?		
8biv	Instrument, machine, vehicle maintenance log book should be maintained on regular basis		
10ci	Has the Cut and fill slopes been protected with using standard engineering practices?		
10.ci	Has peripheral site drainage channel and provision of oil-water separator been made for the site?		
10di	Has septic tanks and soak pits/modular bio-toilets would be provided at construction camp?		
10ei	Are best practices been adopted for ground water usage?		
10g	Has the safety practices been undertaken during the construction? Please explain in details whether barricading, reflective tapes has been undertaken?		
10g	What steps has been taken for coordination with local communities?		
10h	What initiatives have been taken to prevent obstruction to traffic?		
12	Please indicate the actions which have been taken to prevent conflicts with local workers?		
13ai	Have the workers been provided with relevant PPE?		
13aii	How many observation on non – compliance in using personal protective equipment?		

EMP Refer ence	Activities	Observation/ Status till end of last Observation/ Period	Status till end of this Period
13bi	Has the Contractor carried out Health Safety training for workers? (Please provide details of training carried out). This should include the details of carrying out the induction training, refresher training etc. Special Condition		
	Has the precautionary measures which were suggested for the cultural property implemented		

Annexure 5

Format for Registering
Grievance from Community/
Project Affected Persons

JHARKHAND POWER SYSTEMS IMPROVEMENT PROJECT

GRIEVANCE REDRESSAL MECHANISM

Format for Grievance Recording

Name of the Village: _____

Name of Block: _____

Name of the Transmission Line: _____

Period/Month: _____

*The project welcomes complaints, suggestions, queries and comments regarding project implementation. We encourage persons with grievance to provide their name and contact information to enable us to get in touch with you for clarification and feedback. Mentioning the name and Contact details are essential as this would help us in getting in touch with you. Should you choose to include your personal details but want that information to remain confidential, please inform us by writing/typing *(CONFIDENTIAL)* above your name.*

Thank you.

Managing Director

Jharkhand Urja Sancharan Nigam Limited

Date	Sub Division of Registration (to be filled by JE)
Contact Information/Personal Details	
Name	
Address	
Phone Number	
Complaint/Suggestion/Comment/Question: <i>Please provide the details (who, what, where and how) of your grievance below:</i>	
<i>If included as attachment/note/letter, please tick here:</i>	

For Official Use Only

Registered by (Name of the Junior Engineer Registering Grievance)
Mode of Communication: <div>1. Letter</div> <div>2. Verbal/Telephonic</div>
Reviewed by (Name /Position of Official reviewing Grievance)
Action Taken
Whether Action Taken has been communicated to the Complainant: Yes/No

Annexure 6

DGMS Prescribed Permissible Limit of Ground Vibration

DGMS Prescribed Permissible Limit of Ground Vibration

Type of Structure	Dominant Excitation Frequency, HZ		
	<8 HZ	8-25 HZ	>25 HZ
(A) Building/ Structure not belong to the owner			
1. Domestic house/structures (Kutchcha, Bricks & Cement)	5	10	15
2. Industrial Building	10	20	25
3. Objects of historical & Sensitive Structures	2	5	10
(B) Buildings belongs to the owner with limited span of life			
1. Domestic houses/structures	10	15	20
2. Industrial buildings	15	25	50

Annexure 7

Labour Management Plan

LABOUR MANAGEMENT PLAN

It is envisaged that during construction phase of the project, labourers for various jobs such as civil, mechanical and electrical works will be hired through authorised manpower agencies. It is anticipated that the peak labour requirement during construction phase of the project will be approx. 50 persons involving unskilled, semi-skilled and skilled labourers. Unskilled labourers is likely to be recruited from local villages, while semi-skilled and skilled labourers (approx. 10 to 15) may come from outside area. For labourer, who will spend the night onsite, accommodation will be provided.

The influx of construction labourer will have both negative and positive impacts on the nearby community and local environment. The labourer will be accommodated in temporary campsite within the project boundary, which can have significant interface with the nearby communities. This might also put pressure on the local resources such as roads, fuel wood, water etc.

Purpose

The purpose of this plan is to minimize potential health, safety and social impacts associated with influx of project workers on the host population and ensure provision of safe and healthy working conditions, for such workers in consistent with IFC PS 2 and 4 requirements and national labour laws.

Scope

The scope of this management plan encompass key labour related aspects with respect to the proposed project construction phase, such as payment of minimum wage, worker's welfare and amenities, hours of work, grievance redressal, non-discrimination and equal opportunities etc.

Regulatory References

All Contractors and its Subcontractors engaged during project construction are subject to the conditions and obligation set out in the national legislative framework, and relevant IFC PS requirements as outlined in the Box below.

International Finance Cooperation (IFC) Performance Standard

IFC Performance Standard 2- Labour and Working Conditions is specific to labour and working conditions. This Standard focuses on the protection of the basic rights of workers, fostering constructive worker-management relationships, as well as promoting fair treatment and the provision of a safe and healthy workplace. The basic provisions for migrant workers under PS 2 are enumerated below:

- As per the provisions of PS 2, the client shall identify migrant workers engaged through third party and ensure that they are engaged on substantially equivalent terms and conditions to non-migrant workers carrying out similar work (if any);
- The contractor shall ensure provision of adequate accommodation, transportation, and basic services including water, sanitation, and medical care for the workers working on that project;
- The compensation paid to the migrant workers should be non-discriminatory and the principle of equal opportunity and fair treatment to be followed; and
- Wastewater, sewage, food and any other waste materials are to be properly handled, in compliance with local standards- whichever is more stringent – and without causing any significant impacts to the biophysical environment or surrounding communities.

IFC Performance Standard 4 – Community Health, Safety and Security carries health and safety through to the community environment. The objectives of the Performance Standard are:

- To minimise and manage health and safety risks to local communities; and
- To ensure that the project does not harm community health and safety.

National Labour Laws

- Contract Labour (Regulation & Abolition) Act 1970
- Inter-state Migrant Workmen Act, 1979
- Minimum Wage Act, 1948
- Bonded Labour System (Abolition) Act, 1976
- Grievance Redressal Machinery under Industrial Disputes Amendment Act, 2010
- The Child Labour (Prohibition and Regulation) Act, 1986; The Child Labour (Prohibition and Regulation) Amendment Act, 2016
- Employees' Provident Fund and Miscellaneous Provisions Act, 1952
- The Payment of Wages Act, 1936, amended in 2005; Workmen's Compensation Act, 1923; The Equal Remuneration Act 1976; The Equal Remuneration Rules 1976; The Minimum Wages (Jharkhand Amendment) Rules 2015
- Maternity Benefit Act, 1961
- The Contract Labour Regulation and Abolition Act 1970 ; The Contract Labour (Prohibition and Regulation) (Jharkhand Amendment) Rules 2015
- The Inter State Migrant Workmen (Regulation of Employment and Conditions of Service) Act 1979; The Jharkhand Inter State Migrant Workmen (Regulation of Employment and Conditions of Service) (Jharkhand Amendment) Rules 2015
- The Building and other Construction Workers (Regulation of Employment and Conditions of Service) Act, 1996; The Jharkhand Building and Other Construction (RECS) (Jharkhand Amendment) Rules 2015
- Employees State Insurance Act, 1948
- Intimation of Accidents (Forms and Time of Service of Notice) Rules, 2004

Roles and Responsibilities

Contractor will be responsible to implement this labour management plan. Junior Engineer (JUSNL) who will be in charge of the site or at the Divisional/Sub-Divisional Offices of JUSNL will be responsible to monitor contractor's performance on implementation of this labour management plant.

Contract Agreement

Each contractor to be mobilised for the project will have a legally binding, written contract with JUSNL that defines the following items. The scope of the contracted work, will be described in terms of:

- the responsibilities and authority limits of each party to the contract;
- a clear definition of the deliverables and minimum content to be provided by the contractor;
- a clear definition of the services to be provided by the contractor;
- any and all constraints imposed on the contractor by JUSNL such as schedule constraints, budget constraints, specific tools to be used, and
- a clear statement of requirements for quality of deliverables and services including the requirement to allow independent quality inspections of materials and processes.

Appropriate terms and conditions which will be imposed on both JUSNL and the contractor will be identified.

In order to ensure that EHSS aspects related to construction workforce are managed in consistent with the applicable regulatory requirements and international best practices, the same shall be incorporated in the contractor bid/agreement document to demonstrate necessary compliance.

HR Policy and Employment Contract

As part of the mobilisation process, the Contractor shall be responsible for submission to JUSNL, for approval, a site specific HR Policy and Procedure that covers worker recruitment and selection processes including selection criteria of each position; method of recruitment; transparency clauses; prohibition of child labour; acknowledgement of cultural differences; non-discrimination and equal opportunity; worker wages and benefits; worker health and hygiene; grievance redressal etc.

The HR Policy shall be appropriate to the size of the project and workforce strength and prepared in consistent with the IFC PS 2 requirements.

In addition to the development of HR Policy, the contractor is required to have written contract documenting and communicating to all workers their general and special conditions of work; standard working hours; entitlement to wages and benefits and conditions concerning the termination of the contract.

Wherever possible, priority will be given for recruitment of local people. Appropriate and requisite on job and EHS training shall be provided to workers. Further, the contractor as part of the engagement should provide a signed code of conduct governing worker's behaviour.

Working Hours

Regarding working hours and conditions, the Contractor shall comply with the national laws and regulations as referred in Box 1.1 and 1.2. According to applicable labour laws viz. *BOCW Act, 1996*, the duration for onsite construction work shall not exceed more than nine hours a day or forty-eight hours a week.

In consistent with the aforesaid regulation each such worker shall be allowed a day of rest every week which shall ordinarily be Sunday, but the Contractor may fix any other day of the week as the rest day.

A notice showing the construction worker wage rate, hours of work, payment date, wage period and contact details of the Inspector having jurisdiction over such area shall be displayed at a conspicuous place. The notice shall be in English, Hindi and in the local language understood by the majority of such building workers.

Non-Discrimination and Equal Opportunity

JUSNL will strictly prohibit discrimination exercised by the Contractor against any employee or applicant for employment because of the individual's race, color, religion, gender, sexual orientation, gender identity or expression, national origin, age, disability, or any other characteristic protected by law.

Child Labour

In accordance to the national labour law provision viz. *The Child Labour (Prohibition and Regulation) Act, 1986 (as amended 2016)*, the engagement of child labour below the age of fourteen is prohibited in any occupation and/or processes. In this regard, efforts shall be made by the contractor to obtain and verify age proof documents for all workers to be engaged for the project.

Adequate care must be taken by the Contractor to prevent adolescent workers who have not received relevant occupational training to be engaged in any hazardous and dangerous activities like height work, confined space entry etc.

An abstract of the relevant section of the Child Labour Act in both English and local language to be displayed by the Contractor at a conspicuous and accessible location within the workplace.

Worker Health & Hygiene

For any construction work involving hazardous processes the Contractor is required to set up an Occupational Health Centre (OHC) The OHC to be kept in charge of a construction medical officer possessing requisite qualification.

Sufficient number of first aid boxes or cupboards to be provided and maintained at the construction site. The first aid box or cupboard to be distinctly marked "First Aid" and shall be equipped with contents as

prescribed in the *BOCW Rules, 1998* . All such boxes to be kept in charge of a trained first aider who is readily available during the working hours.

The Contractor shall conduct both pre-employment and six monthly medical examination for all worker deployed onsite particularly those engaged in hazardous process and/or dangerous operations viz. operation of crane, winch or other lifting appliance etc. Such examination to be undertaken by approved medical officer or hospitals and medical records maintained for verification by JUSNL.

Furthermore, the Contractor shall make arrangement to facilitate emergency transportation of workers suffering from serious injuries.

With respect to the provision of sanitation facilities and drinking water, please refer to the below section "*Worker Accommodation*".

Wage Payment & Benefits

With respect to payment of wages, JUSNL shall ensure that Contractor conforms to the requirements of the Minimum Wages (Jharkhand Amendment) Rules 2015 with equal wages being paid to both male and female workers for work of similar nature. Where any worker operating for the project is required to work over time he shall be entitled, in respect of such overtime work, to wages at twice the ordinary rate of wages

The wage rates, holiday hours of work and other conditions of service of an inter-State migrant workman shall the same as those applicable to other workmen in that establishment. The contractor employing interstate migrant workmen shall provide and maintain suitable residential accommodation for such workers during the period of their employment; provide the prescribed medical facilities to them, free of charge; provide such protective clothing as may be prescribed.

Worker Accommodation

In every place wherein contract worker is required to halt at night in connection regarding work at the establishment, rest rooms or alternate accommodation to be provided by the contractor. Such accommodation shall conform to the following requirements:

Selection of Worker Accommodation Site

Adequate care to be taken for selection of the worker accommodation site viz. avoidance of flood prone zone; proximity to water bodies.

Ventilation & Lighting

All worker accommodation to be sufficiently lighted and ventilated and maintained in a clean and comfortable condition.

Drinking Water

The worker residing at the accommodation to have access to adequate and convenient supply of free drinking water. Drinking water receptacles shall be provided at every worker accommodation and shall be maintained in a clean and hygienic condition at all times in accordance to the applicable labour laws.

The drinking water supplied shall conform to the *IS 10500:2012* standards; in case of non-compliance with the aforesaid drinking water specifications, additional treatment shall be provided or alternative sources of water supply be arranged such as packaged drinking water conforming to IS 10500 requirements. The direct usage of water from bore well should be prohibited unless permission from the same has obtained from competent ground water authorities.

Cooking Arrangements

To ensure that the fuel need of labourers in the project area does not interfere with the local requirements, necessary arrangements for supply of cooking fuel to the workers shall be done by the contractor. In case, fuel requirement for cooking purposes are only to be met by fuel wood then that must be purchased from authorized vendors.

Requirement of provision of cooking facilities (kitchen) at campsite are listed below:

- Places for food preparation are designed to permit good hygiene practices;
- Adequate personal hygiene including designated areas for cleaning hands and cleaning of utensils; and
- All kitchen floors, ceiling and wall surfaces adjacent to or above food preparation and cooking areas are built using durable, non-absorbent, easily cleanable, non-toxic materials;
- Food preparation area to be durable, easily cleanable, non-corrosive surface made of non-toxic materials.

Security Arrangements

The contractor shall constitute a Camp Security Team headed by a Security Manager who will be responsible for checking the security arrangements round the clock. The residing workforce shall be made aware of security related Do's & Don'ts by the Security Team. The usage of any arms by the campsite security team shall be prohibited and all such personnel shall be imparted necessary training on dealing with conflict with local communities.

Drainage Arrangements

The presence of stagnant water at the campsite may lead to spread of vector borne diseases. Hence adequate care should be taken during selection of the camp site. The selected site should not be prone to flooding and located at least 200 feet from surface water collections unless they can be subjected to vector control measures.

All worker accommodation sites should be graded, ditched, rendered free from depressions and adequately drained to avoid accumulation of water.

Sanitation Arrangements

Adequate number of sanitation facilities shall be provided at the worker accommodation - a minimum of 1 unit to 15 males and 1 unit for 10 females shall be provided. These facilities should be conveniently located and easily accessible.

All such facilities to be have wholesome supply of water, cleaned frequently (at least daily) and maintained in a clean and hygienic conditions. Each sanitation facility shall be lighted naturally or artificially with adequate lighting at all hours of the day and night.

Waste Water Management

Wastewater in the form of sewage shall be generated from the worker accommodation. The Contractor shall ensure that the accommodation sites are equipped with a combination of septic tank and soak pit system for disposal of sewage or there shall be provision of mobile bio-toilets depending upon the strength of the residing workforce.

It is also recommended that the storm water and sewage system should be maintained separately.

Solid Waste Management

The solid waste shall mostly comprise of compostable wastes like vegetable residues (kitchen waste) and combustible waste like paper, cans, plastic and some non-degradable waste like glass/glass bottles. Improper disposal of solid waste will lead to environmental degradation and health hazards to labour as well as nearby community. The following measures shall be adopted by the Contractor for ensuring effective management of solid waste:

- The solid wastes of domestic nature generated shall be collected and stored separately in appropriate containers with proper sealing on them;
- Separate bins with proper markings/colour coding in terms of recyclable or non-recyclable waste shall be provided in the houses, kitchen premises and canteen in sufficient numbers for collection of garbage;
- Pest control shall be undertaken regularly at the accommodation site;
- Food waste and other refuse are to be adequately deposited in sealable containers and removed from the kitchen frequently to avoid accumulation; and
- Wherever possible, the contractor shall engage with local waste disposal agencies approved by the municipal/rural authorities to ensure disposal of biodegradable and recyclable waste.

Health Care Arrangements

Effective health management is necessary for preventing spread of communicable diseases among the workers and within the neighbouring

communities. The following health care arrangements shall be provided by the Contractor at the worker accommodation:

- Adequate first aid kits shall be provided at the accommodation in accessible locations. First aid kit shall contain all type of medicines and dressing material;
- The Contractor shall identify nearby hospital and make an agreement with the hospital to seek health care support including ambulance service for its workers, in case of an emergency.
- Contact details of nearby health care facility (hospital) shall be displayed at the camp;
- Contractor shall identify and train adequate number of workers to provide first aid during medical emergencies;
- Regular health check-ups shall be carried out for the construction workers as discussed in Section 1.1.10; and
- Conducting of awareness training on communicable diseases, AIDS etc. for the resident workers.

Emergency Preparedness & Response

The Contractor at the project construction site to ensure the provision of essential life-saving aids and appliances required to handle emergencies like - head and or spinal injuries; bleeding; fractures; burns dehydration; paralysis; drowning; sunstroke; frost bite; electrical shock and poisonous bites.

Furthermore in construction site where 500 or more workers are deployed, an emergency action plan shall be developed to handle the following emergencies - fire and explosion; lifting appliance collapse; gas leakage; chemical spillage; and natural hazards.

The Contractor shall perform quarterly mock drills at both the site and worker accommodation to evaluate overall preparedness and response in dealing with emergencies.

Worker Grievance Management

A Grievance Redressal Mechanism (GRM) shall be developed for the construction workers which shall include constituting a Review Committee comprising of representatives from both Contractor and JUSNL. This GRM shall have the following elements:

- Proper system for lodging grievances;
- Provision for raising anonymous complaints through complain box;
- Appropriate level of management for addressing concerns;
- Workers and members of the surrounding communities have specific means to raise concerns about security arrangement and staff;
- Provision for timely action and feedback;
- Monitoring and review of grievances raised and action taken; and scope for continual improvement of the system.

The contractor shall regularly share all the grievance received from workers and local community along with details of how the grievances are redressed, with Junior Engineer (JUSNL) who will be in charge of the site or at the Divisional/Sub-Divisional Offices of JUSNL. Workers of a particular site can also register their grievance with Junior Engineer (JUSNL) who will be in charge of the site or at the Divisional/Sub-Divisional Offices of JUSNL. In case, grievance is registered by in-charge of the site or at the Divisional/Sub-Divisional Offices of JUSNL, process laid down in the project level Grievance Redressal Mechanism (refer Section 8.6.3 of this ESIA report) would be followed.

Inspection & Reporting

The Contractor shall perform monthly inspection of the worksite and accommodation area to assess the status of implementation of the Plan and submit monthly progress report to JUSNL.

Contractor shall organise monthly progress review meeting with JUSNL to prepare a corrective action plan to deal with health, safety and social issues related to project construction work. All such meeting minutes to be documented and shared with both parties for necessary action.

Annexure 8

Health & Safety Management Plan (HSMP) Template

CONTRACTOR HEALTH AND SAFETY MANAGEMENT PLAN - TEMPLATE

9.1 PROJECT INFORMATION

9.1.1 Management Review

This Management Plan has been developed to outline the Contractor's approach to managing work health and safety at the <INSERT NAME OF PROJECT> at <INSERT ADDRESS>. The Contractor shall

- make this plan available to all workers and contractors on this project and ensure they have the opportunity to read, understand, clarify and ask questions
- keep a copy of the Management Plan readily available for the duration of the project
- review the plan regularly throughout this project and make any revisions known to those working on the project
- <INSERT ANY OTHER REQUIREMENTS>.

9.1.2 Contractor Details

Business name:	
Address:	
Contact person:	
Work phone:	
Mobile phone:	
Fax:	
Email:	
ABN:	
Contract licence number:	
Principal contractor signature:	

9.1.3 Details of Contractor H&S Personnel

Name	Position	Responsibilities

9.1.4 *Scope of Project Work*

Description of project:	
Location of project:	
Start and finish dates:	

9.2 *GENERAL H&S INFORMATION*

9.2.1 *List of Regulations*

Relevant legislation	Tick if applicable
Contractor Labour (Regulation & Abolition) Act, 1970	<input checked="" type="checkbox"/>
Contractor Labour (Regulation & Abolition) Central Rules, 1971	<input checked="" type="checkbox"/>
<INSERT ANY OTHER RELEVANT LEGISLATION>	<input type="checkbox"/>

9.2.2 *H&S Codes of Practice*

Relevant Codes of Practice	Tick if applicable
Confined spaces	<input type="checkbox"/>
Construction work	<input type="checkbox"/>
Cranes	<input type="checkbox"/>
Demolition work	<input type="checkbox"/>
Excavation work	<input type="checkbox"/>
First aid in the workplace	<input type="checkbox"/>
Hazardous manual tasks	<input type="checkbox"/>
How to manage work health and safety risks	<input type="checkbox"/>
Labelling of workplace hazardous chemicals	<input type="checkbox"/>
Managing electrical risks at the workplace	<input type="checkbox"/>
Managing noise and preventing hearing loss at work	<input type="checkbox"/>
Managing risks of plant in the workplace	<input type="checkbox"/>
Managing the risks of falls in the workplace	<input type="checkbox"/>
Managing the work environment and facilities	<input type="checkbox"/>
Preventing falls in construction	<input type="checkbox"/>
Safe design structures	<input type="checkbox"/>
Scaffolding	<input type="checkbox"/>
Traffic management in workplaces	<input type="checkbox"/>
Welding processes	<input type="checkbox"/>

Work health and safety consultation, cooperation and coordination	<input type="checkbox"/>
Working in the vicinity of overhead and underground electrical lines	<input type="checkbox"/>
<INSERT ANY OTHER RELEVANT CODES OF PRACTICE>	

9.2.3 *Contractor H&S Policy*

Share a copy of the Principal Contractor H&S Policy.

9.3 *RISK MANAGEMENT*

9.3.1 *Identifying hazards and managing risks*

The Contractor shall systematically identify hazards and assess risks before the project starts by using the hierarchy of control (see 1.3.2) in conjunction with:

- developing Safe Work Method Statements (SWMS) to control risks associated with high risk construction work
- using a risk management form to control general construction risks where necessary
- <INSERT ANY OTHER STEPS IF NECESSARY>

The Contractor shall identify risks:

- when introducing a new task; and
- when new information is received about tasks, procedures, equipment or chemicals.

All hazards that are identified throughout the project must be reported immediately to the principal employer. We will inform our workers of our risk management procedures and ensure they are trained in risk management

9.3.2 *Hierarchy of Control*

The contractor shall control all risks identified by applying the Hierarchy of Controls as follows:

- Eliminate
- Substitute
- Isolate
- Engineering controls
- Administrative controls
- Personal Protective Equipment.

Where possible, we will implement risk controls that are high in the order and will implement multiple controls where necessary.

9.3.3 *Critical Construction Work*

We have identified the following critical construction work for this project. A Safe Work Method Statement (SWMS) shall be developed for each of the high

risk construction work activities. We will also develop SWMSs for any additional high risk work that is introduced or identified during the project.

Critical construction work activity	Safe Work Method Statement developed and attached (Yes/No)

All critical construction work shall be governed by a “*Permit to Work*” system which shall be implemented by the Contractor.

The SWMS shall be reviewed by the Contractor when:

- there is a need to change the method of carrying out of the high risk construction work; and
- a risk has been identified that is not included and managed within a SWMS.

9.4 *EMERGENCY PREPAREDNESS & RESPONSE*

9.4.1 *Emergency Preparedness*

The Contractor shall be make arrangements for emergency preparedness to:

- show all workers and subcontractors the emergency point as part of their induction (this shall be covered in the induction checklist)
- display emergency procedures in the site office or other visible location
- provide and inspect fire extinguishers at the beginning of the project and six-monthly after that
- <INSERT ANYTHING ELSE RELEVANT TO YOUR PLAN>.

9.4.2 *Emergency Procedure*

In the event of a fire or similar emergency evacuation, the Contractor shall adopt following measures:

- constitute an Emergency Response Team and develop a response plan encompassing all potential emergency situations;
- stop work immediately and vacate the workplace;
- assist anyone in the workplace who may not be familiar with the evacuation procedures;
- call emergency services on the desired number. Other emergency numbers are on display in the site office (if applicable);
- notify the principal employer;
- assemble in the nominated assembly points until you receive further instructions from the principal employer or emergency services personnel
- <INSERT ANYTHING ELSE RELEVANT TO YOUR PLAN>.

9.4.3 *Emergency Contact*

The contact details of the Emergency Response Team (ERT) and other emergency responder to be provided here.

9.5 *INCIDENT REPORTING & INVESTIGATION*

9.5.1 *Notification of Incidents*

Whenever an incident occurs at the workplace the Contractor shall:

- immediately notify the principal employer and any other authorities in conformance with the applicable regulatory requirements; and
- not interfere with the scene of the incident.

The Contractor shall report the following incidents:

- the death of a person;
- an incident requiring hospitalisation;
- a serious injury or illness of a person as defined in the relevant regulations.

In the event of such an occurrence:

- notify the principal employer who must notify the relevant authorities by the quickest means possible.
- complete and share an **Incident Notification Form** with the principal employer as soon as possible following the incident (must be within 48 hours)
- do not disturb the site until given clearance by the principal employer who will take advice from the local authorities
- the principal contractor shall only give permission to disturb the site when it is agreed that a formal investigation is not required
- if a formal investigation is required, the Contractor will secure the site
- **<INSERT ANY OTHER REQUIREMENTS>.**

9.5.2 *Investigation of Incidents*

For any reportable incident, the Contractor shall examine all incident/accident reports and identify trends. This shall be carried out in accordance to an *Incident Investigation Procedure* which shall be developed and comprise of the following key elements:

- Establishing what happened, when, where and why through collection of evidence;
- Investigation of accidents with a high priority - before people's memories fade and while evidence is still available;
- Looking at root or underlying issues not just immediate causes: viz premises, plant and substances, procedures, or people. Underlying causes includes - management arrangements and organisational factors such as design, selection of materials, maintenance, management of change, adequacy of risk controls, communication, competence etc.

All incident investigation findings to be conducted by trained personnel and maintained in the form of a formal investigation report. In case of complex investigations involving major accident hazards, the Contractor shall engage specialist to support the process.

9.6 *SITE SAFETY PROCEDURE*

The Contractor shall develop *Site Specific Safety Procedure* which shall provide details related to the following:

- Site Safety Rules;
- Site Amenities viz. provision and maintenance of sanitation facilities;
- Site Security Arrangements;
- Provision and display of safety signages at the conspicuous places;
- Provision and maintenance of Personal Protective Equipment's (PPEs);
- Management measures for specific construction hazards viz. fall from heights; excavation work; work near overhead or underground electrical lines; electrical work; scaffolding work; and
- Plan for managing the hazards associated with onsite traffic movement, as applicable.

9.7 *H&S PERFORMANCE MONITORING AND REPORTING*

The H&S Plan will be reviewed on periodic basis by the Project in Charge and Senior Manager Safety and Compliance the Contractor and shall be shared with the principal employer. The performance of the Contractor will be monitored against the following Key Performance Indicators (KPIs):

- Lost time (in hours) due to accidents (including fatalities);
- Lost Time Injury (LTI) – Frequency Rate
- Number of fatalities;
- Number of reportable accidents; and
- Total of hours of Health and Safety training in the month; and
- Number of grievances raised with respect to Health and Safety.

The aforesaid indicators will be tracked and recorded on a monthly basis by the Contractor H&S Manager and compared with the industry best practices. To this regard, the Contractor shall conduct weekly site safety inspection using a standard inspection checklist and corrective action plan developed and shared with the principal employer.

Annexure 9

Socio-Economic Survey format

Socio Economic Survey Form for Proposed Grid Sub Station Site of JPSIP

Form No		Village Name	
Domicile No		Name of the Surveyor	
Name of the Informant		Signature	
Relationship with HOH		Date	

A1. What Caste Do You Belong				A2. What is Your Religious Group				A3. Do You Have BPL Ration Card	
General	SC	ST	OBC	Hindu	Muslim	Christian	Sikhs	Yes	No
①	②	③	④	①	②	③	④	①	②

Member Number	1	2	3	4	5	6	7	8	9	10	11	12	
B1.1 Name	HOH												Write down the names of all person who live and eat together in this household (sharing same kitchen) starting with head
B1.2 Relationship													
B1.3 Sex	Is the NAME male or female?												
	M	M	M	M	M	M	M	M	M	M	M	M	
	F	F	F	F	F	F	F	F	F	F	F	F	
B1.4 Age	How old was NAME on the last birthday?												
B1.5 Education	The class till which the person has been educated.												
	①	①	①	①	①	①	①	①	①	①	①	①	Illiterate
	②	②	②	②	②	②	②	②	②	②	②	②	Primary (class 3)
	③	③	③	③	③	③	③	③	③	③	③	③	Secondary (Class 10)
	④	④	④	④	④	④	④	④	④	④	④	④	Higher (graduate)
	⑤	⑤	⑤	⑤	⑤	⑤	⑤	⑤	⑤	⑤	⑤	⑤	Technical
	⑥	⑥	⑥	⑥	⑥	⑥	⑥	⑥	⑥	⑥	⑥	⑥	Vocational
B1.6	Is the NAME working?												
	①	①	①	①	①	①	①	①	①	①	①	①	Yes
	②	②	②	②	②	②	②	②	②	②	②	②	No
B1.7 Occupation	A. The main activity at the place of job?												
	①	①	①	①	①	①	①	①	①	①	①	①	This may have multiple entries
	②	②	②	②	②	②	②	②	②	②	②	②	Agriculture
	③	③	③	③	③	③	③	③	③	③	③	③	Agri Labour
	④	④	④	④	④	④	④	④	④	④	④	④	Non Agri Labour
	⑤	⑤	⑤	⑤	⑤	⑤	⑤	⑤	⑤	⑤	⑤	⑤	Business/Trade
	⑥	⑥	⑥	⑥	⑥	⑥	⑥	⑥	⑥	⑥	⑥	⑥	Govt. Service
	⑦	⑦	⑦	⑦	⑦	⑦	⑦	⑦	⑦	⑦	⑦	⑦	Private Service
	⑧	⑧	⑧	⑧	⑧	⑧	⑧	⑧	⑧	⑧	⑧	⑧	Maid Servant

	⑧	⑧	⑧	⑧	⑧	⑧	⑧	⑧	⑧	⑧	⑧	⑧	Others
B1.8	What was the main reason for the NAME not working?												To be filled for persons who are not working.
	①	①	①	①	①	①	①	①	①	①	①	①	No work available
	②	②	②	②	②	②	②	②	②	②	②	②	Seasonal inactivity
	③	③	③	③	③	③	③	③	③	③	③	③	Household family duties
	④	④	④	④	④	④	④	④	④	④	④	④	Old/young
	⑤	⑤	⑤	⑤	⑤	⑤	⑤	⑤	⑤	⑤	⑤	⑤	Handicapped
	⑥	⑥	⑥	⑥	⑥	⑥	⑥	⑥	⑥	⑥	⑥	⑥	Others
B1.9 Income	How much does the NAME earn in a month?												
	①	①	①	①	①	①	①	①	①	①	①	①	Rs. 0-Rs. 2000
	②	②	②	②	②	②	②	②	②	②	②	②	Rs. 2000-Rs. 5000
	③	③	③	③	③	③	③	③	③	③	③	③	Rs. 5000 and 10,000
	④	④	④	④	④	④	④	④	④	④	④	④	10,000+
C1.1 Skills	What is the skill possessed by the person?												
													e.g.: traditional artisans, carpentry, mason, weaving, garage mechanic, nursery, others (please mention)
D1.1 Which of the following are availed by the family	<u>General Scheme</u> 1. Old age Pension Scheme 2. Widow Pension Scheme 3. Pradhanmantri Awas Yojana 4. Chief Minister Health insurance scheme 5. Udyami Sakhi Mandal Yojana (To empower rural women) 6. ARYA scheme (To attract rural youth in agriculture in Jharkhand) 7. Vimrao Ambedkar Awas Yojana for widow in Jharkhand <u>Scheme for Tribal people</u> 1. PTG Dakiya Yojana (Free rice scheme for primitive tribal group) 2. Eklavya Model Residential Schools for Tribal Student 3. Development and Marketing of Tribal Products 4. Scheme for Minimum Support Price for Minor Forest Produce 5. Educational Fellowship and Scholarship for Higher Education of ST Students. 2017-2018" 6. National Overseas Scholarship for ST candidates 7. Pre and Post Matric Scholarship 8. Establishment of Ashram Schools in Tribal Sub-Plan Areas 9. Centrally Sponsored Scheme of Hostels for ST boys and ST Girls <u>Others (Please Specify)</u> 												
	A. What is the drinking water source for the family?												


E1.1 Amenities	Piped Water <input type="checkbox"/>	Tube Well <input type="checkbox"/>	Well <input type="checkbox"/>	Pond <input type="checkbox"/>	Any other, specify..... ...	
	B. What is the source of water for domestic use?					
	Piped Water <input type="checkbox"/>	Tube Well <input type="checkbox"/>	Well <input type="checkbox"/>	Pond <input type="checkbox"/>	Any other, specify..... ...	
	C. Is the water source used by you or other families also		Only by the HH <input type="checkbox"/>		Shared by other families <input type="checkbox"/>	
	D. Availability of Household Electricity			Yes <input type="checkbox"/>		No <input type="checkbox"/>
	E. Are there Primary Schools nearby (within 1 – 1.5 km)			Yes <input type="checkbox"/>		No <input type="checkbox"/>
	F. Are there Secondary Schools nearby					
	G. Are there Colleges nearby					
	H. Are there Hospitals nearby		Private Hospital <input type="checkbox"/>	Govt. Hospital <input type="checkbox"/>	None <input type="checkbox"/>	

Annexure 10

Paper related to Patta Land of
Shibu Hembram, Shyam
Hembram and Palu
Hembram

बिहार

सरकार



राजस्व विभाग, जिला-पूर्वी सिंहभूम

बिहार भूमि सुधार कार्यक्रम

जमीन बन्दोबस्ती का परवाना

श्री ...
ग्राम ...
जिला पूर्वी सिंहभूम के निम्नलिखित क्षेत्रों की सरकार की जमीन / भूदान की भूमि, भूमि सुधार अधिनियम के अन्तर्गत
बन्दोबस्ती की जाती है। उक्त भूमि विरासत योग्य नो होगी, किन्तु किसी भी स्थिति में दम्तान्तरणीय नहीं होगी
भूमि पर स्थित वृक्षों पर सरकार का स्वामित्व रहेगा।

भूमि का विवरण

अभिलेख नं. ... मोजा ... आना नं. ... छाट नं. ... रकबा ... लगान ...

अंचल अधिकारी


...

भूमि सुधार उप-समाहर्ता

...

अनुसंहल पदाधिकारी

...

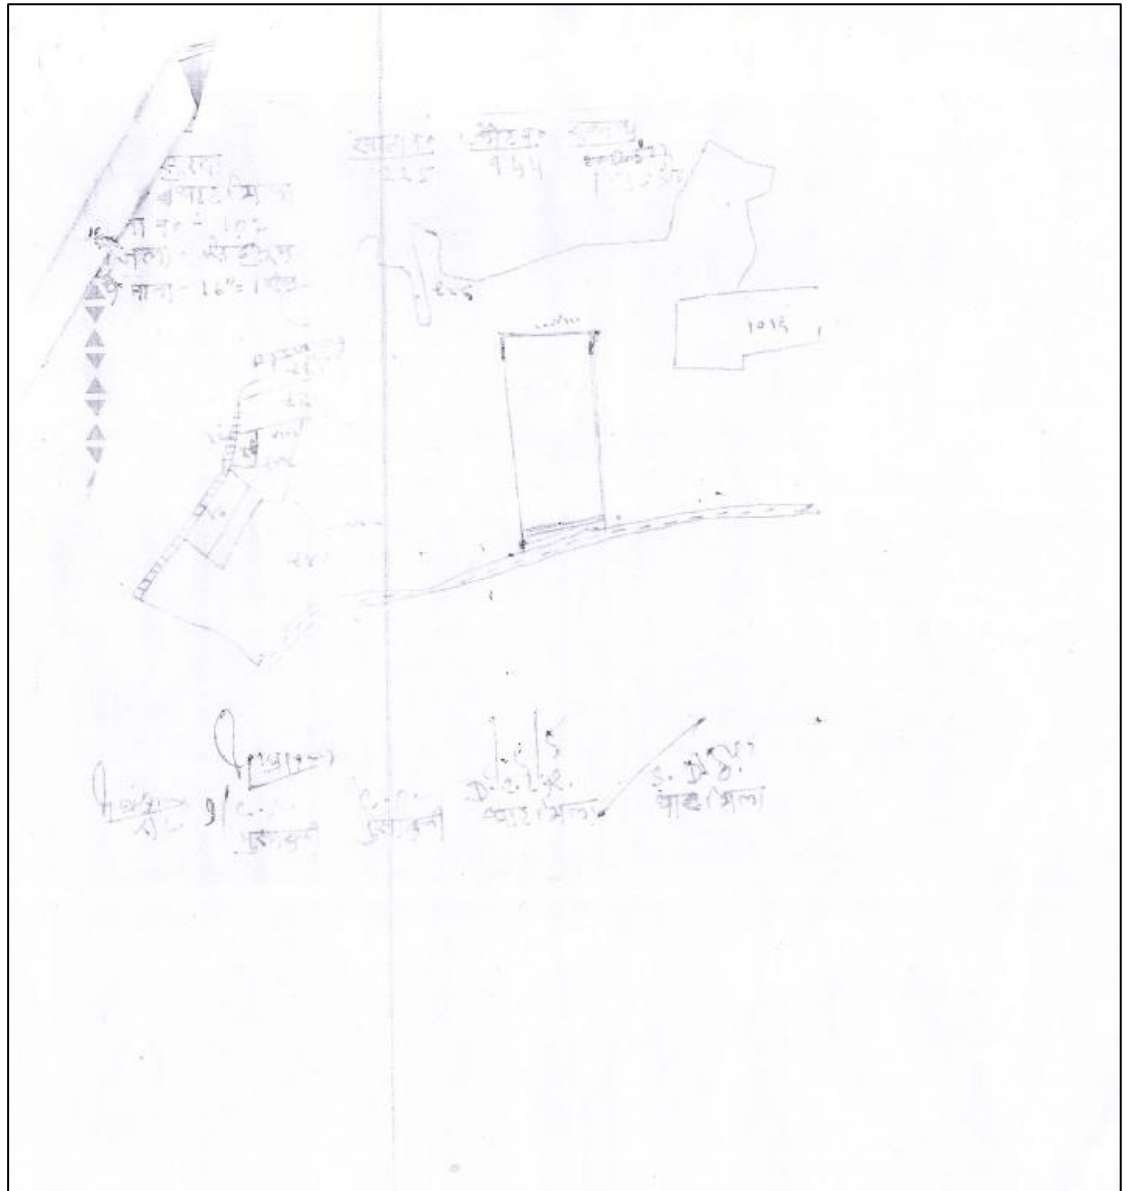

Annexure 11

Assessment of Impact Significance

Impacts on Aesthetics & Visual Quality

Impact	Aesthetic and visual impact			
Impact Nature	Negative	Positive	Neutral	
Impact Type	Direct	Indirect	Induced	
Impact Duration	Short Term	Medium Term	Long Term	
Impact Extent	Local	Regional	National	
Impact Scale	Low	Medium	High	
Impact Magnitude	Positive	Small	Medium	Large
Resource/ Receptor Sensitivity	Low	Medium	High	
Impact Significance	Negligible	Minor	Moderate	Major
Significance of impact is considered Negligible				

Impacts on Air Quality

Impact	Air quality impact			
Impact Nature	Negative	Positive	Neutral	
Impact Type	Direct	Indirect	Induced	
Impact Duration	Short Term	Medium Term	Long Term	
Impact Extent	Local	Regional	National	
Impact Scale	Low	Medium	High	
Impact Magnitude	Positive	Small	Medium	Large
Resource/ Receptor Sensitivity	Low	Medium	High	
Impact Significance	Negligible	Minor	Moderate	Major
Significance of impact is considered Negligible to Minor				

Impacts on Noise Quality

Impact	Noise quality impact			
Impact Nature	Negative	Positive	Neutral	
Impact Type	Direct	Indirect	Induced	
Impact Duration	Short Term	Medium Term	Long Term	
Impact Extent	Local	Regional	National	
Impact Scale	Low	Medium	High	
Impact Magnitude	Positive	Small	Medium	Large
Resource/ Receptor Sensitivity	Low	Medium	High	
Impact Significance	Negligible	Minor	Moderate	Major
Significance of impact is considered Moderate				

Impact on Land use, Soil & Drainage

Impact	Impact on Land use, Soil & Drainage		
Impact Nature	Negative	Positive	Neutral
Impact Type	Direct	Indirect	Induced
Impact Duration	Short Term	Medium Term	Long Term

Impact Extent	Local		Regional		National	
Impact Scale	Low		Medium		High	
Impact Magnitude	Positive	Small		Medium		Large
Resource/ Receptor Sensitivity	Low		Medium			High
Impact Significance	Negligible	Minor		Moderate		Major
	Significance of impact is considered Minor					

Impact on Water Resources

Impact	Impact on water resource			
Impact Nature	Negative	Positive		Neutral
Impact Type		Indirect		Induced
Impact Duration		Medium Term		Long Term
Impact Extent		Regional		National
Impact Scale	Low	Medium		High
Impact Magnitude	Positive	Small	Medium	Large
Resource/ Receptor Sensitivity	Low		Medium	High
Impact Significance	Negligible	Minor	Moderate	Major
	Significance of impact is considered Negligible			

Impact on Surface Water Bodies

Impact	Impact on Surface Water Bodies			
Impact Nature	Negative		Positive	Neutral
Impact Type			Indirect	Induced
Impact Duration			Medium Term	Long Term
Impact Extent			Regional	National
Impact Scale	Low	Medium	High	
Impact Magnitude	Positive	Small	Medium	Large
Resource/ Receptor Sensitivity	Low		Medium	High
Impact Significance	Negligible	Minor	Moderate	Major
	Significance of impact is considered Moderate			

Impact on Biological Environment

Impact	Impact to Biological Environment			
Impact Nature	Negative		Positive	Neutral
Impact Type			Indirect	Induced
Impact Duration	Short Term	Medium Term	Long Term	
Impact Extent	Local		Regional	National
Impact Scale	Low		Medium	High
Impact Magnitude	Positive	Small	Medium	Large
Resource/ Receptor Sensitivity	Low		Medium	High
Impact Significance	Negligible	Minor	Moderate	Major

	Significance of impact is considered Minor to Moderate
--	---

Impact on Socio-economic Conditions

Impact	Impact on Socio-economic Conditions			
Impact Nature	Negative		Positive	Neutral
Impact Type	Direct		Indirect	Induced
Impact Duration	Short Term		Medium Term	Long Term
Impact Extent	Local		Regional	National
Impact Scale	Low		Medium	High
Impact Magnitude	Positive	Small	Medium	Large
Resource/ Receptor Sensitivity	Low		Medium	High
Impact Significance	Negligible	Minor	Moderate	Major
	Significance of impact is considered Minor			

Impact on Community Health and Safety

Impact	Community Health and Safety			
Impact Nature	Negative		Positive	Neutral
Impact Type	Direct		Indirect	Induced
Impact Duration	Short Term		Medium Term	Long Term
Impact Extent	Local		Regional	National
Impact Scale	Low		Medium	High
Impact Magnitude	Positive	Small	Medium	Large
Resource/ Receptor Sensitivity	Low		Medium	High
Impact Significance	Negligible	Minor	Moderate	Major
	Significance of impact is considered Minor			

Impact on Occupational Health and Safety

Impact	Occupational Health and Safety			
Impact Nature	Negative		Positive	Neutral
Impact Type	Direct		Indirect	Induced
Impact Duration	Short Term		Medium Term	Long Term
Impact Extent	Local		Regional	National
Impact Scale	Low		Medium	High
Impact Magnitude	Positive	Small	Medium	Large
Resource/ Receptor Sensitivity	Low		Medium	High
Impact Significance	Negligible	Minor	Moderate	Major
	Significance of impact is considered Moderate			



**ERM has over 160 offices
Across the following
countries worldwide**

Argentina	Netherlands
Australia	Peru
Belgium	Poland
Brazil	Portugal
China	Puerto Rico
France	Singapore
Germany	Spain
Hong Kong	Sweden
Hungary	Taiwan
India	Thailand
Indonesia	UK
Ireland	USA
Italy	Venezuela
Japan	Vietnam
Korea	
Malaysia	
Mexico	

ERM India Private Limited
Building 10, 4th Floor
Tower A, DLF Cyber City
Gurgaon – 122 002, NCR , India
Tel: 91 124 417 0300
Fax: 91 124 417 0301

Regional Office – West
801, 8th Floor, Windfall, Sahar Plaza,
J B Nagar, Andheri (East),
Mumbai – 400 059
Tel : 022 42107373
Fax: 91- 022- 4210 7474

Regional Office – West
702 Abhishree Avenue,
Near Nehru Nagar Circle,
Ambawadi Ahmedabad -380006 India
Tel: +91 79 66214300
Fax: +91 79 66214301

Regional Office -South
Ground Floor, Delta Block
Sigma Soft Tech Park
Whitefield, Main Road
Bangalore- 560 066, India
Tel: +91 80 49366 300 (Board)

Regional Office –East
4th Floor,
Asyst Park, GN-37/1, Sector-V,
Salt Lake City, Kolkata 700 091
Tel : 033-40450300